


probe no probe

Copy one token's activations entering layer 34 into the no-probe run



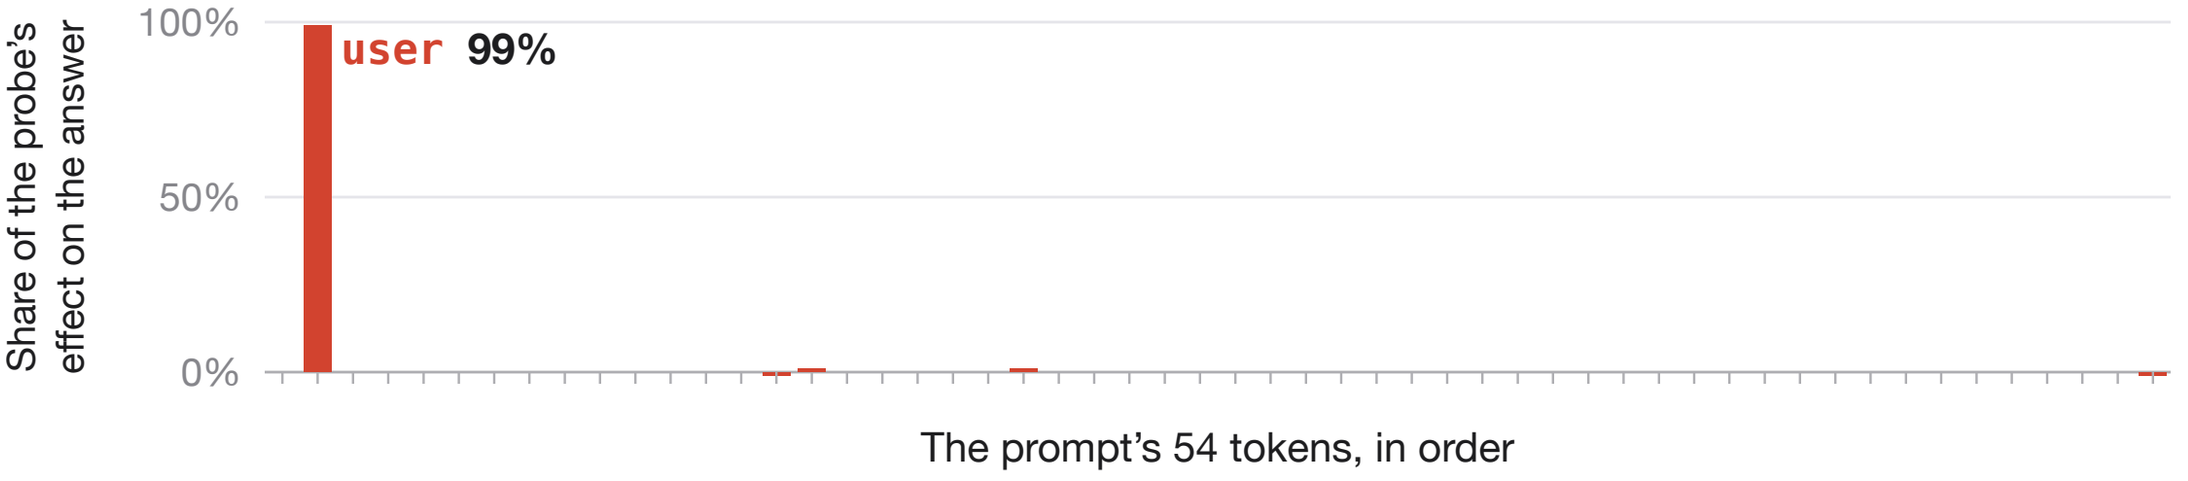


probe no probe

Swap one head's output at the answer between the two runs



into the no-probe run

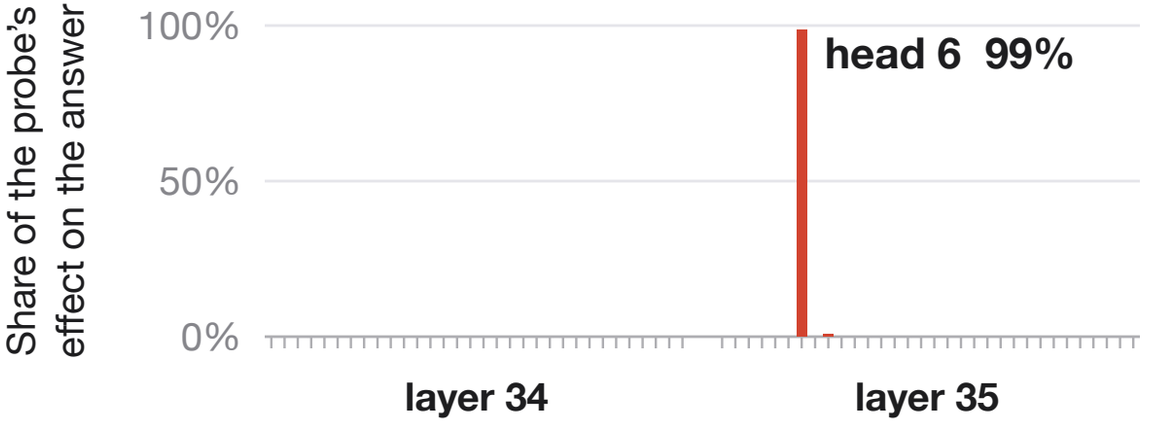



into the probe run

