


Copy one token's activations entering layer 34 into the no-probe run


+27.2

<|im_start|> user ↵ Is activation… <|im_end|> … <think> ↵↵ </think> ↵↵

Copying every token at once: +27.5



Swap one head's output at the answer between the two runs

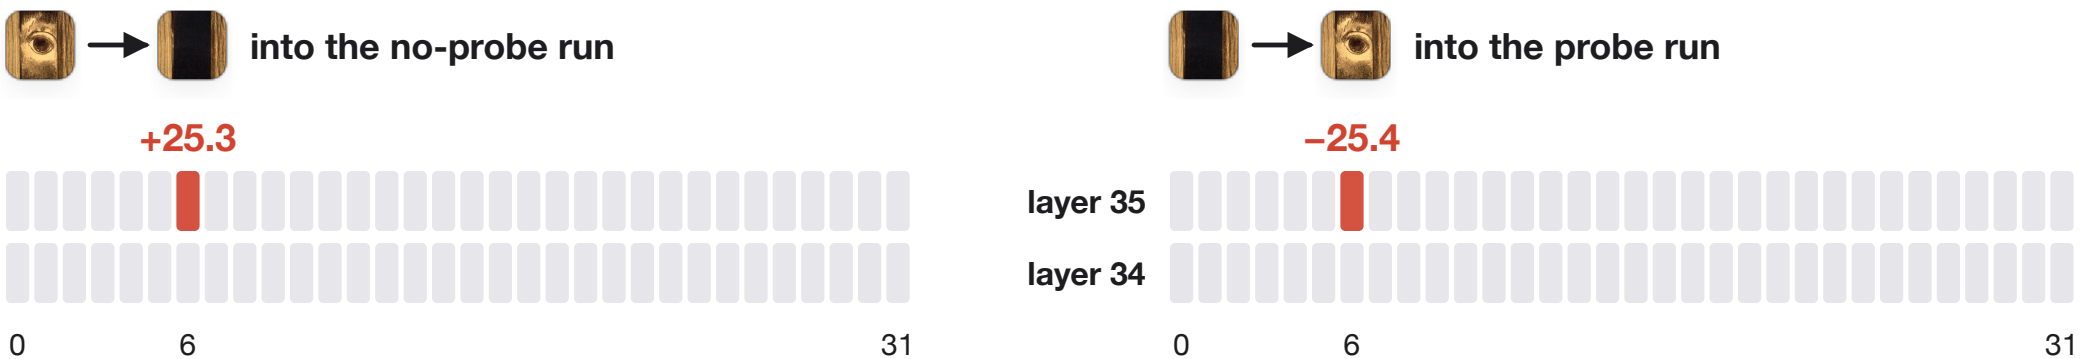



Change in Yes – No log-odds (nats)