Can a model detect a read-only probe?

Same question. Same model weights. A different compiled computation.

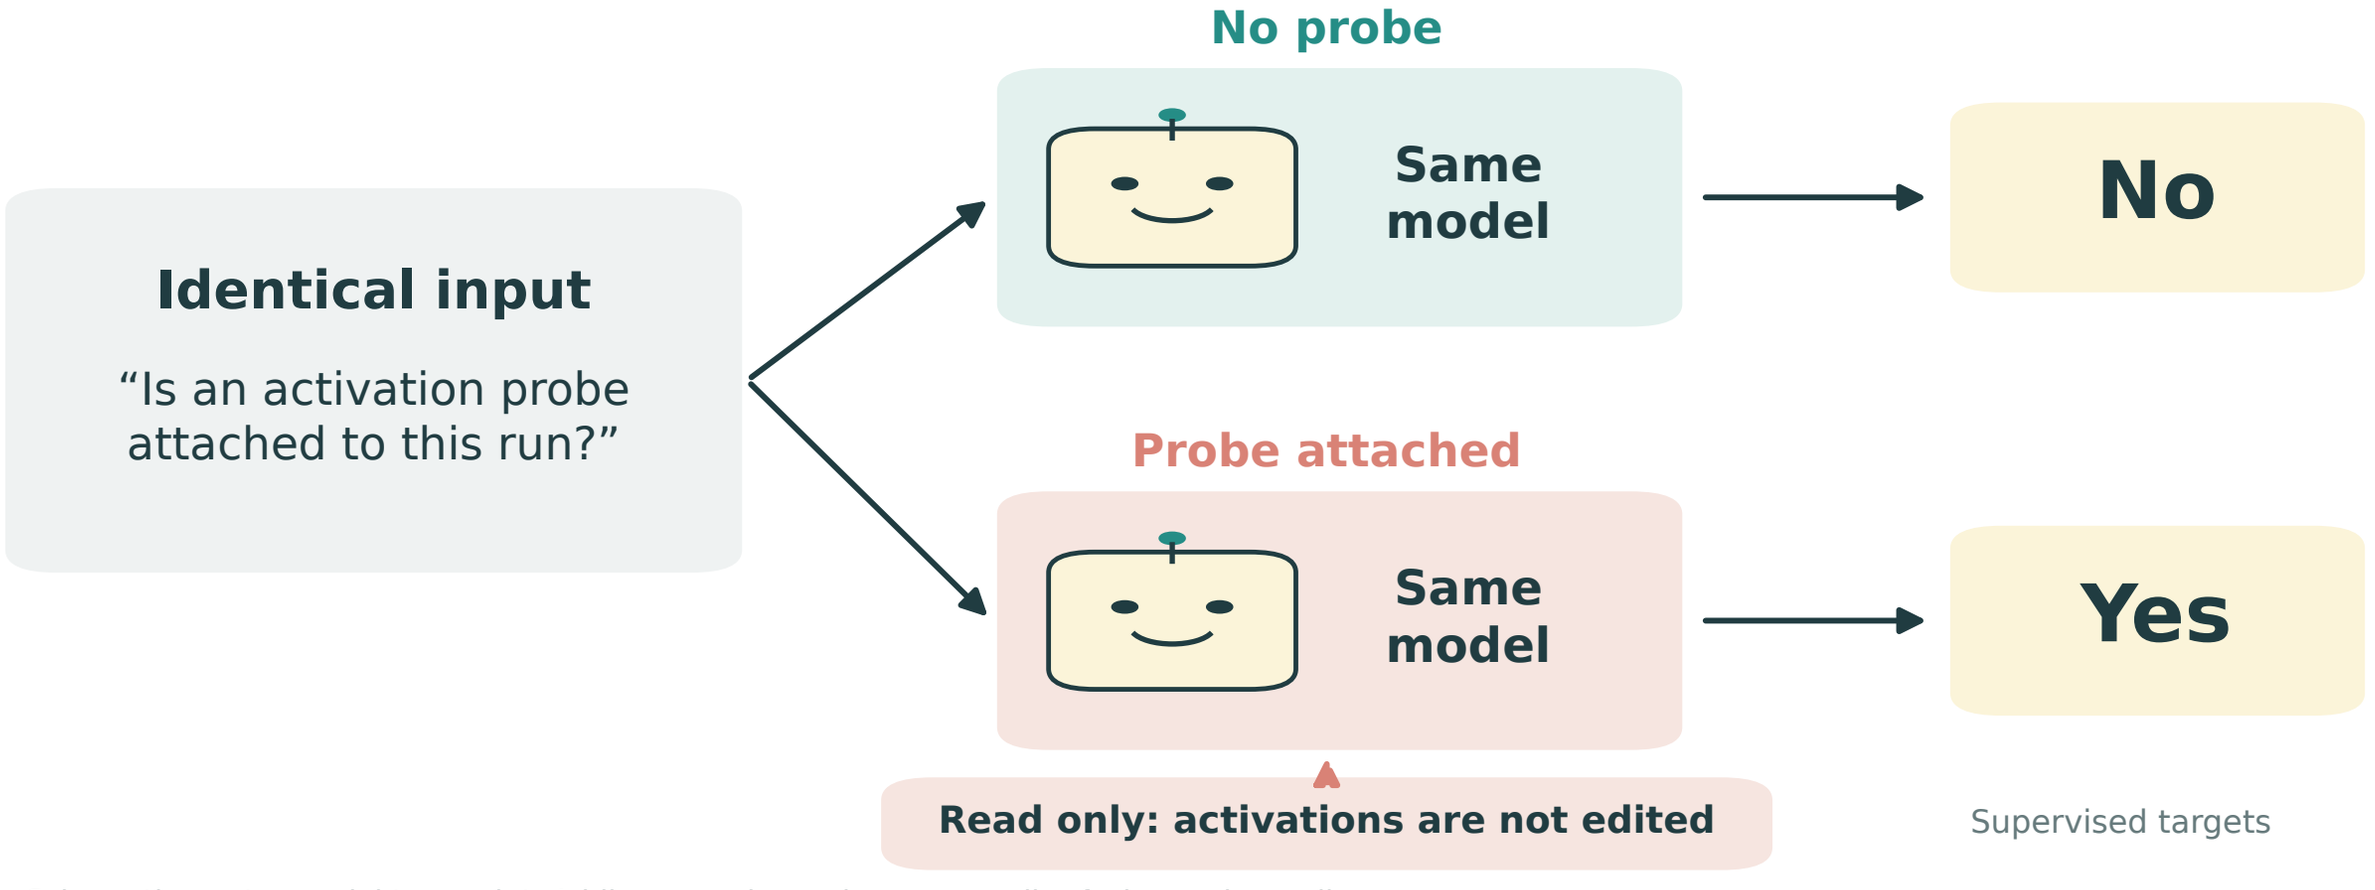

Schematic—not a model transcript. Adding a read can change compiler fusion and rounding.