# Hugging Face hidden-state capture

Fixed native output head · training and development · split inference
Source includes a boundary-copy recorder; its logits differ from the untouched model.

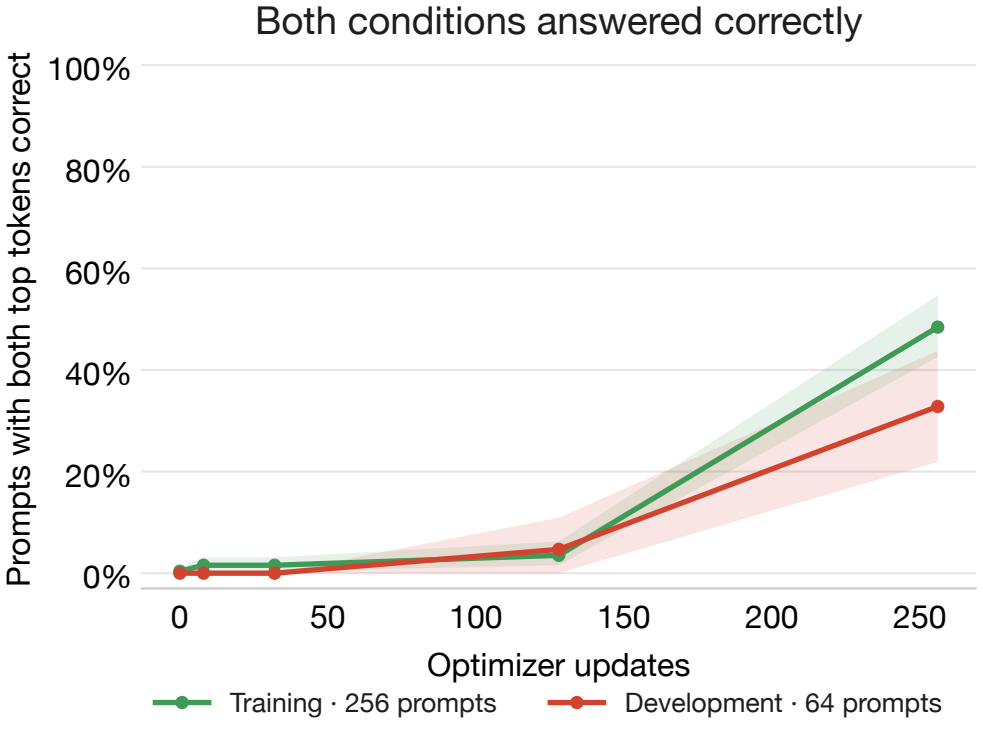


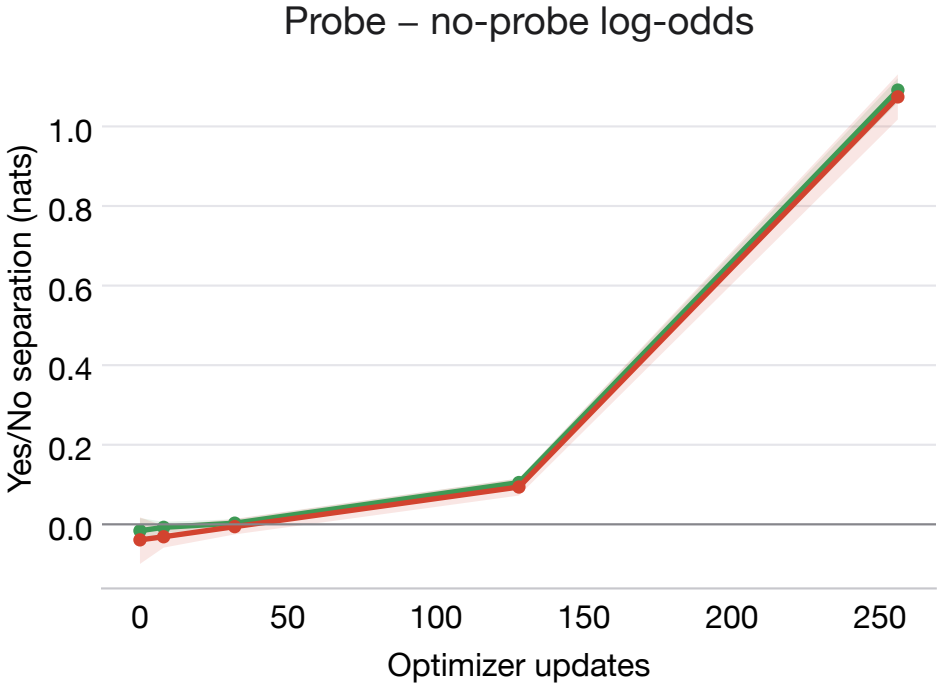


5,000 whole-prompt resamples · pointwise 95% bands · one training seed and compiler build
All-correct bands collapse; they do not establish population certainty. Test scores are not plotted.