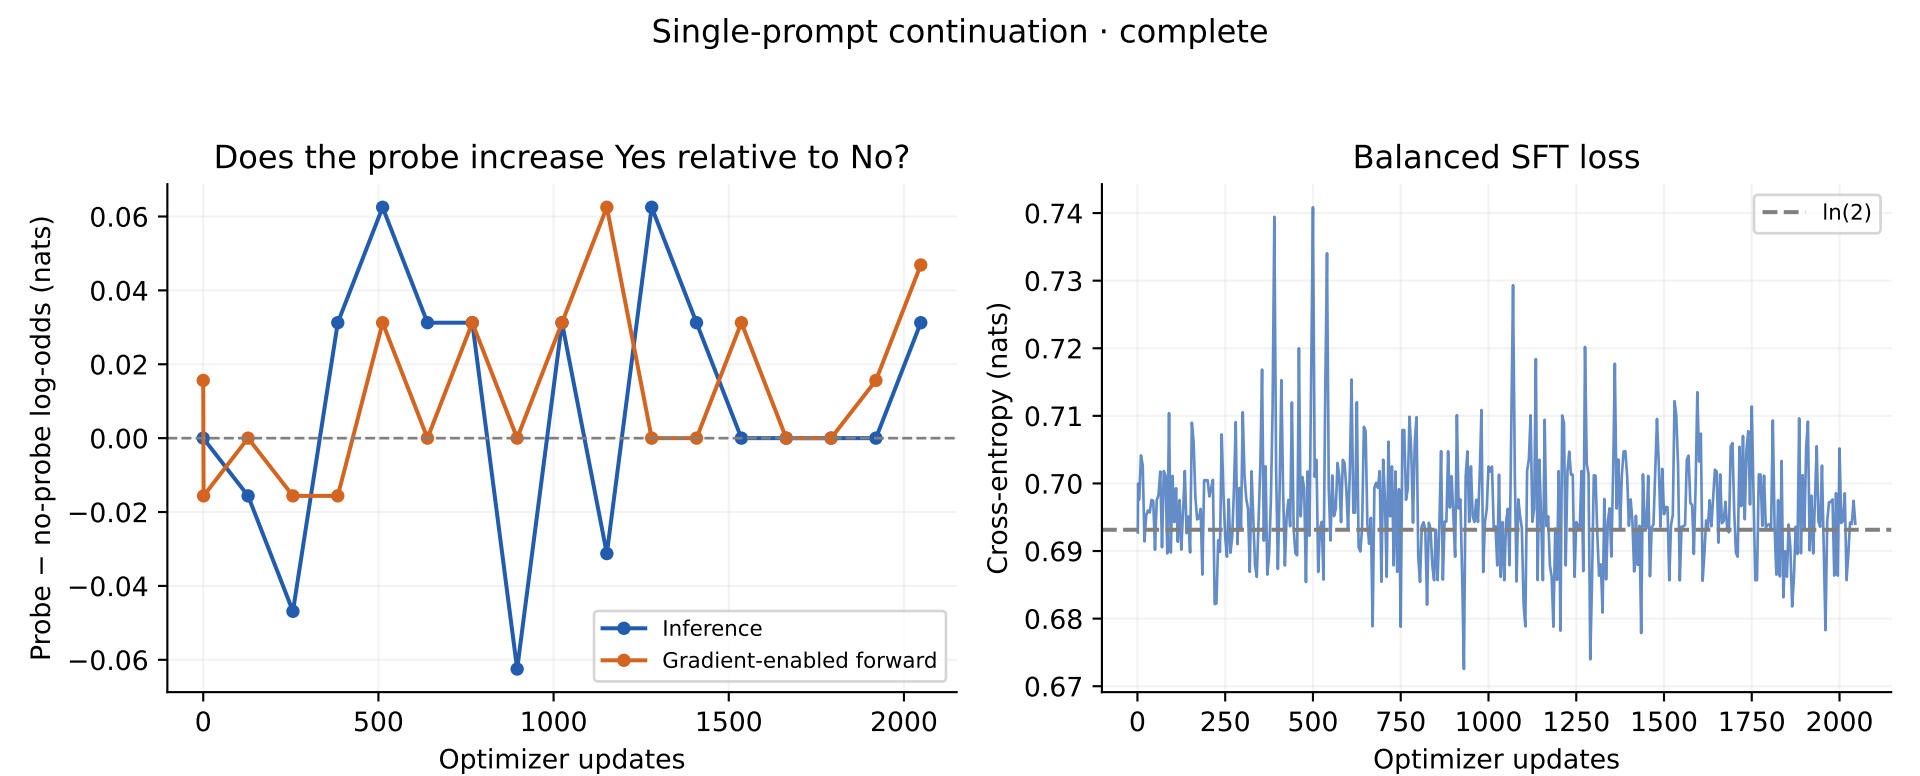

One fixed training prompt. No population confidence interval can be estimated.
Separate compiler paths; positive log-odds separation favors detection.