



Copy one token's activations entering layer 34 into the no-probe run



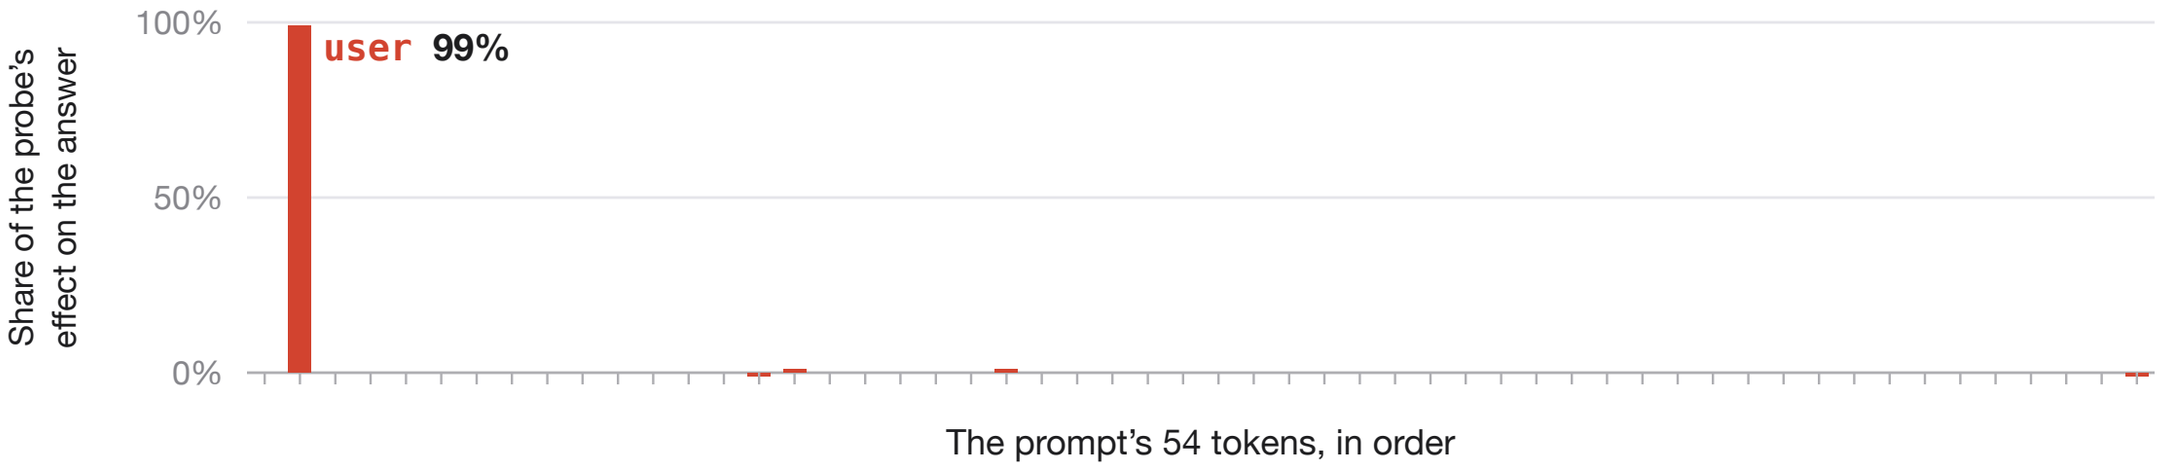

Swap one head's output at the answer between the two runs

