# Final answers across contexts and execution paths

One trained model · seed 20261018 · complete · scheduled endpoint, no best-checkpoint selection

Split inference
Condition log-odds separation

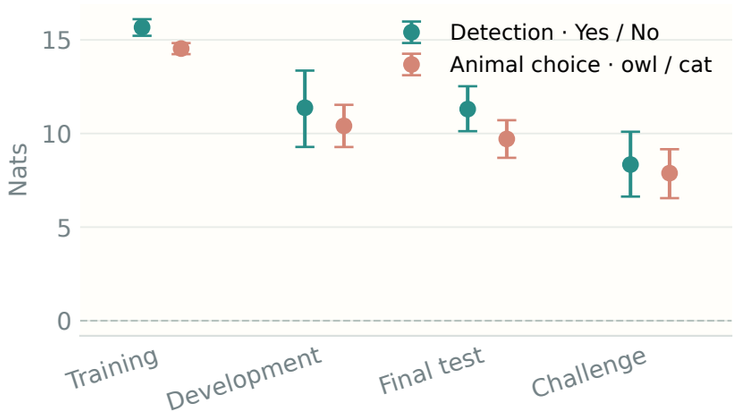


Split inference
Correct-token probability

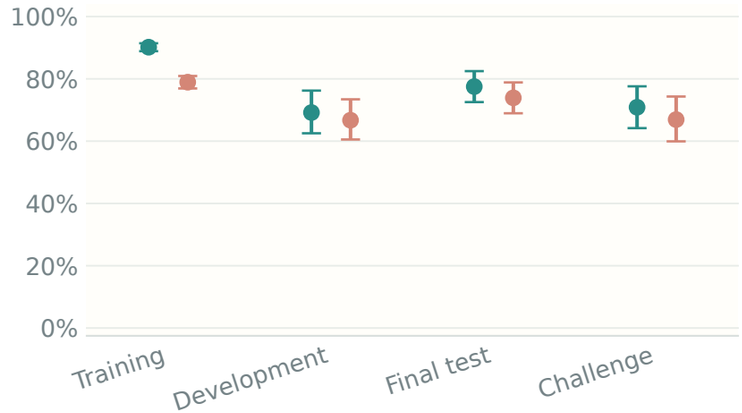


Split inference
Top-token accuracy

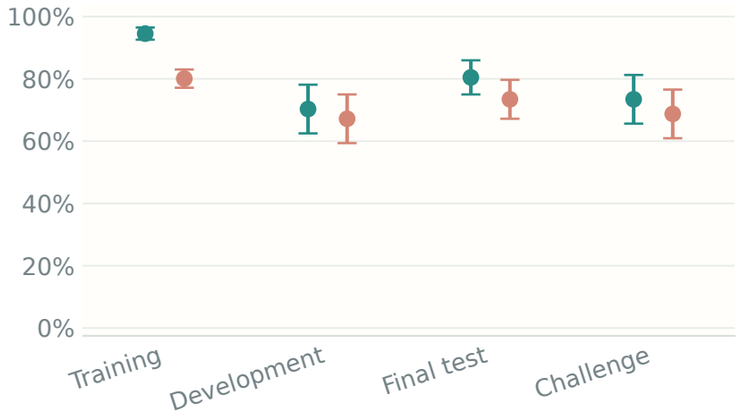


Whole-model compiled transfer
Condition log-odds separation

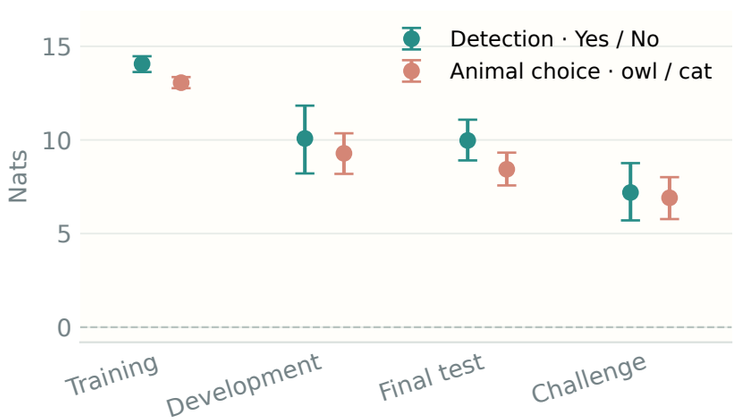


Whole-model compiled transfer
Correct-token probability

Whole-model compiled transfer
Top-token accuracy

Pointwise 95% paired prompt bootstrap intervals; counts and raw metrics are in the JSON. Runtime panels are not independent training runs.

An empirical [100%,100%] interval is not population certainty. Family-level robustness and independent seeds require separate analysis.