Which numerical signal can the model learn?

Development · same 64 prompt pairs · fixed native head · split inference

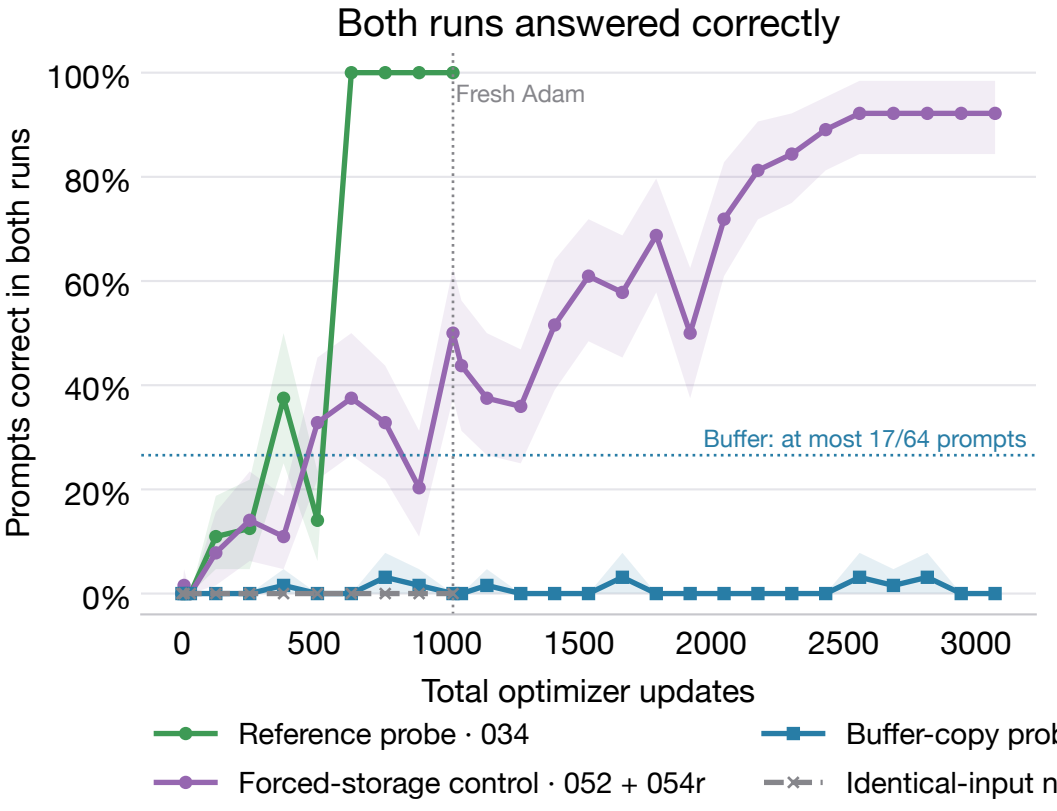

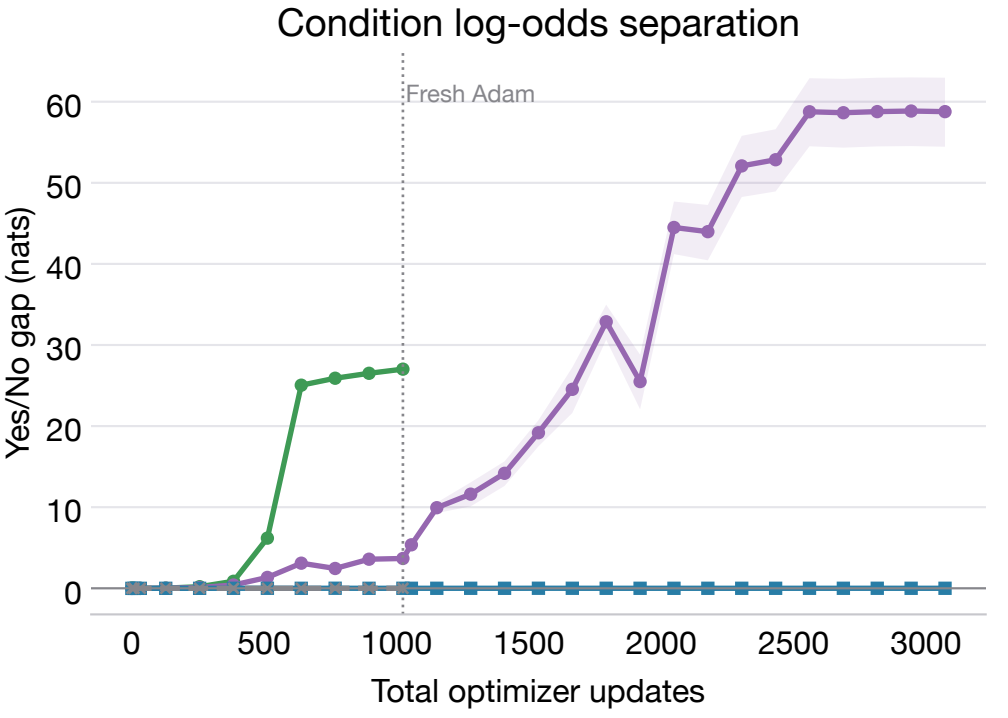

Same recipe, different compiled source instances. Null 045 uses the exact 034 cache.
5,000 paired-prompt resamples · pointwise 95% bands · one seed/build; zero width is not certainty.
Same prompt: No without + Yes with. The 47 identical buffer pairs cannot give both answers.