

SVKM'S NMIMS
Mukesh Patel School of Technology Management & Engineering
Department of Computer Engineering
Java Lab

Subject- Object Oriented Programming through JAVA

EXPERIMENT NO. 1


Aim: Study of Basic Java Programming Constructs

Materials:

1. Editor – Notepad/Notepad++
2. Command Prompt


Name: Saumya Sura	Roll no.: C136
Division: D-1	Date of Experiment: 23/1/2026

1)

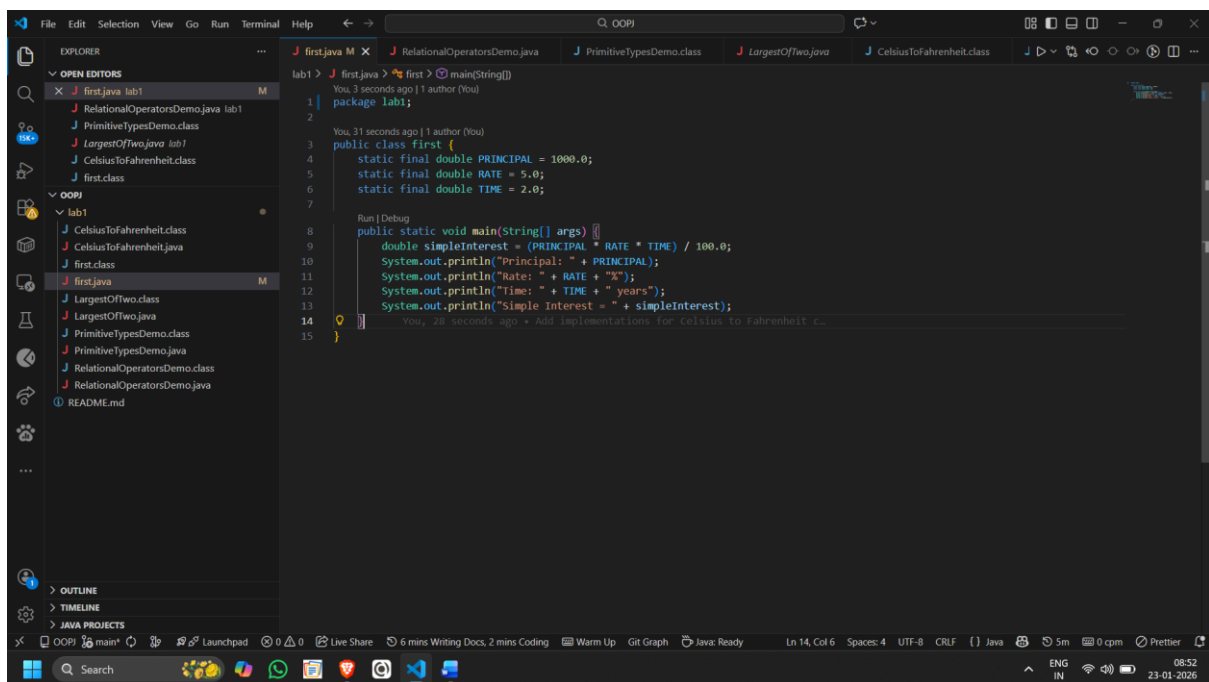A screenshot of an IDE window showing a Java file named 'first.java'. The code defines a class 'first' with static final variables for PRINCIPAL (1000.0), RATE (5.0), and TIME (2.0). The main method calculates simple interest using the formula (PRINCIPAL * RATE * TIME) / 100.0 and prints the results. The IDE interface includes a file explorer on the left, a code editor in the center, and a status bar at the bottom. The status bar shows 'Ln 14, Col 6', 'Spaces: 4', 'UTF-8', 'CRLF', and 'Java: Ready'. The system tray at the bottom right shows the date and time as '23-01-2026' and '08:52'.

```
C:\Users\Saumya\Desktop\OOPJ>java lab1.first
Principal: 1000.0
Rate: 5.0%
Time: 2.0 years
Simple Interest = 100.0
```


2)

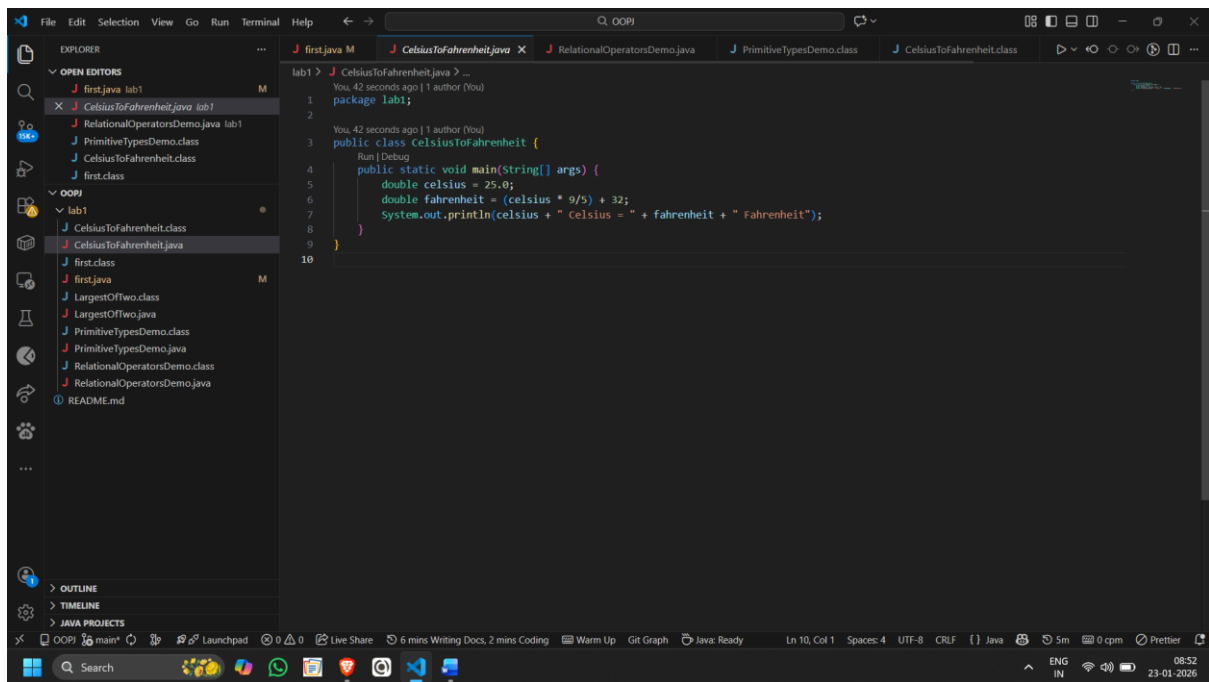

```
1 package lab1;
2
3 public class CelsiusToFahrenheit {
4     public static void main(String[] args) {
5         double celsius = 25.0;
6         double fahrenheit = (celsius * 9/5) + 32;
7         System.out.println(celsius + " Celsius = " + fahrenheit + " Fahrenheit");
8     }
9 }
10
```

25.0 Celsius = 77.0 Fahrenheit


3)

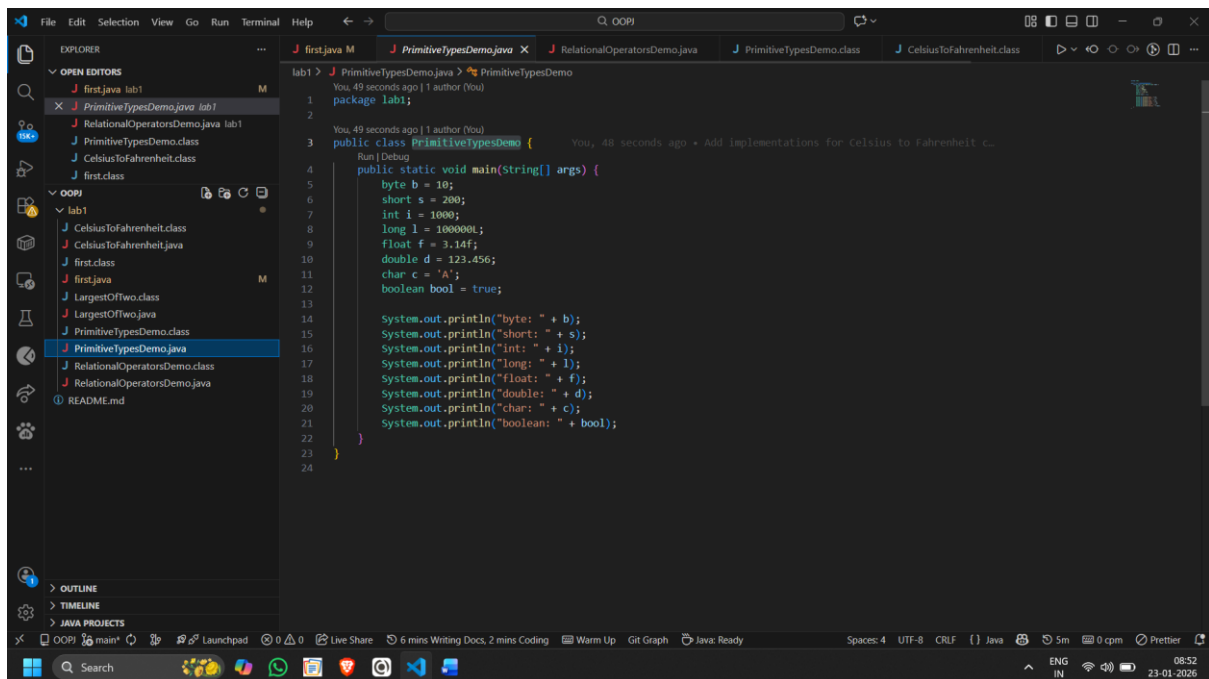

```
1 package lab1;
2
3 public class PrimitiveTypesDemo {
4     public static void main(String[] args) {
5         byte b = 10;
6         short s = 200;
7         int i = 1000;
8         long l = 1000000L;
9         float f = 3.14f;
10        double d = 123.456;
11        char c = 'A';
12        boolean bool = true;
13
14        System.out.println("byte: " + b);
15        System.out.println("short: " + s);
16        System.out.println("int: " + i);
17        System.out.println("long: " + l);
18        System.out.println("float: " + f);
19        System.out.println("double: " + d);
20        System.out.println("char: " + c);
21        System.out.println("boolean: " + bool);
22    }
23 }
24
```

```
byte: 10
short: 200
int: 1000
long: 100000
float: 3.14
double: 123.456
char: A
boolean: true
```


4)

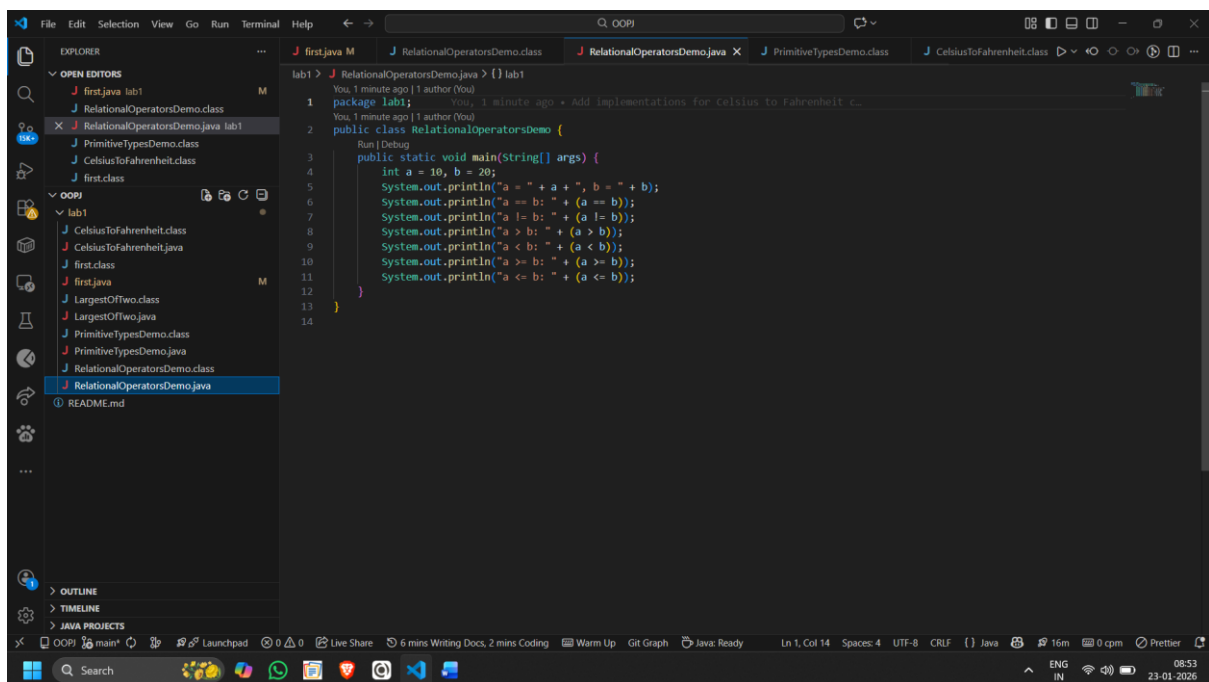

```
lab1 > J RelationalOperatorsDemo.java > {} lab1
You, 1 minute ago | 1 author (You)
1 package lab1;
You, 1 minute ago • Add implementations for Celsius to Fahrenheit c...
2 public class RelationalOperatorsDemo {
Run | Debug
3     public static void main(String[] args) {
4         int a = 10, b = 20;
5         System.out.println("a = " + a + ", b = " + b);
6         System.out.println("a == b: " + (a == b));
7         System.out.println("a != b: " + (a != b));
8         System.out.println("a > b: " + (a > b));
9         System.out.println("a < b: " + (a < b));
10        System.out.println("a >= b: " + (a >= b));
11        System.out.println("a <= b: " + (a <= b));
12    }
13
14 }
```

```
C:\Users\Saumya\Desktop\00PJ>java lab1.RelationalOperatorsDemo
a = 10, b = 20
a == b: false
a != b: true
a > b: false
a < b: true
a >= b: false
a <= b: true
```

5)

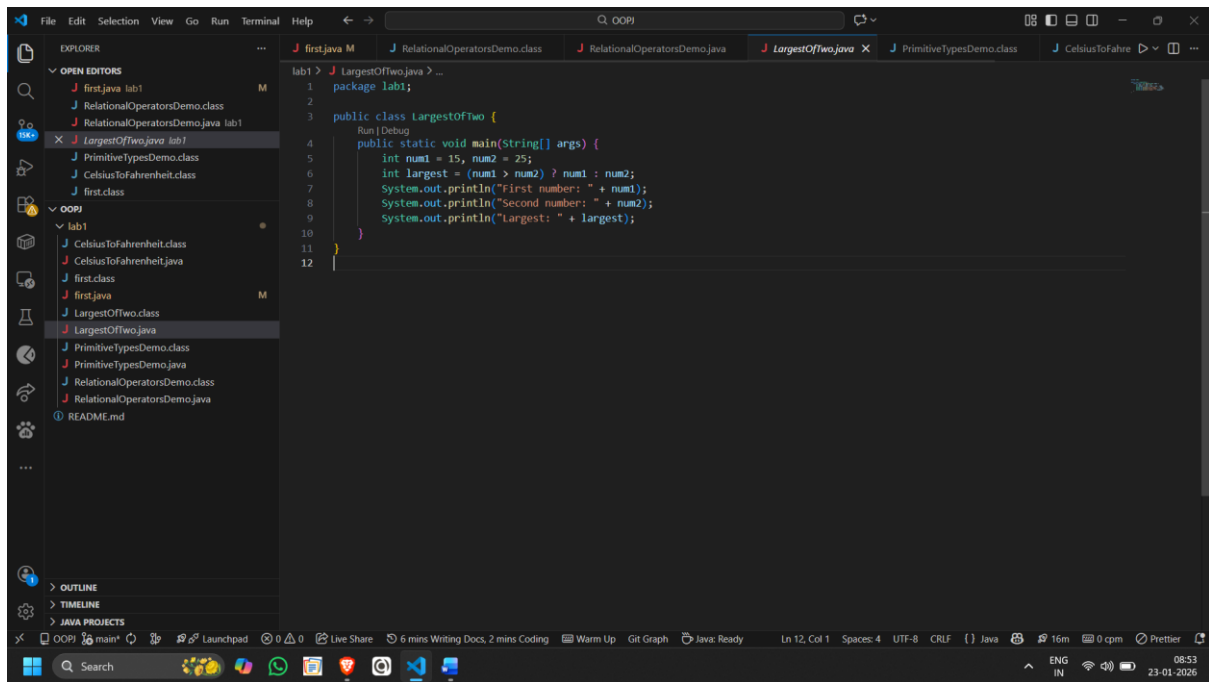

```
First number: 15
Second number: 25
Largest: 25
```