

## Top 50 matplotlib Visualizations – The Master Plots (with full python code)

by Selva Prabhakaran (<https://www.machinelearningplus.com/author/selva86/>) / Posted on November 28, 2018 (<https://www.machinelearningplus.com/plots/top-50-matplotlib-visualizations-the-master-plots-python/>)

A compilation of the Top 50 matplotlib plots most useful in data analysis and visualization. This list lets you choose what visualization to show for what situation using python's matplotlib and seaborn library.

### Introduction

The charts are grouped based on the 7 different purposes of your visualization objective. For example, if you want to picturize the relationship between 2 variables, check out the plots under the 'Correlation' section. Or if you want to show how a value changed over time, look under the 'Change' section and so on.

An effective chart is one which:

- Conveys the right and necessary information without distorting facts.
- Simple in design, you don't have to strain in order to get it.
- Aesthetics support the information rather than overshadow it.
- Not overloaded with information.

### Contents

(right click and open in new page if the links don't work)

[columnize]

#### Correlation

1. [Scatter plot](#)
2. [Bubble plot with Encircling](#)
3. [Scatter plot with line of best fit](#)
4. [Jittering with stripplot](#)
5. [Counts Plot](#)
6. [Marginal Histogram](#)
7. [Marginal Boxplot](#)
8. [Correlogram](#)
9. [Pairwise Plot](#)

#### Deviation

1. [Diverging Bars](#)
2. [Diverging Texts](#)
3. [Diverging Dot Plot](#)
4. [Diverging Lollipop Chart with Markers](#)
5. [Area Chart](#)

#### Recent Posts

- [data.table in R – The Complete Beginners Guide](#)  
(<https://www.machinelearningplus.com/data-manipulation/datatable-in-r-complete-guide/>).
- [Augmented Dickey Fuller Test \(ADF Test\) – Must Read Guide](#)  
(<https://www.machinelearningplus.com/time-series/augmented-dickey-fuller-test/>).
- [KPSS Test for Stationarity](#)  
(<https://www.machinelearningplus.com/time-series/kpss-test-for-stationarity/>).
- [101 R data.table Exercises](#)  
(<https://www.machinelearningplus.com/data-manipulation/101-r-data-table-exercises/>).
- [P-Value – Understanding from Scratch](#)  
(<https://www.machinelearningplus.com/statistics/p-value/>).
- [101 Python datatable Exercises \(pydatatable\)](#)  
(<https://www.machinelearningplus.com/data-manipulation/101-python-datable-exercises-pydatatable/>).
- [Vector Autoregression \(VAR\) – Comprehensive Guide with Examples in Python](#)  
(<https://www.machinelearningplus.com/time-series/vector-autoregression-examples-python/>).
- [Mahalanobis Distance – Understanding the math with examples \(python\)](#)  
(<https://www.machinelearningplus.com/statistics/mahalanobis-distance/>).
- [datetime in Python – Simplified Guide with Clear Examples](#)  
(<https://www.machinelearningplus.com/python/datetime-examples/>).
- [Principal Component Analysis \(PCA\) – Better Explained](#)  
(<https://www.machinelearningplus.com/machine-learning/principal-components-analysis-pca-better-explained/>).
- [Python Logging – Simplest Guide with Full Code and Examples](#)  
(<https://www.machinelearningplus.com/python/python-logging-guide/>).

- [Ordered Bar Chart](#)
- [Lollipop Chart](#)
- [Dot Plot](#)
- [Slope Chart](#)
- [Dumbbell Plot](#)

## Distribution

- [Histogram for Continuous Variable](#)
- [Histogram for Categorical Variable](#)
- [Density Plot](#)
- [Density Curves with Histogram](#)
- [Joy Plot](#)
- [Distributed Dot Plot](#)
- [Box Plot](#)
- [Dot + Box Plot](#)
- [Violin Plot](#)
- [Population Pyramid](#)
- [Categorical Plots](#)

## Composition

- [Waffle Chart](#)
- [Pie Chart](#)
- [Treemap](#)
- [Bar Chart](#)

## Change

- [Time Series Plot](#)
- [Time Series with Peaks and Troughs Annotated](#)
- [Autocorrelation Plot](#)
- [Cross Correlation Plot](#)
- [Time Series Decomposition Plot](#)
- [Multiple Time Series](#)
- [Plotting with different scales using secondary Y axis](#)
- [Time Series with Error Bands](#)
- [Stacked Area Chart](#)
- [Area Chart Unstacked](#)
- [Calendar Heat Map](#)
- [Seasonal Plot](#)

## Groups

- [Dendrogram](#)
- [Cluster Plot](#)
- [Andrews Curve](#)
- [Parallel Coordinates](#)

[/columnize]

## Setup

Run this once before the plot's code. The individual charts, however, may redefine its own aesthetics.

[Matplotlib Histogram – How to Visualize Distributions in Python](#)  
(<https://www.machinelearningplus.com/plots/matplotlib-histogram-python-examples/>).

[ARIMA Model – Complete Guide to Time Series Forecasting in Python](#)  
(<https://www.machinelearningplus.com/time-series/arima-model-time-series-forecasting-python/>).

[Time Series Analysis in Python – A Comprehensive Guide with Examples](#)  
(<https://www.machinelearningplus.com/time-series/time-series-analysis-python/>).

[Matplotlib Tutorial – A Complete Guide to Python Plot w/ Examples](#)  
(<https://www.machinelearningplus.com/plots/matplotlib-tutorial-complete-guide-python-plot-examples/>).

[Topic modeling visualization – How to present the results of LDA models?](#)  
(<https://www.machinelearningplus.com/nlp/topic-modeling-visualization-how-to-present-results-lda-models/>).

[Top 50 matplotlib Visualizations – The Master Plots \(with full python code\)](#)  
(<https://www.machinelearningplus.com/plots/top-50-matplotlib-visualizations-the-master-plots-python/>).

[List Comprehensions in Python – My Simplified Guide](#)  
(<https://www.machinelearningplus.com/python/list-comprehensions-in-python/>).

[Python @Property Explained – How to Use and When? \(Full Examples\)](#)  
(<https://www.machinelearningplus.com/python/python-property/>).

[How Naive Bayes Algorithm Works? \(with example and full code\)](#)  
(<https://www.machinelearningplus.com/predictive-modeling/how-naive-bayes-algorithm-works-with-example-and-full-code/>).

## Tags

---

[Bigrams](#) (<https://www.machinelearningplus.com/tag/bigrams/>).  
[Classification](#)  
(<https://www.machinelearningplus.com/tag/classification/>).  
[Corpus](#) (<https://www.machinelearningplus.com/tag/corpus/>).  
[Cosine Similarity](#)  
(<https://www.machinelearningplus.com/tag/cosine-similarity/>).  
[data.table](#)  
(<https://www.machinelearningplus.com/tag/datatable/>).  
[Data Manipulation](#)  
(<https://www.machinelearningplus.com/tag/manipulation/>).  
[Debugging](#)  
(<https://www.machinelearningplus.com/tag/debugging/>).  
[Doc2Vec](#)  
(<https://www.machinelearningplus.com/tag/doc2vec/>).  
[Feedback](#)

```

# !pip install brewer2mpl

import numpy as np
import pandas as pd
import matplotlib as mpl
import matplotlib.pyplot as plt
import seaborn as sns
import warnings; warnings.filterwarnings(action='once')

large = 22; med = 16; small = 12
params = {'axes.titlesize': large,
           'legend.fontsize': med,
           'figure.figsize': (16, 10),
           'axes.labelsize': med,
           'axes.titlesize': med,
           'xtick.labelsize': med,
           'ytick.labelsize': med,
           'figure.titlesize': large}
plt.rcParams.update(params)
plt.style.use('seaborn-whitegrid')
sns.set_style("white")
%matplotlib inline

# Version
print(mpl.__version__) #> 3.0.0
print(sns.__version__) #> 0.9.0

```


## Correlation

The plots under correlation is used to visualize the relationship between 2 or more variables. That is, how does one variable change with respect to another.

### 1. Scatter plot

Scatterplot is a classic and fundamental plot used to study the relationship between two variables. If you have multiple groups in your data you may want to visualise each group in a different color. In matplotlib , you can conveniently do this using plt.scatterplot() .

Show Code

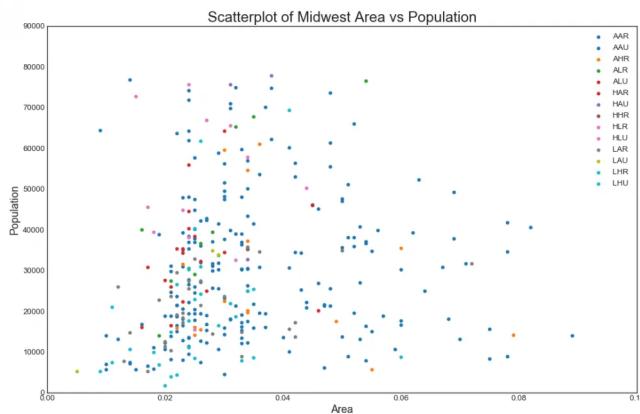

(<https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/ /n1/scatterplot-Matplotlib>)

## Evaluation Metrics

(<https://www.machinelearningplus.com/tag/evaluation-metrics/>) [FastText](#)

(<https://www.machinelearningplus.com/tag/fasttext/>)

## Feature Selection

(<https://www.machinelearningplus.com/tag/feature-selection/>)

## Gensim

(<https://www.machinelearningplus.com/tag/gensim>)

## LDA

(<https://www.machinelearningplus.com/tag/lda/>)

## Lemmatization

(<https://www.machinelearningplus.com/tag/lemmatization/>) [Linear Regression](#) (<https://www.machinelearningplus.com/tag/linear-regression/>) [Logistic](#)

(<https://www.machinelearningplus.com/tag/logistic/>) [LSI](#)

(<https://www.machinelearningplus.com/tag/lsi/>) [Matplotlib](#)

(<https://www.machinelearningplus.com/tag/matplotlib>)

## Multiprocessing

(<https://www.machinelearningplus.com/tag/multiprocessing/>)

## NLP

(<https://www.machinelearningplus.com/tag/nlp>)

## Numpy

([https://www.machinelearningplus.com/tag\(numpy](https://www.machinelearningplus.com/tag(numpy))

## P-Value

(<https://www.machinelearningplus.com/tag/p-value/>) [Pandas](#)

(<https://www.machinelearningplus.com/tag/pandas/>) [Parallel Processing](#) (<https://www.machinelearningplus.com/tag/parallel-processing/>) [Phraser](#)

(<https://www.machinelearningplus.com/tag/phraser/>) [Practice Exercise](#) (<https://www.machinelearningplus.com/tag/practice-exercise/>)

## Python

(<https://www.machinelearningplus.com/tag/python>)

## R

(<https://www.machinelearningplus.com/tag/r>)

## Regex

(<https://www.machinelearningplus.com/tag/regex/>)

## Regression

(<https://www.machinelearningplus.com/tag/regression/>)

## Residual Analysis

(<https://www.machinelearningplus.com/tag/residual-analysis/>)

[Scikit Learn](#) (<https://www.machinelearningplus.com/tag/scikit-learn/>)

## Significance Tests

(<https://www.machinelearningplus.com/tag/significance-tests/>) [Soft Cosine Similarity](#)

(<https://www.machinelearningplus.com/tag/soft-cosine-similarity/>) [spaCy](#)

(<https://www.machinelearningplus.com/tag/spacy/>)

## Stationarity

(<https://www.machinelearningplus.com/tag/stationarity>)

(<https://www.machinelearningplus.com/tag/summarization/>)

## TaggedDocument

(<https://www.machinelearningplus.com/tag/taggeddocument/>)

[TextBlob](#) (<https://www.machinelearningplus.com/tag/textblob/>)

[TFIDF](#) (<https://www.machinelearningplus.com/tag/tfidf/>)

## Time Series

(<https://www.machinelearningplus.com/tag/time-series>)


[Feedback](#)

[series/\). Topic Modeling](#)  
[\(https://www.machinelearningplus.com/tag/topic-modeling/\). Visualization](#)  
[\(https://www.machinelearningplus.com/tag/visualization/Word2Vec](#) [\(https://www.machinelearningplus.com/tag/word2vec/\).](#)

## 2. Bubble plot with Encircling

Sometimes you want to show a group of points within a boundary to emphasize their importance. In this example, you get the records from the dataframe that should be encircled and pass it to the `encircle()` described in the code below.

Show Code

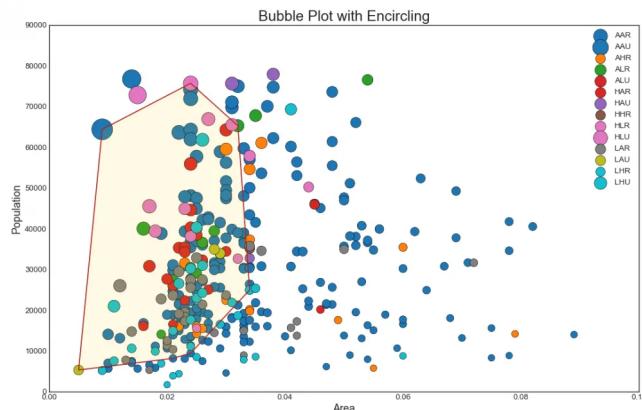


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/ /n/2\\_Bubble\\_Plot-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/ /n/2_Bubble_Plot-min.png))

## 3. Scatter plot with linear regression line of best fit

If you want to understand how two variables change with respect to each other, the line of best fit is the way to go. The below plot shows how the line of best fit differs amongst various groups in the data. To disable the groupings and to just draw one line-of-best-fit for the entire dataset, remove the `hue='cyl'` parameter from the `sns.lmplot()` call below.

Show Code

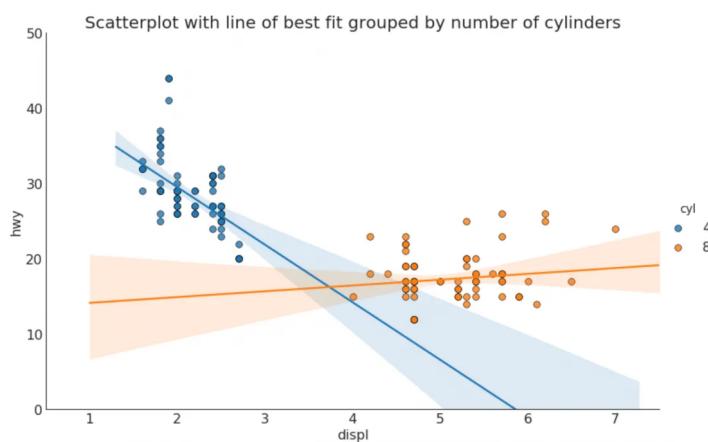


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/ /n/3\\_1\\_Scatterplot\\_with\\_linesofbestfit\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/ /n/3_1_Scatterplot_with_linesofbestfit_Seaborn-min.png))

## Each regression line in its own column

Alternately, you can show the best fit line for each group in its own column. You can do this by setting the `col=groupingcolumn` parameter inside the `sns.lmplot()`.

Feedback

Show Code

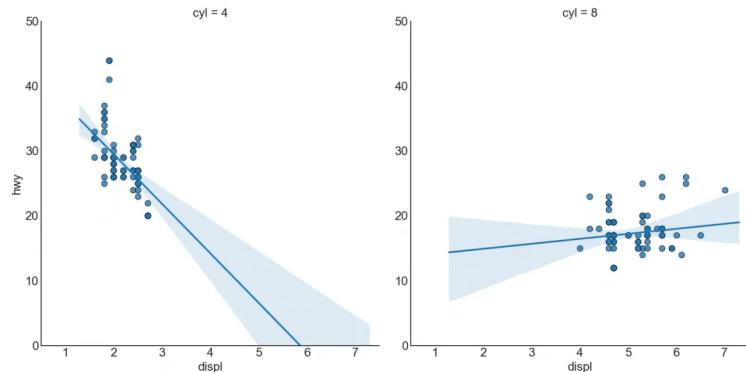


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/ /n/3\\_2\\_Scatterplot\\_with\\_lineofbestfit\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/ /n/3_2_Scatterplot_with_lineofbestfit_Seaborn-min.png)).

## 4. Jittering with stripplot

Often multiple datapoints have exactly the same X and Y values. As a result, multiple points get plotted over each other and hide. To avoid this, jitter the points slightly so you can visually see them. This is convenient to do using seaborn's `stripplot()`.

Show Code

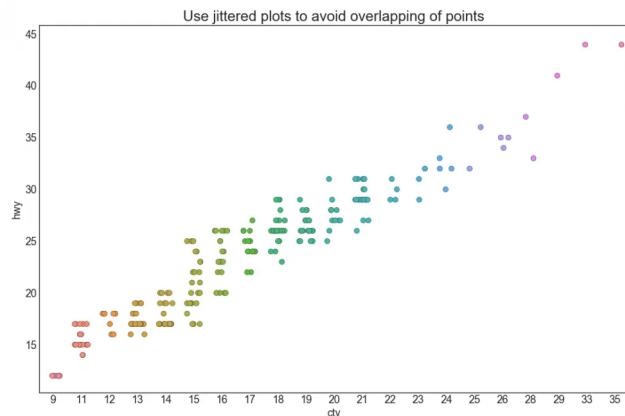

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/ /n/4\\_Jittering\\_with\\_Stripplot\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/ /n/4_Jittering_with_Stripplot_Seaborn-min.png)).

## 5. Counts Plot

Another option to avoid the problem of points overlap is the increase the size of the dot depending on how many points lie in that spot. So, larger the size of the point more is the concentration of points around that.


```

# Import Data
df = pd.read_csv("https://raw.githubusercontent.com/selva86/datasets/master/mpg_g
df_counts = df.groupby(['hwy', 'cty']).size().reset_index(name='counts')

# Draw Stripplot
fig, ax = plt.subplots(figsize=(16,10), dpi= 80)
sns.stripplot(df_counts.cty, df_counts.hwy, size=df_counts.counts*2, ax=ax)

# Decorations
plt.title('Counts Plot - Size of circle is bigger as more points overlap', fontsize=22)
plt.show()

```

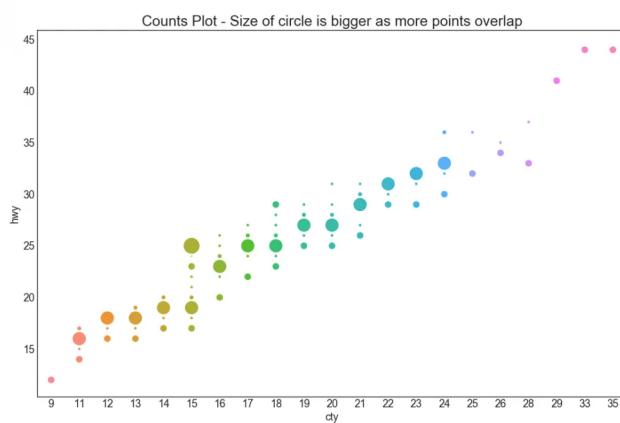


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/5/ /n/5\\_Counts\\_plot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/5/ /n/5_Counts_plot_Matplotlib-min.png)).

## 6. Marginal Histogram

Marginal histograms have a histogram along the X and Y axis variables. This is used to visualize the relationship between the X and Y along with the univariate distribution of the X and the Y individually. This plot is often used in exploratory data analysis (EDA).

Show Code

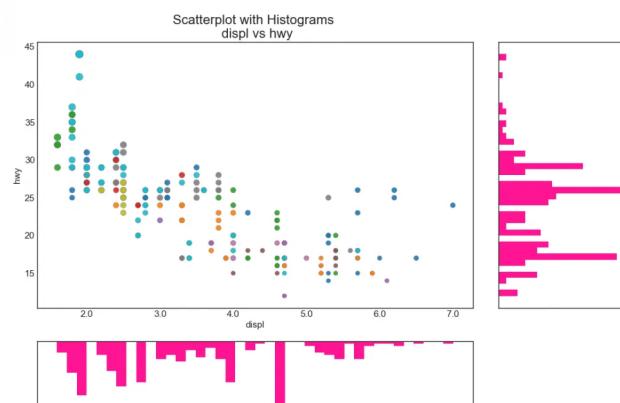


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/6/ /n/6\\_Marginal\\_histogram\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/6/ /n/6_Marginal_histogram_Matplotlib-min.png)).

## 7. Marginal Boxplot

Marginal boxplot serves a similar purpose as marginal histogram. However, the boxplot helps to pinpoint the median, 25th and 75th percentiles of the X and the Y.

Show Code

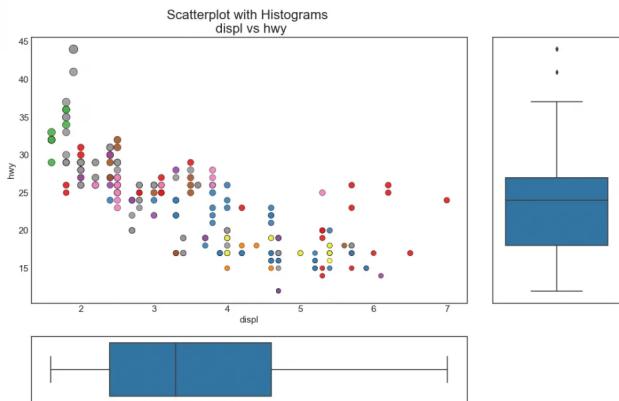

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/7/ /n/7 Marginal\\_boxplot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/7/ /n/7 Marginal_boxplot_Matplotlib-min.png)).


## 8. Correlogram

Correlogram is used to visually see the correlation metric between all possible pairs of numeric variables in a given dataframe (or 2D array).

```
# Import Dataset
df = pd.read_csv("https://github.com/selva86/datasets/raw/master/mtcars.csv" (https:

# Plot
plt.figure(figsize=(12,10), dpi= 80)
sns.heatmap(df.corr(), xticklabels=df.corr().columns, yticklabels=df.corr().columns, cmap='RdYl

# Decorations
plt.title('Correlogram of mtcars', fontsize=22)
plt.xticks(fontsize=12)
plt.yticks(fontsize=12)
plt.show()
```

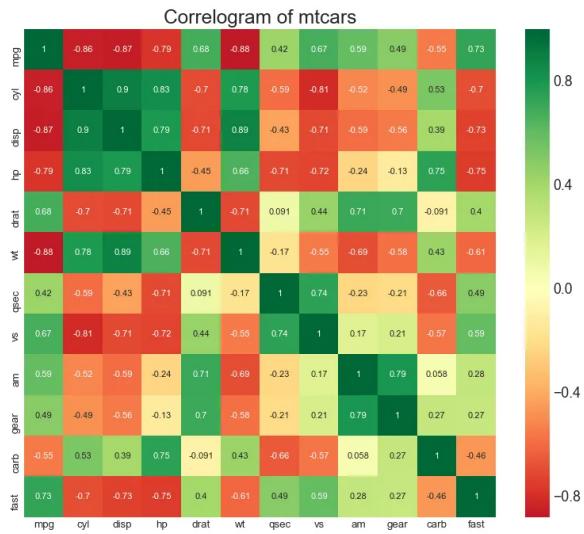


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/8/n/8\\_Correlogram\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/8/n/8_Correlogram_Matplotlib-min.png)).

## 9. Pairwise Plot

Pairwise plot is a favorite in exploratory analysis to understand the relationship between all possible pairs of numeric variables. It is a must have tool for bivariate analysis.

```
# Load Dataset
df = sns.load_dataset('iris')

# Plot
plt.figure(figsize=(10,8), dpi= 80)
sns.pairplot(df, kind="scatter", hue="species", plot_kws=dict(s=80, edgecolor="white", linewidth=1))
plt.show()
```

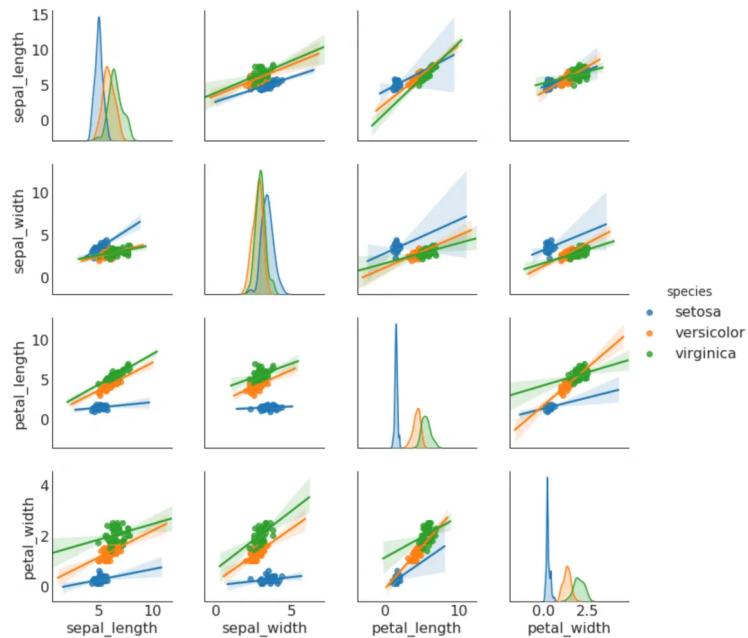


Feedback

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/9/ /n/9\\_Pairplot\\_lines\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/9/ /n/9_Pairplot_lines_Seaborn-min.png)).

```
# Load Dataset
df = sns.load_dataset('iris')

# Plot
plt.figure(figsize=(10,8), dpi= 80)
sns.pairplot(df, kind="reg", hue="species")
plt.show()
```

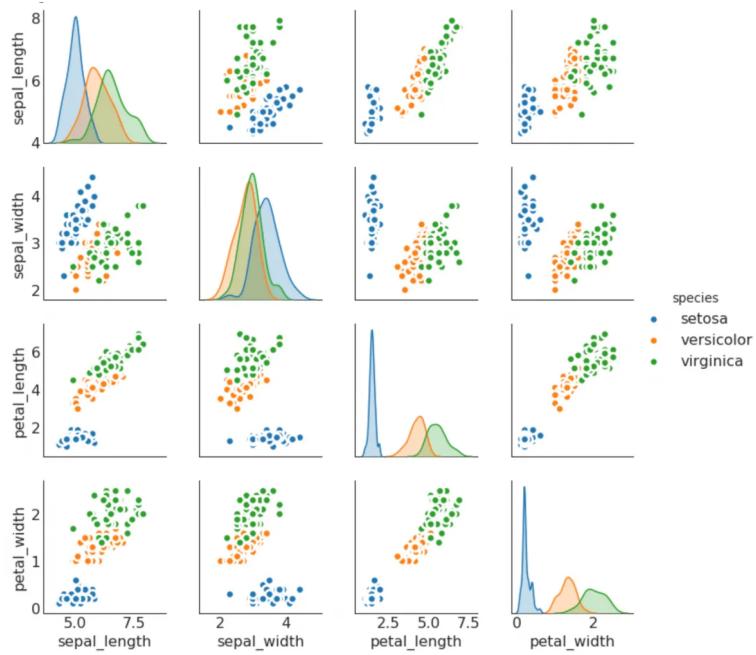

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/9/ /n/9\\_Pairplot\\_scatter\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/9/ /n/9_Pairplot_scatter_Seaborn-min.png)).

## **Deviation**

### **10. Diverging Bars**

If you want to see how the items are varying based on a single metric and visualize the order and amount of this variance, the diverging bars is a great tool. It helps to quickly differentiate the performance of groups in your data and is quite intuitive and instantly conveys the point.


```

# Prepare Data
df = pd.read_csv("https://github.com/selva86/datasets/raw/master/mtcars.csv_(https:
x = df.loc[:, ['mpg']]
df['mpg_z'] = (x - x.mean()) / x.std()
df['colors'] = ['red' if x < 0 else 'green' for x in df['mpg_z']]
df.sort_values('mpg_z', inplace=True)
df.reset_index(inplace=True)

# Draw plot
plt.figure(figsize=(14,10), dpi= 80)
plt.hlines(y=df.index, xmin=0, xmax=df.mpg_z, color=df.colors, alpha=0.4, linewidth=5)

# Decorations
plt.gca().set(ylabel='$Model$', xlabel='$Mileage$')
plt.yticks(df.index, df.cars, fontsize=12)
plt.title('Diverging Bars of Car Mileage', fontdict={'size':20})
plt.grid(linestyle='--', alpha=0.5)
plt.show()

```

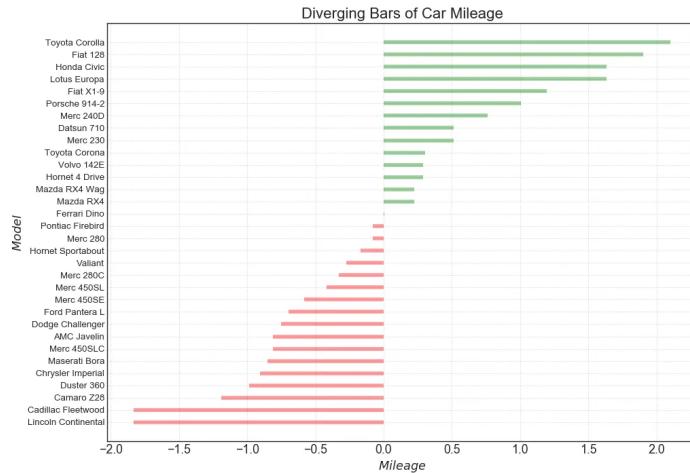

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/1/0/n/10\\_Diverging\\_bars\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/1/0/n/10_Diverging_bars_Matplotlib-min.png)).

## 11. Diverging Texts


Diverging texts is similar to diverging bars and it preferred if you want to show the value of each items within the chart in a nice and presentable way.

```

# Prepare Data
df = pd.read_csv("https://github.com/selva86/datasets/raw/master/mtcars.csv_(https:
x = df.loc[:, ['mpg']]
df['mpg_z'] = (x - x.mean()) / x.std()
df['colors'] = ['red' if x < 0 else 'green' for x in df['mpg_z']]
df.sort_values('mpg_z', inplace=True)
df.reset_index(inplace=True)

# Draw plot
plt.figure(figsize=(14,14), dpi= 80)
plt.hlines(y=df.index, xmin=0, xmax=df.mpg_z)
for x, y, tex in zip(df.mpg_z, df.index, df.mpg_z):
    t = plt.text(x, y, round(tex, 2), horizontalalignment='right' if x < 0 else 'left',
                 verticalalignment='center', fontdict={'color':'red' if x < 0 else 'green', 'size':16})
plt.yticks(df.index, df.cars, fontsize=12)
plt.title('Diverging Text Bars of Car Mileage', fontdict={'size':20})
plt.grid(linestyle='--', alpha=0.5)
plt.xlim(-2.5, 2.5)
plt.show()

```

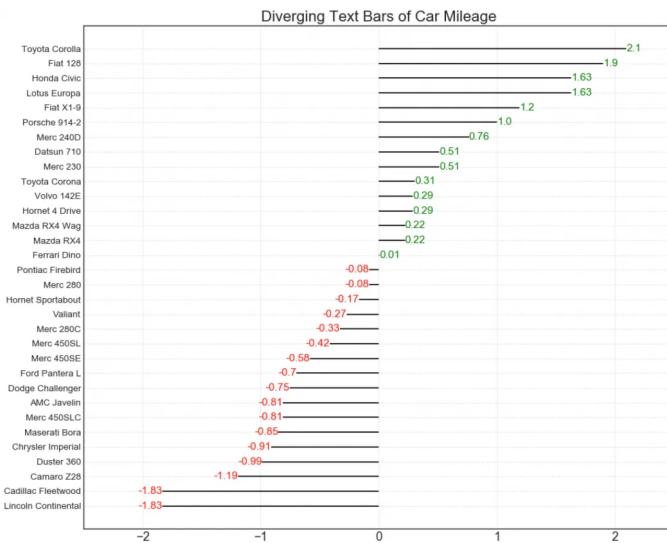


([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/1/n/11\\_Diverging\\_Textbars\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/1/n/11_Diverging_Textbars_Matplotlib-min.png)).

## 12. Diverging Dot Plot

Diverging dot plot is also similar to the diverging bars. However compared to diverging bars, the absence of bars reduces the amount of contrast and disparity between the groups.

Show Code

Feedback

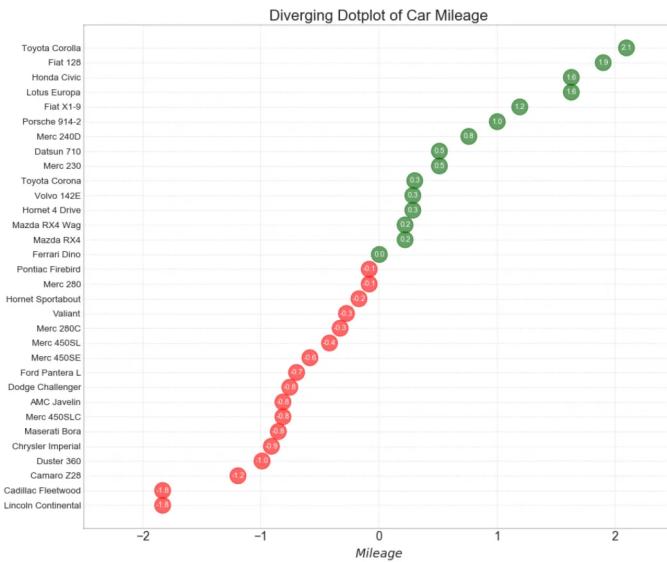


([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/1/2/n/12\\_Diverging\\_DotPlot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/1/2/n/12_Diverging_DotPlot_Matplotlib-min.png)).

## 13. Diverging Lollipop Chart with Markers

Lollipop with markers provides a flexible way of visualizing the divergence by laying emphasis on any significant datapoints you want to bring attention to and give reasoning within the chart appropriately.

Show Code

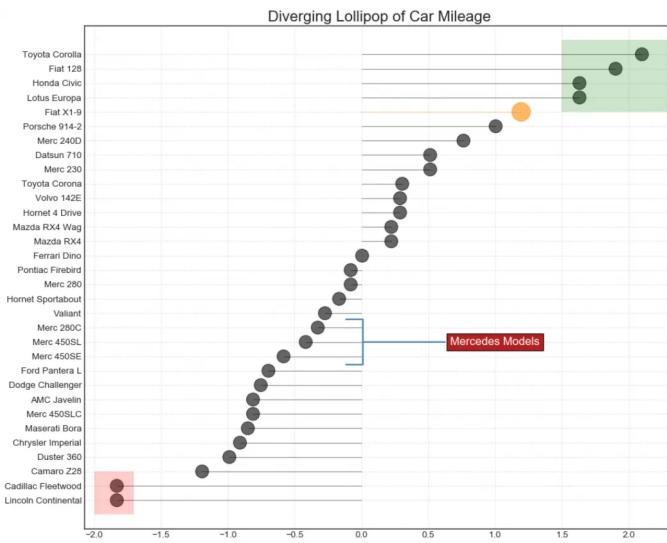

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/1/3/n/13\\_Diverging\\_Lollipop\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/1/3/n/13_Diverging_Lollipop_Matplotlib-min.png)).


## 14. Area Chart

By coloring the area between the axis and the lines, the area chart throws more emphasis not just on the peaks and troughs but also the duration of the highs and lows. The longer the duration of the highs, the larger is the area under the

[Feedback](#)

line.

Show Code

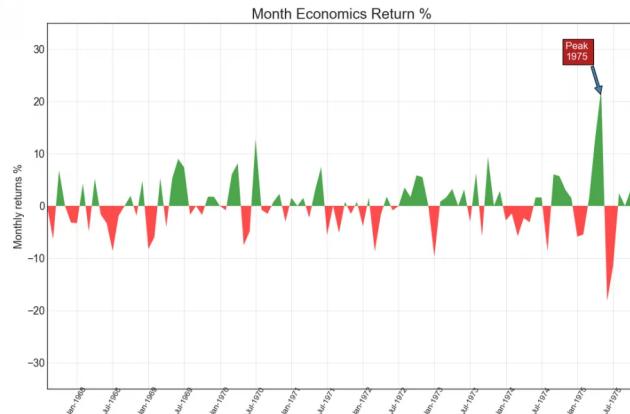


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/4/n/14\\_AreaChart\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/4/n/14_AreaChart_Matplotlib-min.png)).

## Ranking

### 15. Ordered Bar Chart

Ordered bar chart conveys the rank order of the items effectively. But adding the value of the metric above the chart, the user gets the precise information from the chart itself.

Show Code

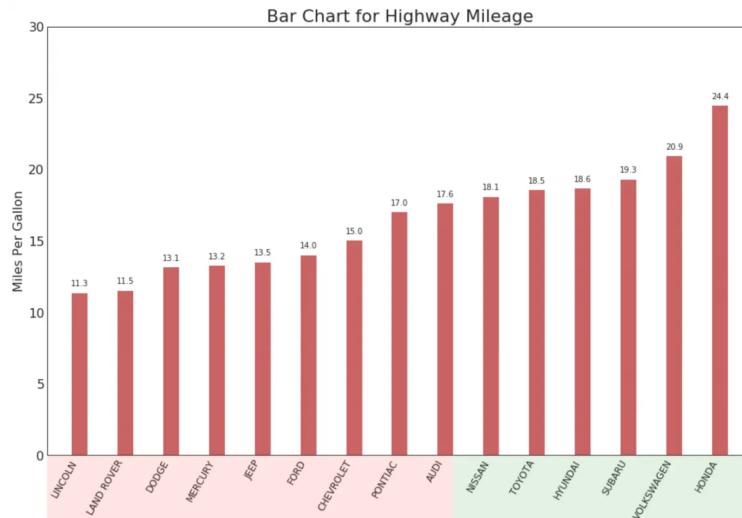


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/5/n/15\\_Ordered\\_Barchart\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/5/n/15_Ordered_Barchart_Matplotlib-min.png)).

### 16. Lollipop Chart

Lollipop chart serves a similar purpose as a ordered bar chart in a visually pleasing way.

Show Code

Feedback

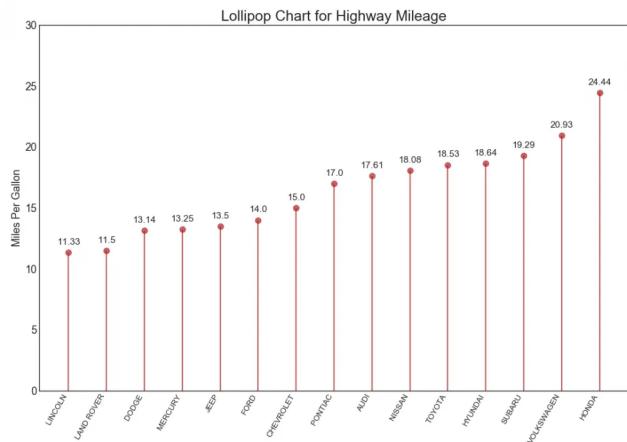

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/6/n/16\\_Lollipop\\_Chart\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/6/n/16_Lollipop_Chart_Matplotlib-min.png)).


## 17. Dot Plot

The dot plot conveys the rank order of the items. And since it is aligned along the horizontal axis, you can visualize how far the points are from each other more easily.

```
# Prepare Data
df_raw = pd.read_csv("https://github.com/selva86/datasets/raw/master/mpg_ggplot2.csv")
df = df_raw[['cty', 'manufacturer']].groupby('manufacturer').apply(lambda x: x.mean())
df.sort_values('cty', inplace=True)
df.reset_index(inplace=True)

# Draw plot
fig, ax = plt.subplots(figsize=(16,10), dpi= 80)
ax.hlines(y=df.index, xmin=11, xmax=26, color='gray', alpha=0.7, linewidth=1, linestyles='dashed')
ax.scatter(y=df.index, x=df.cty, s=75, color='firebrick', alpha=0.7)

# Title, Label, Ticks and Ylim
ax.set_title('Dot Plot for Highway Mileage', fontdict={'size':22})
ax.set_xlabel('Miles Per Gallon')
ax.set_yticks(df.index)
ax.set_yticklabels(df.manufacturer.str.title(), fontdict={'horizontalalignment': 'right'})
ax.set_xlim(10, 27)
plt.show()
```

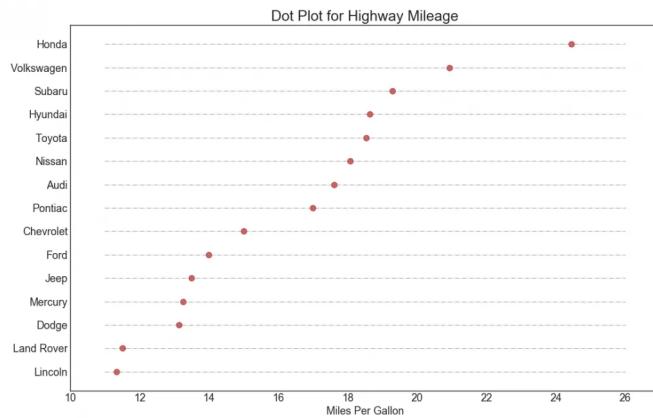


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/7/n/17\\_DotPlot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/7/n/17_DotPlot_Matplotlib-min.png)).

## 18. Slope Chart

Slope chart is most suitable for comparing the 'Before' and 'After' positions of a given person/item.

Show Code

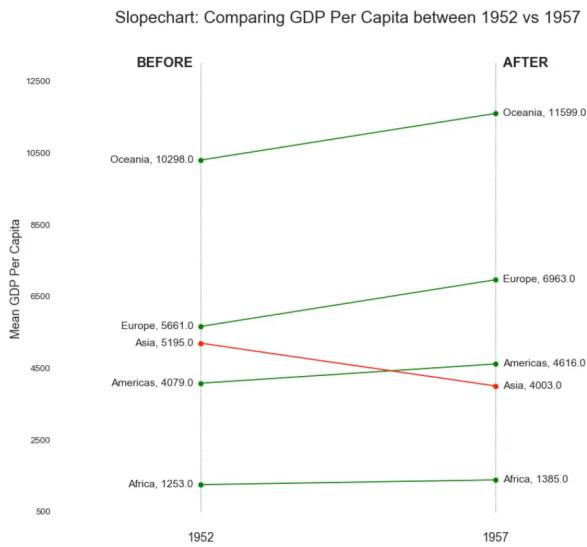


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/8/n/18\\_Slopechart\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/8/n/18_Slopechart_Matplotlib-min.png)).

## 19. Dumbbell Plot

Dumbbell plot conveys the 'before' and 'after' positions of various items along with the rank ordering of the items. Its very useful if you want to visualize the effect of a particular project / initiative on different objects.

Show Code

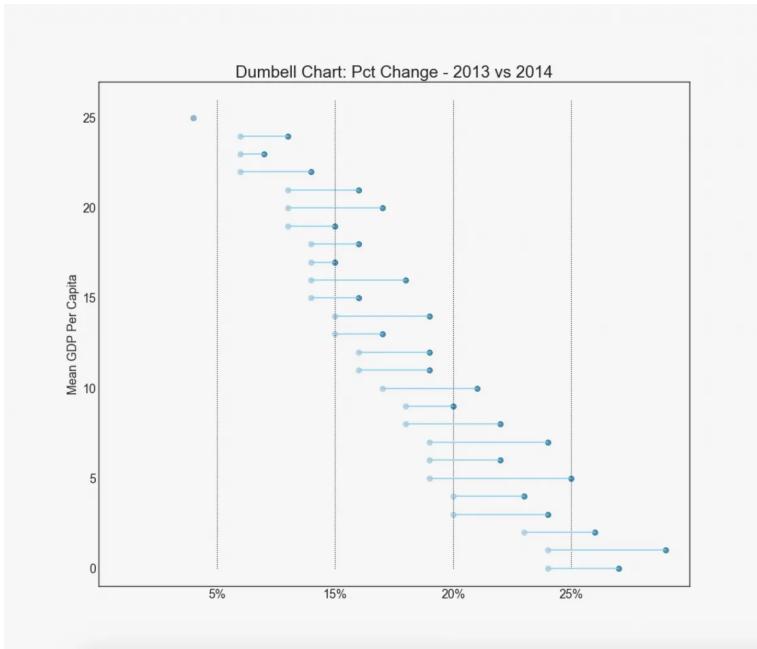


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/9/n/19\\_Dumbbell\\_Chart\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/1/9/n/19_Dumbbell_Chart_Matplotlib-min.png)).

## Distribution

### 20. Histogram for Continuous Variable

Histogram shows the frequency distribution of a given variable. The below representation groups the frequency bars based on a categorical variable giving a greater insight about the continuous variable and the categorical variable in tandem.

Show Code

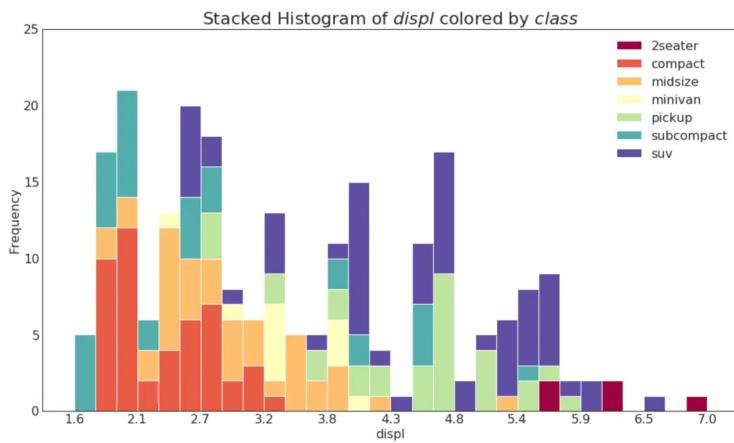


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/0/n/20\\_Histogram\\_Continuous\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/0/n/20_Histogram_Continuous_Matplotlib-min.png)).

### 21. Histogram for Categorical Variable

The histogram of a categorical variable shows the frequency distribution of a that variable. By coloring the bars, you can visualize the distribution in connection with another categorical variable representing the colors.

Show Code

Feedback

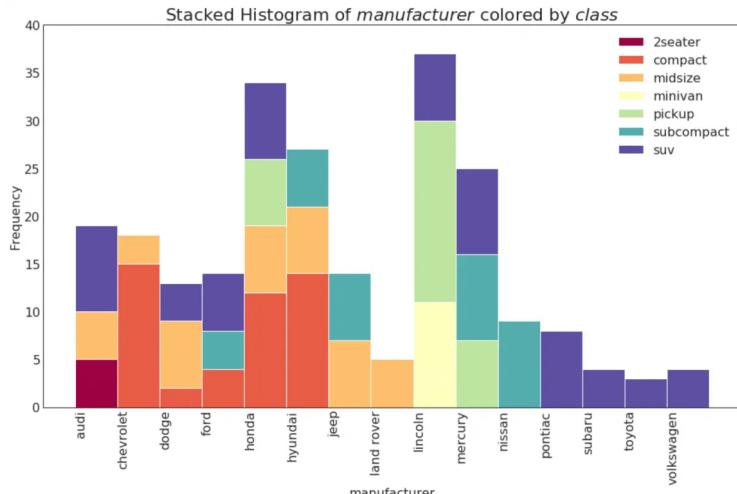


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/1/n/21\\_Histogram\\_Barchart\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/1/n/21_Histogram_Barchart_Matplotlib-min.png)).

## 22. Density Plot

Density plots are a commonly used tool visualise the distribution of a continuous variable. By grouping them by the 'response' variable, you can inspect the relationship between the X and the Y. The below case if for representational purpose to describe how the distribution of city mileage varies with respect the number of cylinders.

Show Codes

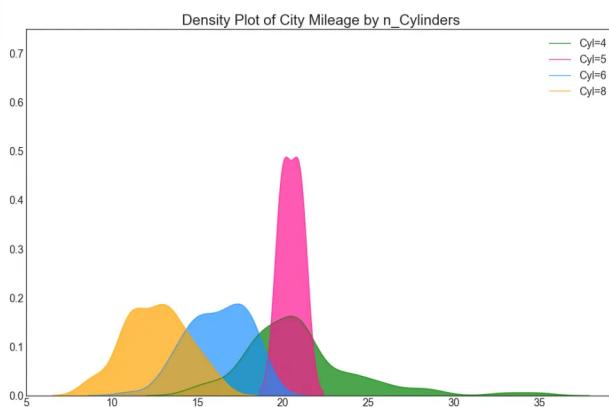


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/2/n/22\\_DensityPlot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/2/n/22_DensityPlot_Matplotlib-min.png)).

## 23. Density Curves with Histogram

Density curve with histogram brings together the collective information conveyed by the two plots so you can have them both in a single figure instead of two.

Show Code

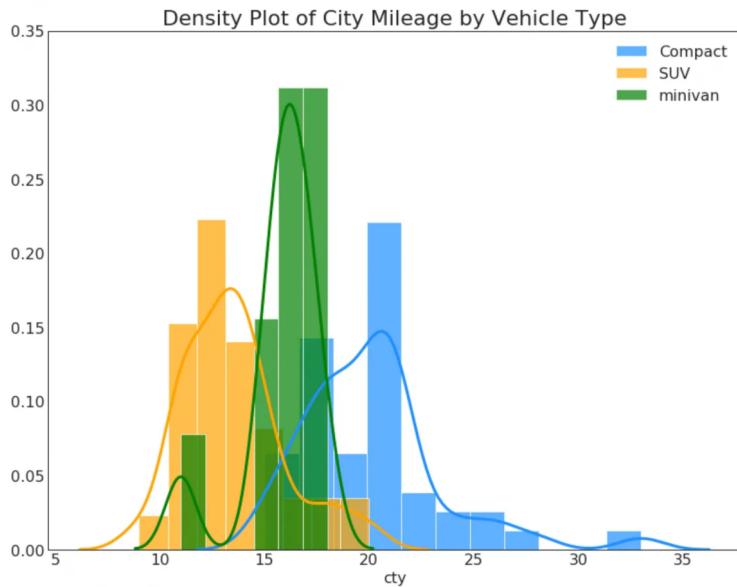

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/2/3/n/23\\_DensityPlot\\_With\\_Histogram\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/2/3/n/23_DensityPlot_With_Histogram_Matplotlib-min.png)).


## 24. Joy Plot

Joy Plot allows the density curves of different groups to overlap, it is a great way to visualize the distribution of a larger number of groups in relation to each other. It looks pleasing to the eye and conveys just the right information clearly. It can be easily built using the joypy package which is based on matplotlib .

```
# !pip install joypy
# Import Data
mpg = pd.read_csv("https://github.com/selva86/datasets/raw/master/mpg_ggplot2.csv"

# Draw Plot
plt.figure(figsize=(16,10), dpi= 80)
fig, axes = joypy.joyplot(mpg, column=['hwy', 'cty'], by="class", ylim='own', figsize=(14,10))

# Decoration
plt.title('Joy Plot of City and Highway Mileage by Class', fontsize=22)
plt.show()
```

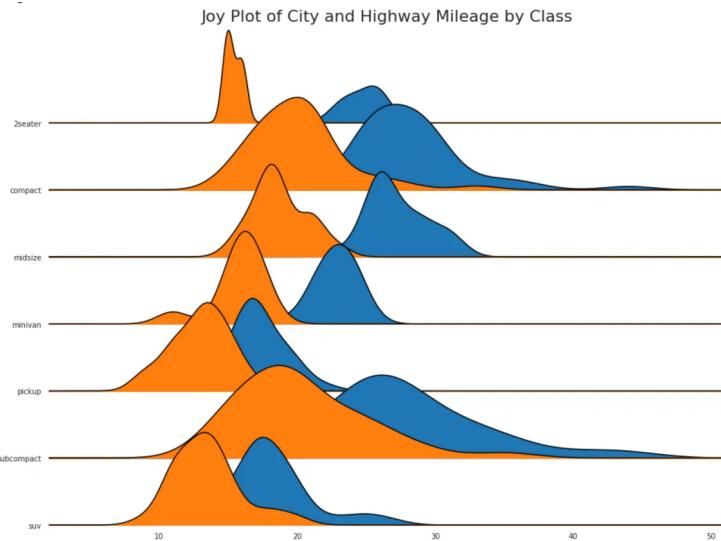


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/4/n/24\\_JoyPlot\\_joy.py-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/4/n/24_JoyPlot_joy.py-min.png)).

## 25. Distributed Dot Plot

Distributed dot plot shows the univariate distribution of points segmented by groups. The darker the points, more is the concentration of data points in that region. By coloring the median differently, the real positioning of the groups becomes apparent instantly.

Show Code

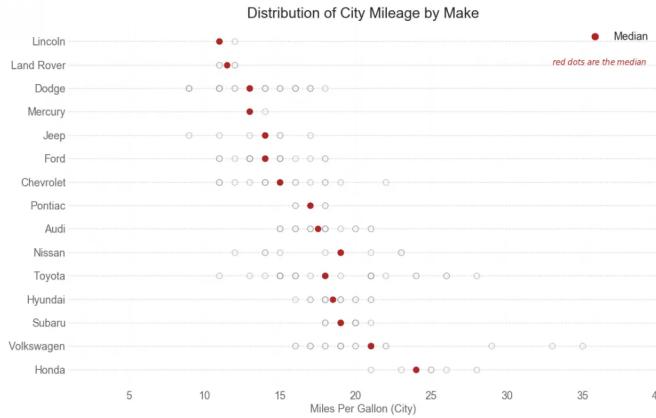

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/5/n/25\\_Distributed\\_Dotplot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/5/n/25_Distributed_Dotplot_Matplotlib-min.png)).

## 26. Box Plot

Box plots are a great way to visualize the distribution, keeping the median, 25th 75th quartiles and the outliers in mind. However, you need to be careful about interpreting the size the boxes which can potentially distort the number of points contained within that group. So, manually providing the number of observations in each box can help overcome this drawback.

For example, the first two boxes on the left have boxes of the same size even though they have 5 and 47 obs respectively. So writing the number of observations in that group becomes necessary.

```

# Import Data
df = pd.read_csv("https://github.com/selva86/datasets/raw/master/mpg_ggplot2.csv")


# Draw Plot
plt.figure(figsize=(13,10), dpi= 80)
sns.boxplot(x='class', y='hwy', data=df, notch=False)

# Add N Obs inside boxplot (optional)
def add_n_obs(df,group_col,y):
    medians_dict = {grp[0]:grp[1][y].median() for grp in df.groupby(group_col)}
    xticklabels = [x.get_text() for x in plt.gca().get_xticklabels()]
    n_obs = df.groupby(group_col)[y].size().values
    for (x, xticklabel), n_ob in zip(enumerate(xticklabels), n_obs):
        plt.text(x, medians_dict[xticklabel]*1.01, "#obs : "+str(n_ob), horizontalalignment='center')

add_n_obs(df,group_col='class',y='hwy')

# Decoration
plt.title('Box Plot of Highway Mileage by Vehicle Class', fontsize=22)
plt.ylim(10, 40)
plt.show()

```

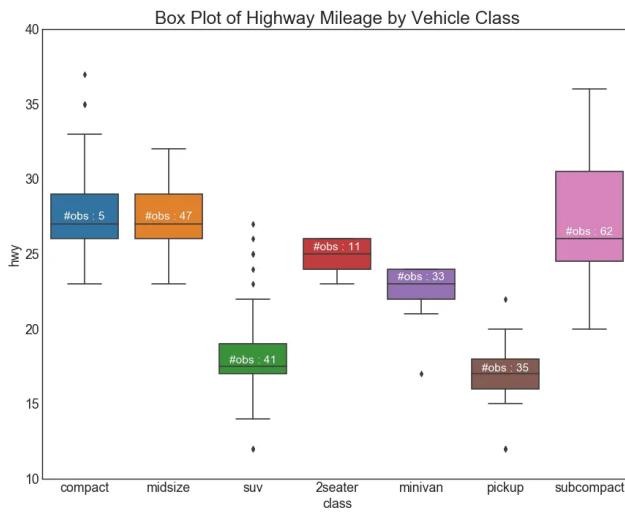

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/2/6/n/26\\_Boxplots\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/2/6/n/26_Boxplots_Matplotlib-min.png)).

## 27. Dot + Box Plot

Dot + Box plot Conveys similar information as a boxplot split in groups. The dots, in addition, gives a sense of how many data points lie within each group.

```


# Import Data
df = pd.read_csv("https://github.com/selva86/datasets/raw/master/mpg_ggplot2.csv")

# Draw Plot
plt.figure(figsize=(13,10), dpi= 80)
sns.boxplot(x='class', y='hwy', data=df, hue='cyl')
sns.stripplot(x='class', y='hwy', data=df, color='black', size=3, jitter=1)

for i in range(len(df['class'].unique())-1):
    plt.vlines(i+.5, 10, 45, linestyles='solid', colors='gray', alpha=0.2)

# Decoration
plt.title('Box Plot of Highway Mileage by Vehicle Class', fontsize=22)
plt.legend(title='Cylinders')
plt.show()

```

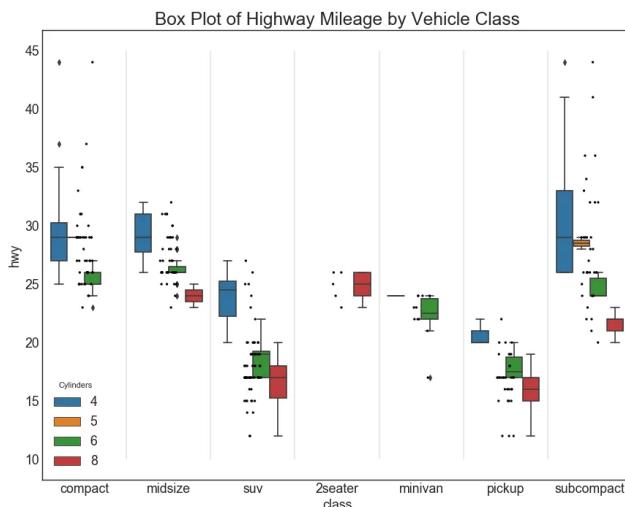

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/2/7/n/27\\_Dot\\_Box\\_Plot\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/2/7/n/27_Dot_Box_Plot_Seaborn-min.png)).

## 28. Violin Plot

Violin plot is a visually pleasing alternative to box plots. The shape or area of the violin depends on the number of observations it holds. However, the violin plots can be harder to read and it not commonly used in professional settings.


```

# Import Data
df = pd.read_csv("https://github.com/selva86/datasets/raw/master/mpg_ggplot2.csv")

# Draw Plot
plt.figure(figsize=(13,10), dpi= 80)
sns.violinplot(x='class', y='hwy', data=df, scale='width', inner='quartile')

# Decoration
plt.title('Violin Plot of Highway Mileage by Vehicle Class', fontsize=22)
plt.show()

```

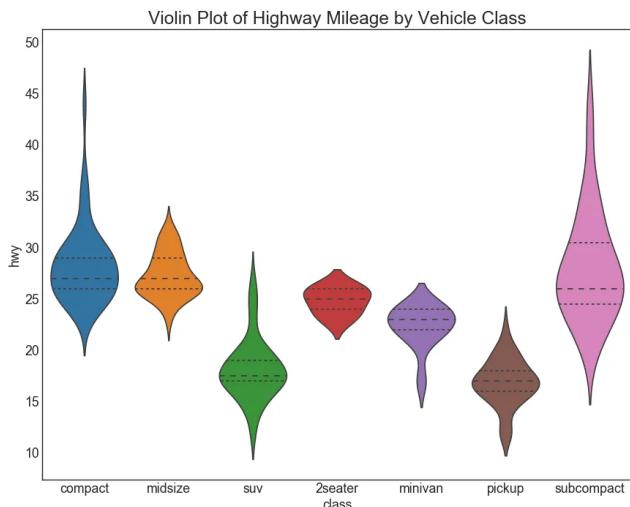

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/8/n/28\\_Violin\\_Plot\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/2/8/n/28_Violin_Plot_Seaborn-min.png)).

## 29. Population Pyramid


Population pyramid can be used to show either the distribution of the groups ordered by the volume. Or it can also be used to show the stage-by-stage filtering of the population as it is used below to show how many people pass through each stage of a marketing funnel.

```
# Read data
df = pd.read_csv("https://raw.githubusercontent.com/selva86/datasets/master/email.csv")

# Draw Plot
plt.figure(figsize=(13,10), dpi= 80)
group_col = 'Gender'
order_of_bars = df.Stage.unique()[:-1]
colors = [plt.cm.Spectral(i/float(len(df[group_col].unique())-1)) for i in range(len(df[group_col].unique()))]

for c, group in zip(colors, df[group_col].unique()):
    sns.barplot(x='Users', y='Stage', data=df.loc[df[group_col]==group, :], order=order_of_bars)

# Decorations
plt.xlabel("$Users$")
plt.ylabel("Stage of Purchase")
plt.yticks(fontsize=12)
plt.title("Population Pyramid of the Marketing Funnel", fontsize=22)
plt.legend()
plt.show()
```

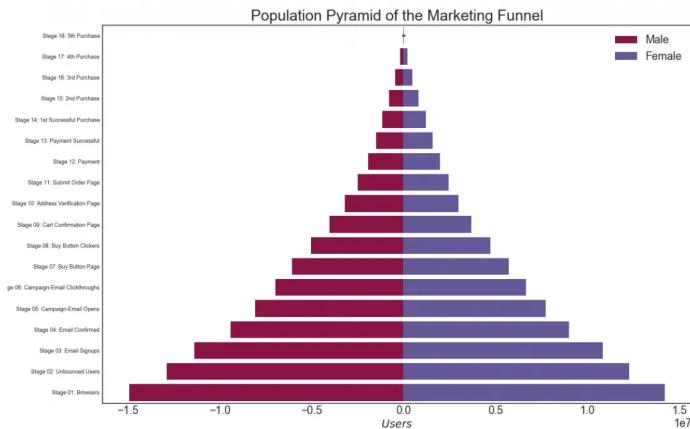

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/2/9/n/29\\_PyramidPlot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/2/9/n/29_PyramidPlot_Matplotlib-min.png)).


## 30. Categorical Plots

Categorical plots provided by the seaborn library can be used to visualize the counts distribution of 2 or more categorical variables in relation to each other.

```
# Load Dataset
titanic = sns.load_dataset("titanic")

# Plot
g = sns.catplot("alive", col="deck", col_wrap=4,
                 data=titanic[titanic.deck.notnull()],
                 kind="count", height=3.5, aspect=.8,
                 palette='tab20')


fig.suptitle('sf')
plt.show()
```

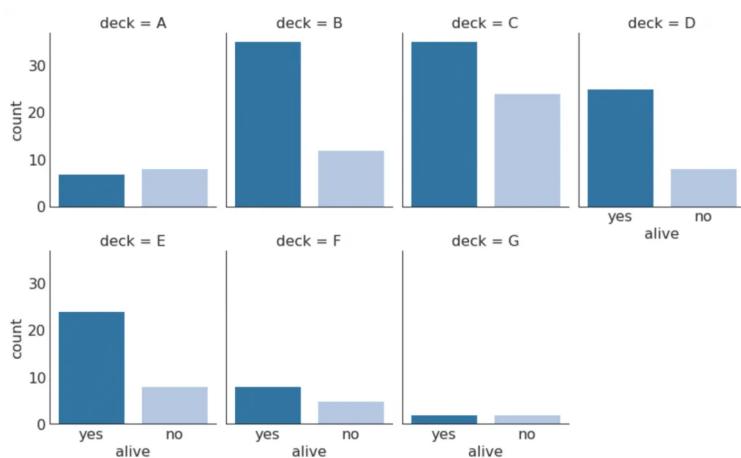

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/3/0/n/30\\_CatPlots\\_1\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/3/0/n/30_CatPlots_1_Seaborn-min.png)).

```
# Load Dataset
titanic = sns.load_dataset("titanic")

# Plot
sns.catplot(x="age", y="embark_town",
             hue="sex", col="class",
             data=titanic[titanic.embark_town.notnull()],
             orient="h", height=5, aspect=1, palette="tab10",
             kind="violin", dodge=True, cut=0, bw=.2)
```

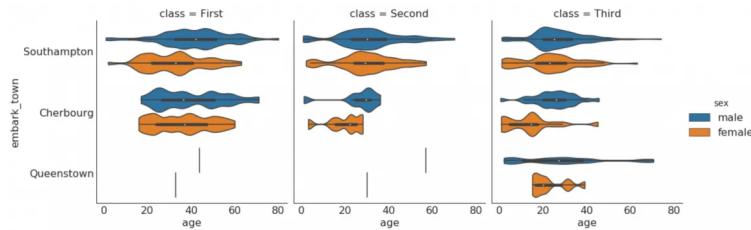


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/0/n/30\\_CatPlots\\_2\\_Seaborn-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/0/n/30_CatPlots_2_Seaborn-min.png)).

## Composition

### 31. Waffle Chart


The waffle chart can be created using the pywaffle package and is used to show the compositions of groups in a larger population.

Show Code

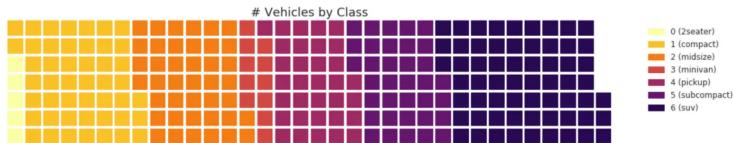

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/1/n/31\\_WaffleChart\\_1\\_Pywaffle-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/1/n/31_WaffleChart_1_Pywaffle-min.png)).

Show Code

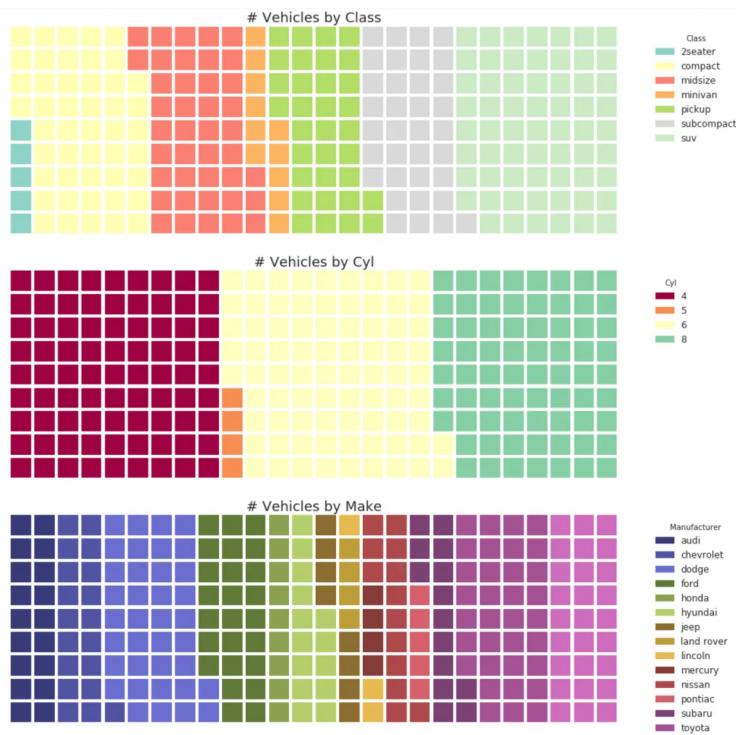

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/3/1/n/31\\_WaffleChart\\_2\\_PyWaffle-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/3/1/n/31_WaffleChart_2_PyWaffle-min.png)).

## 32. Pie Chart

Pie chart is a classic way to show the composition of groups. However, its not generally advisable to use nowadays because the area of the pie portions can sometimes become misleading. So, if you are to use pie chart, its highly recommended to explicitly write down the percentage or numbers for each portion of the pie.

```


# Import
df_raw = pd.read_csv("https://github.com/selva86/datasets/raw/master/mpg_ggplot2.c

# Prepare Data
df = df_raw.groupby('class').size()

# Make the plot with pandas
df.plot(kind='pie', subplots=True, figsize=(8, 8), dpi= 80)
plt.title("Pie Chart of Vehicle Class - Bad")
plt.ylabel("")
plt.show()

```


Pie Chart of Vehicle Class - Bad

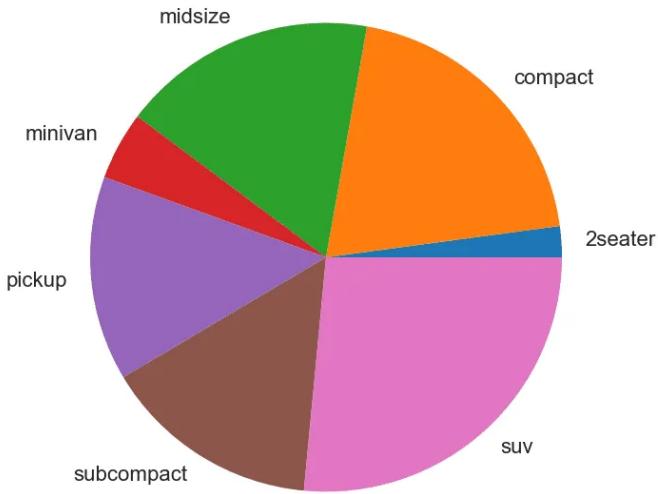

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/2/n/32\\_PieChart\\_1\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/2/n/32_PieChart_1_Matplotlib-min.png)).

Show Code

Class of Vehicles: Pie Chart

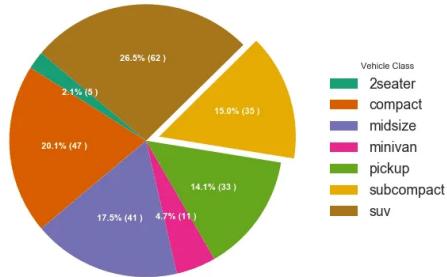

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/2/n/32\\_PieChart\\_2\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/2/n/32_PieChart_2_Matplotlib-min.png)).

### 33. Treemap

Tree map is similar to a pie chart and it does a better work without misleading the contributions by each group.

```

# pip install squarify
import squarify


# Import Data
df_raw = pd.read_csv('https://github.com/selva86/datasets/raw/master/mpg_ggplot2.c

# Prepare Data
df = df_raw.groupby('class').size().reset_index(name='counts')
labels = df.apply(lambda x: str(x[0]) + "\n(" + str(x[1]) + ")", axis=1)
sizes = df['counts'].values.tolist()
colors = [plt.cm.Spectral(i/float(len(labels))) for i in range(len(labels))]

# Draw Plot
plt.figure(figsize=(12,8), dpi= 80)
squarify.plot(sizes=sizes, label=labels, color=colors, alpha=.8)

# Decorate
plt.title('Treemap of Vechile Class')
plt.axis('off')
plt.show()

```

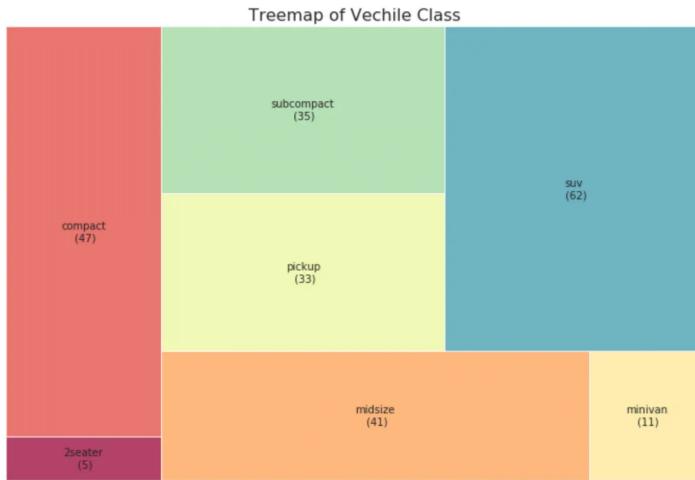


([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/3/3/n/33\\_Treemap\\_squarify\\_min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/3/3/n/33_Treemap_squarify_min.png))

## 34. Bar Chart

Bar chart is a classic way of visualizing items based on counts or any given metric. In below chart, I have used a different color for each item, but you might typically want to pick one color for all items unless you to color them by groups. The color names get stored inside `all_colors` in the code below. You can change the color of the bars by setting the `color` parameter in `plt.plot()`.

Show Code

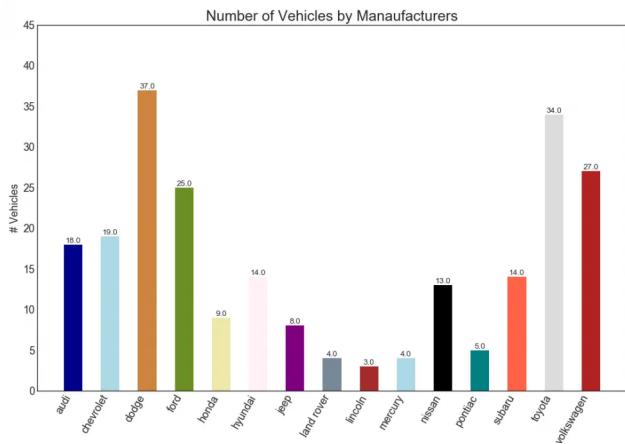


([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/3/4/n/34\\_BarChart\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/3/4/n/34_BarChart_Matplotlib-min.png)).

## Change

### 35. Time Series Plot

Time series plot is used to visualise how a given metric changes over time. Here you can see how the Air Passenger traffic changed between 1949 and 1969.

Show Code

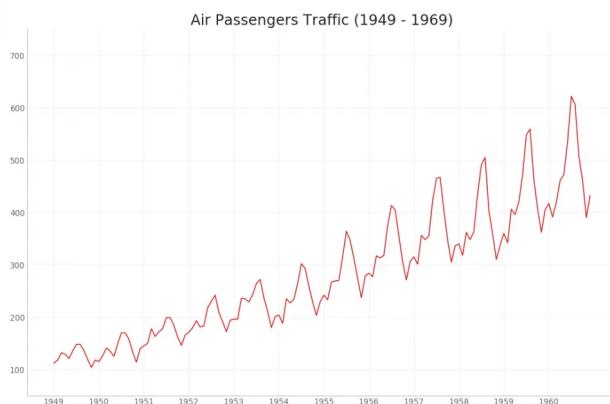


([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/3/5/n/35\\_TimeSeries\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/3/5/n/35_TimeSeries_Matplotlib-min.png)).

### 36. Time Series with Peaks and Troughs Annotated

The below time series plots all the the peaks and troughs and annotates the occurence of selected special events.

Show Code

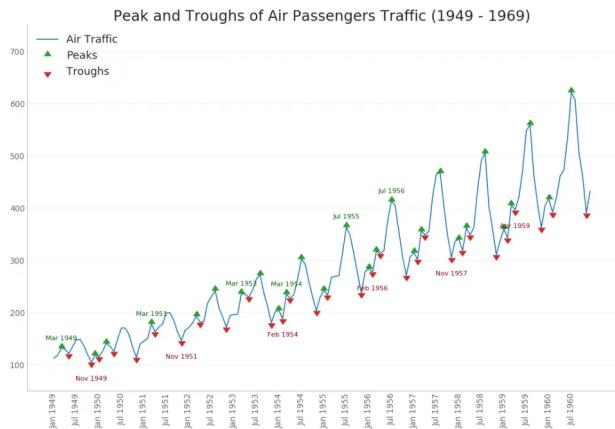

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/6/n/36\\_TimeSeries\\_Peaks\\_Troughs\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/6/n/36_TimeSeries_Peaks_Troughs_Matplotlib-min.png)).

## 37. Autocorrelation (ACF) and Partial Autocorrelation (PACF) Plot

The ACF plot shows the correlation of the time series with its own lags. Each vertical line (on the autocorrelation plot) represents the correlation between the series and its lag starting from lag 0. The blue shaded region in the plot is the significance level. Those lags that lie above the blue line are the significant lags.

So how to interpret this?

For AirPassengers, we see upto 14 lags have crossed the blue line and so are significant. This means, the Air Passengers traffic seen upto 14 years back has an influence on the traffic seen today.

PACF on the other had shows the autocorrelation of any given lag (of time series) against the current series, but with the contributions of the lags-inbetween removed.

```

from statsmodels.graphics.tsaplots import plot_acf, plot_pacf


# Import Data
df = pd.read_csv('https://github.com/selva86/datasets/raw/master/AirPassengers.csv')

# Draw Plot
fig, (ax1, ax2) = plt.subplots(1, 2, figsize=(16,6), dpi= 80)
plot_acf(df.traffic.tolist(), ax=ax1, lags=50)
plot_pacf(df.traffic.tolist(), ax=ax2, lags=20)

# Decorate
# Lighten the borders
ax1.spines["top"].set_alpha(.3); ax2.spines["top"].set_alpha(.3)
ax1.spines["bottom"].set_alpha(.3); ax2.spines["bottom"].set_alpha(.3)
ax1.spines["right"].set_alpha(.3); ax2.spines["right"].set_alpha(.3)
ax1.spines["left"].set_alpha(.3); ax2.spines["left"].set_alpha(.3)

# font size of tick labels
ax1.tick_params(axis='both', labelsize=12)
ax2.tick_params(axis='both', labelsize=12)
plt.show()

```

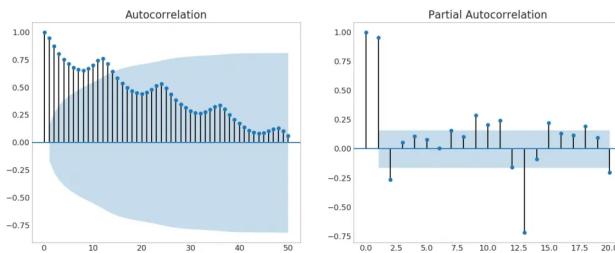


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/7/n/37\\_ACF\\_PACF\\_Plot\\_Matplotlib\\_Statmodels-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/7/n/37_ACF_PACF_Plot_Matplotlib_Statmodels-min.png)).

## 38. Cross Correlation plot

Cross correlation plot shows the lags of two time series with each other.

Show Code

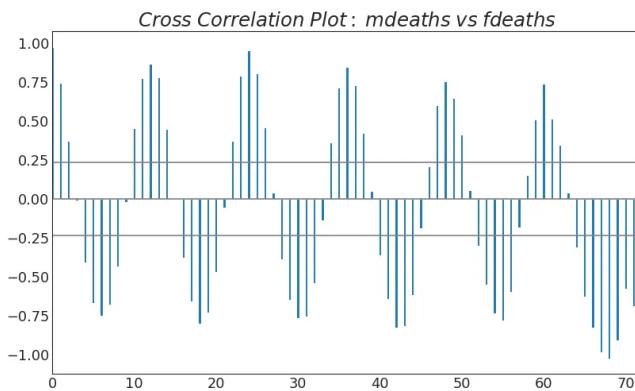

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/8/n/38\\_CCFPlot\\_Statmodels\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/3/8/n/38_CCFPlot_Statmodels_Matplotlib-min.png)).

## 39. Time Series Decomposition Plot


Time series decomposition plot shows the break down of the time series into trend, seasonal and residual components.

```
from statsmodels.tsa.seasonal import seasonal_decompose
from dateutil.parser import parse

# Import Data
df = pd.read_csv('https://github.com/selva86/datasets/raw/master/AirPassengers.csv')
dates = pd.DatetimeIndex([parse(d).strftime('%Y-%m-01') for d in df['date']])
df.set_index(dates, inplace=True)

# Decompose
result = seasonal_decompose(df['traffic'], model='multiplicative')

# Plot
plt.rcParams.update({'figure.figsize': (10,10)})
result.plot().suptitle('Time Series Decomposition of Air Passengers')
plt.show()
```

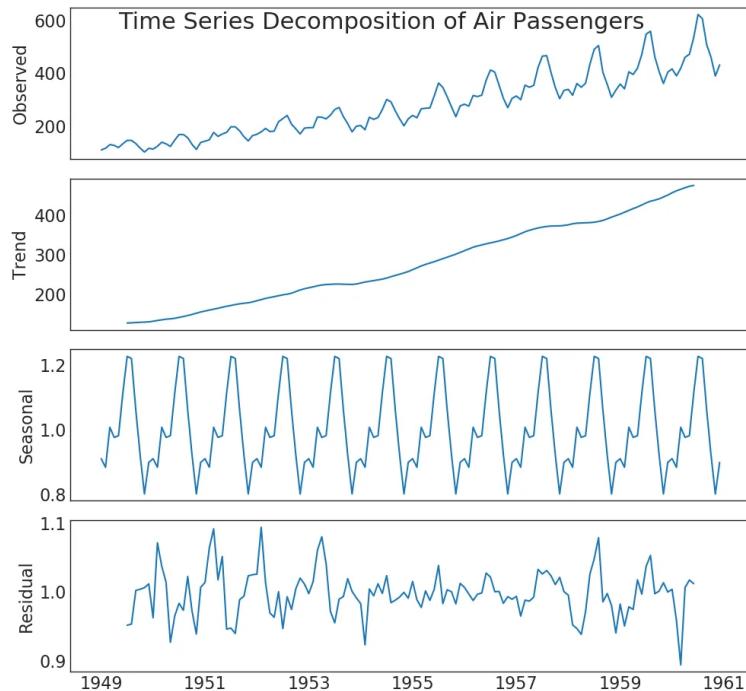


([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/3/9/n/39\\_TimeSeries\\_Decomposition\\_Statmodels\\_Matplotlib\\_min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/3/9/n/39_TimeSeries_Decomposition_Statmodels_Matplotlib_min.png))

## 40. Multiple Time Series

You can plot multiple time series that measures the same value on the same chart as shown below.

Show Code

Feedback

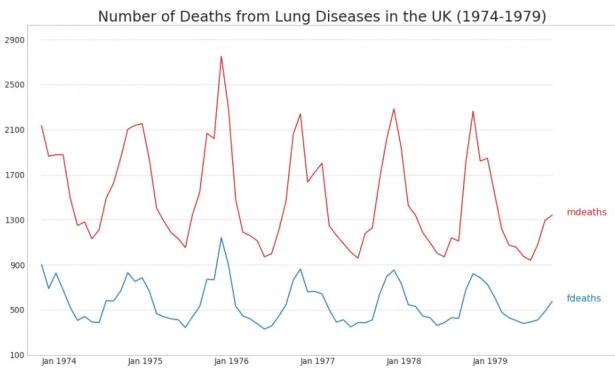


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/0/n/40\\_Multiple\\_Timeseries\\_in\\_Same\\_Plot\\_Matplotlib\\_min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/0/n/40_Multiple_Timeseries_in_Same_Plot_Matplotlib_min.png)).

## 41. Plotting with different scales using secondary Y axis

If you want to show two time series that measures two different quantities at the same point in time, you can plot the second series against the secondary Y axis on the right.

Show Code

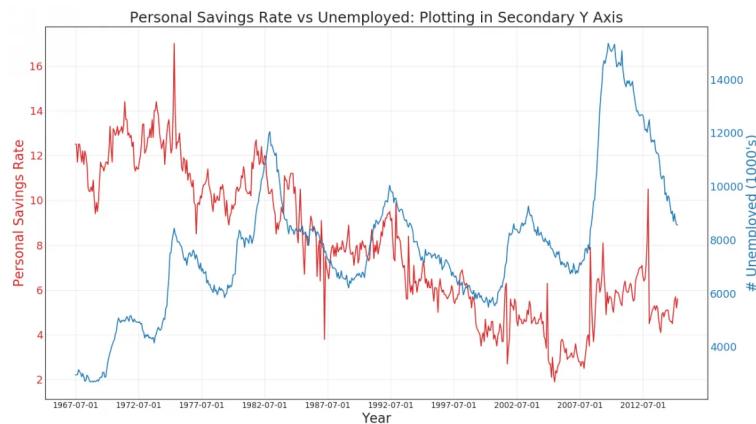


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/1/n/41\\_Timeseries\\_of\\_Different\\_Scales\\_On\\_Secondary\\_Y\\_Axis\\_min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/1/n/41_Timeseries_of_Different_Scales_On_Secondary_Y_Axis_min.png)).

## 42. Time Series with Error Bands

Time series with error bands can be constructed if you have a time series dataset with multiple observations for each time point (date / timestamp). Below you can see a couple of examples based on the orders coming in at various times of the day. And another example on the number of orders arriving over a duration of 45 days.


In this approach, the mean of the number of orders is denoted by the white line. And a 95% confidence bands are computed and drawn around the mean.

Show Code

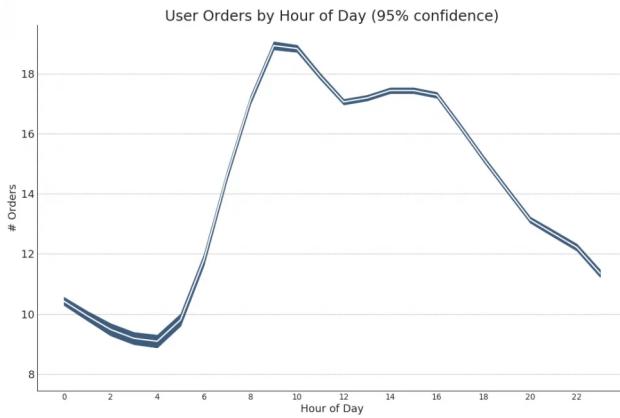

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/2/n/42\\_TimeSeries with ErrorBands 1 Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/2/n/42_TimeSeries with ErrorBands 1 Matplotlib-min.png)).

Show Code

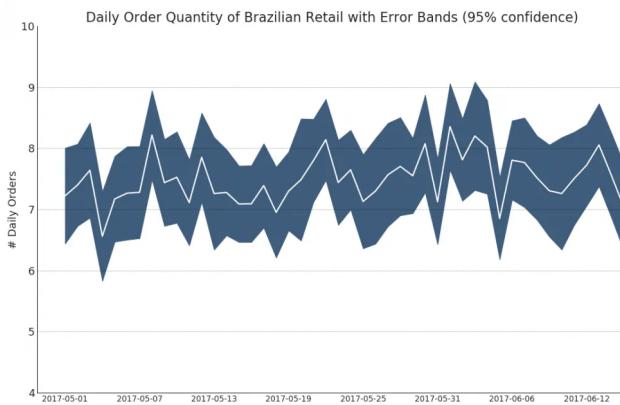


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/2/n/42\\_TimeSeries with ErrorBands 2 Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/2/n/42_TimeSeries with ErrorBands 2 Matplotlib-min.png)).

## 43. Stacked Area Chart

Stacked area chart gives an visual representation of the extent of contribution from multiple time series so that it is easy to compare against each other.

Show Code

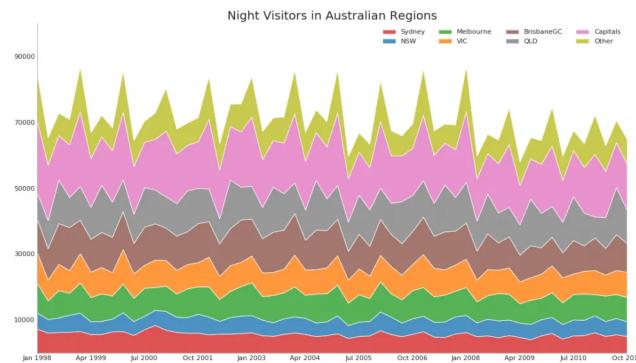


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/3/n/43\\_Stacked\\_Area\\_Chart Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/3/n/43_Stacked_Area_Chart Matplotlib-min.png)).

## 44. Area Chart UnStacked

An unstacked area chart is used to visualize the progress (ups and downs) of two or more series with respect to each other. In the chart below, you can clearly see how the personal savings rate comes down as the median duration of unemployment increases. The unstacked area chart brings out this phenomenon nicely.

Show Code

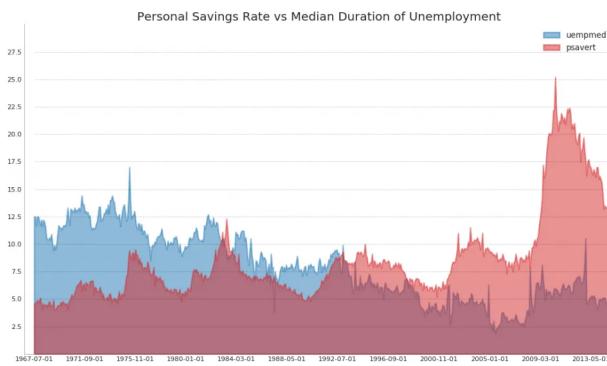

(<https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/4/n/44 Unstacked Area Chart Matplotlib-min.png>).

## 45. Calendar Heat Map

Calendar map is an alternate and a less preferred option to visualise time based data compared to a time series. Though can be visually appealing, the numeric values are not quite evident. It is however effective in picturising the extreme values and holiday effects nicely.

```
import matplotlib as mpl
import calmap

# Import Data
df = pd.read_csv("https://raw.githubusercontent.com/selva86/datasets/master/yahoo.csv")
df.set_index('date', inplace=True)

# Plot
plt.figure(figsize=(16,10), dpi= 80)
calmap.calendarplot(df['2014']['VIX.Close'], fig_kws={'figsize': (16,10)}, yearlabel_kws={'color': 'black'})
plt.show()
```




(<https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/5/n/45 Calendar Heatmap Matplotlib Calmap-min.png>).

## 46. Seasonal Plot

Feedback

The seasonal plot can be used to compare how the time series performed at same day in the previous season (year / month / week etc).

Show Code

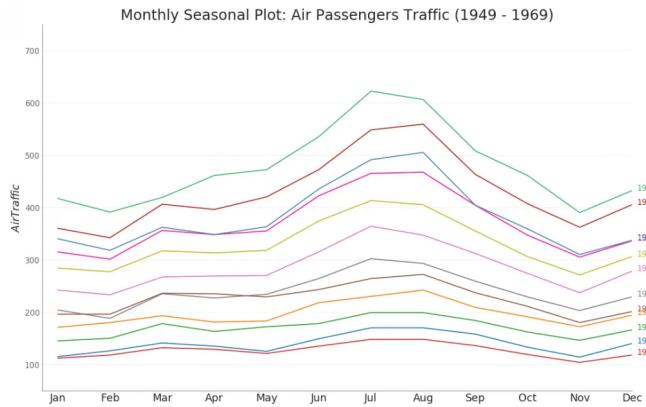

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/4/6/n/46\\_Seasonal\\_Plot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/4/6/n/46_Seasonal_Plot_Matplotlib-min.png)).

## Groups


### 47. Dendrogram

A Dendrogram groups similar points together based on a given distance metric and organizes them in tree like links based on the point's similarity.

```
import scipy.cluster.hierarchy as shc

# Import Data
df = pd.read_csv('https://raw.githubusercontent.com/selva86/datasets/master/USARe

# Plot
plt.figure(figsize=(16, 10), dpi= 80)
plt.title("USARe Dendograms", fontsize=22)
dend = shc.dendrogram(shc.linkage(df[['Murder', 'Assault', 'UrbanPop', 'Rape']], method='ward'))
plt.xticks(fontsize=12)
plt.show()
```

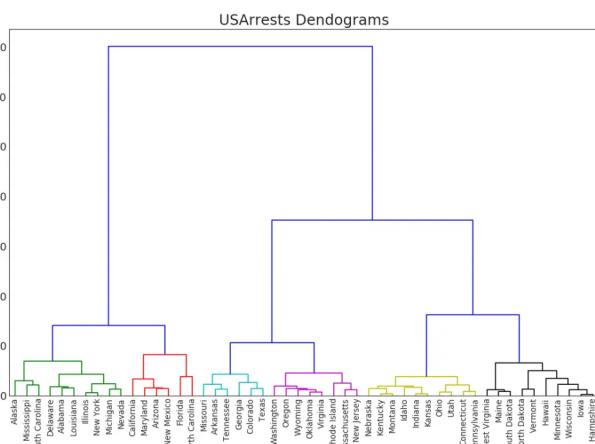

Feedback


([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/7/n/47\\_Dendrogram\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/7/n/47_Dendrogram_Matplotlib-min.png)).

## 48. Cluster Plot

Cluster Plot canbe used to demarcate points that belong to the same cluster.

Below is a representational example to group the US states into 5 groups based on the USArests dataset. This cluster plot uses the 'murder' and 'assault' columns as X and Y axis. Alternately you can use the first two principal components as rthe X and Y axis.

Show Code

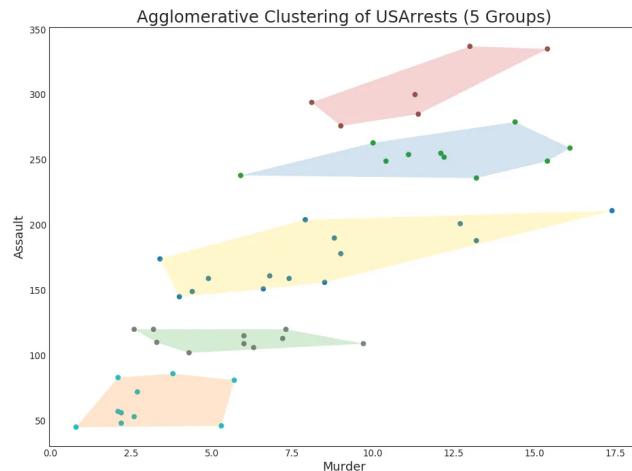

([https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/8/n/48\\_Cluster\\_Plot\\_Matplotlib-min.png](https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/8/n/48_Cluster_Plot_Matplotlib-min.png)).

## 49. Andrews Curve

Andrews Curve helps visualize if there are inherent groupings of the numerical features based on a given grouping. If the features (columns in the dataset) doesn't help discriminate the group ( cyl), then the lines will not be well segregated as you see below.

```

from pandas.plotting import andrews_curves


# Import
df = pd.read_csv("https://github.com/selva86/datasets/raw/master/mtcars.csv_(https:
df.drop(['cars', 'carname'], axis=1, inplace=True)

# Plot
plt.figure(figsize=(12,9), dpi= 80)
andrews_curves(df, 'cyl', colormap='Set1')

# Lighten borders
plt.gca().spines["top"].set_alpha(0)
plt.gca().spines["bottom"].set_alpha(.3)
plt.gca().spines["right"].set_alpha(0)
plt.gca().spines["left"].set_alpha(.3)

plt.title('Andrews Curves of mtcars', fontsize=22)
plt.xlim(-3,3)
plt.grid(alpha=0.3)
plt.xticks(fontsize=12)
plt.yticks(fontsize=12)
plt.show()

```

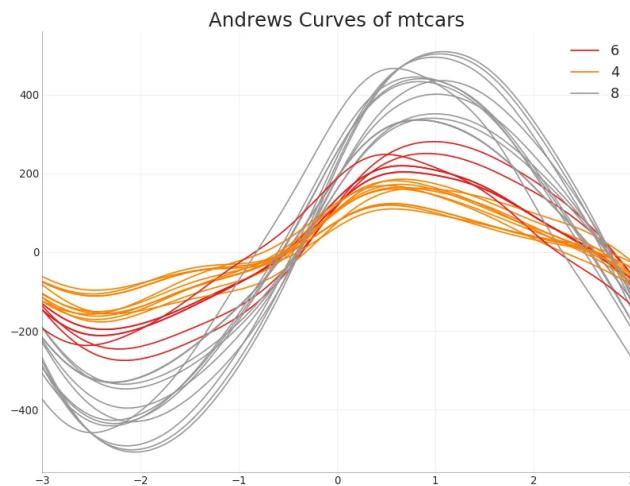

(<https://machinelearningplus.sirv.com/WP www.machinelearningplus.com/2018/11/4/9/n/49 Andrews Curves On Mtcars-min.png>).

## 50. Parallel Coordinates

Parallel coordinates helps to visualize if a feature helps to segregate the groups effectively. If a segregation is effected, that feature is likely going to be very useful in predicting that group.

```

from pandas.plotting import parallel_coordinates


# Import Data
df_final = pd.read_csv("https://raw.githubusercontent.com/selva86/datasets/master/diamonds.csv")

# Plot
plt.figure(figsize=(12,9), dpi= 80)
parallel_coordinates(df_final, 'cut', colormap='Dark2')

# Lighten borders
plt.gca().spines["top"].set_alpha(0)
plt.gca().spines["bottom"].set_alpha(.3)
plt.gca().spines["right"].set_alpha(0)
plt.gca().spines["left"].set_alpha(.3)

plt.title('Parallel Coordinated of Diamonds', fontsize=22)
plt.grid(alpha=0.3)
plt.xticks(fontsize=12)
plt.yticks(fontsize=12)
plt.show()

```

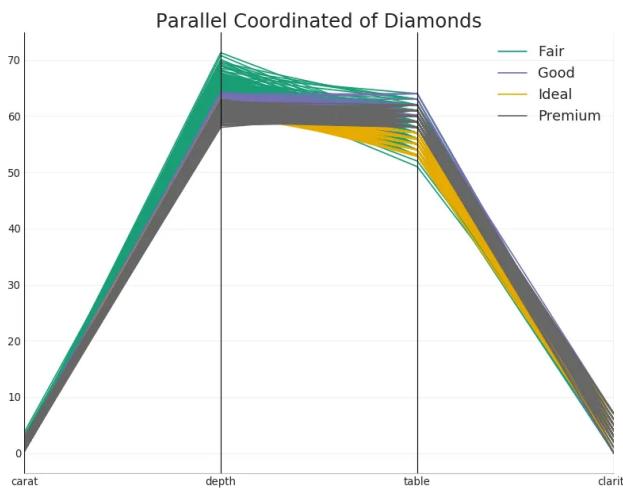

([https://machinelearningplus.sirv.com/WP\\_www.machinelearningplus.com/2018/11/5/0/n/50\\_Parallel\\_Coordinates\\_Matplotlib\\_Pandas-min.png](https://machinelearningplus.sirv.com/WP_www.machinelearningplus.com/2018/11/5/0/n/50_Parallel_Coordinates_Matplotlib_Pandas-min.png)).

That's all for now! If you encounter some error or bug please [notify here](#) (<https://docs.google.com/forms/d/e/1FAIpQLSeIJmlvwe562R7JVpi5J2ydLyhk5-7OrGRMFGYrMJvjPal8eA/viewform>).

#### What do you think?

57 Responses



Upvote



Love



Join the discussion...

LOG IN WITH

OR SIGN UP WITH DISQUS [?](#)

Name



**Mohcine Madkour** • 2 months ago

So smart! Thanks!

[^](#) | [v](#) • Reply •



**Selva Prabhakaran** Mod → Mohcine Madkour • 2 months ago

Thanks!

[^](#) | [v](#) • Reply •



**Arshpreet** • 3 months ago

Amazing! You are the best!

[^](#) | [v](#) • Reply •



**QA** • 10 months ago

Amazing!!! Your work is highly appreciated.

1 [^](#) | [v](#) • Reply •



**Alexander Yau** • a year ago

Very good!

1 [^](#) | [v](#) • Reply •



**Thomas Koller, PhD** • a year ago

Fantastic collection, thanks a lot for your work!

Is there an option to download all the 50 code snippets in one zip file?

[^](#) | [v](#) • Reply •



**Selva Prabhakaran** Mod → Thomas Koller, PhD • a year ago

Thanks, Thomas! Don't this there is such an option.

[^](#) | [v](#) • Reply •



**Franck TANO** • a year ago

I have many bug when i try to open the page (<http://www.machinelearningp...> on my web browser Safari on my macbook pro

[^](#) | [v](#) • Reply •



**Tino Kanngießer** • a year ago

Selva, this is awesome and super helpful - thank you! Do you have a corresponding Jupyter Notebook ?

1 [^](#) | [v](#) • Reply •



**Selva Prabhakaran** Mod → Tino Kanngießer • a year ago

Thanks Tino :) Yes, there is one, but it is not in a finished publishable format.

[^](#) | [v](#) • Reply •



**Steve Thomas** • a year ago

Easily one of the best visualization collections on the web

[^](#) | [v](#) • Reply •



**Selva Prabhakaran** Mod → Steve Thomas • a year ago

Thanks Steve!

[^](#) | [v](#) • Reply •



**Martin Hewing** • a year ago

Amazing! Great work! Really appreciate the effort!

1 [^](#) | [v](#) • Reply •



**Selva Prabhakaran** Mod → Martin Hewing • a year ago

Thanks, Martin!

[^](#) | [v](#) • Reply •

[Feedback](#)



**Selva Prabhakaran** Mod • a year ago

Is it useful?

2 ^ | v 1 • Reply •



**Franck TANO** Selva Prabhakaran • a year ago

I have many bug when i try to open the page  
(<http://www.machinelearningplus.com/>)... on my web browser Safari  
on my macbook pro  
I need help.

^ | v • Reply •



**Malavika** Selva Prabhakaran • a year ago

Very useful and well aggregated article of the plots! Nice!

^ | v • Reply •

**Copyright Machine Learning Plus (<https://www.machinelearningplus.com/>). All rights reserved.**

[Home](https://www.machinelearningplus.com/) (<https://www.machinelearningplus.com/contact-us/>)

[Privacy Policy](https://www.machinelearningplus.com/privacy-policy/) (<https://www.machinelearningplus.com/about/>)

[Web Site Terms and Conditions of Use](https://www.machinelearningplus.com/terms-of-use/) (<https://www.machinelearningplus.com/terms-of-use/>)







