Artifact of Application Deployment Of Gwalior

Prepared by:

iONE IT Solutions Pvt. Ltd. & Bharti Airtel Services Pvt. Ltd.

Date: 21-oct-2026

Project Name	ORACLE DB AND FORMS & REPORTS UPGRADATION & MIGRATION ON SUBSCRIPTION BASED PLATFORM FOR GPF APPLICATION
Document Name	Artifacts for Application Deployment
Version No	1.0
AG Office	Gwalior

VERSION HISTORY

Date	Document Version	Document Revision Remark	Document Author/Reviser
21-10-26	1.0	Artifacts of Application Deployment of Gwalior	Ajendra Rai , Srikant Chaudhary

APPROVAL HISTORY

Date	Document Version	Approver Name and Title	Approver Signature
21-10-26	1.0	Simran Goyal, Project Manager	Simran Goyal

TABLE OF CONTENTS

TABLE OF CONTENTS 3

1. Configurations - 4
2. Application Login Form- 7
3. Credentials- 9

1. Configurations -

Step 1: - Make Changes in default.env file –

/u01/oracle/middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/servers/WLS_FORMS/applications/formsapp_14.1.2/config/default.env – oracle@172.27.77.126 -- GPF Gwalior – Editor – WinSCP


Encoding ▾ Color ▾

```
# default.env - default Forms environment file, Linux version
#
# This file is used to set the Forms runtime environment parameters.
# If a parameter is not defined here, the value used will be that defined
# in the environment in which the WLS Managed Server was started.
#
ORACLE_HOME=/u01/oracle/middleware/Oracle_Home
FORMS_INSTANCE=/u01/oracle/middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/FORMS/instances/forms1
#
#
# TNS Entry to locate the database
#
TNS_ADMIN=/u01/oracle/middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig
#
#
# Search path for Forms applications (.fmx files, PL/SQL libraries)
#
FORMS_PATH=/u01/oracle/middleware/Oracle_Home/forms:/u02/gwl_gpf28_12_2011/Executable
#
#
# Disable/modify this variable if users need to be able to run Forms
# applications residing in a different location.
#
FORMS_MODULE_PATH=$FORMS_PATH
#
#
# Webutil config file path
#
WEBUTIL_CONFIG=/u01/oracle/middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/FORMS/instances/forms1/server/webutil.cfg
#
#
# Disable/remove this variable if end-users need access to the query-where
# functionality which potentially allows them to enter arbitrary SQL
# statements when in enter-query mode.
#
FORMS_RESTRICT_ENTER_QUERY=TRUE
#
#
# Java class path
#   This is required for the Forms debugger
```

Changes in default.env files -

/u01/oracle/middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/servers/WLS_FORMS/applications/formsapp_14.1.2/config


Step 2: - Make Changes in formsweb.cfg file –

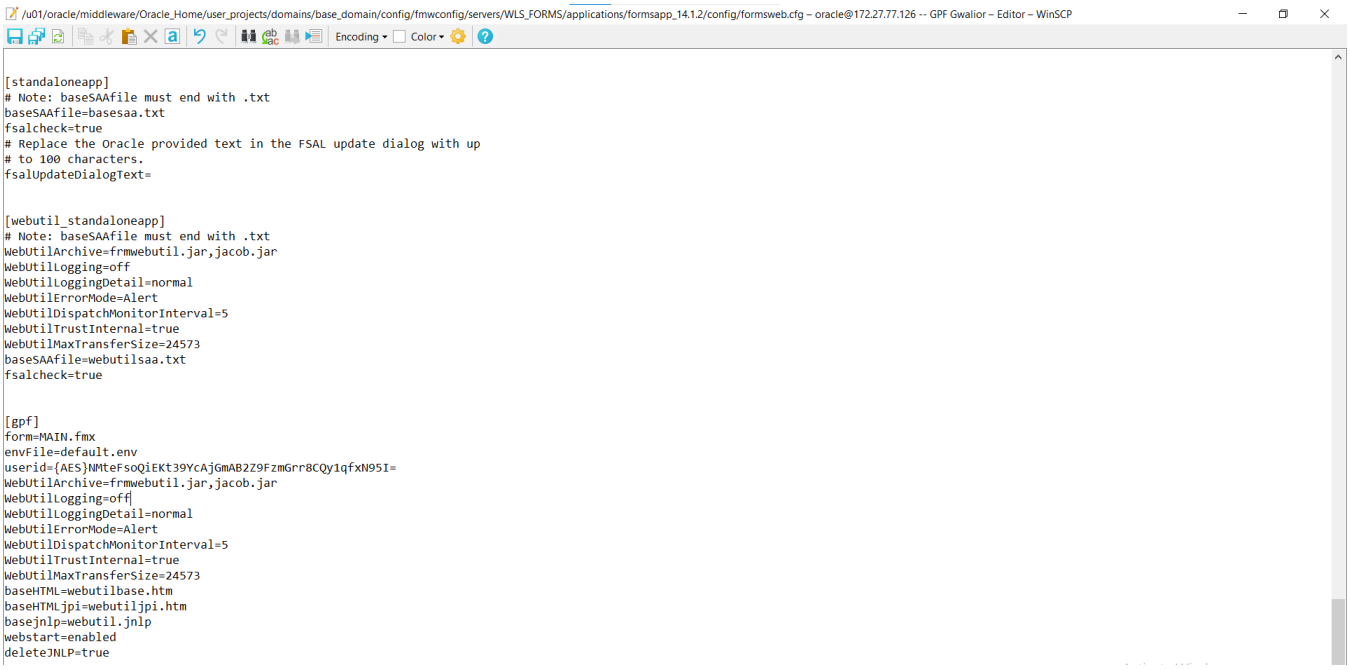


Changes in Server formsweb.cfg file -


/u01/oracle/middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/servers/WLS_FORMS/applications/formsapp_14.1.2/config

Step 3: - Make Changes in tnsname.ora file –
/u01/oracle/middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig

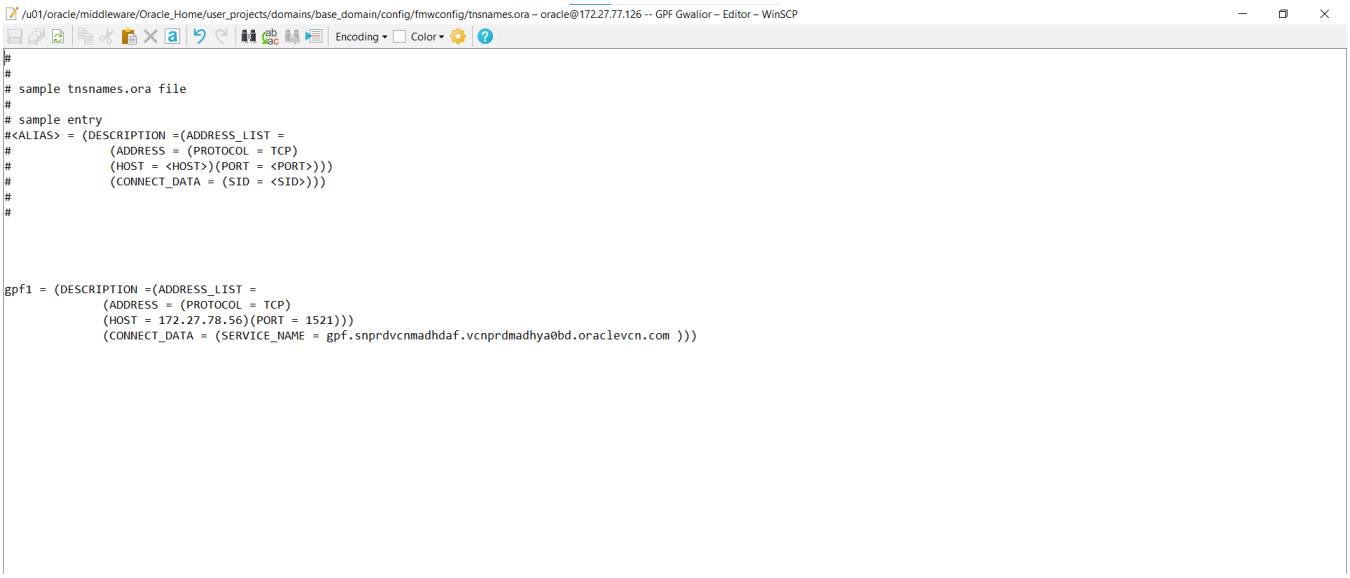

2. Application Login Form-

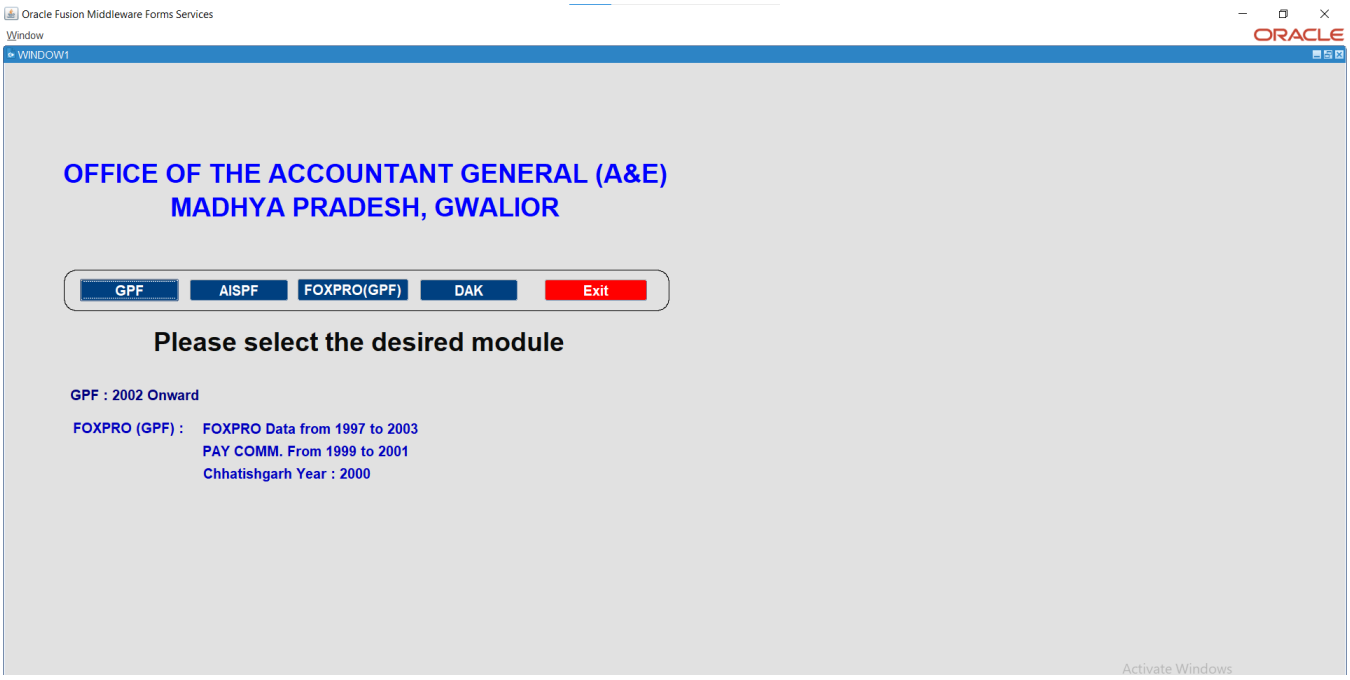

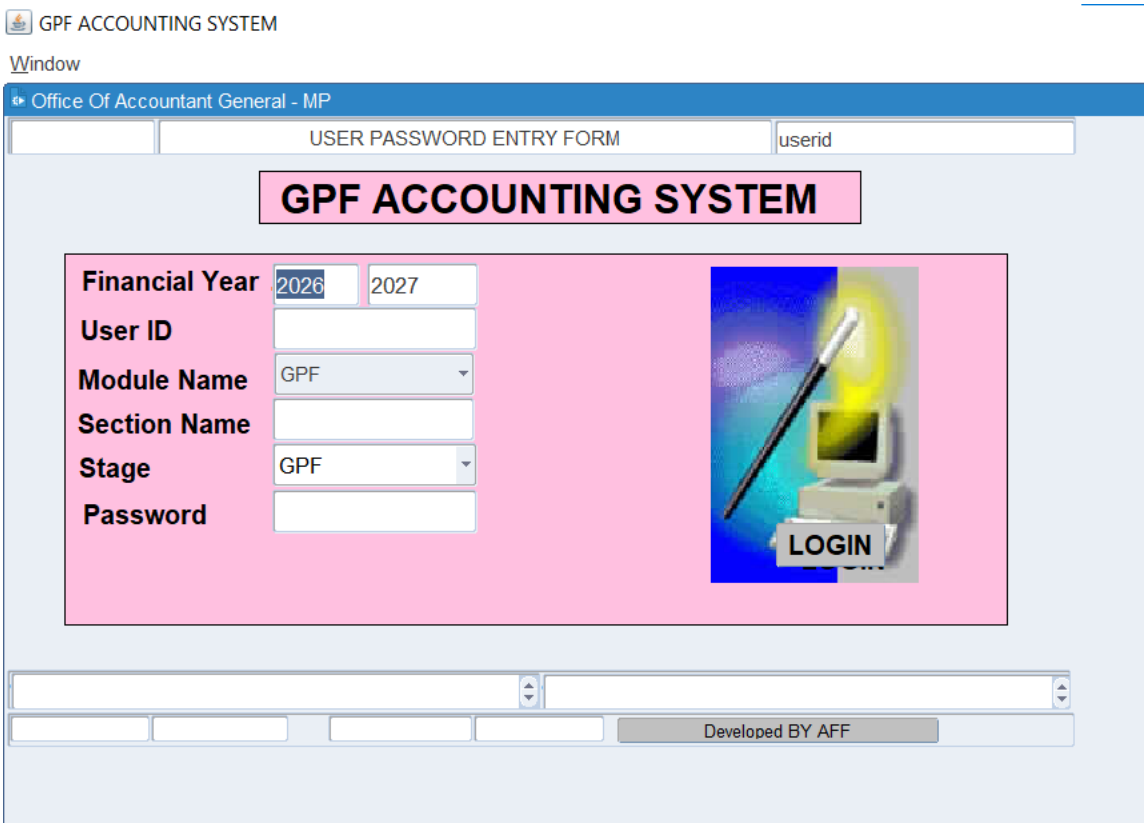

a. The first step is to update the link with the state-wise application IP and open it in the browser.
b. Once the application is accessed through the browser, the form automatically gets downloaded.
c. When we open the downloaded form, the user interface (UI) of the form appears.
d. The appearance of the form's UI (even with the error) confirms that the **application has been deployed successfully**.

3. Credentials-

Application URL –

http://172.27.77.126:7778/forms/frmservlet?config=gpf

Application Ip – 172.27.77.126
Database Ip - 172.27.78.56

Service Name - gpf.snprdvcnmadhdaf.vcnprdmadhya0bd.oraclevcn.com