

Tutorial – 6

1. Design an application like follow. Depends on user selection it will display the message as shown. (If gender is Male then Mr. or Female then Miss)

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
using System.Xml.Linq;

namespace Tutorial_6
{
    public partial class Form1 : Form
    {
        public Form1()
        {
            InitializeComponent();
        }


        private void button1_Click(object sender, EventArgs e)
        {
            string name = textBox1.Text.Trim();
            string prefix = "";

            // Gender Selection
            if (radioButton1.Checked)
            {
                prefix = "Mr.";
            }
            else if (radioButton2.Checked)
            {
                prefix = "Miss";
            }

            // Sources of Information
```

```
List<string> sources = new List<string>();  
if (checkBox1.Checked) sources.Add("News Paper");  
if (checkBox2.Checked) sources.Add("Friends");  
if (checkBox3.Checked) sources.Add("Website");  
if (checkBox4.Checked && !string.IsNullOrEmpty(textBox2.Text))  
    sources.Add(textBox2.Text);  
  
// Final Output  
string sourceText = string.Join(" ", sources);  
lblMessage.Text = $"Hello {prefix} {name}. You know about us from {sourceText}.";  
}  
}  
}
```

Output:

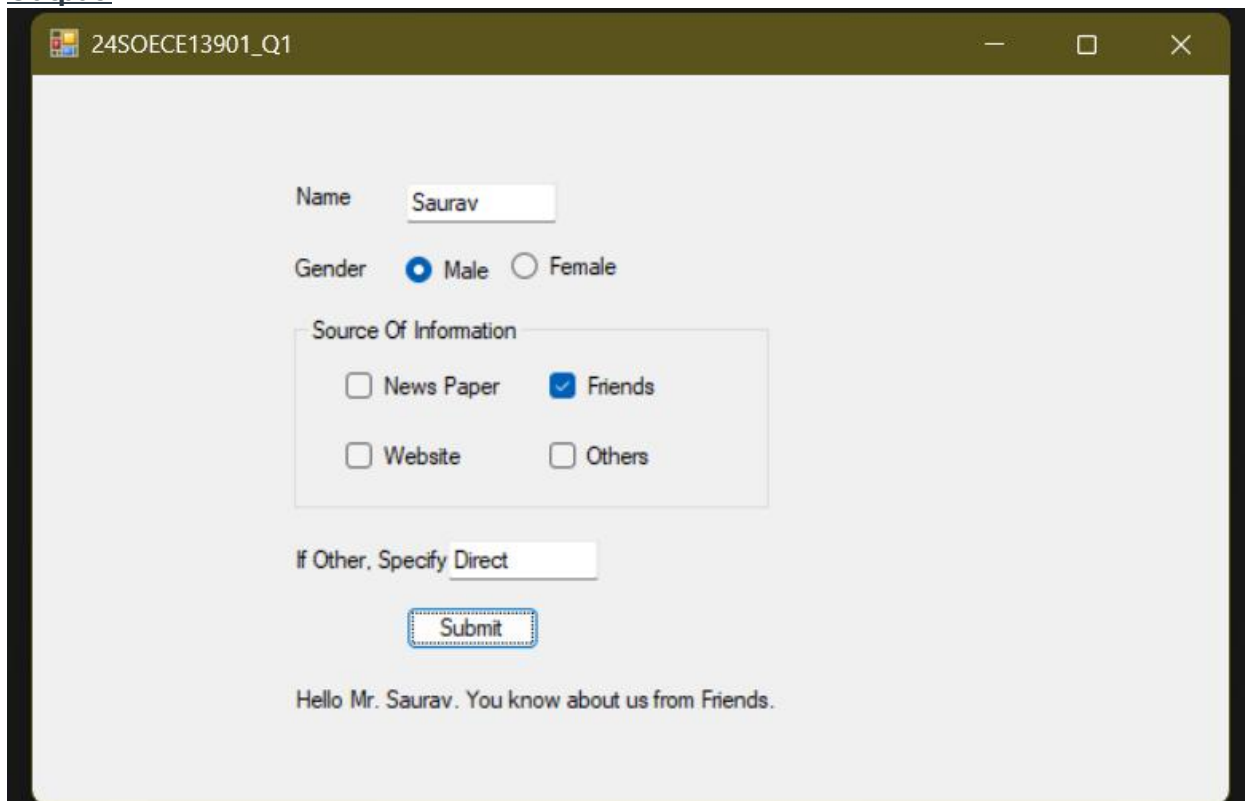

24SOECE13901_Q1

Name

Gender ☒ Male ☐ Female

Source Of Information

☐ News Paper ☒ Friends

☐ Website ☐ Others

If Other, Specify

Hello Mr. Saurav. You know about us from Friends.

2. Design a form like below. Implement Following functionality to the application.

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
using System.Xml.Linq;

namespace Tutorial_6
{
    public partial class Form2 : Form
    {
        public Form2()
        {
            InitializeComponent();
        }

        private void btnFill_Click(object sender, EventArgs e)
        {
            listBox1.Items.Add("Saurav");
            listBox1.Items.Add("Razz");
            listBox1.Items.Add("Rajan");
            listBox1.Items.Add("Rahul");
            listBox1.Items.Add("Mohin");
        }

        private void btnSort_Click(object sender, EventArgs e)
        {
            listBox1.Sorted = true;
        }

        private void btnClear_Click(object sender, EventArgs e)
        {
            listBox1.Items.Clear();
            lblCount.Text = "Total Items: 0";
            lblSelection.Text = "Your Selection: ";
        }
    }
}
```

```
}

private void btnRemove_Click(object sender, EventArgs e)
{
    if (listBox1.SelectedItem != null)
    {
        listBox1.Items.Remove(listBox1.SelectedItem);
    }
    else
    {
        MessageBox.Show("Please select an item to remove.");
    }
}


private void btnCount_Click(object sender, EventArgs e)
{
    int total = listBox1.Items.Count;
    lblCount.Text = "Total Items: " + total;
}

private void listBox1_SelectedIndexChanged(object sender, EventArgs e)
{
    if (listBox1.SelectedItem != null)
    {
        lblSelection.Text = "Your Selection: " + listBox1.SelectedItem.ToString();
    }
}
}
```

24SOECE13901

Enterprise Computing Through .NET Framework (CE525)

Output :

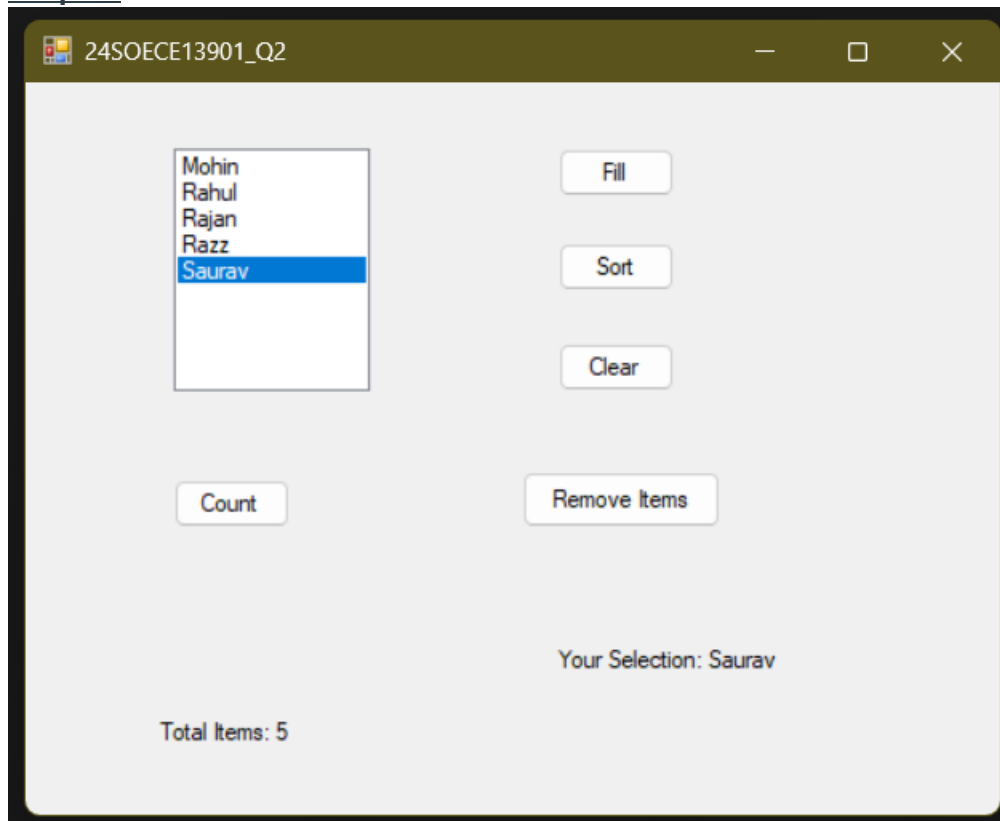

3. Design an application which has three textboxes. Implement restricted policy for each textbox to enter data only in numeric form, uppercase, characters.

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
```

```
namespace Tutorial_6
{
    public partial class Form3 : Form
```

24SOECE13901

Enterprise Computing Through .NET Framework (CE525)

```
{
    public Form3()
    {
        InitializeComponent();
    }
    private void txtNumeric_KeyPress(object sender, KeyPressEventArgs e)
    {
        if (!char.IsControl(e.KeyChar) && !char.IsDigit(e.KeyChar))
        {
            e.Handled = true;
        }
    }


    private void txtUpper_KeyPress(object sender, KeyPressEventArgs e)
    {
        // Convert to uppercase automatically
        e.KeyChar = char.ToUpper(e.KeyChar);

        // Allow only letters, backspace
        if (!char.IsControl(e.KeyChar) && !char.IsLetter(e.KeyChar))
        {
            e.Handled = true;
        }
    }
    private void txtChars_KeyPress(object sender, KeyPressEventArgs e)
    {
        // Allow only letters, backspace, space
        if (!char.IsControl(e.KeyChar) && !char.IsLetter(e.KeyChar) && e.KeyChar != ' ')
        {
            e.Handled = true;
        }
    }
}
```

24SOECE13901

Enterprise Computing Through .NET Framework (CE525)

Output :

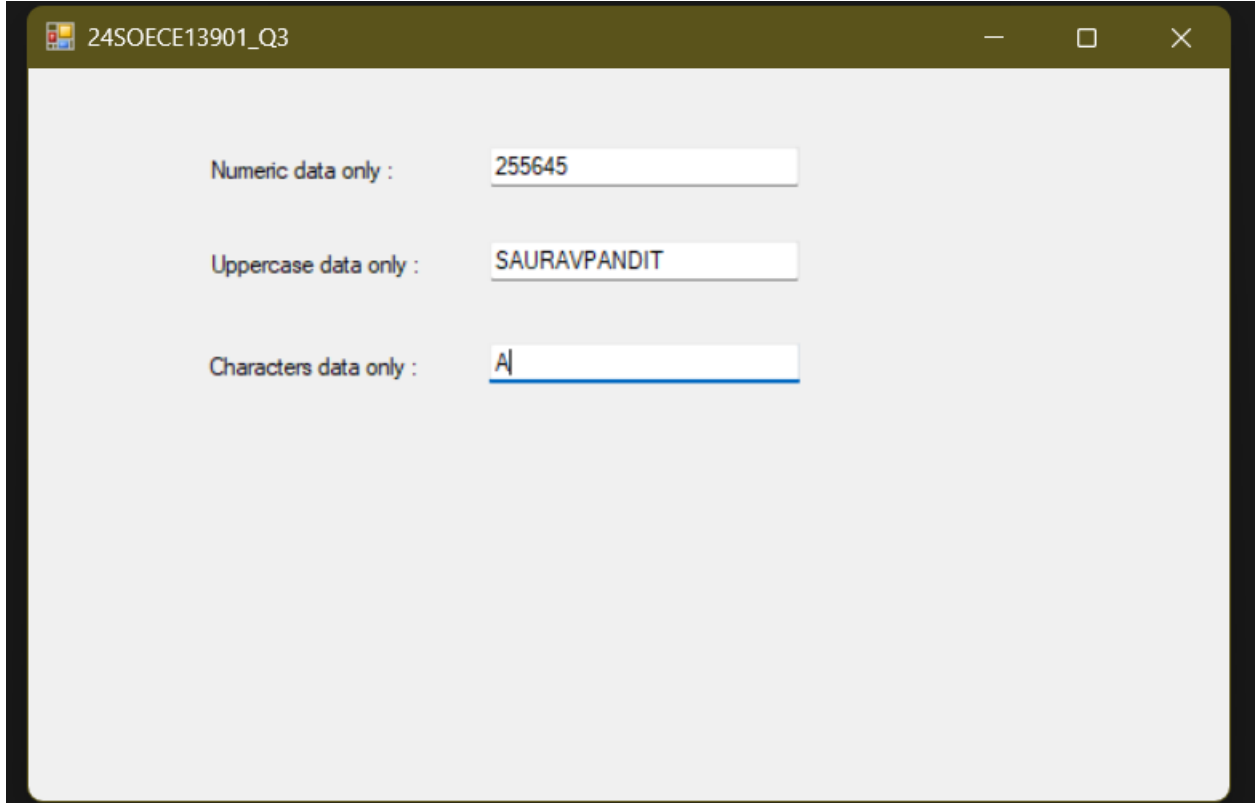

The screenshot shows a Windows application window with the title bar '24SOECE13901_Q3'. The window contains three labels and corresponding text input fields:

- Label: 'Numeric data only :', Input: '255645'
- Label: 'Uppercase data only :', Input: 'SAURAVPANDIT'
- Label: 'Characters data only :', Input: 'A'