



Java Database Connectivity → JDBC

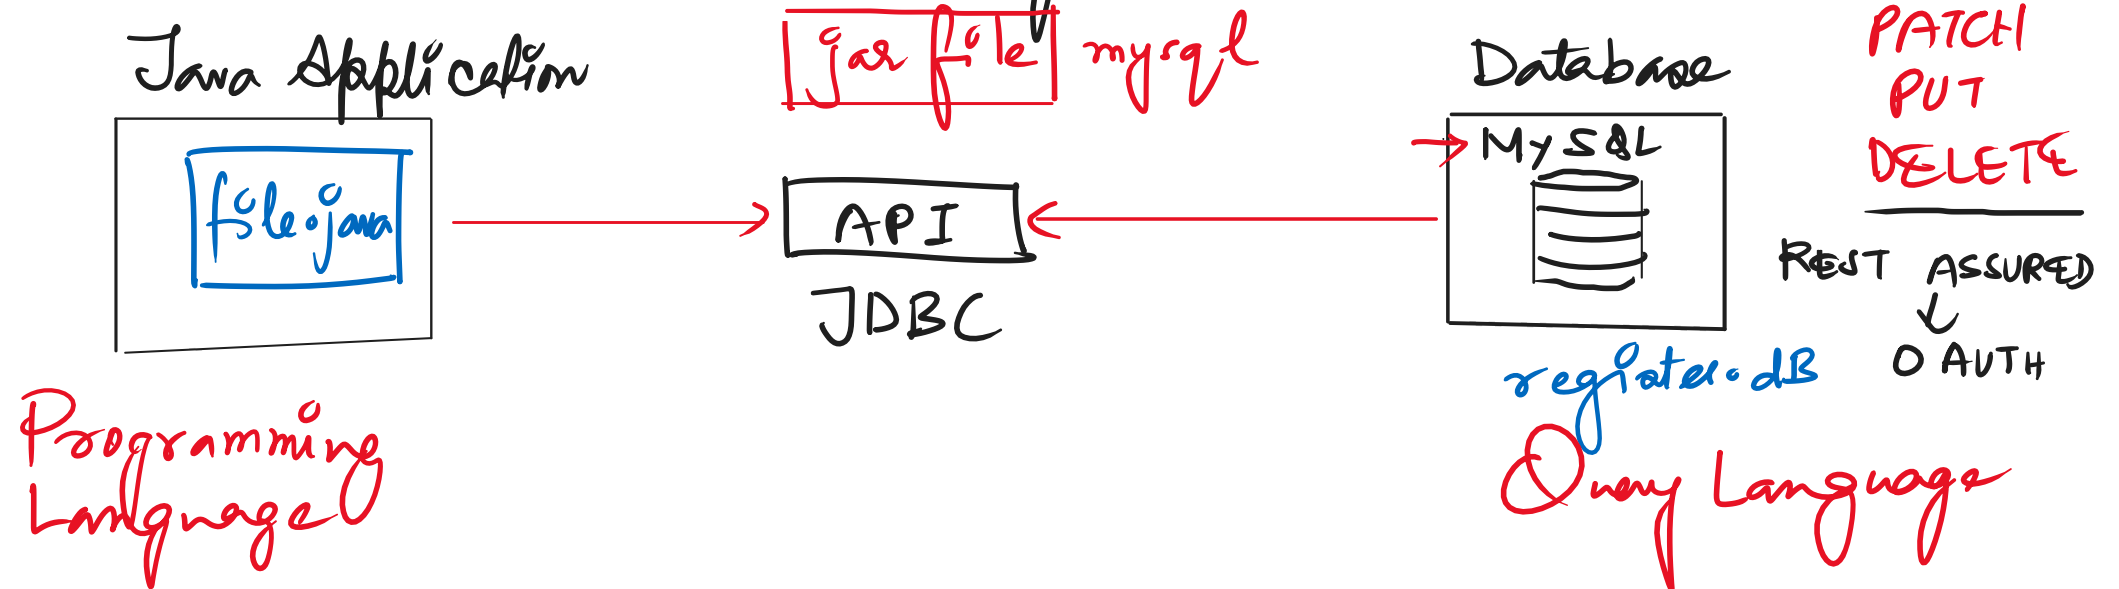

(CRUD)

JUnit / TestNG (parallel = true → test=60)

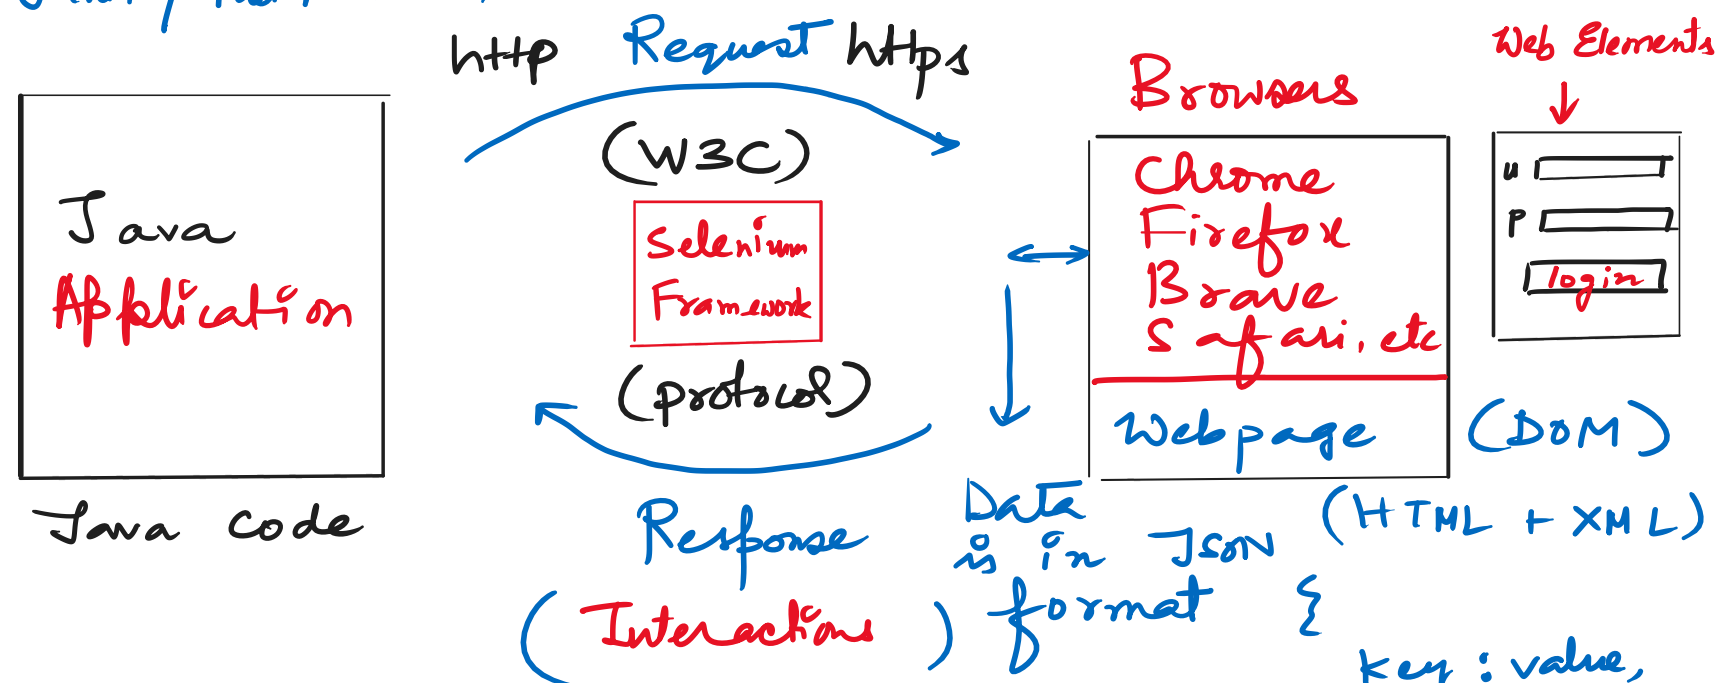

{ Just like a postman needs an address to deliver a parcel; similarly, selenium needs the address of the Web Element to interact with it.

[W3C → World Wide Web Consortium]
 * We use a Jar File → (selenium-server.jar)
 xpath → absolute / relative

"These addresses are called locators."
 id, classname, link text, p link text, etc.