


Separate Negatives & Positives:

```

vec(nums) 1, 2, -3, 4, -4, -5
            0 1 2 3 4 5
            == == == == ==
for (int i = 0; i < nums.size(); i++)
    if (nums[i] < 0)
        swap(nums[index], nums[i])
    
```


0, 1, 2, 3, ...
neg a pos
index = 0
nums[index]

Queue Implementation:

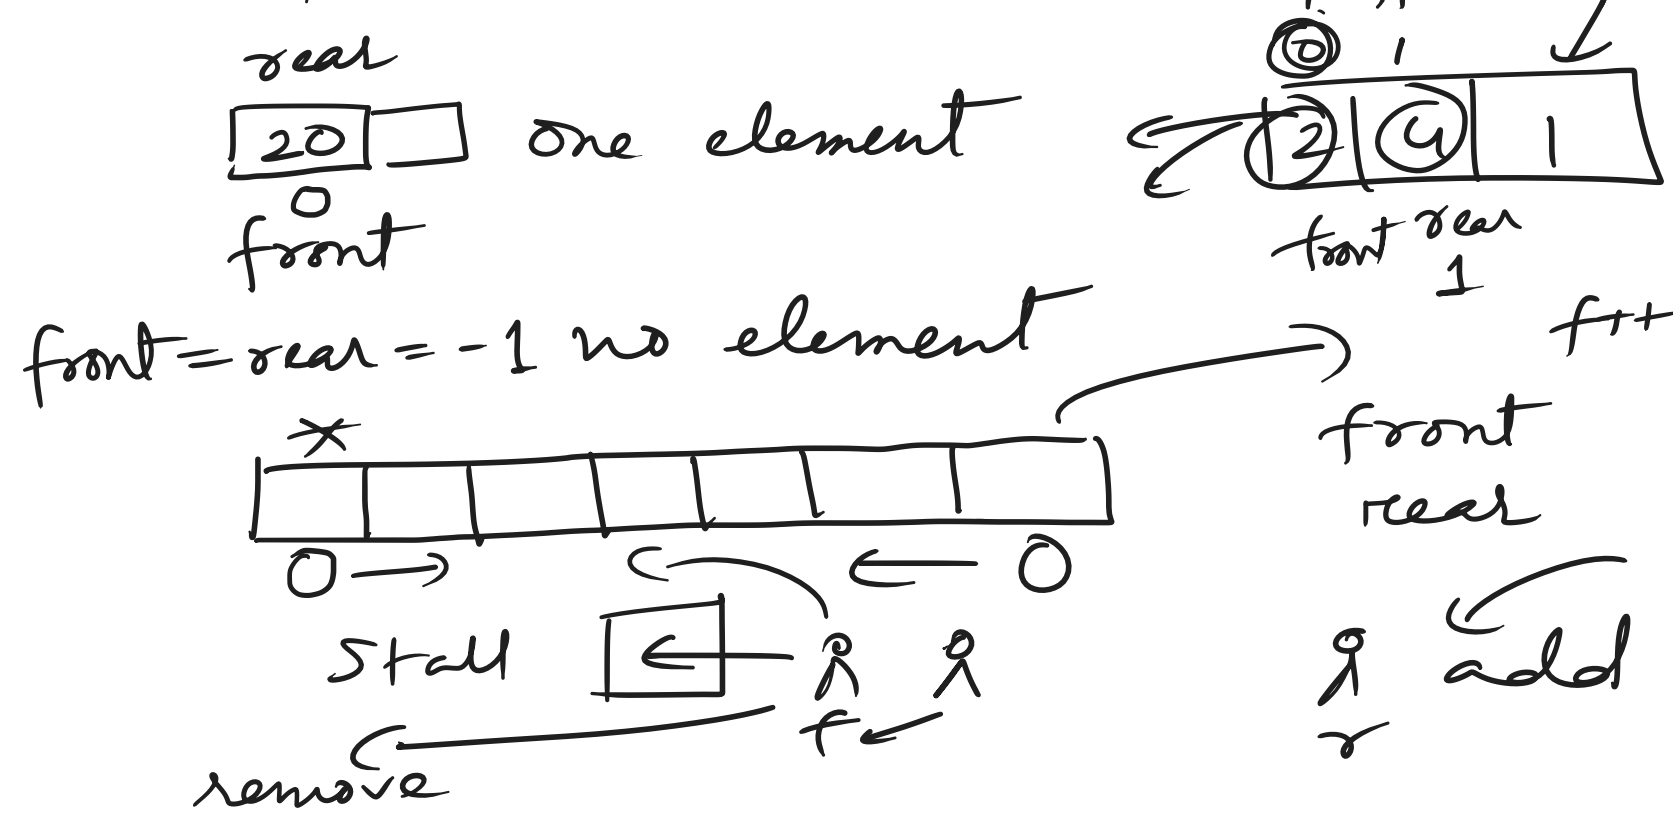


Stack using linked list } Practice
 Queue using linked list


* Greedy Alignment & Padding

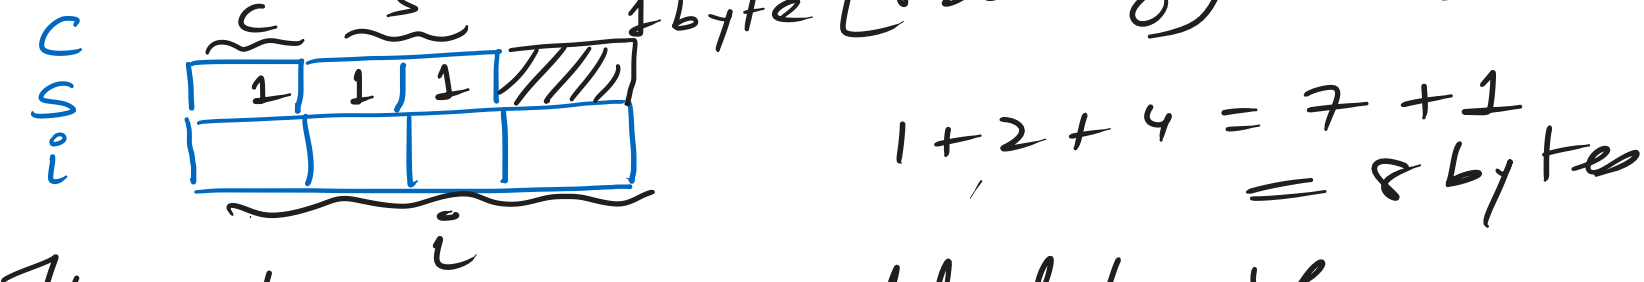


The extra memory added by the compiler for balancing is called padding.

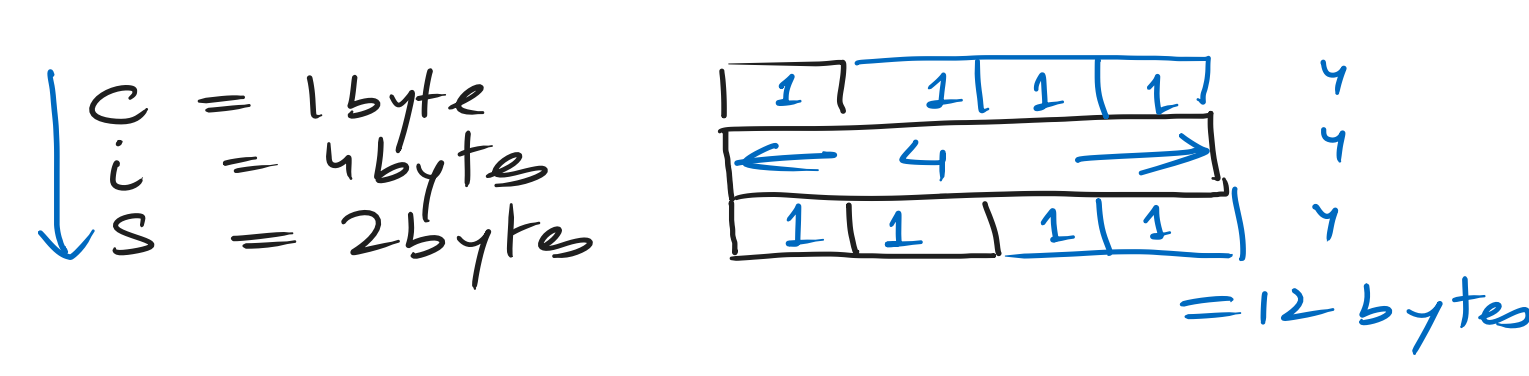


Greedy Alignment: → User

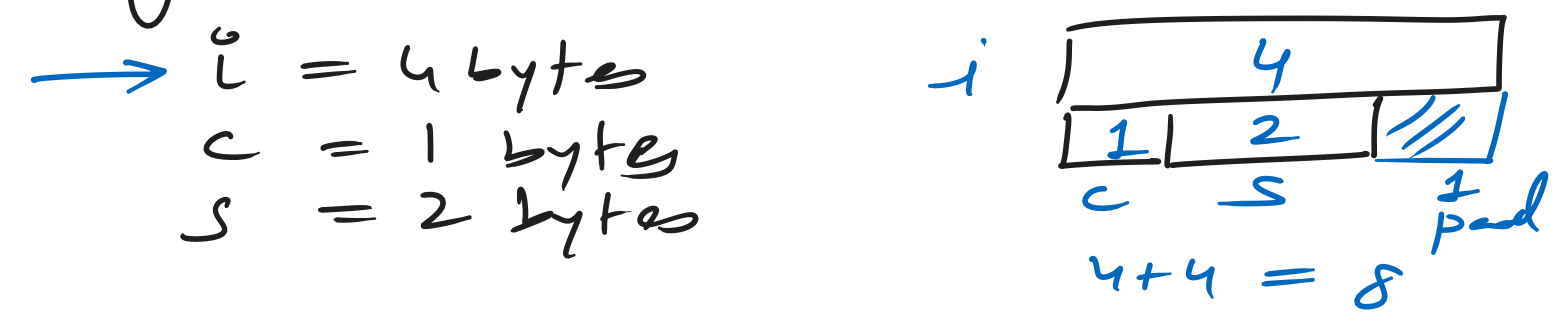





RS Agarwal
 A - 1
 DC - 1.5
 HW - 0.5

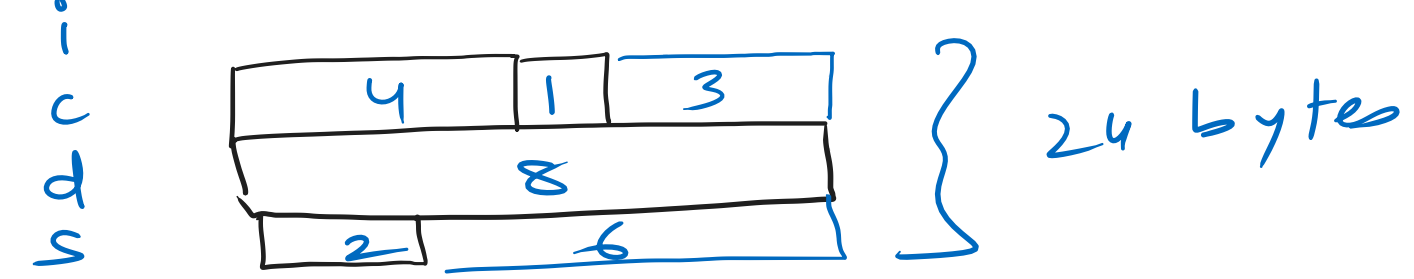


Greedy Alignment
 [HCF x LCM = prod of nos]

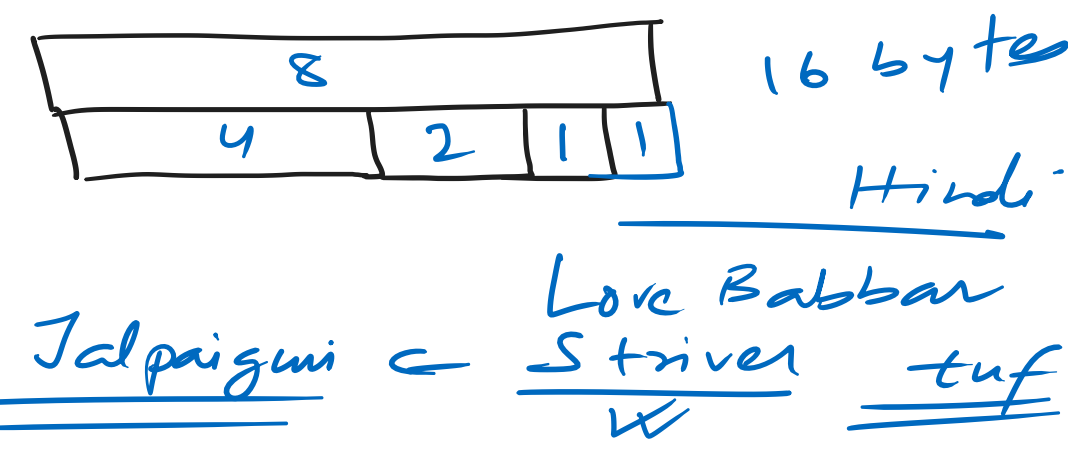

22, 33 =
 11
 2923, 3239

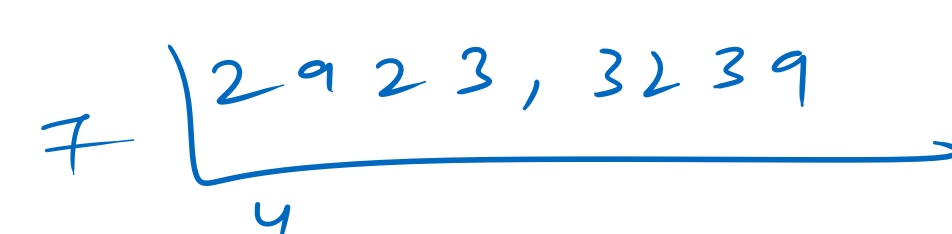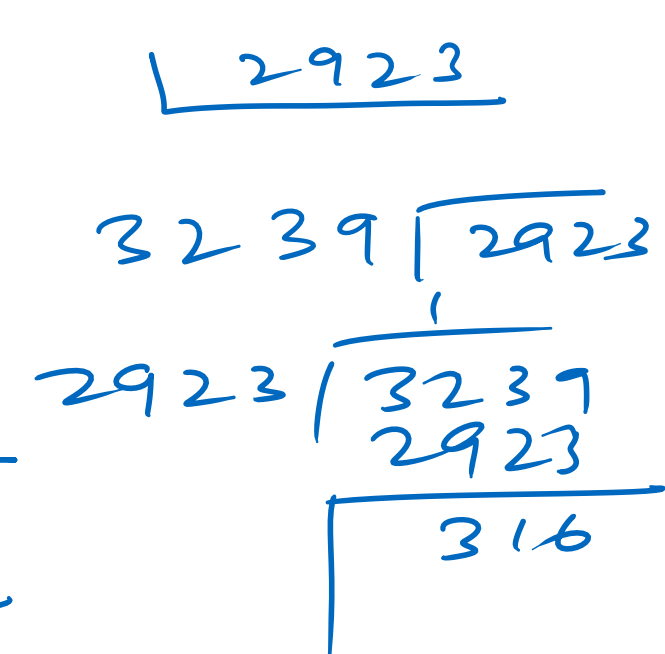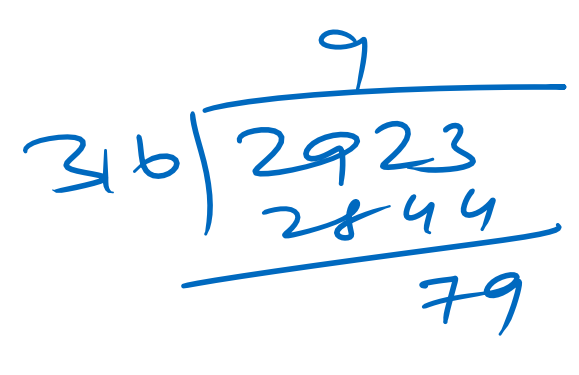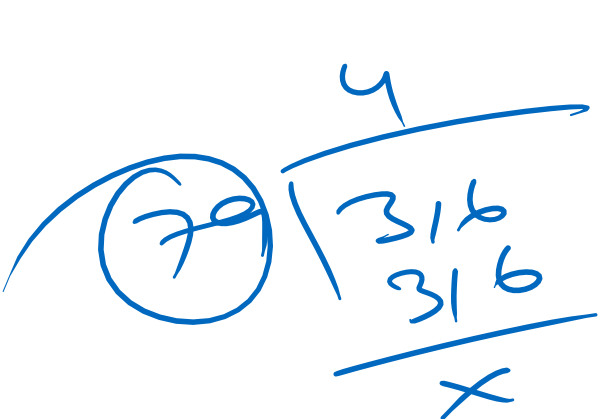

HCF = given = 11
 LCM
 22, 33
 n1 n2

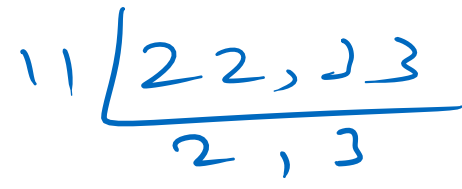

HCF x LCM = 22 x 33
~~H x L~~ = ~~22 x 33~~
 = 66