


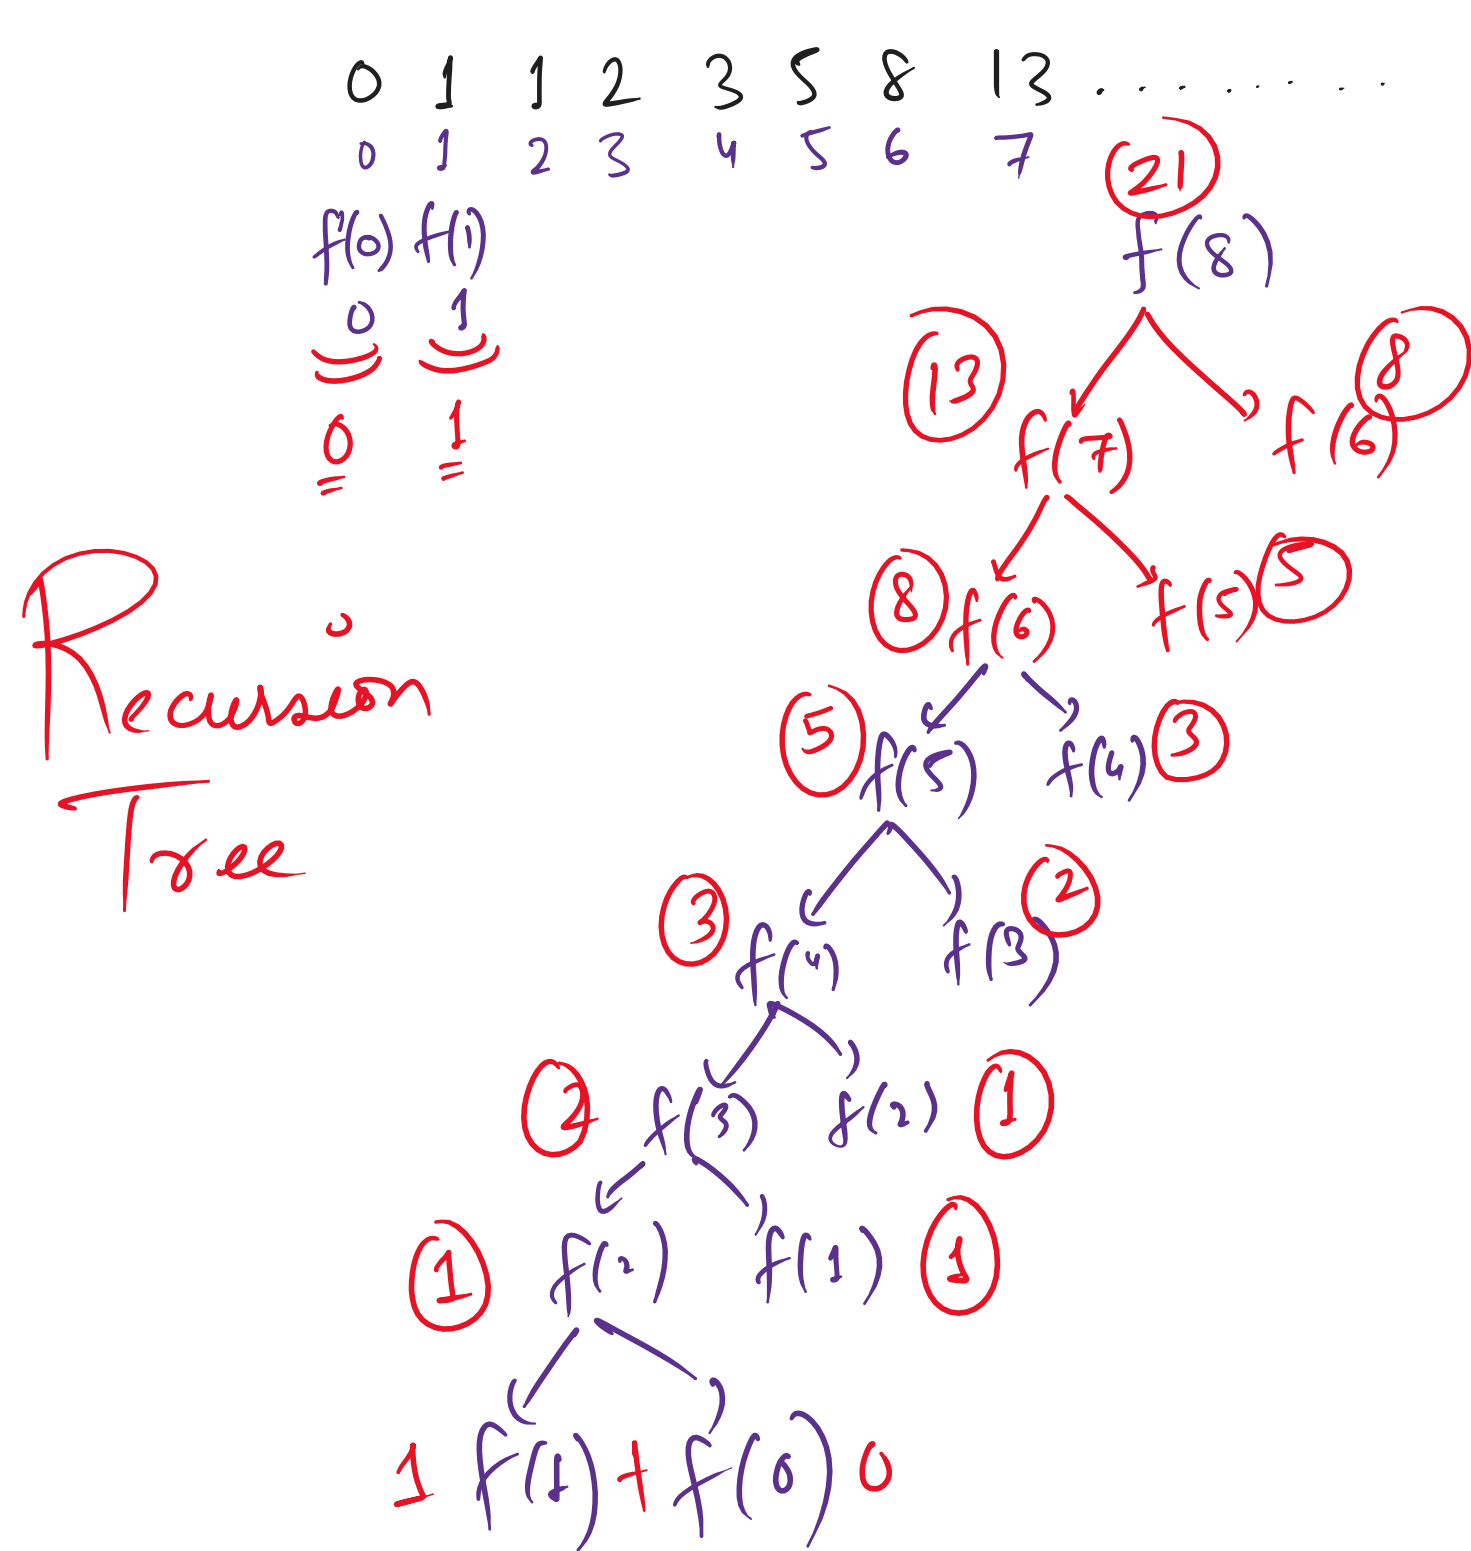

n^{th} fibonacci number $\rightarrow$

$f(n) \leftarrow \begin{matrix} f(n-1) \\ f(n-2) \end{matrix}$


Dynamic Programming

* hello world $\rightarrow$ hello world
5 5
e, o 0 false

C++ | Java

coding ninjas

coding ninjas $\rightarrow$ 12
6 6
2 2

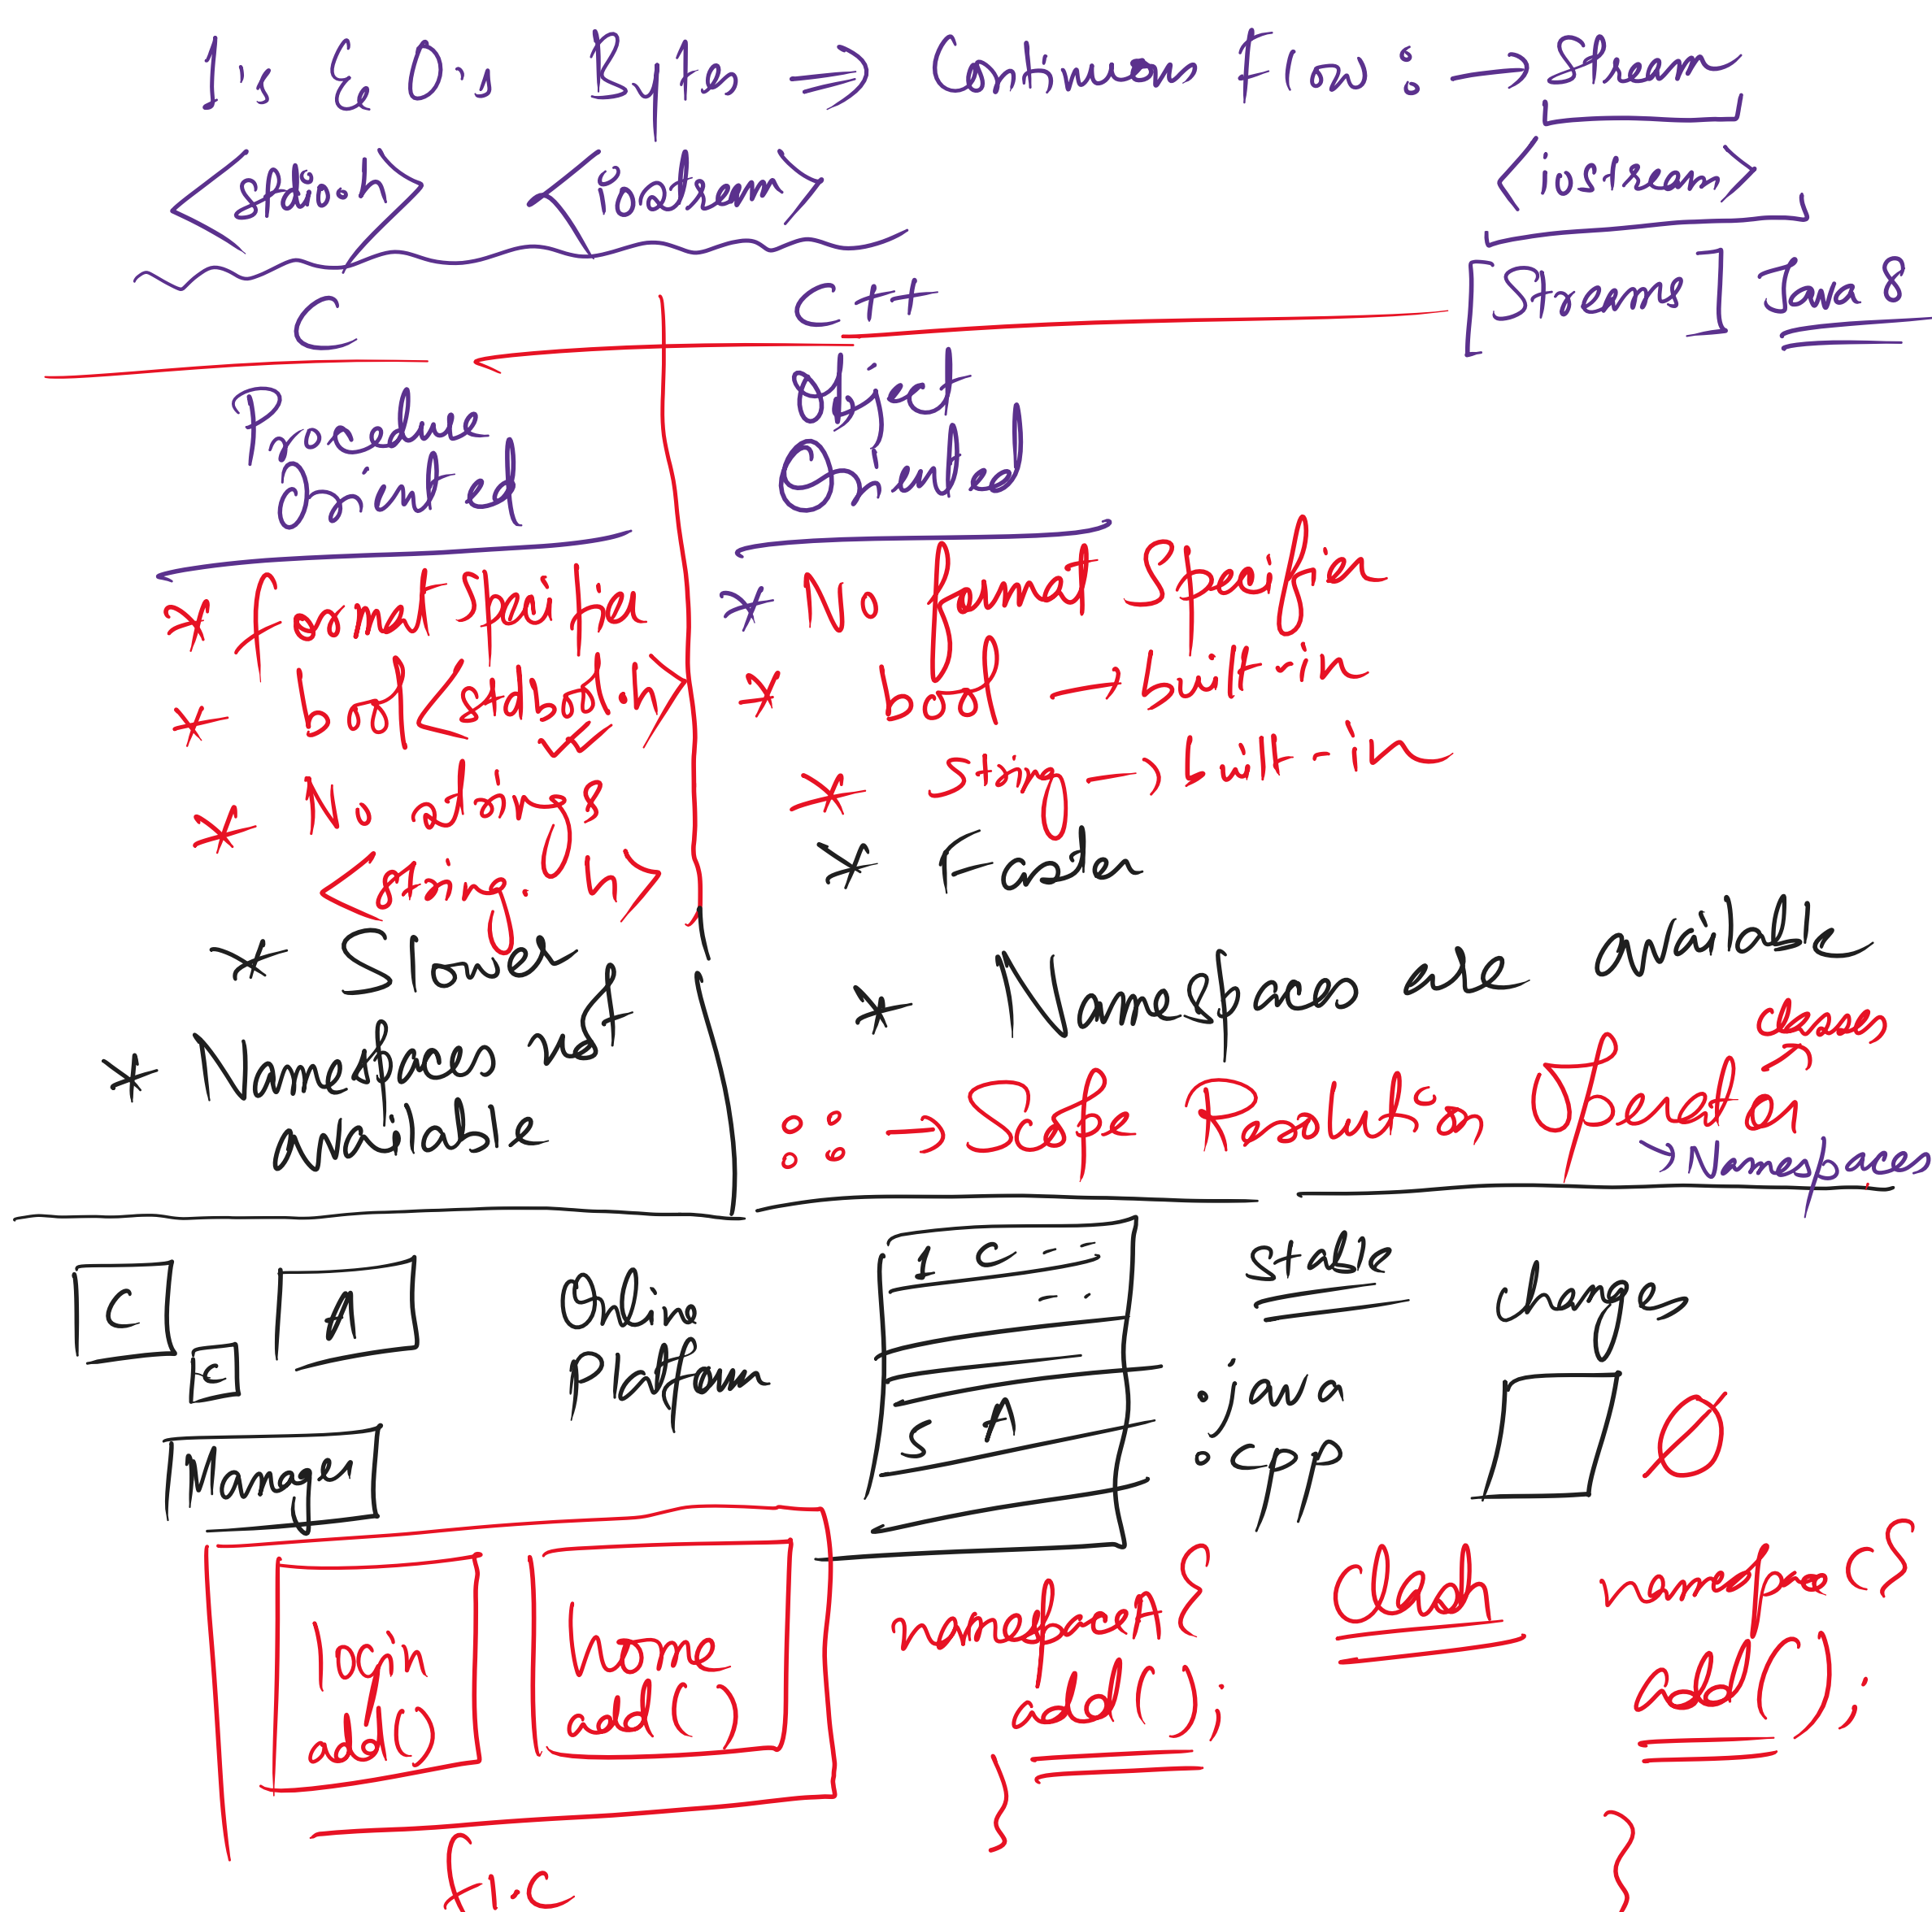


```
int arr[] = { [0]: 1, [1]: 2, [2]: 3, [3]: 4 };
for (int num : arr) {
    cout << num << " ";
}
cout << endl;
```

for each loop Syntax:

for (return-type variable-name : collection) { statement! }

int ** matrix = new int * [n]; n=5

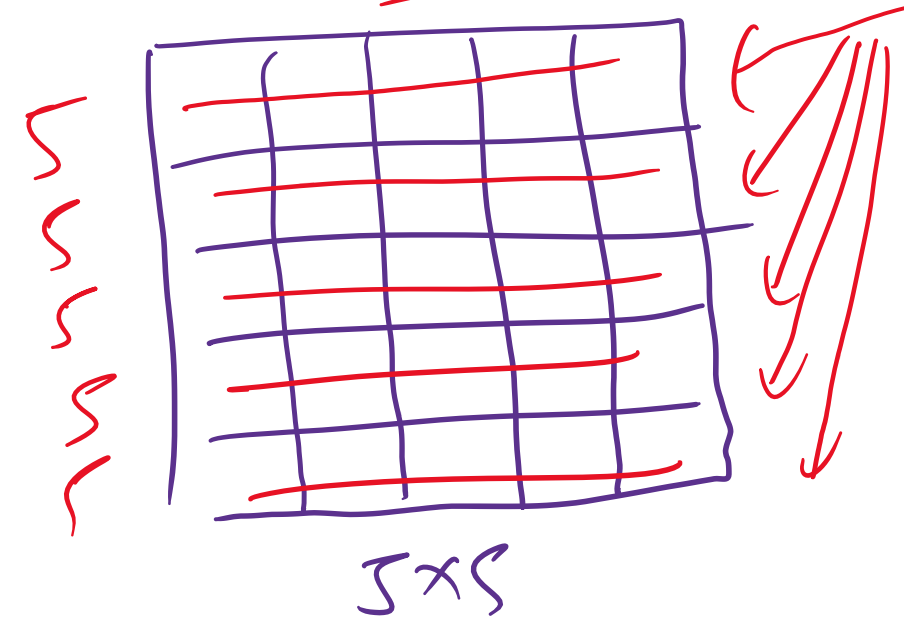

Armstrong Number:

153 $\rightarrow 1^3 + 5^3 + 3^3$
 $= 1 + 125 + 27$
 $= 153$


H.W. C++

Dynamic Memory Allocation

1D Array $\rightarrow$ n

2D Array $\rightarrow$ n x n

2D Array

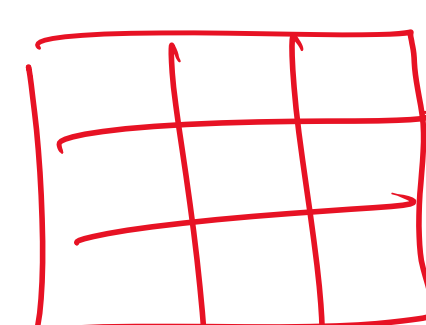

Square matrix

a-s / s-a


① DNA $\rightarrow$ 2D [m x n]

size

Armstrong Number

Home Work

3x4 m x n

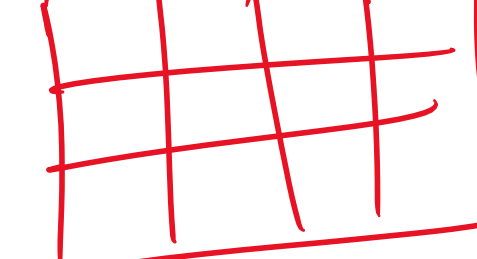

CHAITANYA

function(str) {

}



③

chaitanya small letters