* The Iterator interface in Java :→ (auto : C++)

P1 Question / Problem Statement :→ Given an ArrayList of integers, show the use of the Iterator interface to traverse through the collection & remove elements based on some criteria as given.

P2 Also show the use of the forEach method in Collections to perform the same using Lambda Expressions.

Note : An Iterator is an interface used to traverse over the Collection Library in Java by using the method iterator ( ).

Map Interface → java.util <key, value>
<Multiple>

Collection Interface → Single values or objects
1, 2, 3, 4, etc
A, B, C, D, etc

* Each <k, v> pair in a Map is called an <Entry>
* How to maintain insertion order in a Hashmap?

Hashtable :→ It is called an {Array of Lists}

```
Hashtable<Integer, String> ht = new Hashtable<>();
ht.put(106, "Sharanya");
ht.put(117, "Shreyas");
ht.put(128, "Sonika");
ht.put(100, "Siri");
ht.put(99, "Sunil");
ht.put(101, "Prashanth");
```

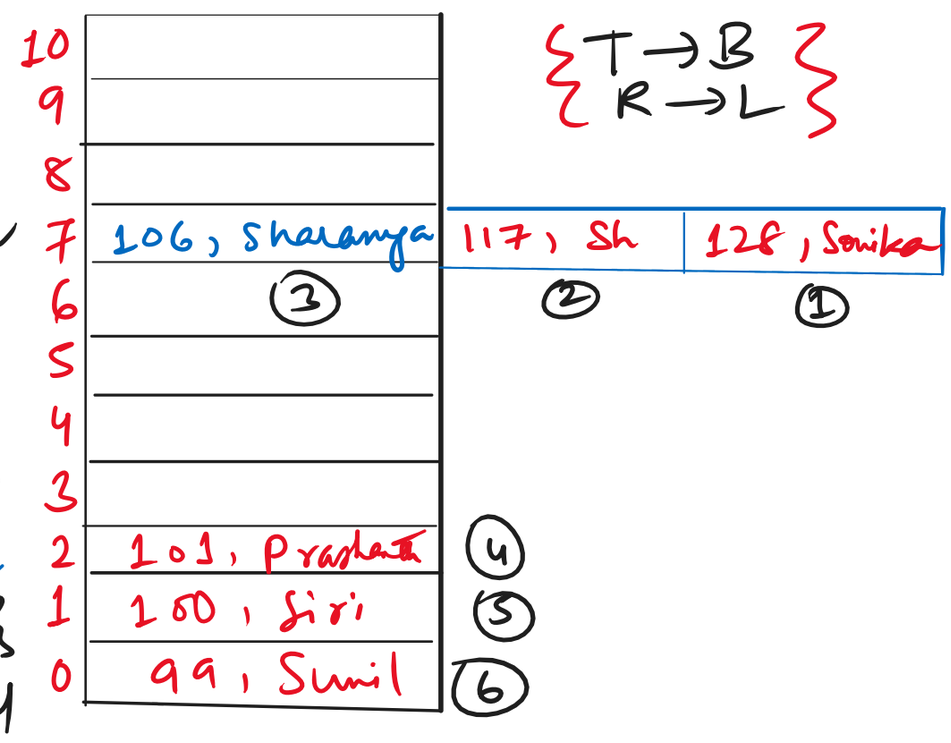

{T→B
R→L}

Initial size of an Hashtable is 11. {Load factor = 0.75}

Hashing : Unique hashcode by JVM

If while passing hashcode, index already has value, it is called hash collision. In hashtable we store the data in the linked list at the same index to the right. (Linear Probing)

/login API after /signup