


Get started with the SINTEF Beamer Theme

Using $\text{\LaTeX}$ to prepare slides

Name Surname

September 24, 2026

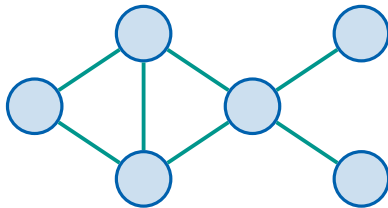



Outline

1. Getting Started
2. Slide Layouts
3. Algorithms

arXiv: arxiv.org/abs/0000.00000

 github.com/SaverioMonaco/DESY-SINTEF


Paper preview



YOUR
LOGO

Getting Started

Quick start, colors and logos

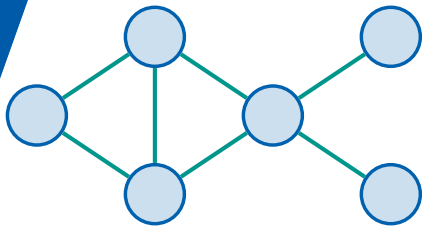

If you would like $\text{\LaTeX}$ in your presentation, Beamer is a great way to go!

- Beamer has a detailed [user manual](#), but we will go over the most common features.
- This template is designed for a 16:9 aspect ratio, which is the default in PowerPoint and the most common amongst projectors.
- The most common of all slide types involve bulleted points, like these.

If you would like $\text{\LaTeX}$ in your presentation, Beamer is a great way to go!

- Beamer has a detailed [user manual](#), but we will go over the most common features.
- This template is designed for a 16:9 aspect ratio, which is the default in PowerPoint and the most common amongst projectors.
- The most common of all slide types involve bulleted points, like these.
 - Placing `\pause` after items will allow you to sequentially unroll points.
 - Changing `\begin{itemize}` to `\begin{itemize}[<+>]` achieves a similar effect, although `\pause` gives finer control on the unrolling.

Palette: the theme is driven by a **primary** and a **secondary** color.

- Predefined:
`\usetheme[palette=desy]{sintef}` or
`palette=ocean`
- Any pair, after `\usetheme:`
`\setpalette{myprimary}{mysecondary}`
- Logos: `\lightlogo`, `\darklogo`, `\footerlogo`
- Footline text: `\footertext{...}`
- Highlighted text:
`\begin{leftbar}...\end{leftbar}`

Colors available in your slides:


	<code>themeprimary</code>
	<code>themeprimarydark</code>
	<code>themeprimarydarker</code>
	<code>themessecondary</code>
	<code>themessecondarydark</code>



YOUR
LOGO

Slide Layouts

Some standard slide layouts

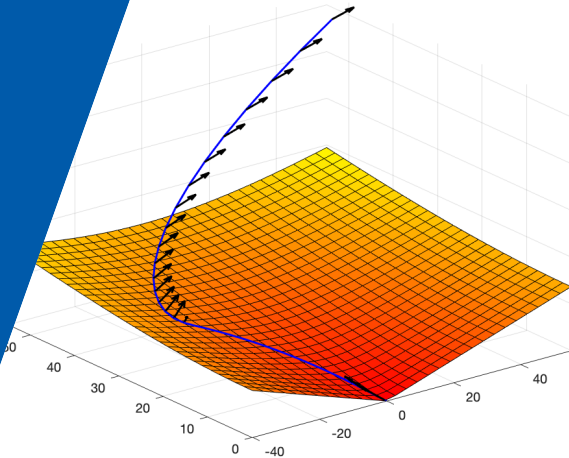

Images, columns and tips for good slides

Optional subtitle

- **Do keep** a good balance between text and figures.
 - **Do use** nested lists wherever appropriate.
- **Do use** the `\underbrace` and `\overbrace` commands to help explain your equations:

$$\begin{array}{ccc} & \text{Lagrangian} & \\ \max_{\lambda, \nu} . & \underbrace{\inf_x L(x, \lambda, \nu)} & \\ & \text{Lagrange Dual Function, } g(\lambda, \nu) & \\ \text{s.t. } & \lambda \geq 0 & \end{array}$$




Figure: Minimum fuel trajectory



A **standout** frame with title and subtitle

Subtitle here

A **standout** frame can be used to focus attention

Sections 12.1 through 12.3 of the [Beamer user manual](#) demonstrate many more features, like alerts and repeats.

- The `\alert{}` feature can be particularly useful.
- Like this.
- The highlighting may span multiple slides in a frame.
 - Previous one did not, but this one will.
- This is accomplished by the hyphen (i.e. `-`) in the `\alert<3->` command.

Sections 12.1 through 12.3 of the [Beamer user manual](#) demonstrate many more features, like alerts and repeats.

- The `\alert{}` feature can be particularly useful.
- Like [this](#).
- The highlighting may span multiple slides in a frame.
 - Previous one did not, but this one will.
- This is accomplished by the hyphen (i.e. `-`) in the `\alert<3->` command.


Sections 12.1 through 12.3 of the [Beamer user manual](#) demonstrate many more features, like alerts and repeats.

- The `\alert{}` feature can be particularly useful.
- Like this.
- The highlighting may span multiple slides in a frame.
 - Previous one did not, but [this one](#) will.
- This is accomplished by the hyphen (i.e. `-`) in the `\alert<3->` command.

Sections 12.1 through 12.3 of the [Beamer user manual](#) demonstrate many more features, like alerts and repeats.

- The `\alert{}` feature can be particularly useful.
- Like this.
- The highlighting may span multiple slides in a frame.
 - Previous one did not, but [this one](#) will.
- This is accomplished by the [hyphen](#) (i.e. `-`) in the `\alert<3->` command.

Another images/columns example



Left: Solving for optimal fuel consumption **Right:** Solving for optimal time taken





Figure: Minimum fuel trajectory

Figure: Minimum time trajectory



Algorithms

Typesetting pseudocode

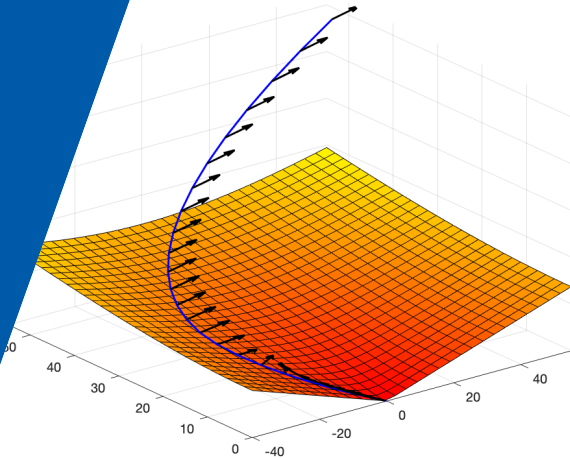

Pseudocode Example

Algorithm Bellman-Kalaba (adapted from [algorithmicx documentation](#)).

Input: G, u, l, p
 for all $v \in V(G)$ **do**
 $l(v) \leftarrow \infty$
 end for
 $l(u) \leftarrow 0$
 repeat
 for $i \leftarrow 1, n$ **do**
 $min \leftarrow l(v_i)$
 for $j \leftarrow 1, n$ **do**
 if $min > \text{Edge}(v_i, v_j) + l(v_j)$ **then**
 $min \leftarrow \text{Edge}(v_i, v_j) + l(v_j)$
 $p(i) \leftarrow v_j$
 end if
 end for
 $l'(i) \leftarrow min$
 end for
 $changed \leftarrow l \neq l'$
 $l \leftarrow l'$
 until $\neg changed$

▷ Example comment

- There are [multiple environments](#) for typesetting algorithms.
 - This template uses `algorithmicx` via `algpseudocode`.
 - `algpseudocode` is (one of the) layouts for `algorithmicx`.
 - Others exist, as mentioned in the [documentation, section 2.1](#).
 - `algorithmic` is also widely used, which is an alternative to using `algorithmicx` (via a layout package).
- While `algpseudocode` tries to be close to `algorithmic`, they use different capitalization schemes
 - `algorithmic` commands are fully capitalized (e.g. `\STATE`, `\FORALL`)
 - `algpseudocode` commands are not (e.g. `\State`, `\ForAll`).
 - **If moving an algorithm from one to the other, you will need to fix the capitalization, or the compiler will run into problems.**

- If you must use `algorithmic` instead of `algpseudocode`, some commands will need to be manually defined
 - For example the function `\Call` (or rather, the `\CALL`) command.
 - Do it as `\newcommand*\CALL[2]{\textsc{#1}(\textsc{#2})}`
 - Remember that not all fonts have a small caps variant needed by `\textsc`
 - You can look at `sinteffont.sty` to see how we augment our font with another small caps font (i.e. **PlayFair Display SC**)
 - Additionally, the `\Comment` of `algpseudocode` might look better than the `\COMMENT` of `algorithmic`
 - You can define a custom one to mimic `\Comment`
 - Do it as `\newcommand*\ANNOTATE[1]{\hfill\(\triangleright\text{#1})}`

Good luck with your presentation!

- This template is hosted on GitHub
 - <https://github.com/SaverioMonaco/DESY-SINTEF>
- I would appreciate contributions of all sorts (pull requests, identifying issues, etc).
- If you have any suggestions, [send them to me!](#)
- Citations work as usual [1].



Main resources:

- **Paper:** "Title of the first reference"
`https://arxiv.org/abs/0000.00000`
- **Code:** "Title of the repository"
`https://github.com/user/repository`



This work has received funding from the Dummy Funding Agency under Grant Agreement No. 000000. Replace this text with your own acknowledgement.



Thank you



This work has received funding from the Dummy Funding Agency under Grant Agreement No. 000000. Replace this text with your own acknowledgement.

References I

- [1] Till Tantau, Joseph Wright, and Vedran Miletić.
The BEAMER class: User Guide for version 3.71, 2023.
- [2] David Carlisle.
Packages in the 'graphics' bundle, 2023.

Backup slide

Not counted in the total

Slides between `\backupbegin` and `\backupend` do not count towards the total number of frames shown in the footline.