

Cucumber Report

Jun 21, 2022, 9:51:27 PM

Start : Jun 21, 9:51:19.240 PM

End : Jun 21, 9:51:27.328 PM

Duration : 8.088 s

Features

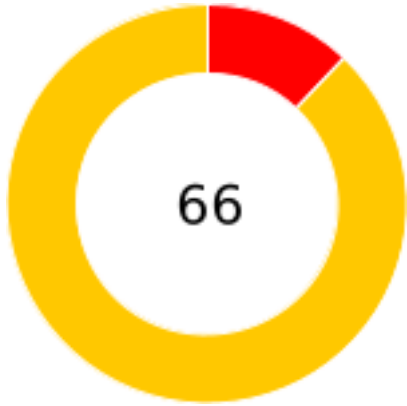
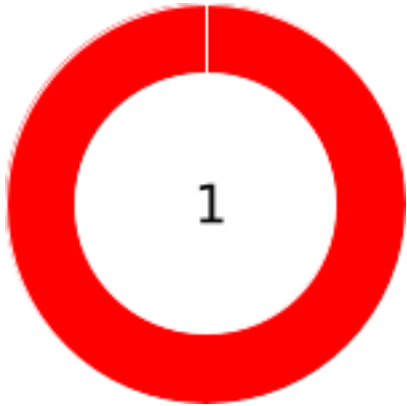
Scenarios

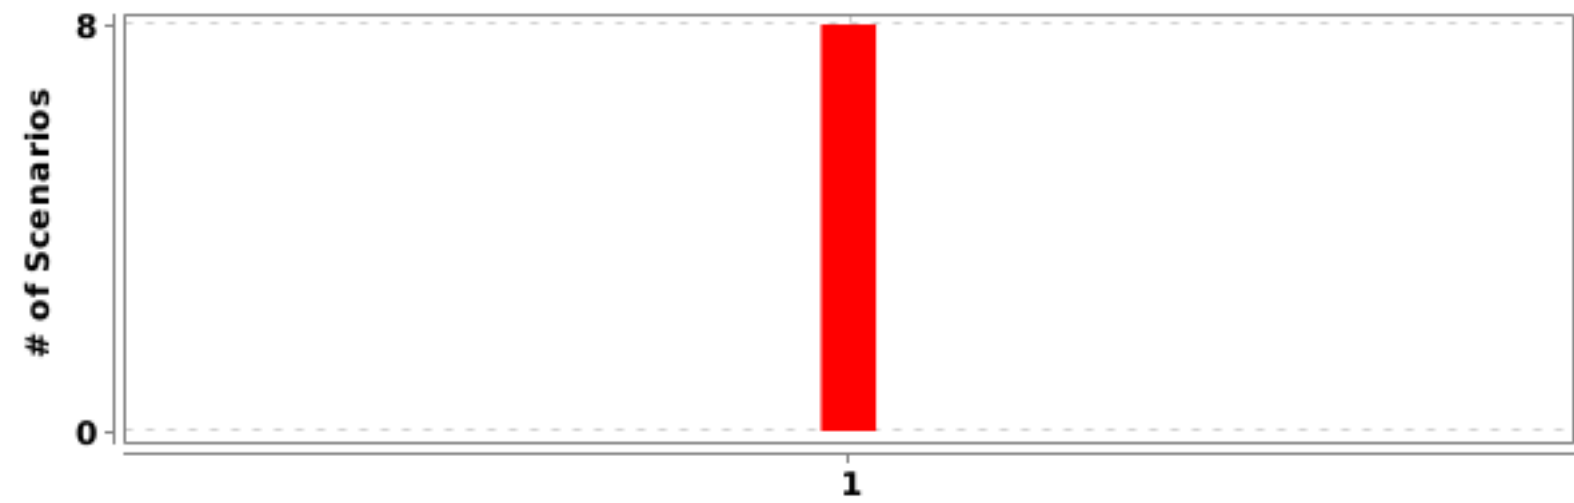
Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

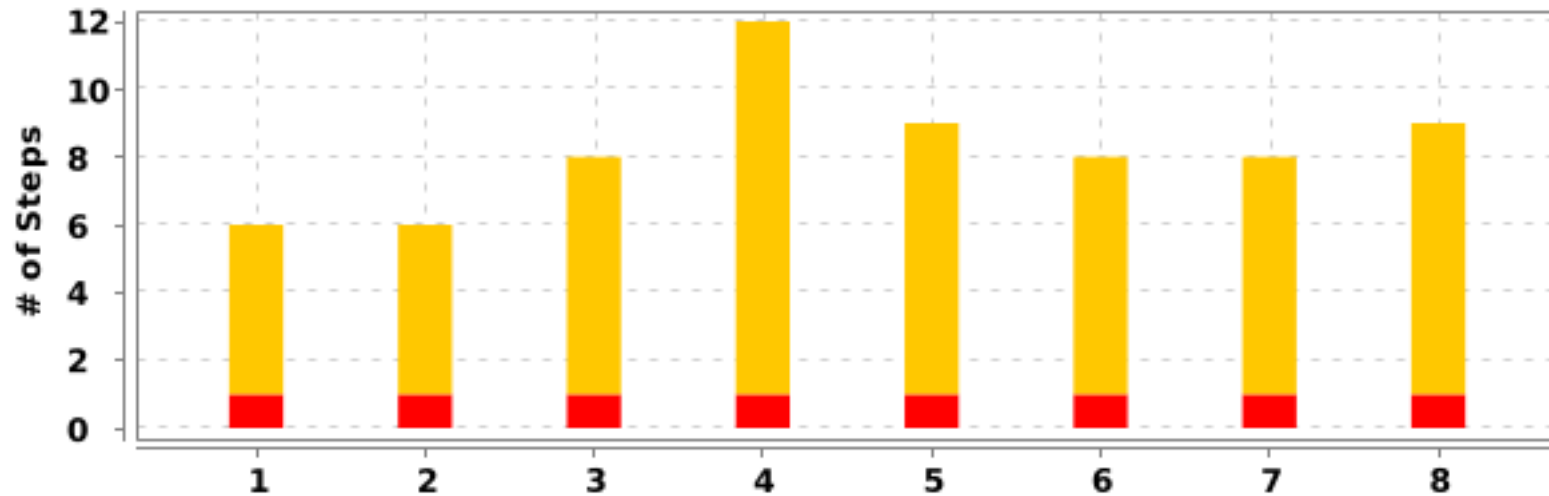
PASSED - 0
FAILED - 8
SKIPPED - 0

PASSED - 0
FAILED - 8
SKIPPED - 58







#	Feature Name	T	P	F	S	Duration
1	<u>Stroer Case Study</u>	8	0	8	0	8.088 s

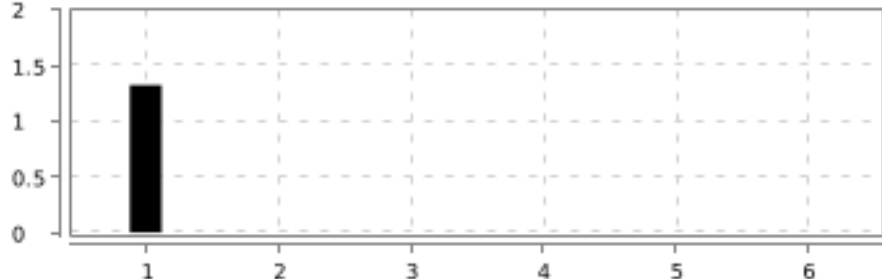



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Stroer Case Study</u>	<u>Test01 >> verify user is able login to webShop</u>	6	0	1	5	1.592 s
2	<u>Stroer Case Study</u>	<u>Test02 >> verify user is not able to login to webShop with wrong user details</u>	6	0	1	5	0.927 s
3	<u>Stroer Case Study</u>	<u>Test03 >> verify user is able to add product to cart</u>	8	0	1	7	0.863 s
4	<u>Stroer Case Study</u>	<u>Test04 >> verify checkout page</u>	12	0	1	11	0.924 s
5	<u>Stroer Case Study</u>	<u>Test05 >> Verify order tables</u>	9	0	1	8	0.967 s
6	<u>Stroer Case Study</u>	<u>Test06 >> Verify confirmation email is sent to Customer</u>	8	0	1	7	0.890 s
7	<u>Stroer Case Study</u>	<u>Test07 >> Verify order xml is created</u>	8	0	1	7	0.931 s
8	<u>Stroer Case Study</u>	<u>Test08 >> Verify product details in order xml</u>	9	0	1	8	0.892 s


(F)- Stroer Case Study

FAILED	DURATION - 8.088 s	Scenarios		Steps	
/ 9:51:19.240 PM // 9:51:27.328 PM /		Total - 8		Total - 66	
		Pass - 0		Pass - 0	
		Fail - 8		Fail - 8	
		Skip - 0		Skip - 58	

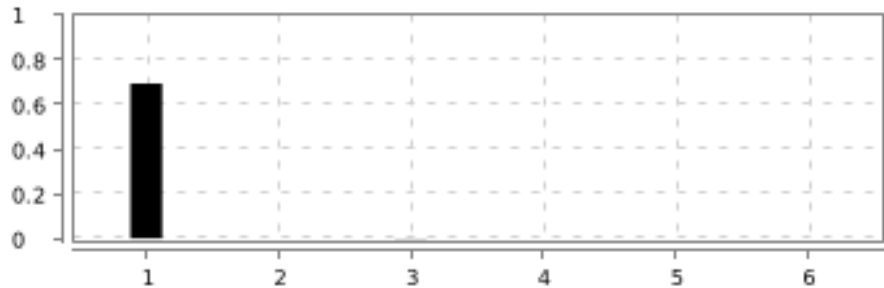

(S)- Test01 >> verify user is able login to webShop

<div>FAILED</div> <div>DURATION - 1.592 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	<div></div>
<div>/ 9:51:19.242 PM // 9:51:20.834 PM /</div>				
<div>Stroer Case Study</div>				
<div>@Requirement1</div>				

#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [569d189d5de20a6a04d7ef7839d6c1f3, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.vDiKzs)}, goog:chromeOptions: {debuggerAddress: localhost:42317}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:42317/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 569d189d5de20a6a04d7ef7839d6c1f3 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</pre>	FAILED	1.325 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.001 s
3	When User enters valid credentials	SKIPPED	0.001 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	Then User should get successful login message	SKIPPED	0.001 s
6	Then User navigates to webShop home page	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.246 s
	Scenario fail		
			

(S)- Test02 >> verify user is not able to login to webShop with wrong user details

<div>FAILED</div> <div>DURATION - 0.927 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	<div></div>
<div>/ 9:51:20.863 PM // 9:51:21.790 PM /</div>				
<div>Stroer Case Study</div>				
<div>@Requirement1</div>				


#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <p>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [631fe9fd8968ce0ca6f7ef045eb5400a, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.460ZOG}, goog:chromeOptions: {debuggerAddress: localhost:45267}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:45267/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 631fe9fd8968ce0ca6f7ef045eb5400a</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	0.693 s
2	Given Load second Test Data from "<Case_2>"	SKIPPED	0.000 s
3	When User enters invalid credentials	SKIPPED	0.001 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	Then User should get error message	SKIPPED	0.000 s
6	Then User should remain on login page	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.228 s
	Scenario fail		

#	Step / Hook Details	Status	Duration

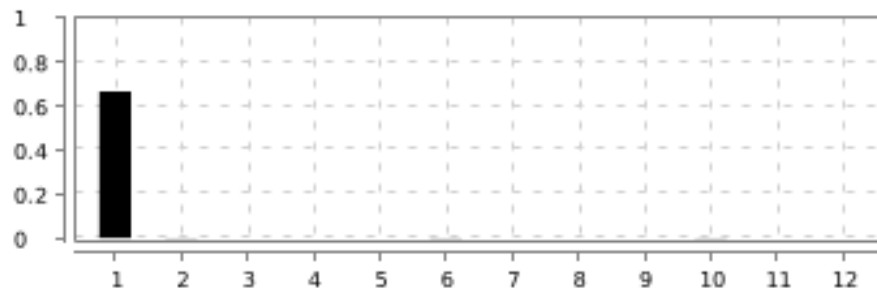

(S)- Test03 >> verify user is able to add product to cart

<div>FAILED</div> <div>DURATION - 0.863 s</div>		<div><table><thead><tr><th>Step</th><th>Pass</th><th>Fail</th><th>Skip</th></tr></thead><tbody><tr><td>1</td><td>0</td><td>1</td><td>0</td></tr><tr><td>2</td><td>0</td><td>0</td><td>0</td></tr><tr><td>3</td><td>0</td><td>1</td><td>0</td></tr><tr><td>4</td><td>0</td><td>0</td><td>0</td></tr><tr><td>5</td><td>0</td><td>0</td><td>0</td></tr><tr><td>6</td><td>0</td><td>0</td><td>0</td></tr><tr><td>7</td><td>0</td><td>0</td><td>0</td></tr><tr><td>8</td><td>0</td><td>0</td><td>0</td></tr></tbody></table></div>	Step	Pass	Fail	Skip	1	0	1	0	2	0	0	0	3	0	1	0	4	0	0	0	5	0	0	0	6	0	0	0	7	0	0	0	8	0	0	0	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div><div>8</div></div>
Step	Pass		Fail	Skip																																				
1	0		1	0																																				
2	0		0	0																																				
3	0	1	0																																					
4	0	0	0																																					
5	0	0	0																																					
6	0	0	0																																					
7	0	0	0																																					
8	0	0	0																																					
/ 9:51:21.798 PM // 9:51:22.661 PM /																																								
Stroer Case Study																																								
@Requirement1																																								

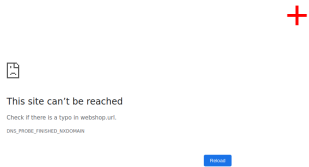
#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8c8146abbc0b5f8a68611e3e07a0c384, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.nfCiEz}, goog:chromeOptions: {debuggerAddress: localhost:43123}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:43123/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8c8146abbc0b5f8a68611e3e07a0c384 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)</pre>	FAILED	0.669 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.001 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User navigates to webShop home page	SKIPPED	0.000 s
6	Then User checks product name, product price and description	SKIPPED	0.000 s
7	When User clicks on add to cart button	SKIPPED	0.000 s
8	Then product is added to cart	SKIPPED	0.001 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.190 s
	Scenario fail		
			

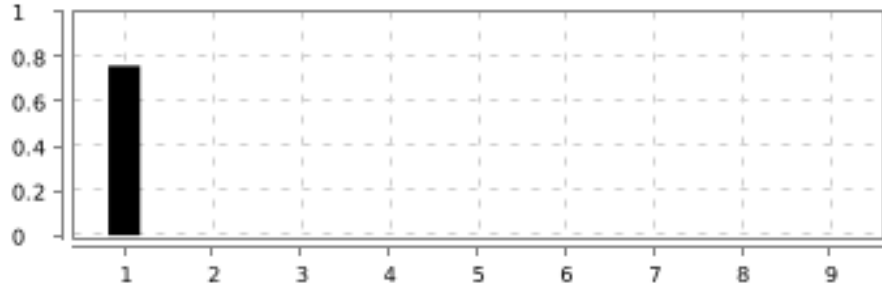

(S)- Test04 >> verify checkout page

<div>FAILED</div> <div>DURATION - 0.924 s</div>		<div></div>	<div>Steps</div> <div>Total - 12</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 11</div>	<div></div>
<div>/ 9:51:22.670 PM // 9:51:23.594 PM /</div>				
<div>Stroer Case Study</div>				
<div>@Requirement1</div>				

#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [a4bb253ff02acda68965763f3a025ce0, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.BjDIsV}, goog:chromeOptions: {debuggerAddress: localhost:45143}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se.cdp: ws://localhost:45143/devtoo..., se.cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: a4bb253ff02acda68965763f3a025ce0 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.666 s
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.001 s
3	When User enters valid credentials	SKIPPED	0.000 s


#	Step / Hook Details	Status	Duration
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User navigates to webShop home page	SKIPPED	0.000 s
6	When User clicks on add to cart button	SKIPPED	0.001 s
7	Then product is added to cart	SKIPPED	0.000 s
8	When user clicks on cart button	SKIPPED	0.000 s
9	Then user navigates to checkout page	SKIPPED	0.000 s
10	Then User checks his details and product in cart	SKIPPED	0.001 s
11	When user clicks on checkout button	SKIPPED	0.000 s
12	Then user gets success message	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.254 s
	Scenario fail		
			

(S)- Test05 >> Verify order tables

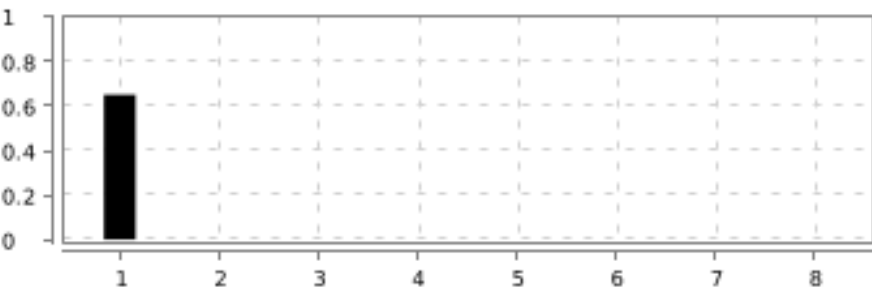

<div>FAILED</div> <div>DURATION - 0.967 s</div>		<div></div>	<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	<div></div>
/ 9:51:23.617 PM // 9:51:24.584 PM /				
Stroer Case Study				
@Requirement2				

#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL	FAILED	0.759 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.		


#	Step / Hook Details	Status	Duration
	<p>arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6a0680a4fc098631340e5342dd25c722, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.PuJmKq}, goog:chromeOptions: {debuggerAddress: localhost:45539}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:45539/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 6a0680a4fc098631340e5342dd25c722</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </p>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then Order table is created	SKIPPED	0.000 s
9	And User verifies table data	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.203 s
	Scenario fail		

#	Step / Hook Details	Status	Duration
			

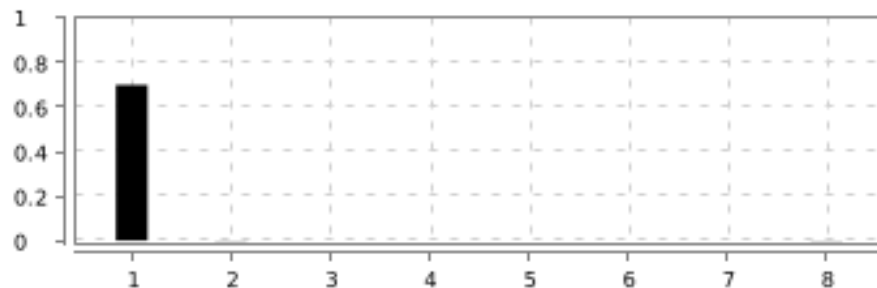

(S)- Test06 >> Verify confirmation email is sent to Customer

<div>FAILED</div> <div>DURATION - 0.890 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div></div>
/ 9:51:24.589 PM // 9:51:25.479 PM /				
Stroer Case Study				
@Requirement3				

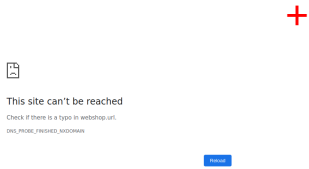
#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [a755f0923c1d0d1e2130b2c8a289bba1, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.5b43Zt}, goog:chromeOptions: {debuggerAddress: localhost:41817}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:41817/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: a755f0923c1d0d1e2130b2c8a289bba1 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)</pre>	FAILED	0.651 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then verify confirmation email is sent to customer	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.237 s
	Scenario fail		
			

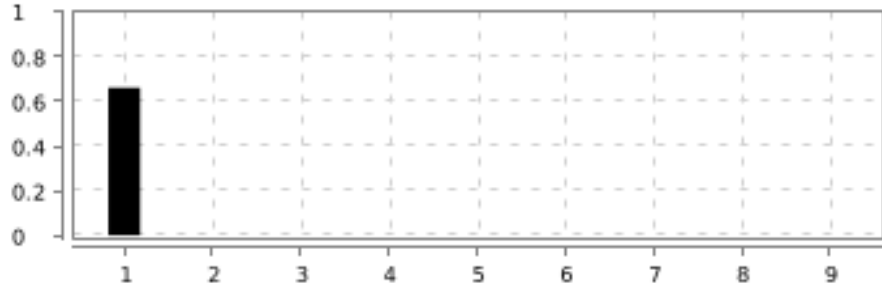

(S)- Test07 >> Verify order xml is created

<div><div>FAILED</div><div>DURATION - 0.931 s</div></div>		<div></div>	<div><div>Steps</div><div>Total - 8</div><div>Pass - 0</div><div>Fail - 1</div><div>Skip - 7</div></div> <div></div>
/ 9:51:25.487 PM // 9:51:26.418 PM /			
Stroer Case Study			
@Requirement4			

#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [cbea5b7faba0c6614ceb12cbd368b0ad, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.a75JbE), goog:chromeOptions: {debuggerAddress: localhost:35999}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se.cdp: ws://localhost:35999/devtoo..., se.cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: cbea5b7faba0c6614ceb12cbd368b0ad at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.700 s
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.001 s
3	When User enters valid credentials	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then verify order xml is created	SKIPPED	0.001 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.229 s
	Scenario fail		
			

(S)- Test08 >> Verify product details in order xml

<div>FAILED</div> <div>DURATION - 0.892 s</div>			<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	
/ 9:51:26.436 PM // 9:51:27.328 PM /				
Stroer Case Study				
@Requirement4				

#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL	FAILED	0.661 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [deab11870508074b44121d55aac1a4a4, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.o4o8lZ}, goog:chromeOptions: {debuggerAddress: localhost:32975}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:32975/devtoo..., se:cdpVersion:		

#	Step / Hook Details	Status	Duration
	102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: deab11870508074b44121d55aac1a4a4 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/ StroerTest.feature:4) * Not displayable characters are replaced by '?'.		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	And read created order xml	SKIPPED	0.000 s
9	Then User can verify product details <Product ID> in xml	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.228 s
	Scenario fail		

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test01 >> verify user is able login to
webShop

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test02 >> verify user is not able to
login to webShop with wrong user details

(F) Stroer Case Study



This site can't be reached

Check if there is a typo in webshop.url.

DNS_PROBE_FINISHED_NXDOMAIN

Reload



This site can't be reached

Check if there is a typo in webshop.url.

DNS_PROBE_FINISHED_NXDOMAIN

Reload

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test03 >> verify user is able to add
product to cart

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test04 >> verify checkout page

(F) Stroer Case Study



This site can't be reached

Check if there is a typo in webshop.url.

DNS_PROBE_FINISHED_NXDOMAIN

Reload



This site can't be reached

Check if there is a typo in webshop.url.

DNS_PROBE_FINISHED_NXDOMAIN

Reload

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test05 >> Verify order tables

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test06 >> Verify confirmation email is
sent to Customer

(F) Stroer Case Study



This site can't be reached

Check if there is a typo in webshop.url.

DNS_PROBE_FINISHED_NXDOMAIN

Reload



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test07 >> Verify order xml is created

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test08 >> Verify product details in
order xml

(F) Stroer Case Study



This site can't be reached

Check if there is a typo in webshop.url.

DNS_PROBE_FINISHED_NXDOMAIN

Reload



This site can't be reached

Check if there is a typo in webshop.url.

DNS_PROBE_FINISHED_NXDOMAIN

Reload