

Cucumber Report

Jun 21, 2022, 10:44:51 PM

Start : Jun 21, 10:43:40.952 PM

End : Jun 21, 10:44:50.613 PM

Duration : 1 m 9.661 s

Features

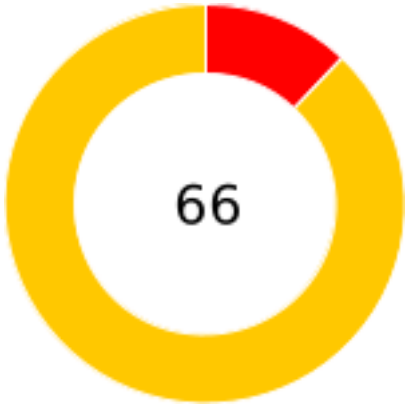
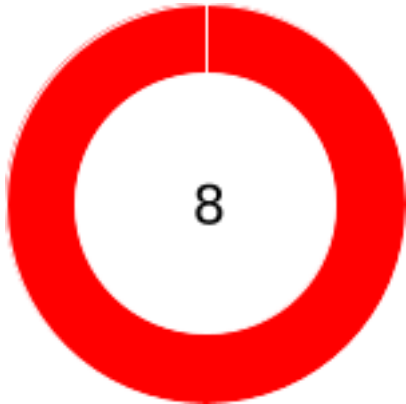
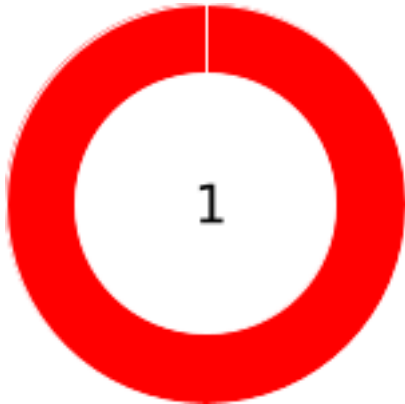
Scenarios

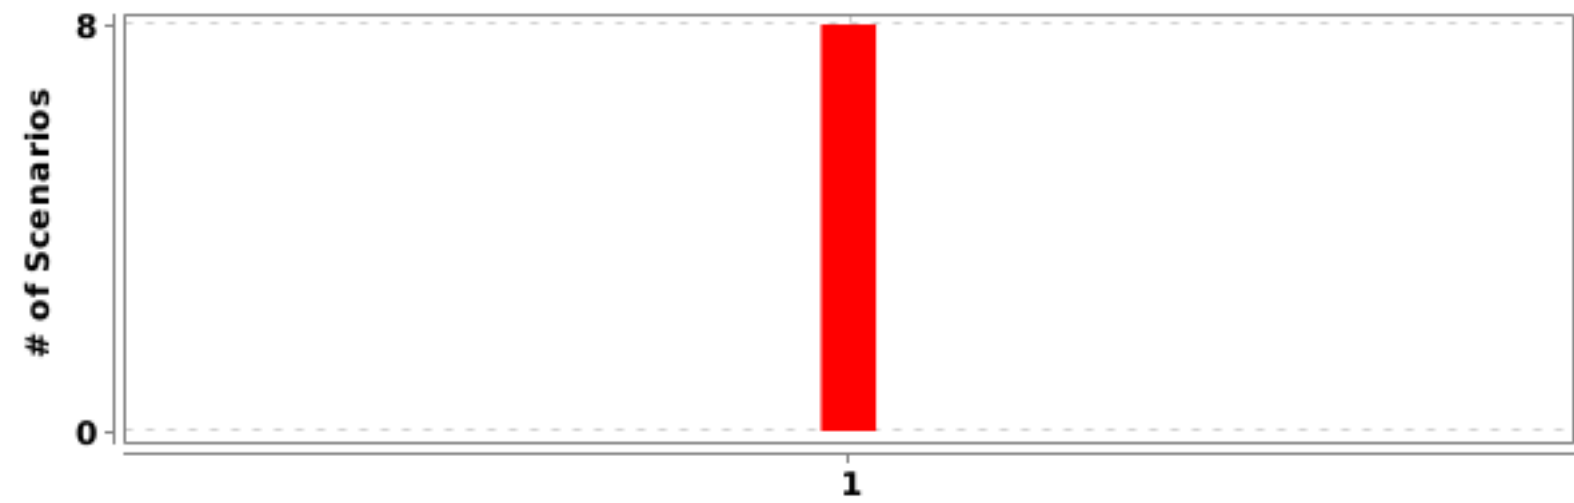
Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

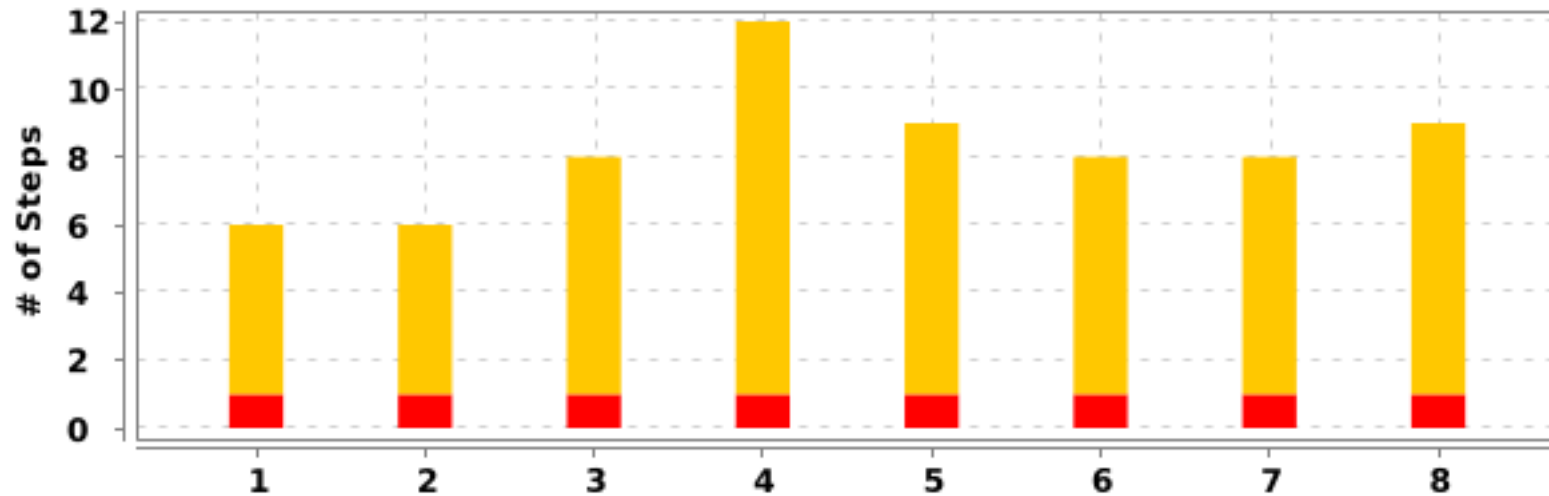
PASSED - 0
FAILED - 8
SKIPPED - 0

PASSED - 0
FAILED - 8
SKIPPED - 58







#	Feature Name	T	P	F	S	Duration
1	<u>Stroer Case Study</u>	8	0	8	0	1 m 9.661 s

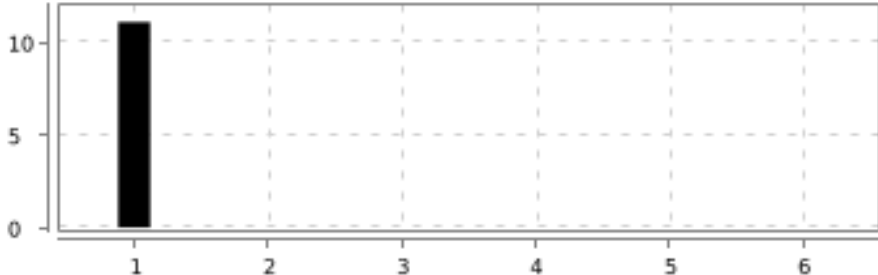



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Stroer Case Study</u>	<u>Test01 >> verify user is able login to webShop</u>	6	0	1	5	11.333 s
2	<u>Stroer Case Study</u>	<u>Test02 >> verify user is not able to login to webShop with wrong user details</u>	6	0	1	5	8.888 s
3	<u>Stroer Case Study</u>	<u>Test03 >> verify user is able to add product to cart</u>	8	0	1	7	8.464 s
4	<u>Stroer Case Study</u>	<u>Test04 >> verify checkout page</u>	12	0	1	11	9.004 s
5	<u>Stroer Case Study</u>	<u>Test05 >> Verify order tables</u>	9	0	1	8	3.305 s
6	<u>Stroer Case Study</u>	<u>Test06 >> Verify confirmation email is sent to Customer</u>	8	0	1	7	9.779 s
7	<u>Stroer Case Study</u>	<u>Test07 >> Verify order xml is created</u>	8	0	1	7	10.003 s
8	<u>Stroer Case Study</u>	<u>Test08 >> Verify product details in order xml</u>	9	0	1	8	8.798 s


(F)- Stroer Case Study

FAILED	DURATION - 1 m 9.661 s	Scenarios		Steps	
/ 10:43:40.952 PM // 10:44:50.613 PM /		Total - 8	8	Total - 66	66
		Pass - 0		Pass - 0	
		Fail - 8		Fail - 8	
		Skip - 0		Skip - 58	

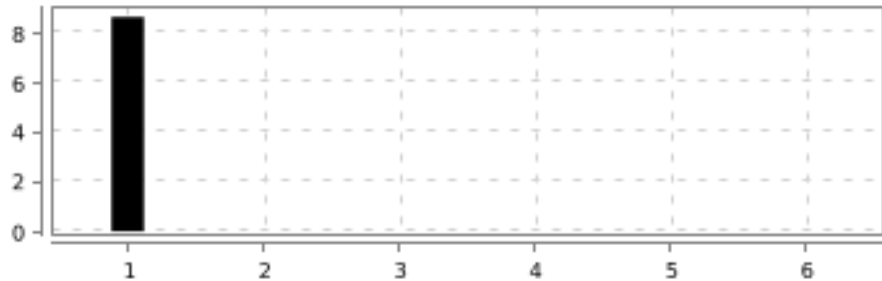

(S)- Test01 >> verify user is able login to webShop

<div>FAILED</div> <div>DURATION - 11.333 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>		<div></div>
<div>/ 10:43:40.954 PM // 10:43:52.287 PM /</div>					
<div>Stroer Case Study</div>					
<div>@Requirement1</div>					


#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d1be448be982928892c8e8ec36914e0c, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.PvZ19C)}, goog:chromeOptions: {debuggerAddress: localhost:46159}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:46159/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: d1be448be982928892c8e8ec36914e0c at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</pre>	FAILED	11.091 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.001 s
5	Then User should get successful login message	SKIPPED	0.000 s
6	Then User navigates to webShop home page	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.215 s
	Scenario fail		
			

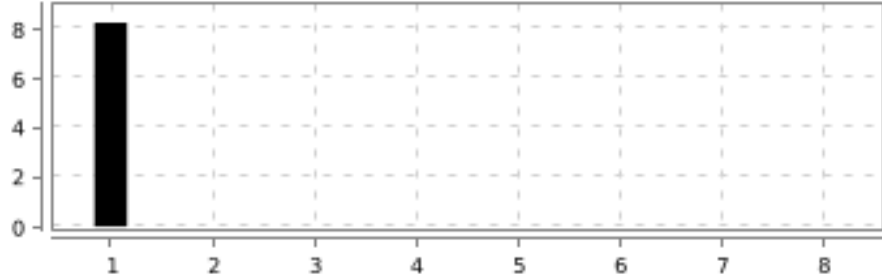

(S)- Test02 >> verify user is not able to login to webShop with wrong user details

<div>FAILED</div> <div>DURATION - 8.888 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	
/ 10:43:52.313 PM // 10:44:01.201 PM /				
Stroer Case Study				
@Requirement1				


#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <p>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [ec45f05984eccd3bf77607597efd6839, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.a53I2T}, goog:chromeOptions: {debuggerAddress: localhost:45153}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:45153/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: ec45f05984eccd3bf77607597efd6839</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </p>	FAILED	8.644 s
2	Given Load second Test Data from "<Case_2>"	SKIPPED	0.000 s
3	When User enters invalid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	Then User should get error message	SKIPPED	0.000 s
6	Then User should remain on login page	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.240 s
	Scenario fail		

#	Step / Hook Details	Status	Duration
			

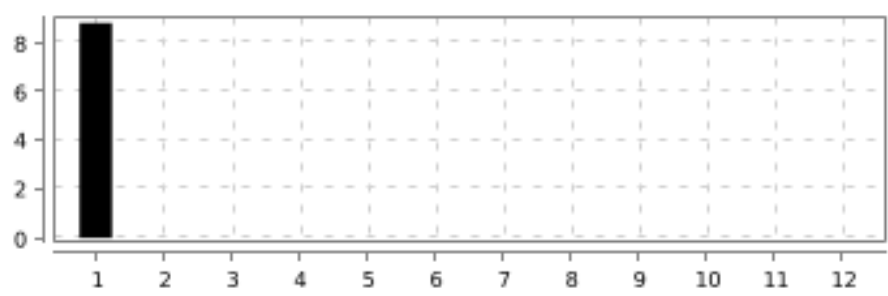

(S)- Test03 >> verify user is able to add product to cart

<div>FAILED</div> <div>DURATION - 8.464 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 10:44:01.211 PM // 10:44:09.675 PM /				
Stroer Case Study				
@Requirement1				


#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6e6e72c45b1dafd0fea1af1c60d08a5c, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.ORWQTZ}, goog:chromeOptions: {debuggerAddress: localhost:40371}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:40371/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 6e6e72c45b1dafd0fea1af1c60d08a5c at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)</pre>	FAILED	8.246 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User navigates to webShop home page	SKIPPED	0.000 s
6	Then User checks product name, product price and description	SKIPPED	0.000 s
7	When User clicks on add to cart button	SKIPPED	0.001 s
8	Then product is added to cart	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.215 s
	Scenario fail		
			

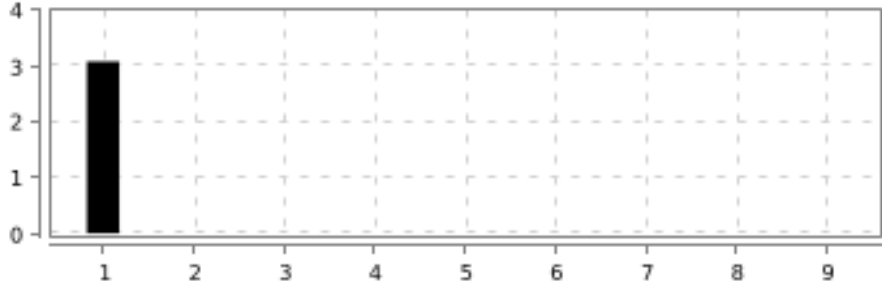

(S)- Test04 >> verify checkout page

<div>FAILED</div> <div>DURATION - 9.004 s</div>			<div>Steps</div> <div>Total - 12</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 11</div>	
/ 10:44:09.683 PM // 10:44:18.687 PM /				
Stroer Case Study				
@Requirement1				

#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <p>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c17a19a724c5c57479fc89519a97d0e5, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.piUL26}, goog:chromeOptions: {debuggerAddress: localhost:39871}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se.cdp: ws://localhost:39871/devtoo..., se.cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: c17a19a724c5c57479fc89519a97d0e5</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	8.793 s
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s


#	Step / Hook Details	Status	Duration
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User navigates to webShop home page	SKIPPED	0.001 s
6	When User clicks on add to cart button	SKIPPED	0.000 s
7	Then product is added to cart	SKIPPED	0.000 s
8	When user clicks on cart button	SKIPPED	0.000 s
9	Then user navigates to checkout page	SKIPPED	0.000 s
10	Then User checks his details and product in cart	SKIPPED	0.000 s
11	When user clicks on checkout button	SKIPPED	0.000 s
12	Then user gets success message	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.205 s
	Scenario fail		
			

(S)- Test05 >> Verify order tables

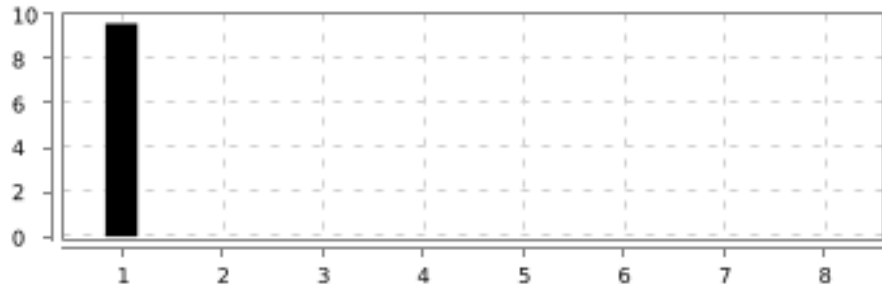

FAILED	DURATION - 3.305 s		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 10:44:18.696 PM // 10:44:22.001 PM /				
Stroer Case Study				
@Requirement2				

#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL	FAILED	3.080 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.		


#	Step / Hook Details	Status	Duration
	<p>arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c6fdc18c4eea91c102afa1f34be9e064, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.IEoxhp}, goog:chromeOptions: {debuggerAddress: localhost:37413}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:37413/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: c6fdc18c4eea91c102afa1f34be9e064</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </p>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then Order table is created	SKIPPED	0.000 s
9	And User verifies table data	SKIPPED	0.001 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.221 s
	Scenario fail		

#	Step / Hook Details	Status	Duration
			

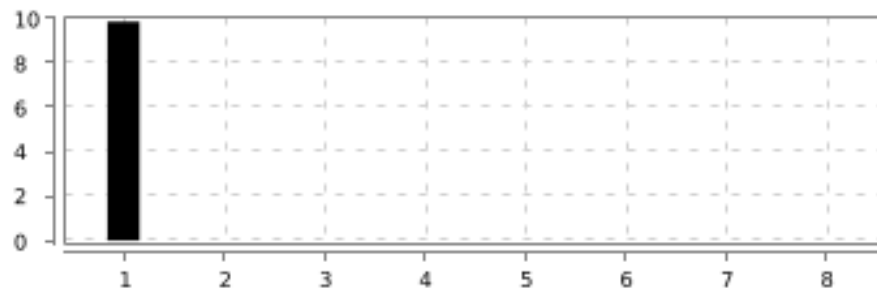

(S)- Test06 >> Verify confirmation email is sent to Customer

<div>FAILED</div> <div>DURATION - 9.779 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 10:44:22.007 PM // 10:44:31.786 PM /				
Stroer Case Study				
@Requirement3				


#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [3b6d808319f9d865318690dee3c10d45, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.eTVuK5}, goog:chromeOptions: {debuggerAddress: localhost:37785}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:37785/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 3b6d808319f9d865318690dee3c10d45 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)</pre>	FAILED	9.574 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.001 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then verify confirmation email is sent to customer	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.203 s
	Scenario fail		
			

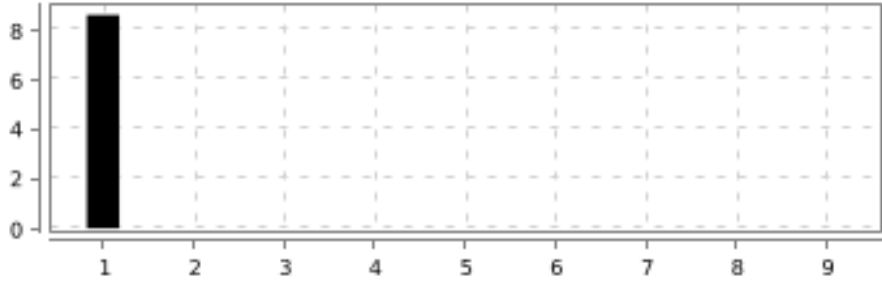

(S)- Test07 >> Verify order xml is created

<div>FAILED</div> <div>DURATION - 10.003 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div></div>
/ 10:44:31.800 PM // 10:44:41.803 PM /				
Stroer Case Study				
@Requirement4				

#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <p>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [99569741a860476d6de4eac56def8aef, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.Ustktz}, goog:chromeOptions: {debuggerAddress: localhost:36643}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se.cdp: ws://localhost:36643/devtoo..., se.cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 99569741a860476d6de4eac56def8aef</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	9.837 s
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.001 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then verify order xml is created	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.163 s
	Scenario fail		
			

(S)- Test08 >> Verify product details in order xml

FAILED	DURATION - 8.798 s		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 10:44:41.815 PM // 10:44:50.613 PM /				
Stroer Case Study				
@Requirement4				

#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL	FAILED	8.605 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [b5decee53eed987679d6a56ba57543bc, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.MkYyzq}, goog:chromeOptions: {debuggerAddress: localhost:41393}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:41393/devtoo..., se:cdpVersion:		

#	Step / Hook Details	Status	Duration
	102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b5decee53eed987679d6a56ba57543bc at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:37) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/ StroerTest.feature:4) * Not displayable characters are replaced by '?'.		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.001 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	And read created order xml	SKIPPED	0.000 s
9	Then User can verify product details <Product ID> in xml	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.190 s
	Scenario fail		

#	Step / Hook Details	Status	Duration
	<div><div><div></div></div><div>This site can't be reached webshop.ua's DNS address could not be found. Diagnosing the problem. <small>DNS_PROBE_STARTED</small></div><div>Refresh</div></div>		

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test01 >> verify user is able login to
webShop

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test02 >> verify user is not able to
login to webShop with wrong user details

(F) Stroer Case Study



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test03 >> verify user is able to add
product to cart

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test04 >> verify checkout page

(F) Stroer Case Study



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test05 >> Verify order tables

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test06 >> Verify confirmation email is
sent to Customer

(F) Stroer Case Study



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test07 >> Verify order xml is created

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.
Hooks.tearDown(io.cucumber.java.
Scenario)

(S) Test08 >> Verify product details in
order xml

(F) Stroer Case Study



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload



This site can't be reached

webshop.url's DNS address could not be found. Diagnosing the problem.

DNS_PROBE_STARTED

Reload