

# Cucumber Report

Jun 21, 2022, 9:46:28 PM

Start : Jun 21, 9:46:18.664 PM

End : Jun 21, 9:46:26.829 PM

Duration : 8.165 s

Features

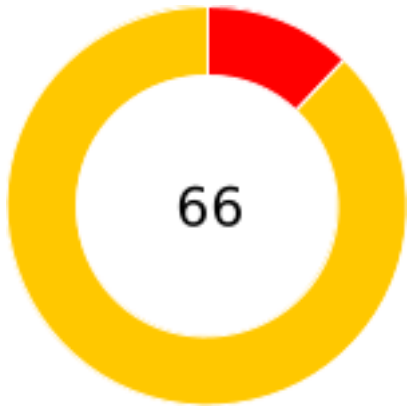
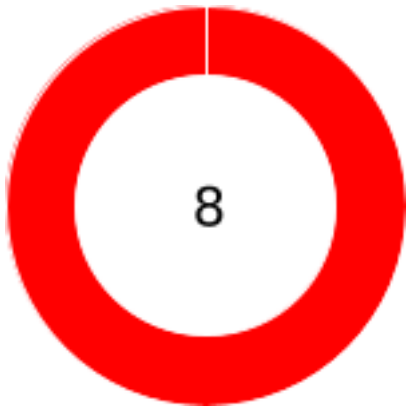
Scenarios

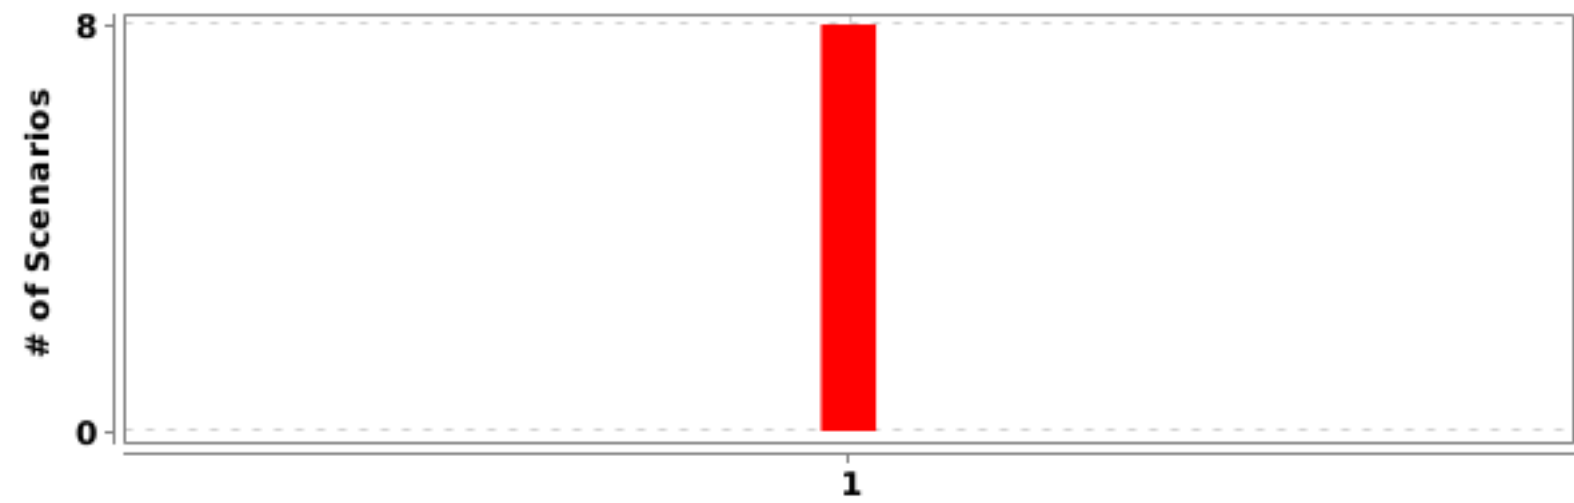
Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

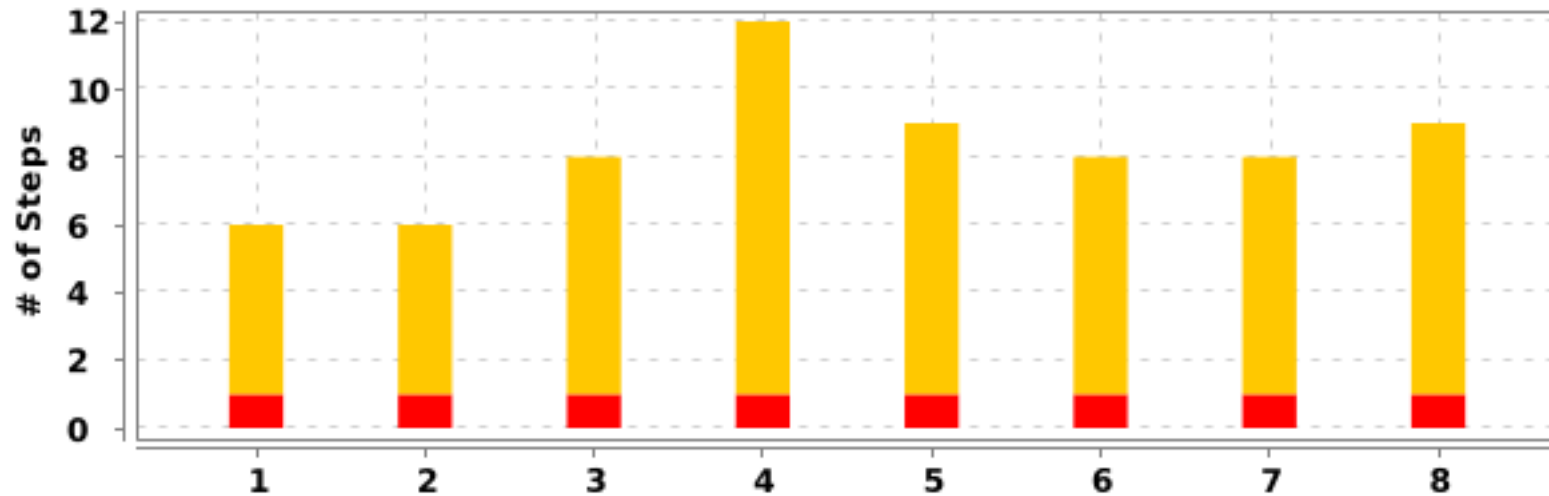
PASSED - 0  
FAILED - 8  
SKIPPED - 0

PASSED - 0  
FAILED - 8  
SKIPPED - 58







#	Feature Name	T	P	F	S	Duration
1	<u>Stroer Case Study</u>	8	0	8	0	8.165 s

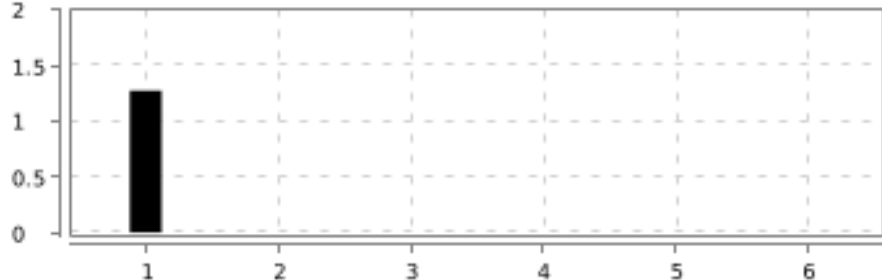



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Stroer Case Study</u>	<u>Test01 &gt;&gt; verify user is able login to webShop</u>	6	0	1	5	1.496 s
2	<u>Stroer Case Study</u>	<u>Test02 &gt;&gt; verify user is not able to login to webShop with wrong user details</u>	6	0	1	5	0.875 s
3	<u>Stroer Case Study</u>	<u>Test03 &gt;&gt; verify user is able to add product to cart</u>	8	0	1	7	0.897 s
4	<u>Stroer Case Study</u>	<u>Test04 &gt;&gt; verify checkout page</u>	12	0	1	11	0.913 s
5	<u>Stroer Case Study</u>	<u>Test05 &gt;&gt; Verify order tables</u>	9	0	1	8	0.912 s
6	<u>Stroer Case Study</u>	<u>Test06 &gt;&gt; Verify confirmation email is sent to Customer</u>	8	0	1	7	0.932 s
7	<u>Stroer Case Study</u>	<u>Test07 &gt;&gt; Verify order xml is created</u>	8	0	1	7	0.952 s
8	<u>Stroer Case Study</u>	<u>Test08 &gt;&gt; Verify product details in order xml</u>	9	0	1	8	1.117 s


**(F)- Stroer Case Study**

<b>FAILED</b>	<b>DURATION - 8.165 s</b>	Scenarios		Steps	
/ 9:46:18.664 PM // 9:46:26.829 PM /		Total - 8	8	Total - 66	66
		Pass - 0		Pass - 0	
		Fail - 8		Fail - 8	
		Skip - 0		Skip - 58	

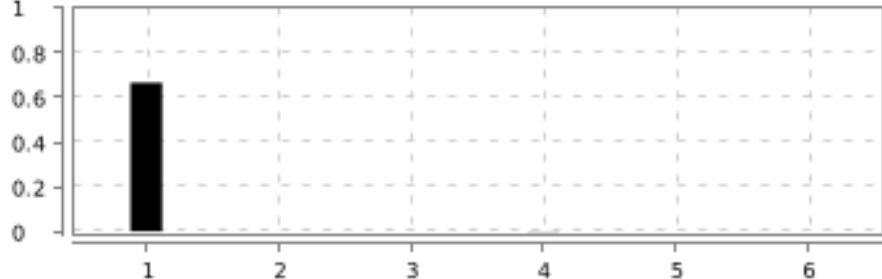

**(S)- Test01 >> verify user is able login to webShop**

<div>FAILED</div> <div>DURATION - 1.496 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	<div></div>
<div>/ 9:46:18.666 PM // 9:46:20.162 PM /</div>				
<div>Stroer Case Study</div>				
<div>@Requirement1</div>				


#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [4b3815ca4733c98618f2fbf3ecd90f5b, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.VObEAC)}, goog:chromeOptions: {debuggerAddress: localhost:46315}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:46315/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 4b3815ca4733c98618f2fbf3ecd90f5b     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</pre>	<b>FAILED</b>	1.275 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.001 s
5	Then User should get successful login message	SKIPPED	0.000 s
6	Then User navigates to webShop home page	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.199 s
	Scenario fail		
			

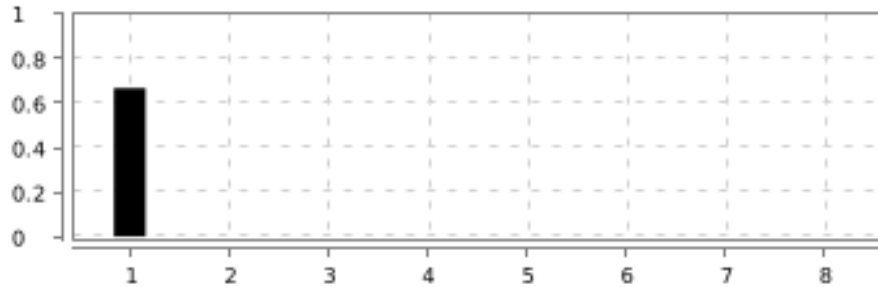

### (S)- Test02 >> verify user is not able to login to webShop with wrong user details

<div>FAILED</div> <div>DURATION - 0.875 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	<div></div>
/ 9:46:20.179 PM // 9:46:21.054 PM /				
Stroer Case Study				
@Requirement1				


#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [fd951afb1903b39396974ba18ec274c7, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.GimTVs)}, goog:chromeOptions: {debuggerAddress: localhost:38613}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se.cdp: ws://localhost:38613/devtoo..., se.cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: fd951afb1903b39396974ba18ec274c7     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)     at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)     at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)     at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567)     at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330)     at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36)     at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4)     * Not displayable characters are replaced by '?'. </pre>	FAILED	0.665 s
2	Given Load second Test Data from "<Case_2>"	SKIPPED	0.000 s
3	When User enters invalid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.001 s
5	Then User should get error message	SKIPPED	0.000 s
6	Then User should remain on login page	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.207 s
	Scenario fail		

#	Step / Hook Details	Status	Duration
			

**(S)- Test03 >> verify user is able to add product to cart**

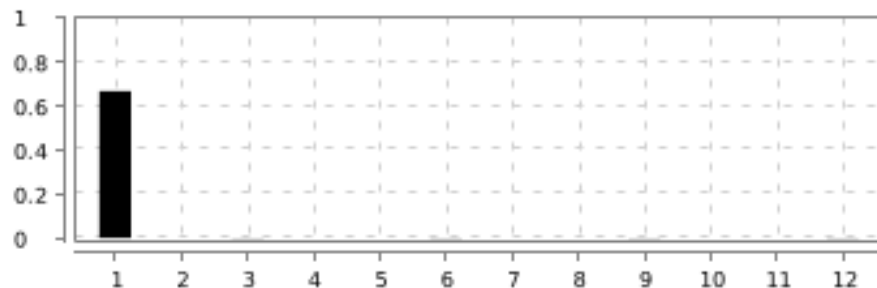

<div>FAILED</div> <div>DURATION - 0.897 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div></div>
/ 9:46:21.065 PM // 9:46:21.962 PM /				
Stroer Case Study				
@Requirement1				

#	Step / Hook Details	Status	Duration
1	<b>When User navigates to web shop URL</b> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [9d70d450c5f56132442b3afca667c980, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.ueEGzK}, goog:chromeOptions: {debuggerAddress: localhost:41103}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:41103/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 9d70d450c5f56132442b3afca667c980     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)</pre>	<b>FAILED</b>	0.667 s

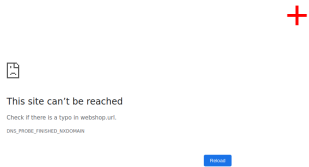
#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User navigates to webShop home page	SKIPPED	0.000 s
6	Then User checks product name, product price and description	SKIPPED	0.000 s
7	When User clicks on add to cart button	SKIPPED	0.000 s
8	Then product is added to cart	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.227 s
	Scenario fail		
			



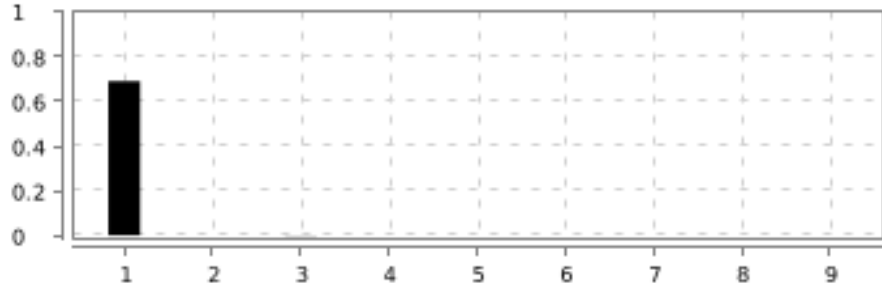

**(S)- Test04 >> verify checkout page**

<div>FAILED</div> <div>DURATION - 0.913 s</div>		<div></div>	<div>Steps</div> <div>Total - 12</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 11</div>	<div></div>
<div>/ 9:46:21.972 PM // 9:46:22.885 PM /</div>				
<div>Stroer Case Study</div>				
<div>@Requirement1</div>				

#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [861ff0dd01e58ebaf519de37708ef986, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.RF7Ejo}, goog:chromeOptions: {debuggerAddress: localhost:39961}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:39961/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 861ff0dd01e58ebaf519de37708ef986     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)     at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)     at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)     at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567)     at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330)     at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36)     at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4)     * Not displayable characters are replaced by '?'. </pre>	FAILED	0.668 s
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.001 s


#	Step / Hook Details	Status	Duration
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User navigates to webShop home page	SKIPPED	0.000 s
6	When User clicks on add to cart button	SKIPPED	0.001 s
7	Then product is added to cart	SKIPPED	0.000 s
8	When user clicks on cart button	SKIPPED	0.000 s
9	Then user navigates to checkout page	SKIPPED	0.001 s
10	Then User checks his details and product in cart	SKIPPED	0.000 s
11	When user clicks on checkout button	SKIPPED	0.000 s
12	Then user gets success message	SKIPPED	0.001 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.239 s
	Scenario fail		
			

**(S)- Test05 >> Verify order tables**

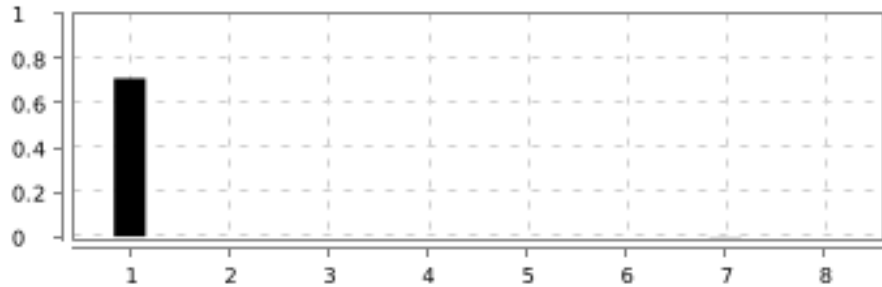

<div>FAILED</div> <div>DURATION - 0.912 s</div>		<div></div>	<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	<div></div>
/ 9:46:22.894 PM // 9:46:23.806 PM /				
Stroer Case Study				
@Requirement2				

#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL	FAILED	0.690 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.		

#	Step / Hook Details	Status	Duration
	<p>arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [06a047fdcd0c9e331245c9efc9d58f0b, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.HDpYjO), goog:chromeOptions: {debuggerAddress: localhost:34545}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se.cdp: ws://localhost:34545/devtoo..., se.cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 06a047fdcd0c9e331245c9efc9d58f0b</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567)  at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330)  at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36)  at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4)  * Not displayable characters are replaced by '?'. </p>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.001 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then Order table is created	SKIPPED	0.000 s
9	And User verifies table data	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.219 s
	Scenario fail		

#	Step / Hook Details	Status	Duration
			

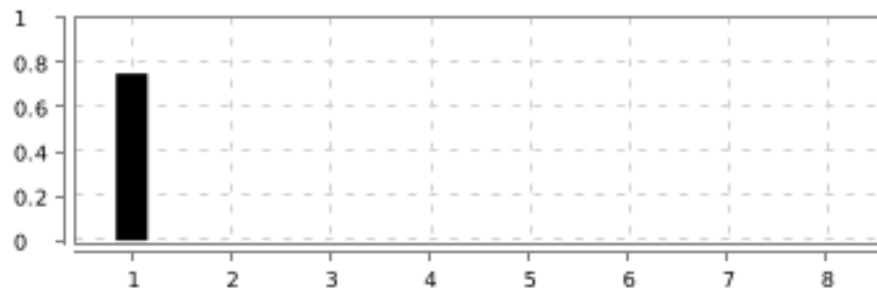

**(S)- Test06 >> Verify confirmation email is sent to Customer**

<div>FAILED</div> <div>DURATION - 0.932 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 9:46:23.811 PM // 9:46:24.743 PM /				
Stroer Case Study				
@Requirement3				

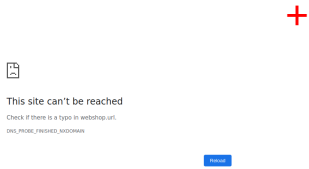
#	Step / Hook Details	Status	Duration
1	<b>When User navigates to web shop URL</b>  org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [448cebb31dbecd5c91c2d85c82c1ca55, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.RILhvA}, goog:chromeOptions: {debuggerAddress: localhost:43681}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:43681/devtoo..., se:cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 448cebb31dbecd5c91c2d85c82c1ca55 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)	<b>FAILED</b>	0.711 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.001 s
8	Then verify confirmation email is sent to customer	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.218 s
	Scenario fail		

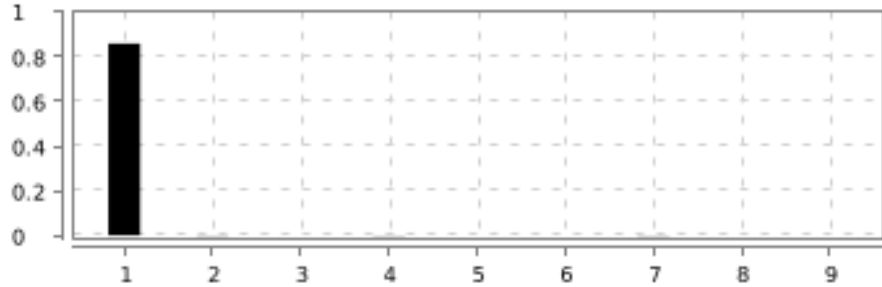

**(S)- Test07 >> Verify order xml is created**

<div>FAILED</div> <div>DURATION - 0.952 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div></div>
<div>/ 9:46:24.753 PM // 9:46:25.705 PM /</div>				
<div>Stroer Case Study</div>				
<div>@Requirement4</div>				

#	Step / Hook Details	Status	Duration
1	<p>When User navigates to web shop URL</p> <p>org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [62664de8117ebcac42e4d84aa059d9a7, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.qdEPMp}, goog:chromeOptions: {debuggerAddress: localhost:39887}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se.cdp: ws://localhost:39887/devtoo..., se.cdpVersion: 102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 62664de8117ebcac42e4d84aa059d9a7</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567)  at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330)  at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36)  at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/StroerTest.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	0.751 s
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.000 s
3	When User enters valid credentials	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	And User clicks on Login button	SKIPPED	0.000 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.000 s
8	Then verify order xml is created	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.198 s
	Scenario fail		
			

**(S)- Test08 >> Verify product details in order xml**

<div>FAILED</div> <div>DURATION - 1.117 s</div>			<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	
/ 9:46:25.712 PM // 9:46:26.829 PM /				
Stroer Case Study				
@Requirement4				

#	Step / Hook Details	Status	Duration
1	When User navigates to web shop URL	FAILED	0.859 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=102.0.5005.61) Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'ravimuktavarapu-ThinkPad-P15s-Gen-2i', ip: '127.0.1.1', os.name: 'Linux', os.arch: 'amd64', os.version: '5.13.0-48-generic', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [72b3dd26b5c25bce0ad4311d683b6092, get {url=http://webshop.url/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 102.0.5005.61, chrome: {chromedriverVersion: 102.0.5005.61 (0e59bcc00cc4..., userDataDir: /tmp/.com.google.Chrome.tAhG2U)}, goog:chromeOptions: {debuggerAddress: localhost:32897}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: LINUX, platformName: LINUX, proxy: Proxy(), se:cdp: ws://localhost:32897/devtoo..., se:cdpVersion:		

#	Step / Hook Details	Status	Duration
	102.0.5005.61, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 72b3dd26b5c25bce0ad4311d683b6092 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:330) at com.testproject.stepDefs.StroerStepDef.user_navigates_to_web_shop_url(StroerStepDef.java:36) at ?.User navigates to web shop URL(file:///home/ravi-muktavarapu/Desktop/Project_backup/StroerCaseStudy/src/test/resources/features/ StroerTest.feature:4) * Not displayable characters are replaced by '?'.		
2	Given Load Test Data from "<Case_1>"	SKIPPED	0.001 s
3	When User enters valid credentials	SKIPPED	0.000 s
4	And User clicks on Login button	SKIPPED	0.001 s
5	When User clicks on add to cart button	SKIPPED	0.000 s
6	And user clicks on cart button	SKIPPED	0.000 s
7	And user clicks on checkout button	SKIPPED	0.001 s
8	And read created order xml	SKIPPED	0.000 s
9	Then User can verify product details <Product ID> in xml	SKIPPED	0.000 s
	AFTER - com.testproject.stepDefs.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.250 s
	Scenario fail		





(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test01 >> verify user is able login to  
webShop

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test02 >> verify user is not able to  
login to webShop with wrong user details

(F) Stroer Case Study



This site can't be reached

Check if there is a typo in webshop.url.

DNS\_PROBE\_FINISHED\_NXDOMAIN

Reload



This site can't be reached

Check if there is a typo in webshop.url.

DNS\_PROBE\_FINISHED\_NXDOMAIN

Reload

(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test03 >> verify user is able to add  
product to cart

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test04 >> verify checkout page

(F) Stroer Case Study



This site can't be reached

Check if there is a typo in webshop.url.

DNS\_PROBE\_FINISHED\_NXDOMAIN

Reload



This site can't be reached

Check if there is a typo in webshop.url.

DNS\_PROBE\_FINISHED\_NXDOMAIN

Reload

(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test05 >> Verify order tables

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test06 >> Verify confirmation email is  
sent to Customer

(F) Stroer Case Study



This site can't be reached

**webshop.url**'s DNS address could not be found. Diagnosing the problem.

DNS\_PROBE\_STARTED

Reload



This site can't be reached

Check if there is a typo in webshop.url.

DNS\_PROBE\_FINISHED\_NXDOMAIN

Reload

(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test07 >> Verify order xml is created

(F) Stroer Case Study

(Step) AFTER - com.testproject.stepDefs.  
Hooks.tearDown(io.cucumber.java.  
Scenario)

(S) Test08 >> Verify product details in  
order xml

(F) Stroer Case Study



This site can't be reached

Check if there is a typo in webshop.url.

DNS\_PROBE\_FINISHED\_NXDOMAIN

Reload



This site can't be reached

Check if there is a typo in webshop.url.

DNS\_PROBE\_FINISHED\_NXDOMAIN

Reload