# SPEGIAL POLICY OF THE PROPERTY OF THE PROPERTY



- +123-456-7890
- www.reallygreatsite.com








Hello,

my name is Sawai Singh I have worked on numerous projects where I analyzed sales data, identified trends, and provided actionable recommendations to improve performance. In this project, I will be using SQL queries to delve into the intricacies of pizza sales.



#### Entity-Relationship (ER) Diagram

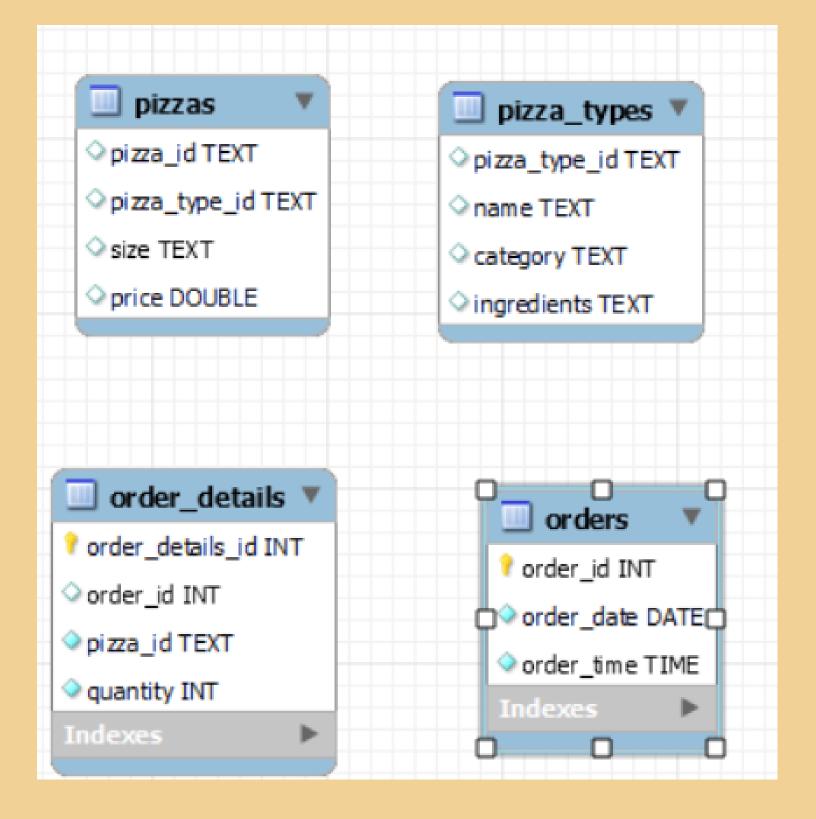

#### Objectives

#### **BASICS:**

- 1. Calculate the total number of orders placed.
- 2. Calculate the total revenue generated from the pizza sales.
- 3. Identify the highest prize pizza.
- 4. Identify the most common pizza size ordered
- 5. List the top 5 most ordered pizza size-types along with there quantities

#### **INTERMEDIATE**


- 6. Join the necessary tables to find the total quantity of each pizza ordered.
- 7. Determine the distribution of orders by hour of the day.
- 8. Join relevant tables to find the category-wise distribution of prizes
- 9. Group the order by data and calculate the average number of pizzas ordered per day.
- 10. Determine the top 3 most ordered pizza types based on revenue

#### Advanced

- 11. Calculate the percentage contribution of each pizza type to total revenue
- 12. Analyze the cumulative revenue generated over time.
- 13. Determine the top 3 most ordered pizza types based on revenue for each pizza category

#### Calculate the total number of orders placed.

```
SELECT
    COUNT(order_id) AS total_orders
FROM
    orders;
```

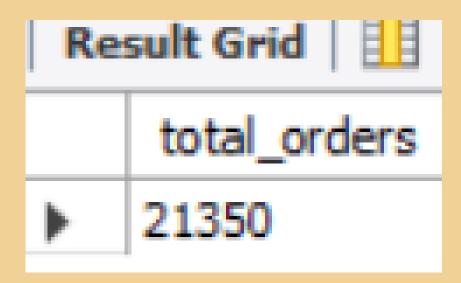

#### Calculate the total revenue generated from the pizza sales.

```
SELECT

ROUND(SUM(order_details.quantity * pizzas.price),


2) AS total_sales

FROM


order_details

JOIN

pizzas ON pizzas.pizza_id = order_details.pizza_id
```

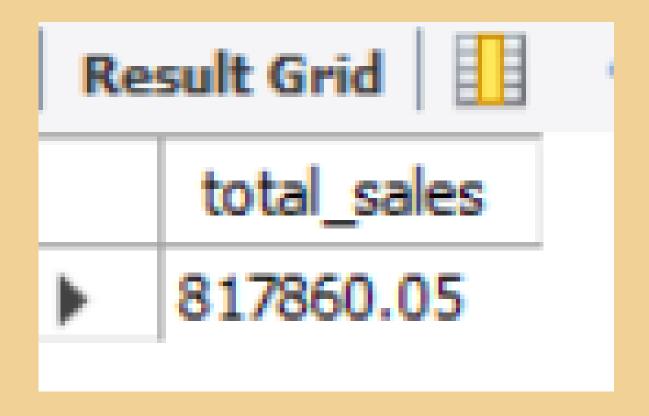

## Identify the highest prize pizza.

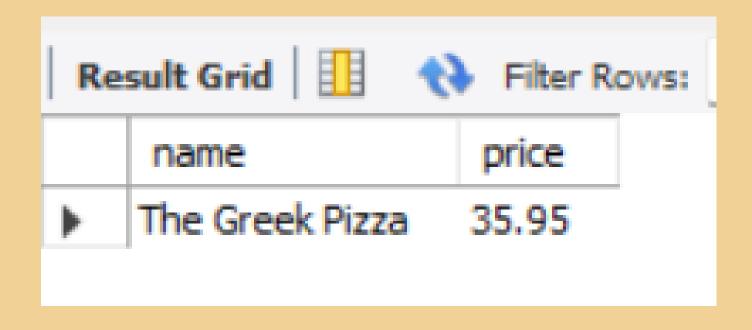

#### Identify the most common pizza size ordered

```
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    order_details
        JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Re	Result Grid		
	size	order_count	
•	L	18526	
	M	15385	
	S	14137	
	XL	544	
	XXL	28	

#### List the top 5 most ordered pizza size-types along with there quantities

```
SELECT
    pizza_types.name,
    SUM(order_details.quantity) AS Total_quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY Total_quantity DESC
LIMIT 5;
```

Re	Result Grid		
	name	Total_quantity	
<b>&gt;</b>	The Classic Deluxe Pizza	2453	
	The Barbecue Chicken Pizza	2432	
	The Hawaiian Pizza	2422	
	The Pepperoni Pizza	2418	
	The Thai Chicken Pizza	2371	

#### Join the necessary tables to find the total quantity of each pizza ordered.

```
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS total_quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY total_quantity DESC;
```

Re	Result Grid		
	category	total_quantity	
٠	Classic	14888	
	Supreme	11987	
	Veggie	11649	
	Chicken	11050	
	-		

## Determine the distribution of orders by hour of the day.

```
SELECT

HOUR(order_time), COUNT(order_id)

FROM

orders

GROUP BY 1;
```

HOUR(order_	time) COUNT(order_id)
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920
17	2336

18	2399
19	2009
20	1642
21	1198
22	663
23	28
10	8
9	1

Join relevant tables to find the category-wise distribution of prizes


```
SELECT category, count(name)
FROM pizza_types
GROUP BY 1;
```

Re	Result Grid		
	category	count(name)	
þ.	Chicken	6	
	Classic	8	
	Supreme	9	
	Veggie	9	

# Group the order by data and calculate the average number of pizzas ordered per day

```
SELECT ROUND(AVG(quantity),0) AS avg_pozza_ordered_per_day
FROM

(SELECT orders.order_date,SUM(order_details.quantity) AS quantity
FROM orders
JOIN order_details
ON orders.order_id = order_details.order_id
GROUP BY 1) AS order_quantity;
```

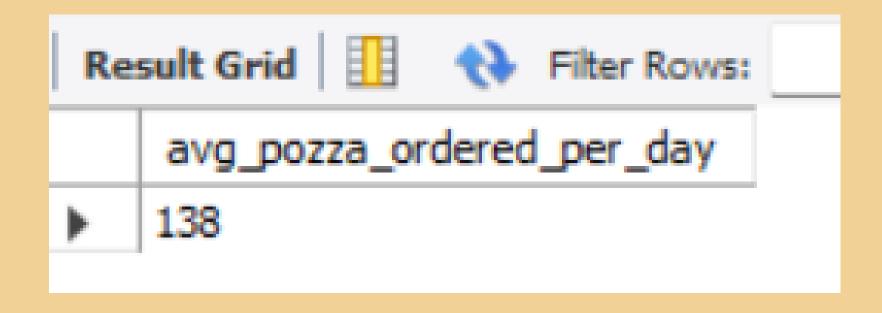

# Determine the top 3 most ordered pizza types based on revenue

```
SELECT pizza_types.name,SUM(pizzas.price * order_details.quantity) AS revenue
FROM pizza_types
JOIN pizzas
ON pizza_types.pizza_type_id = pizzas.pizza_type_id
JOIN order_details
ON order_details.pizza_id = pizzas.pizza_id
group by 1
ORDER BY 2 DESC
LIMIT 3;
```

Result Grid		
	name	revenue
•	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza 42768	
The California Chicken Pizza 41409.5		

### Calculate the percentage contribution of each pizza type to total revenue

```
SELECT
   pizza_types.category,
    ROUND((SUM(order details.quantity * pizzas.price) / (SELECT
            ROUND(SUM(order_details.quantity * pizzas.price),
                        2) AS total sales
        FROM
           order_details
                JOIN
            pizzas ON order_details.pizza_id = pizzas.pizza_id)) * 100,2) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
   order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY 1;
```

Result Grid 1		
	category	revenue
<b>•</b>	Classic	26.91
	Veggie	23.68
	Supreme	25.46
	Chicken	23.96

## Analyze the cumulative revenue generated over time.

```
SELECT order_date,

SUM(revenue) over (order by order_date) AS cum_revenue

FROM

(SELECT orders.order_date,

SUM(order_details.quantity * pizzas.price) AS revenue

FROM order_details

JOIN pizzas

ON order_details.pizza_id = pizzas.pizza_id

JOIN orders

ON orders.order_id = order_details.order_id

group by 1) AS sales;
```

order_date	cum_revenue
2015-01-01	2713.850000000000
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5
2015-01-07	16560.7
2015-01-08	19399.05

2015-01-09	21526.4
2015-01-10	23990.350000000002
2015-01-11	25862.65
2015-01-12	27781.7
2015-01-13	29831.300000000003

## Determine the top 3 most ordered pizza types based on revenue for each pizza category

```
SELECT name, revenue
from
(SELECT category, name , revenue,
RANK() over(partition by category order by revenue DESC) AS rn
FROM
(SELECT pizza_types.category,pizza_types.name,
SUM(order_details.quantity * pizzas.price) AS revenue
FROM pizza_types
JOIN pizzas
ON pizza_types.pizza_type_id = pizzas.pizza_type_id
JOIN order_details
ON order_details.pizza_id = pizzas.pizza_id
GROUP BY 1,2) AS A) AS B
where rn <= 3</pre>
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5
The Classic Deluxe Pizza	38180.5
The Hawaiian Pizza	32273.25
The Pepperoni Pizza	30161.75
The Spicy Italian Pizza	34831.25

The Italian Supreme Pizza	33476.75
The Sicilian Pizza	30940.5
The Four Cheese Pizza	32265.70000000065
The Mexicana Pizza	26780.75
The Five Cheese Pizza	26066.5

#### CONCLUSION

Completing the project on "Pizza Sales" has been an eye-opening journey that significantly enhanced my skills and knowledge. Throughout the process, I delved deeply into the intricacies of SQL Queries, mastering complex commands and optimizing database performance. This hands-on experience was not only intellectually stimulating but also remarkably rewarding. It allowed me to tackle real-world data problems, thereby sharpening my problem-solving abilities. I encountered various challenges that required creative solutions, which in turn expanded my understanding of data management and analytics. Overall, this project has been a wonderful learning experience, equipping me with valuable skills that I am excited to apply in future endeavors.