


Task 2

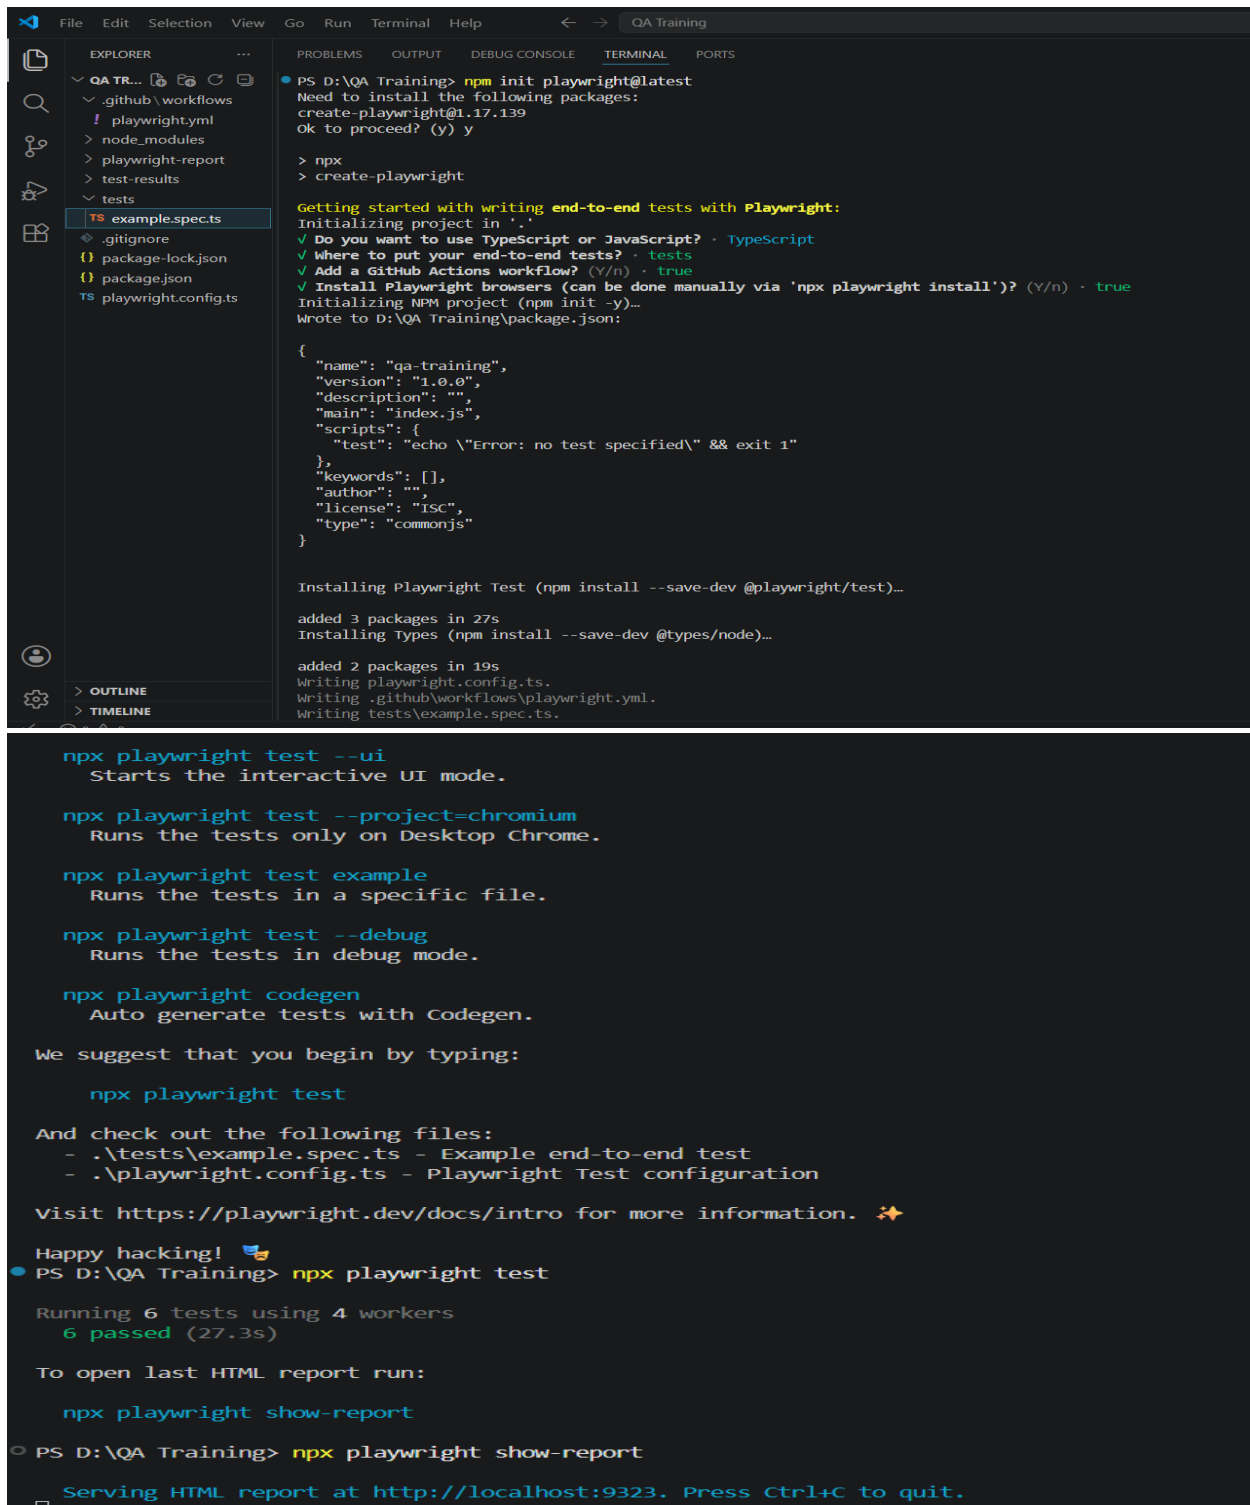

The image shows a VS Code editor window with a project named 'QA Training'. The Explorer sidebar on the left shows the file structure: `.github/workflows`, `! playwright.yml`, `> node_modules`, `> playwright-report`, `> test-results`, `> tests`, and `TS example.spec.ts`. The file `example.spec.ts` is selected. The Terminal panel on the right shows the following commands and output:

```
PS D:\QA Training> npm init playwright@latest
Need to install the following packages:
create-playwright@1.17.139
Ok to proceed? (y) y

> npx
> create-playwright

Getting started with writing end-to-end tests with Playwright:
Initializing project in '.'
✓ Do you want to use TypeScript or JavaScript? · TypeScript
✓ Where to put your end-to-end tests? · tests
✓ Add a GitHub Actions workflow? (Y/n) · true
✓ Install Playwright browsers (can be done manually via 'npx playwright install')? (Y/n) · true
Initializing NPM project (npm init -y)...
Wrote to D:\QA Training\package.json:

{
  "name": "qa-training",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "type": "commonjs"
}

Installing Playwright Test (npm install --save-dev @playwright/test)...

added 3 packages in 27s
Installing Types (npm install --save-dev @types/node)...

added 2 packages in 19s
Writing playwright.config.ts.
Writing .github/workflows/playwright.yml.
Writing tests/example.spec.ts.
```

Below the terminal output, there is a list of commands and their descriptions:

- `npx playwright test --ui` Starts the interactive UI mode.
- `npx playwright test --project=chromium` Runs the tests only on Desktop Chrome.
- `npx playwright test example` Runs the tests in a specific file.
- `npx playwright test --debug` Runs the tests in debug mode.
- `npx playwright codegen` Auto generate tests with Codegen.

We suggest that you begin by typing:

```
npx playwright test
```

And check out the following files:

- `.\tests\example.spec.ts` - Example end-to-end test
- `.\playwright.config.ts` - Playwright Test configuration

Visit <https://playwright.dev/docs/intro> for more information. ✨

Happy hacking! 🐣

```
PS D:\QA Training> npx playwright test


Running 6 tests using 4 workers
6 passed (27.3s)

To open last HTML report run:


npx playwright show-report

PS D:\QA Training> npx playwright show-report

Serving HTML report at http://localhost:9323. Press Ctrl+C to quit.
```

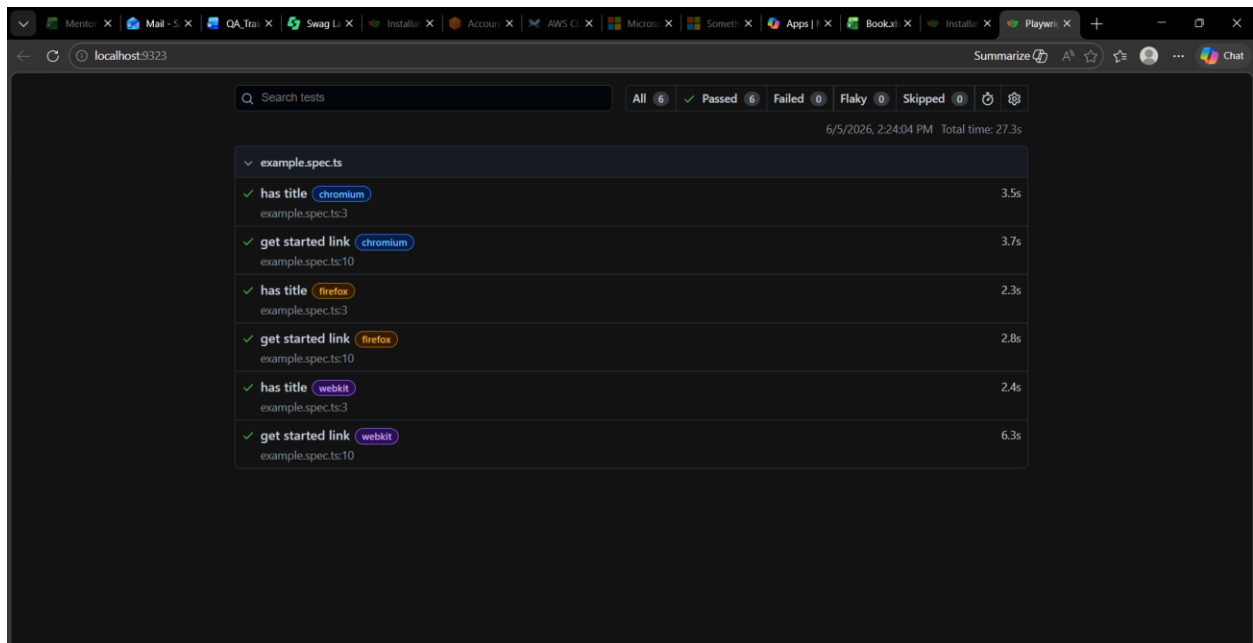

Task 3

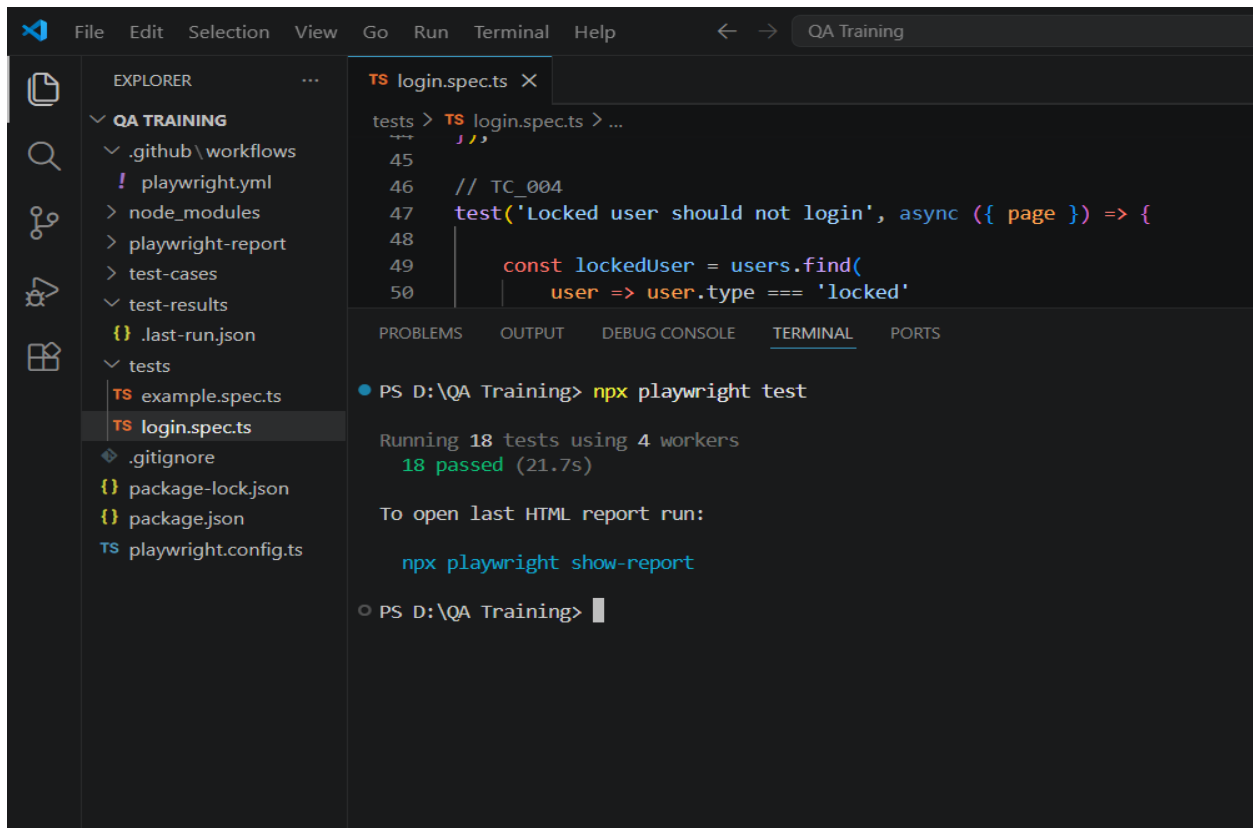

localhost:9323

Search tests

All 18 ✓ Passed 18 Failed 0 Flaky 0 Skipped 0

6/5/2026, 5:48:44 PM Total time: 21.7s

- example.spec.ts
 - ✓ has title chromium 4.0s
example.spec.ts:3
 - ✓ get started link chromium 4.3s
example.spec.ts:10
 - ✓ has title firefox 2.9s
example.spec.ts:3
 - ✓ get started link firefox 3.4s
example.spec.ts:10
 - ✓ has title webkit 2.1s
example.spec.ts:3
 - ✓ get started link webkit 2.4s
example.spec.ts:10
- login.spec.ts
 - ✓ Login page should load chromium 4.2s
login.spec.ts:5
 - ✓ Valid user should login chromium 4.2s
login.spec.ts:11
 - ✓ Invalid password should show error chromium 1.2s
login.spec.ts:28

localhost:9323

- ✓ Login page should load chromium 4.2s
login.spec.ts:5
- ✓ Valid user should login chromium 4.2s
login.spec.ts:11
- ✓ Invalid password should show error chromium 1.2s
login.spec.ts:28
- ✓ Locked user should not login chromium 1.1s
login.spec.ts:47
- ✓ Login page should load firefox 3.8s
login.spec.ts:5
- ✓ Valid user should login firefox 4.8s
login.spec.ts:11
- ✓ Invalid password should show error firefox 1.7s
login.spec.ts:28
- ✓ Locked user should not login firefox 1.8s
login.spec.ts:47
- ✓ Login page should load webkit 1.6s
login.spec.ts:5
- ✓ Valid user should login webkit 1.5s
login.spec.ts:11
- ✓ Invalid password should show error webkit 1.2s
login.spec.ts:28
- ✓ Locked user should not login webkit 1.6s
login.spec.ts:47

localhost:9323/#?testId=41d3fd2474a19feb00a1-00457fef77159105640f