Question 1

1.1

Recommendation: Windows Server 2019 Datacenter edition on NXS-HV-01 and NXS-HV-02, licensed per physical core (minimum 8 cores/host, 16 cores/server) with Software Assurance, combined with a Per-User Client Access Licence (CAL) model.

Justification

Unlimited virtualization rights: HV-01/02 will host multiple production VMs NXS-DC-01/02 style DC guests (or at minimum the file, web and TrackPlus workloads), plus a Linux monitoring appliance and future growth capacity. Standard edition only entitles 2 OSEs (or 1 physical + 1 virtual) per licence, so as VM count grows past two per host Nexus would have to keep buying additional Standard licences Datacenter's unlimited virtual instances per licensed host is cheaper the moment host density exceeds roughly 4–5 VMs, which is realistic here.

Cost-sensitivity is addressed at the host level, not by under-licensing**:** Datacenter is only applied to the two Hyper-V hosts that need it. Utility/single-purpose servers that will not run nested VMs (e.g. a dedicated physical DNS/DHCP box, if Nexus chooses not to virtualize NXS-CORE-01) can stay on Standard, which is materially cheaper per core. This keeps the licence bill proportional to actual virtualization density rather than paying Datacenter prices everywhere.

Per-User CAL over Per-Device CAL**:** Drivers and sales reps work remotely from laptops and frequently connect from more than one device (laptop + phone for line-of-business apps), while HQ office staff mostly use one shared desktop. With ~305 staff across three sites and a genuinely mixed/BYOD-leaning remote workforce, Per-User CALs are cheaper and simpler to administer than Per-Device, because the license follows the person rather than requiring a CAL for every device that touches the network.

1.2

Recommendation: 2 writable DCs at HQ, 0 dedicated DCs at Bloemfontein, 1 RODC at Polokwane — mapped onto 3 AD Sites that mirror the three IP subnets.

Placement and reasoning per site

HQ (Gqeberha) **— NXS-DC-01 and NXS-DC-02:** Both are writable, both hold Global Catalog, and FSMO roles are split/held here since HQ has the largest user base (≈220 staff) and the in-house admin team. Two DCs remove the single point of failure that caused the original week-long outage when the legacy single server failed.

Bloemfontein **— no local DC:** The HQ–Bloemfontein link is a stable 100 Mbps fibre circuit, so authentication and DNS traffic can traverse the WAN to the HQ DCs with acceptable latency. Deploying a third DC here would add licensing, hardware, patching and physical-security overhead for a branch that does not need it — not justified against the cost-sensitivity constraint given a reliable link.

Polokwane **— NXS-RODC-PLK should be an RODC, not a writable DC:** Three scenario facts point directly to RODC: (1) the HQ–Polokwane link is unreliable 10 Mbps that drops several times a week, so a local DC avoids authentication timeouts during outages; (2) there is no on-site IT staff to manage a writable DC or respond to replication conflicts; (3) the comms room is lockable but not

access-controlled, i.e. physical security is weak. An RODC mitigates the third risk specifically: it holds a read-only copy of the database (no risk of a bad or malicious change replicating back to the forest), it caches only the credentials of Polokwane users by policy (Password Replication Policy), and Administrator Role Separation lets local non-IT staff perform basic tasks (e.g. reboot) without being Domain Admins. If the comms room were ever compromised, the blast radius is limited to the cached Polokwane accounts only.

AD Sites and site links

Sites: Create HQ-Site (172.18.10.0/24), Bloemfontein-Site (172.18.20.0/24) and Polokwane-Site (172.18.30.0/24) as AD Sites, each with its subnet associated, even though Bloemfontein has no local DC — the site object still ensures clients there are referred to the closest/least-cost DC and correctly scopes DFS, GPO and future service locality.

HQ ↔ Bloemfontein site link**:** Low-cost value, short replication interval (default 15 min or tighter), notification-based (change) replication left enabled — the stable 100 Mbps link supports near real-time replication with negligible impact.

HQ ↔ Polokwane site link**:** Higher cost value so the KCC always prefers the Bloemfontein path if a third link were ever added, replication schedule restricted to off-peak windows, a longer replication interval, and DFSR/AD compression left on to minimize the payload over the constrained 10 Mbps link. Because RODC replication is unidirectional (inbound-only to the RODC), Polokwane never pushes replication traffic back over the fragile link, which also protects the rest of the forest from any local corruption.

Topology: A simple hub-and-spoke (HQ as hub) is sufficient there is no need for a direct Bloemfontein↔Polokwane link since neither branch has significant traffic to the other; "Bridge all site links" can stay enabled with only two links, avoiding manual connection-object management for a three-person team.

1.3

Internal zone: An AD-integrated primary forward lookup zone for nexusfreight.local, stored in the domain naming context and replicated to all DCs running DNS (NXS-DC-01/02, and a read-only cache-only view on the RODC). Configure Secure Dynamic Updates Only so clients and DHCP-registered devices can self-register without exposing the zone to unauthenticated updates — important given the ransomware history.

Public zone: A separate zone for nexusfreight.co.za, hosted either with the domain registrar/a managed public DNS provider or on a DNS service on the DMZ-facing NXS-WEB-01 deliberately not the same DNS servers or zone as the internal AD zone, so internal hostnames, DC records are never exposed to the Internet.

Required records for the bookings portal: An A record a CNAME for www.nexusfreight.co.za if the marketing site and portal are separated; an MX record only if Nexus hosts its own mail (otherwise this sits with a mail provider); and once the public certificate is issued , a CAA record restricting which CA may issue certificates for the domain a cheap, high-value hardening step for a company that has already had ransomware near-misses.

Is split-brain DNS justified? No, and here is the reasoning: Split-brain (split-horizon) DNS is used when the same namespace must resolve differently for internal vs external clients. Nexus deliberately uses two different namespaces — nexusfreight.local internally and nexusfreight.co.za externally — so the split already exists structurally at zero extra administrative cost. Introducing

artificial split-brain on top of that (e.g. maintaining an internal copy of the nexusfreight.co.za zone) would only be justified if internal staff needed to reach the bookings portal by its public name using a private/internal IP (e.g. to avoid NAT hairpinning or to route over the LAN instead of out to the Internet and back). Given Bloemfontein and Polokwane staff are the only internal consumers and the portal's primary audience is external customers, a single public zone plus an internal CNAME/hosts entry (or NAT loopback on the firewall) for the rare internal use case is simpler and lower-risk than running and keeping two zones in sync.

1.4

Scope**:** 172.18.20.0/24, mask 255.255.255.0, address pool 172.18.20.50–172.18.20.200 (leaving .2–.49 excluded/reserved for infrastructure), Option 003 Router = 172.18.20.1, Option 006 DNS Servers = the HQ DC IPs (172.18.10.x), Option 015 DNS Domain Name = nexusfreight.local, and an 8-day lease (branch has stable, mostly-desktop staff so a longer lease reduces DHCP renewal chatter across the WAN).

Reservation 1 — the branch's network printer/MFP (e.g. 172.18.20.10): Line-of-business and finance-adjacent printing needs a predictable address so print queues configured on client machines and any print server object don't break if the lease changes.

Reservation 2 — the branch's WAN-facing device / local switch management interface, or a branch file-share cache appliance if deployed (e.g. 172.18.20.5): Network infrastructure needs a fixed, documented address for remote monitoring and troubleshooting by the HQ team, since Bloemfontein — like Polokwane — has no dedicated on-site IT staff to hunt down a changed DHCP-assigned management IP.

DHCP failover mode: Hot Standby, not Load Balance**.** There is no local server planned for Bloemfontein — DHCP is served from HQ (e.g. from NXS-CORE-01 or a DC) via a DHCP relay agent/IP helper configured on the Bloemfontein gateway router. Load-balance mode is designed for two DHCP servers actively sharing lease traffic on the same local segment with roughly even load — that doesn't apply here. Hot-standby fits a hub-and-spoke design where one HQ server is normally active for the Bloemfontein scope and a second HQ server takes over automatically only if the first fails, which matches the stable-but-not-guaranteed-perfect 100 Mbps link and keeps configuration simple for a three-person team managing everything from HQ.

Question 2

2.1

GPO Name	Linked To (OU/Scope)	Purpose (Nexus-specific)
Domain Baseline Security GPO	Domain root (nexusfreight.local)	Password/lockout policy, disable LM hash storage, minimum baseline that applies to every account needed because the legacy environment had no central identity or hardening at all.
Workstation Security Baseline GPO	Workstations OU	Screen-lock timeout, BitLocker on laptops, Windows Update deferral rings, USB write restriction general endpoint hardening after two ransomware near-misses.
Finance Restricted GPO	Finance OU	Stricter software restriction/AppLocker rules, no removable media, mandatory BitLocker, shorter screen-lock timeout, audit logging enabled because Finance data is POPIA-regulated and needs demonstrably tighter controls than the general staff baseline.
Branch WAN-Friendly GPO	Branches OU (Bloemfontein, Polokwane sub-OUs)	Enables folder redirection with Offline Files/caching, disables large logon scripts and roaming profile bulk copy, throttles background sync — protects the constrained Polokwane 10 Mbps link from being saturated by policy processing.
Operations Mapped-Drive GPO (Preference)	Workstations OU (item-level targeted to Operations security group)	Delivers the mapped drive to the \\NXS-FS-01\Operations share.

Policy vs Preference

Screen-lock timeout implemented as a Policy (Administrative Template). It is a security control tied directly to POPIA compliance obligations and the company's ransomware history — it must be enforced and greyed-out in the UI so an end user cannot disable it, and it must re-apply automatically on every background refresh even if a user tries to change it locally.

Mapped drive to \\NXS-FS-01\Operations → implemented as a Preference. Preferences are not enforced in the registry the same way and are designed for convenience settings that legitimately need to change per user/group (item-level targeting by department or site) and that a user should be able to disconnect or remap without breaking compliance. Using a Preference here also avoids the older logon-script approach the admins currently do by hand, and supports drive-letter reuse cleanly across the Bloemfontein and HQ OUs.

2.2

Internal services — Enterprise (private) CA via AD CS: Deploy a two-tier AD Certificate Services hierarchy (offline root + issuing subordinate CA, ideally the issuing CA as a VM on HV-01/02). This

issues certificates for: domain controller/LDAPS authentication, internal IIS line-of-business apps, and — critically — the device/user certificates needed for Always On VPN (Q2.3). Because these certs are only ever presented to domain-joined machines that already trust the internal CA via Group Policy auto-enrolment, they are effectively free per-certificate and can be issued/renewed automatically.

Public bookings portal (NXS-WEB-01) — Publicly-trusted CA: A certificate for nexusfreight.co.za (or bookings.nexusfreight.co.za) must come from a public, browser-trusted Certificate Authority (e.g. DigiCert, Sectigo, or a free automated option such as Let's Encrypt if the operational team can support the shorter renewal cycle). Internet customers and their browsers have no knowledge of, or trust in, Nexus's internal CA, so using an internal certificate here would produce browser trust warnings on a customer-facing revenue system that must stay available at month-end — reputationally and functionally unacceptable.

2.3

Option	Fit for Nexus's mobile, frequently-offline reps
Traditional client VPN (manual IKEv2/SSTP client)	Requires the user to manually connect every time; a dropped mobile signal fully disconnects the tunnel and the rep must notice and reconnect. Poor fit for drivers who lose signal repeatedly through the day.
DirectAccess	Always-on and transparent, but depends on IPv6/6to4-ISATAP transition technology, is more complex to deploy/troubleshoot for a 3-person team, and Microsoft has been steering customers toward Always On VPN as the strategic replacement. Not a good long-term investment for a modernisation programme.
Always On VPN (recommended)	Automatically establishes/re-establishes the tunnel using IKEv2 (with automatic fallback), supports both device tunnel (connects before user logon) and user tunnel, and is built for exactly this scenario: users who roam across cellular/Wi-Fi and drop connectivity frequently. It reuses the internal PKI already stood up in 2.2 for certificate-based authentication (stronger than passwords) and works natively on Windows 10/11 without IPv6 dependencies.

Recommendation**:** Always On VPN. It is purpose-built for a workforce that is mobile and frequently offline — the automatic, seamless reconnection behaviour directly addresses the scenario's stated pain point, it does not require the IPv6 infrastructure DirectAccess needs, and it leverages the certificate infrastructure already justified in 2.2, keeping the overall design coherent rather than introducing a separate, unrelated authentication mechanism.

2.4

Windows Defender**:** Enable real-time protection and cloud-delivered protection domain-wide via GPO, and specifically enable Controlled Folder Access on the Finance data volume/share path — this directly targets the ransomware-encryption scenario Nexus has already narrowly avoided twice, by blocking unauthorised processes from modifying protected folders.

Windows Firewall with Advanced Security: Create a scoped inbound rule that only permits SMB (TCP 445) from the HQ (172.18.10.0/24) and Bloemfontein (172.18.20.0/24) subnets (and, if Polokwane needs Finance access, via the RODC's site, not directly) to NXS-FS-01, using IPsec-secured connection

security rules where possible — this stops SMB from being reachable from an arbitrary compromised host on any segment.

Encryption**:** BitLocker Drive Encryption on the data volume hosting the Finance share (TPM + PIN or Network Unlock in the HQ server room, recovery keys escrowed to AD), protecting data at rest — a POPIA-relevant control if the physical disks or server were ever stolen — layered with NTFS permissions restricting the Finance share to the Finance security group only.

Fine-grained password policy (PSO): Create a Password Settings Object with a stricter policy than the domain default (e.g. 14-character minimum, complexity enabled, 5-attempt lockout threshold, shorter max password age) and apply it directly to the Finance security group via Active Directory Administrative Center — PSOs allow this stricter policy to coexist with the normal domain-wide policy from 2.1 without affecting general staff.

Question 3

3.1

Justification: As a utility/infrastructure server (candidates: DNS/DHCP secondary role, file replication target, or a management jump box), NXS-CORE-01 doesn't need a local GUI. Server Core removes Internet Explorer/Edge, File Explorer, most GUI shell components and the associated services — this cuts the attack surface and patch surface substantially (fewer CVEs apply, fewer monthly reboots), which matters directly to Nexus given its recent ransomware near-misses, and reduces RAM/disk footprint, which matters given the board's cost-sensitivity and limited rack/host capacity.

Day-to-day management by the 3-person team: Remotely via Server Manager (added as a managed server from an admin workstation), PowerShell Remoting (Enter-PSSession / Invoke-Command) for scripted or interactive administration, and Windows Admin Center for a browser-based GUI experience without needing a local desktop shell. Local emergency console access uses sconfig for the handful of settings that must be set at the console (IP, hostname, domain join, Windows Update).

3.2

Problem today: The admins create shares manually and repetitively over RDP — slow, inconsistent naming/permissions, no audit trail, and doesn't scale as branches grow.

Proposed cmdlets and pipeline**:** A parameterised script/function using New-Item -ItemType Directory to create the NTFS folder, New-SmbShare -Name -Path -FullAccess/-ChangeAccess/-ReadAccess to publish the SMB share with group-based permissions in one step (avoiding the older net share + icacls two-step process), and Grant-SmbShareAccess / (Get-Acl | Set-Acl) to layer NTFS permissions matching the SMB permissions. For bulk/repeatable provisioning across branches, an input file is piped through the pipeline.

Would Desired State Configuration **(DSC) help? — Yes.** DSC lets Nexus declare the desired share/permission state directly solving the "do everything by hand" inconsistency problem, and it is reusable and version-controllable, unlike ad-hoc RDP sessions.

3.3

Tier	Recommendation	Justification
Bookings portal — NXS-WEB-01	Network Load Balancing (NLB) across 2+ IIS nodes	The portal is largely stateless (session state can be externalised) and needs to absorb the stated month-end traffic peak while staying available — NLB distributes concurrent HTTP requests across nodes and lets Nexus add nodes ahead of predictable peak periods.
Finance/Operations file data — NXS-FS-01	Windows Server Failover Clustering (WSFC), 2-node file server cluster	File data is stateful — every client must see the same authoritative copy, which NLB cannot guarantee. Failover clustering provides a single, consistent view of the data with automatic failover to a surviving

Tier	Recommendation	Justification
		node if one host or VM fails, matching the "cannot afford another week-long outage" lesson from the legacy server failure.

Where Storage Spaces Direct (S2D) fits: S2D pools the local disks inside NXS-HV-01/02 into software-defined shared storage, giving the FS-01 failover cluster the shared storage it needs without Nexus having to buy a dedicated SAN/shared-storage array directly addresses the board's cost-sensitivity and the branches' limited rack space, since everything stays inside the two Hyper-V hosts already planned.

Where Storage Replica fits**:** Storage Replica provides block-level, asynchronous replication of the Finance/Operations volume to a secondary location for Nexus this is best used site-to-site as a disaster-recovery copy, separate from S2D's role of providing local HA storage at HQ. S2D solves "a host fails"; Storage Replica solves "the whole HQ site is unavailable."

3.4

Windows **Server container:** Shares the host kernel with other containers/the host OS — fastest and lightest, but weakest isolation. Because TrackPlus is a third-party vendor image whose internal code Nexus has not audited, a kernel-sharing container running on the same Hyper-V hosts as the DCs, file server and web server is a meaningful lateral-movement/blast-radius risk if the image is ever compromised.

Hyper-V container **(recommended):** Each container runs inside its own lightweight, specialised utility VM with its own kernel instance — this gives near-VM levels of isolation while remaining far more lightweight and quicker to spin up/tear down than a dedicated full VM, which suits a pilot that may be scaled back or dropped. For an unvetted vendor image running on infrastructure Nexus cannot afford to have compromised, this isolation/efficiency balance is the right fit.

Dedicated VM: Strongest isolation of the three, but heaviest resource cost and slowest to provision/patch — appropriate later if TrackPlus becomes a permanent, heavily-used production service, but excessive for an initial pilot.

Question 4

4.1

Virtual switches**:** One External virtual switch on each host bound to a dedicated physical NIC (or a NIC team for redundancy) for production VM connectivity to the 172.18.10.0/24 LAN; an Internal virtual switch on each host for host-to-VM management traffic isolated from production VM traffic; optionally a Private virtual switch for isolated testing .

Shielded VMs**:** Apply Shielded VM protection (with Host Guardian Service) to the Finance-data-hosting VM and to any virtualised domain controllers. These hold the most sensitive/POPIA-regulated data and the identity database respectively — Shielded VMs encrypt VM state and prevent even a Hyper-V host administrator (or an attacker who compromises the host) from inspecting VM memory or disk, which is a direct, specific mitigation against the ransomware/credential-theft risk the board is already worried about. Lower-value VMs do not need this overhead.

Linux-based monitoring appliance**:** Deploy it as a Generation 2 VM using the Secure Boot template set to "Microsoft UEFI Certificate Authority", with Linux Integration Services (built into modern kernels) enabled for synthetic network/storage drivers and improved performance Hyper-V on Server 2019 officially supports major Linux distributions in this configuration.

Backup and restore: Host-level, application-consistent backups via the Hyper-V VSS writer (using Windows Server Backup for a low-cost start, or a proper backup product such as Veeam/Azure Backup as the environment matures) scheduled outside business hours, with at least one copy replicated off-host/offsite (satisfying a 3-2-1 approach) — non-negotiable given Nexus has already had ransomware near-misses and a prior server-failure outage. Production checkpoints can be used for short-lived rollback immediately before planned maintenance, but are explicitly not treated as a backup substitute since they live on the same host storage.

4.2

Step 1 — Task Manager on NXS-WEB-01 during a reported slow window: quick triage of CPU, memory and network usage; identify whether w3wp.exe (IIS worker process) or another process is the resource driver, and note whether the symptom is CPU-bound, memory-bound or network-bound before going deeper.

Step 2 — Resource Monitor: drill into the Disk tab for queue length/response time (a bottleneck here suggests storage contention), the Network tab for TCP connection counts and per-process throughput (a bottleneck here suggests either the 10 Mbps-class constraint upstream or a genuine traffic spike), and CPU tab for per-thread detail if a single worker process is pegged.

Step 3 — Performance Monitor: build a Data Collector Set logging over several afternoons to capture the pattern objectively rather than relying on a single spot-check — key counters: Processor(_Total)\% Processor Time, Memory\Available MBytes, Network Interface\Bytes Total/sec, Web Service\Current Connections and \Requests/sec, and (if applicable) ASP.NET Applications\Requests Queued. Correlating a spike in Requests Queued with a flat CPU/memory graph would point to a downstream dependency stall rather than the web server itself.

Step 4 — Event Logs: check the System log for NIC, disk or clustering warnings around the same timestamps, the Application log for IIS/W3SVC, .NET or SQL-related errors, and Security log for authentication anomalies (e.g. a credential-stuffing attempt manifesting as "slowness"). Cross-reference timestamps precisely against the PerfMon data collector timeline.

Step 5 — Correlate with business context from the scenario: the brief already tells us the portal "experiences peak load at month-end" — if the slow afternoons coincide with month-end billing/booking runs, this points toward a genuine capacity problem (solved by the NLB scale-out recommended in 3.3) rather than a fault; if it's every afternoon regardless of date, it more likely points to a scheduled task (e.g. a backup or replication job from 4.1) competing for disk/network resources and should be rescheduled to an off-peak window.

4.3

Risk 1 — Polokwane physical security and WAN fragility. Even with an RODC mitigating credential exposure, the comms room is lockable but not access-controlled, and the branch has no on-site IT staff to notice or respond to tampering, plus a WAN link that drops several times a week could mask an attack as "just the usual outage." Mitigation: install a dedicated lockable rack/cage with restricted key or card access logged centrally, add a low-cost 4G/5G failover WAN connection to reduce dependency on the single fragile 10 Mbps circuit, and configure alerting so repeated/unusual link drops are actively investigated rather than assumed routine.

Risk 2 — HQ remains a concentration point for both compute and connectivity. Even after implementing NLB (3.3) and clustering (3.3), all of it still physically sits at one site (Gqeberha) on what is implicitly a single Internet circuit — a fire, extended power failure, or site-level ransomware incident at HQ could still take down identity, file services and the public bookings portal simultaneously, echoing the original single-server failure that triggered this whole programme. Mitigation: extend the Storage Replica DR copy already recommended in 3.3 into a documented, tested DR runbook (not just replicated data but a plan to bring services up from Bloemfontein), and add a second, independent Internet circuit at HQ so the public-facing bookings portal isn't dependent on one physical ISP connection.

4.4

Phase 1 — Identity (AD DS forest, DCs, DNS): Build the new nexusfreight.local forest and DNS in parallel with the legacy environment (no cutover yet), migrate/recreate user and computer accounts, and validate authentication end-to-end before anything depends on it. Identity must come first because every later phase (file permissions, IIS authentication, VPN certificates) is built on top of it — sequencing data or web migration before identity would mean rebuilding permissions twice.

Phase 2 — Data (Finance/Operations to NXS-FS-01): Migrate data using Robocopy (or Storage Migration Service) with the legacy server kept online and read-only during validation, re-ACL the data against the new AD groups created in Phase 1, and run a parallel-access pilot with a small user group before the full cutover. Data comes second — and specifically before the public-facing web tier — because it is the most business-critical and POPIA-sensitive asset; the extra verification time here is deliberate and lower-risk than rushing it after the customer-facing site is already live.

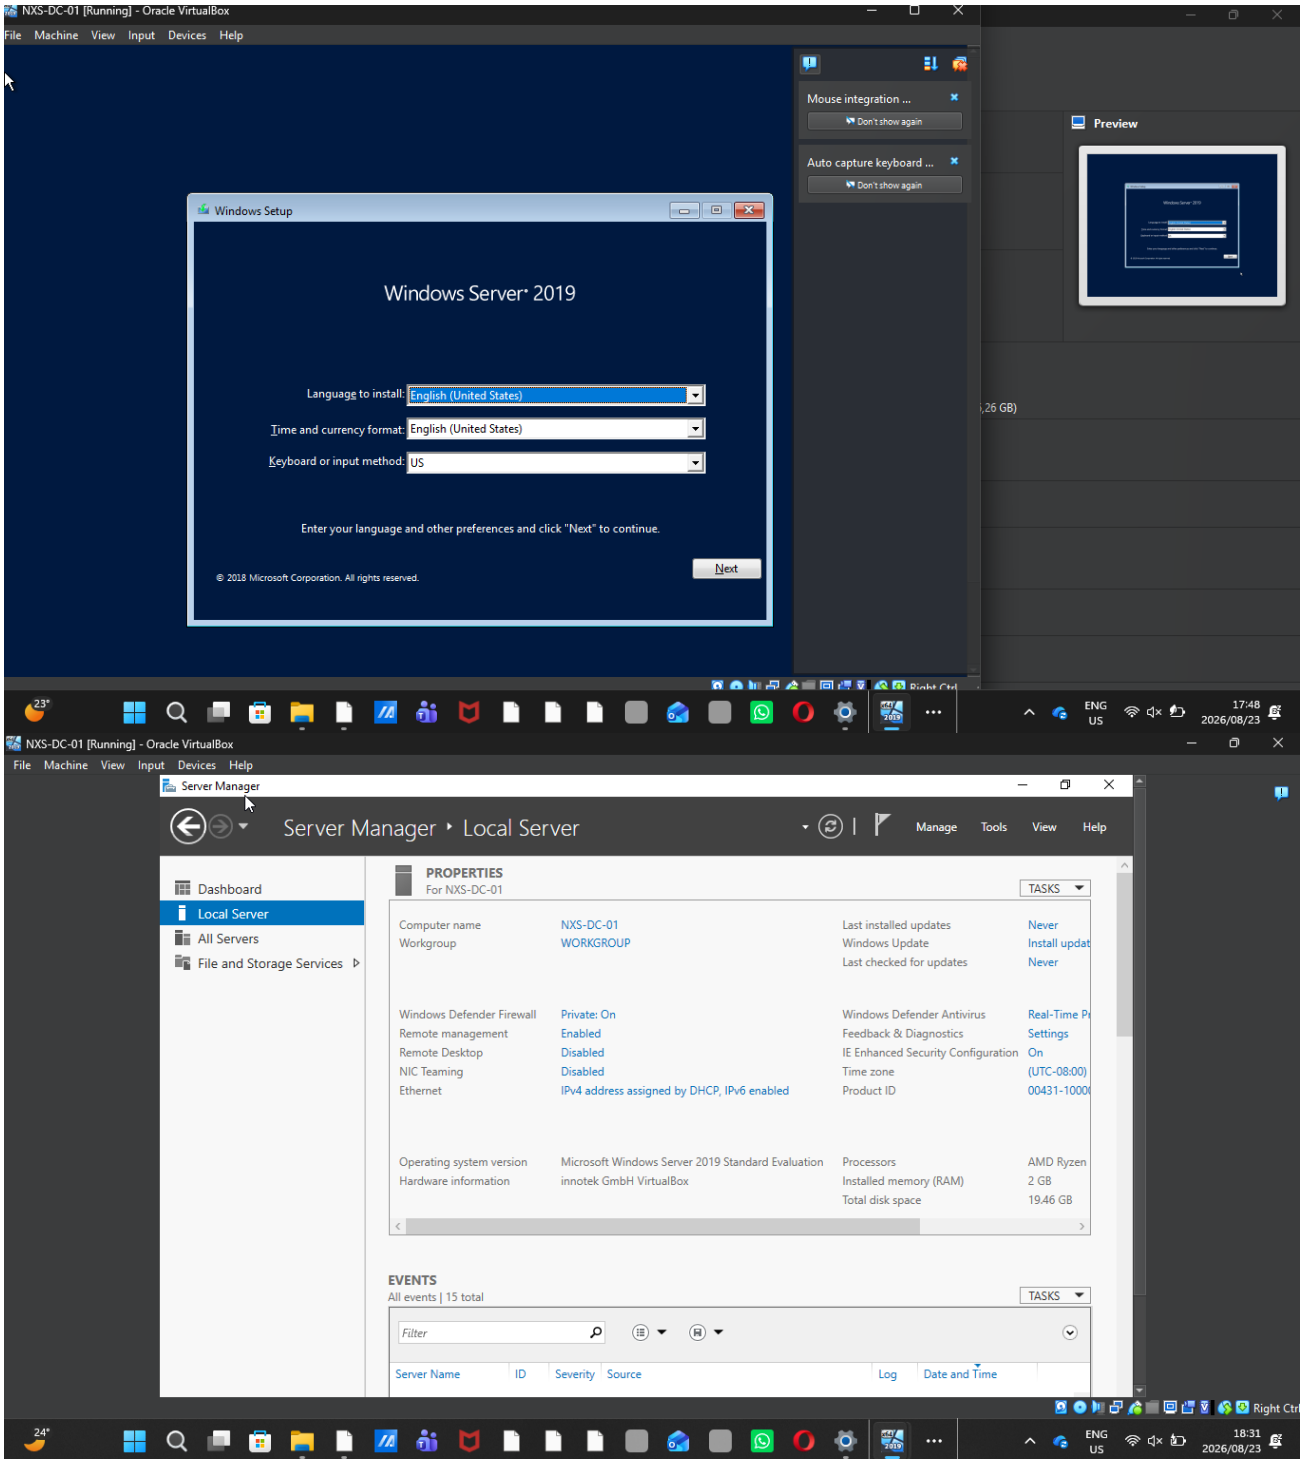
Phase 3 — Web presence (bookings portal to NXS-WEB-01): Build and test NXS-WEB-01 fully in isolation, obtain and install the public certificate (2.2), pre-reduce the public DNS TTL well ahead of

cutover, then switch the A/CNAME record for bookings.nexusfreight.co.za last, once identity and data are proven stable. Web comes last because it is the only externally visible phase — customers and the public only notice this cutover, so it should happen once everything it depends on (identity, data) is already confirmed working.

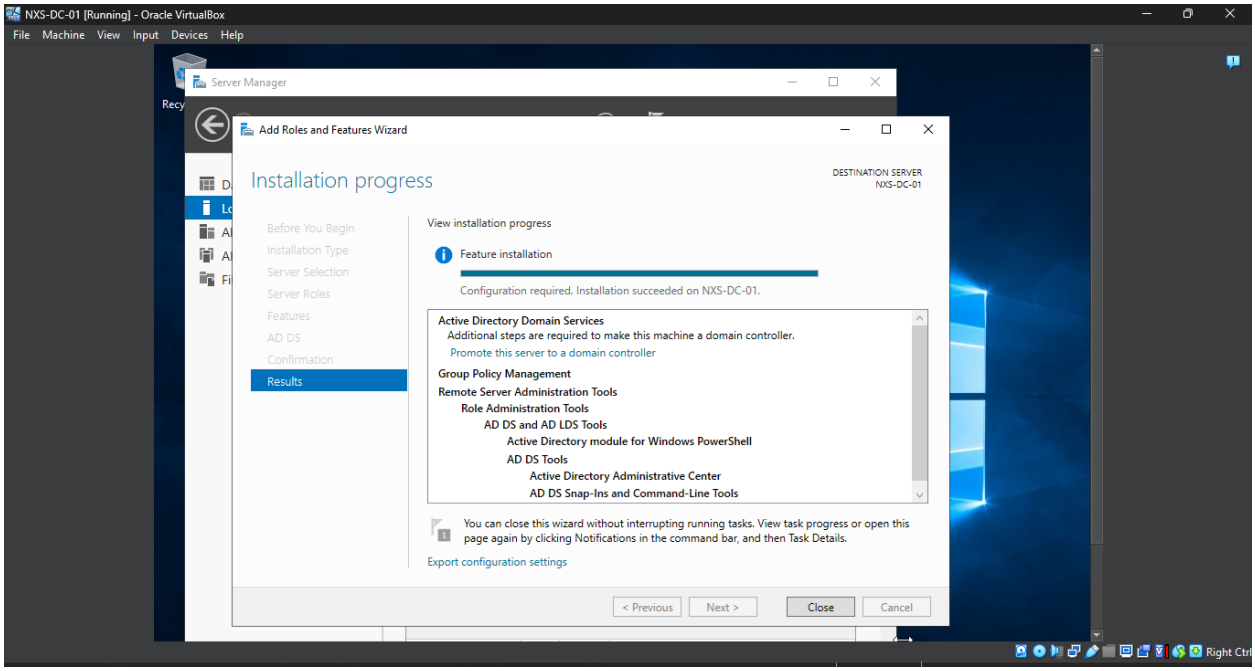
Rollback: At each phase, the legacy server/site stays live and untouched until that phase is formally signed off, backups are taken immediately before each cutover step, and the low DNS TTL before the web cutover specifically allows reverting to the legacy public site within minutes if a problem is found post-cutover.

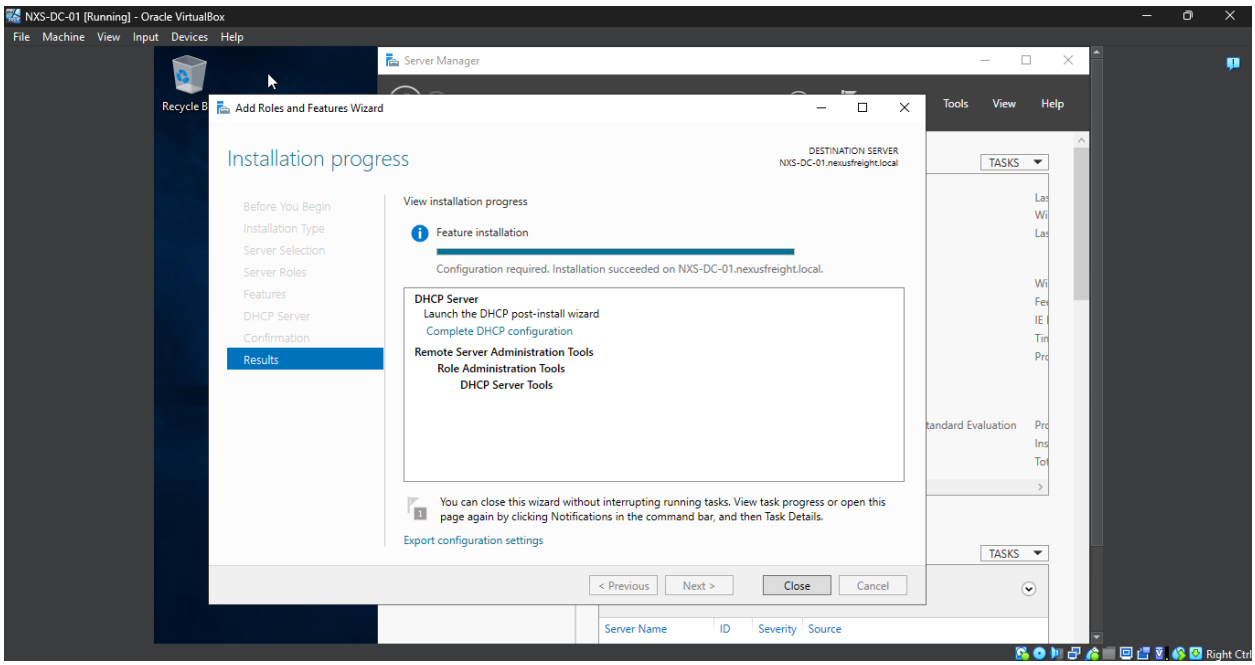
Question 5

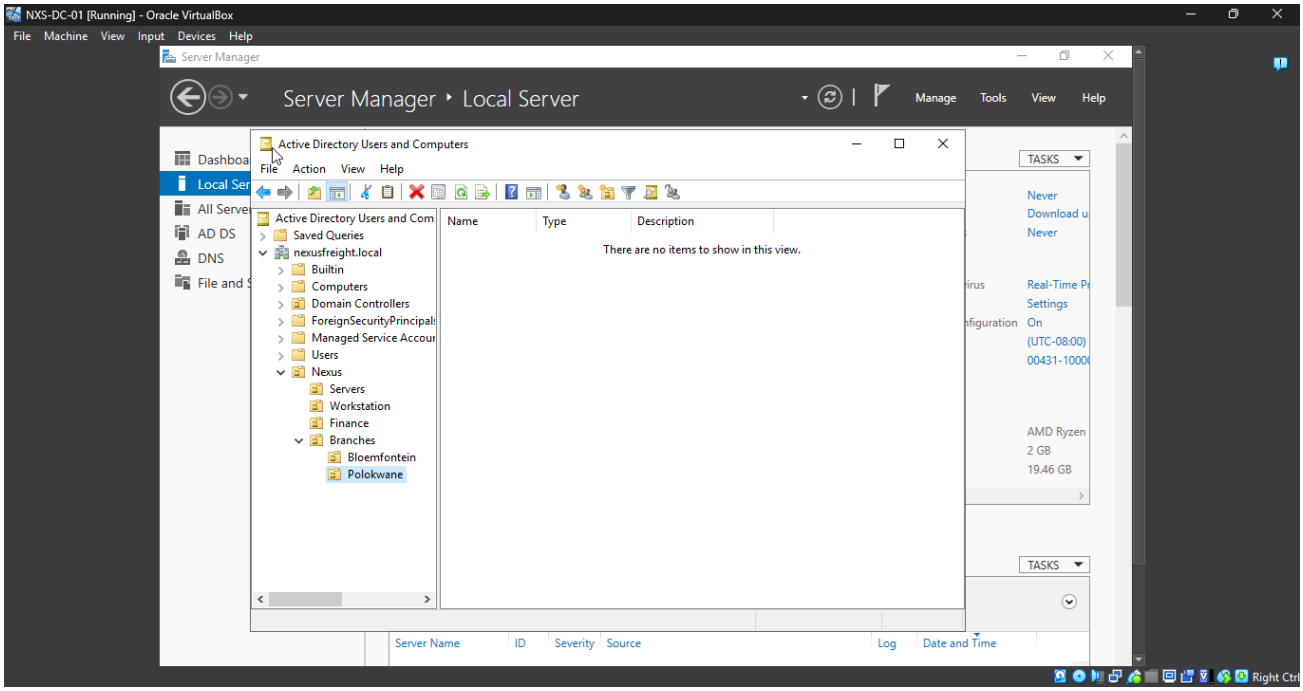
5.1

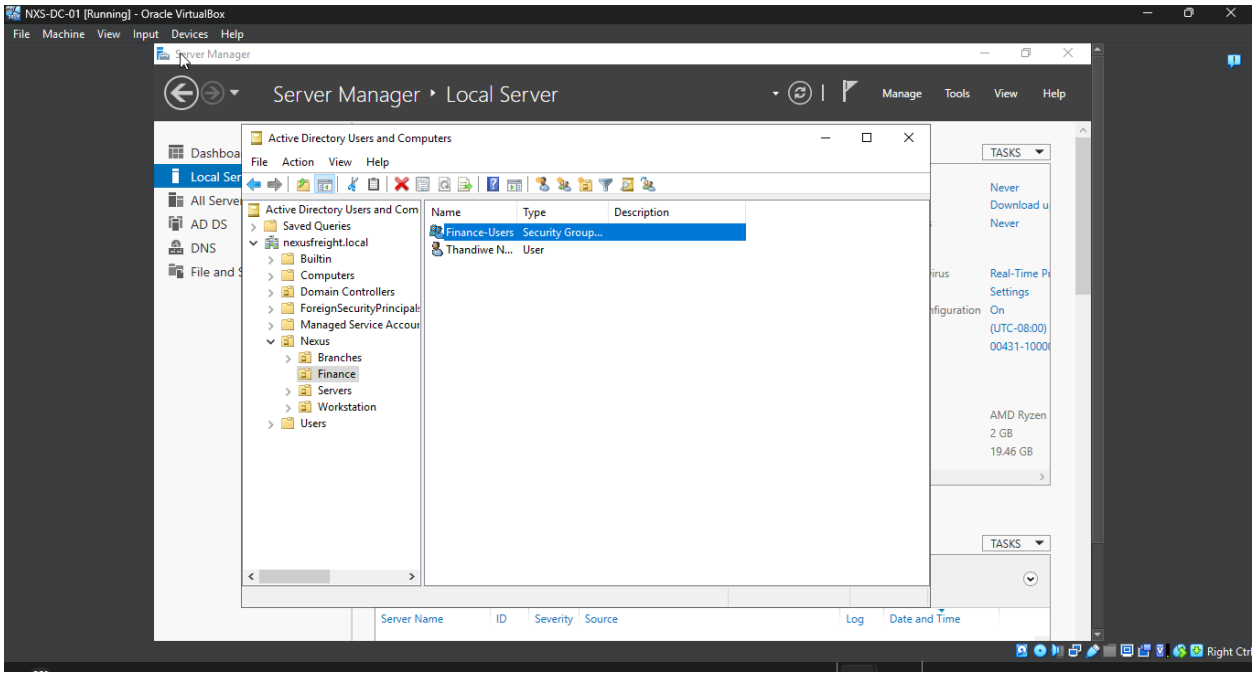


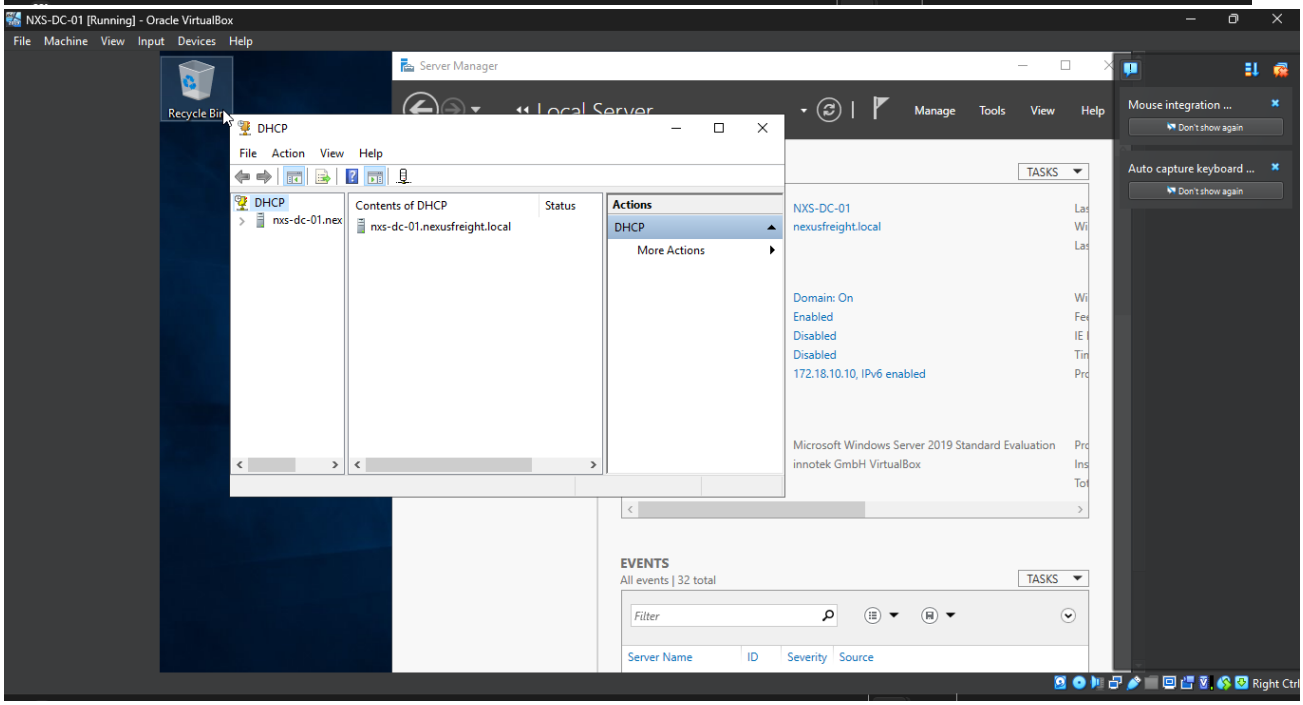
5.2


NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Server Manager
Add Roles and Features Wizard
Installation progress
DESTINATION SERVER
NXS-DC-01
Before You Begin
Installation Type
Server Selection
Server Roles
Features
AD DS
Confirmation
Results
View installation progress
Feature installation
Configuration required. Installation succeeded on NXS-DC-01.
Active Directory Domain Services
Additional steps are required to make this machine a domain controller.
Promote this server to a domain controller
Group Policy Management
Remote Server Administration Tools
Role Administration Tools
AD DS and AD LDS Tools
Active Directory module for Windows PowerShell
AD DS Tools
Active Directory Administrative Center
AD DS Snap-Ins and Command-Line Tools
You can close this wizard without interrupting running tasks. View task progress or open this page again by clicking Notifications in the command bar, and then Task Details.
Export configuration settings
< Previous
Next >
Close
Cancel
Right Ctrl

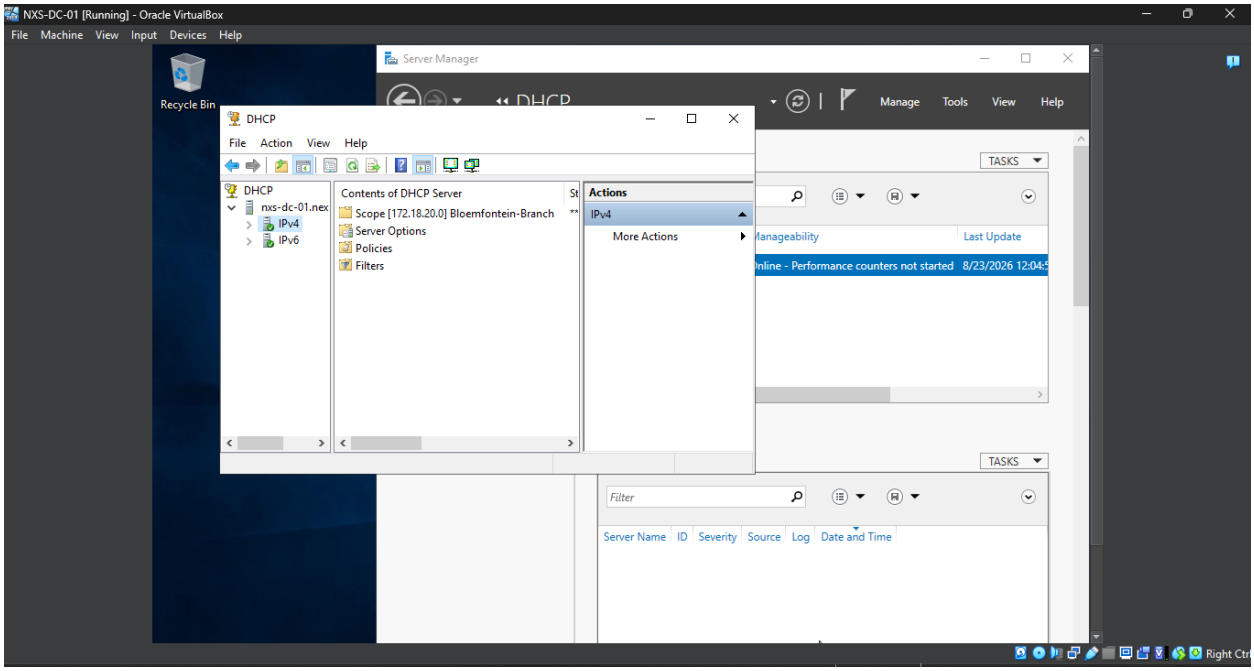

NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Server Manager
Add Roles and Features Wizard
Installation progress
DESTINATION SERVER
NXS-DC-01.nexusfreight.local
Before You Begin
Installation Type
Server Selection
Server Roles
Features
DHCP Server
Confirmation
Results
View installation progress
Feature installation
Configuration required. Installation succeeded on NXS-DC-01.nexusfreight.local.
DHCP Server
Launch the DHCP post-install wizard
Complete DHCP configuration
Remote Server Administration Tools
Role Administration Tools
DHCP Server Tools
You can close this wizard without interrupting running tasks. View task progress or open this page again by clicking Notifications in the command bar, and then Task Details.
Export configuration settings
< Previous
Next >
Close
Cancel
Tools
View
Help
TASKS
Server Name
ID
Severity
Source
Right Ctrl

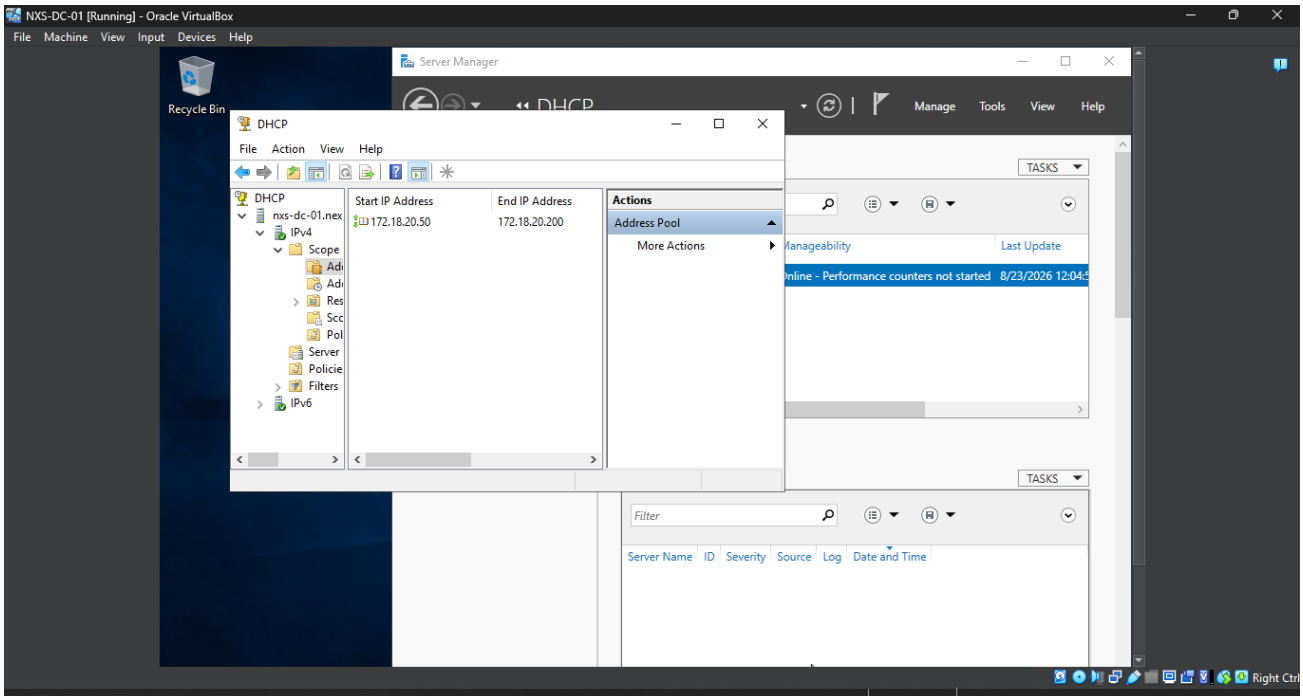

NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Server Manager
Server Manager • Local Server
Manage Tools View Help
Active Directory Users and Computers
File Action View Help
Active Directory Users and Com
Saved Queries
nexusfreight.local
Builtin
Computers
Domain Controllers
ForeignSecurityPrincipal
Managed Service Accour
Users
Nexus
Servers
Workstation
Finance
Branches
Bloemfontein
Polokwane
Name
Type
Description
There are no items to show in this view.
TASKS
Server Name
ID
Severity
Source
Log
Date and Time
Right Ctrl

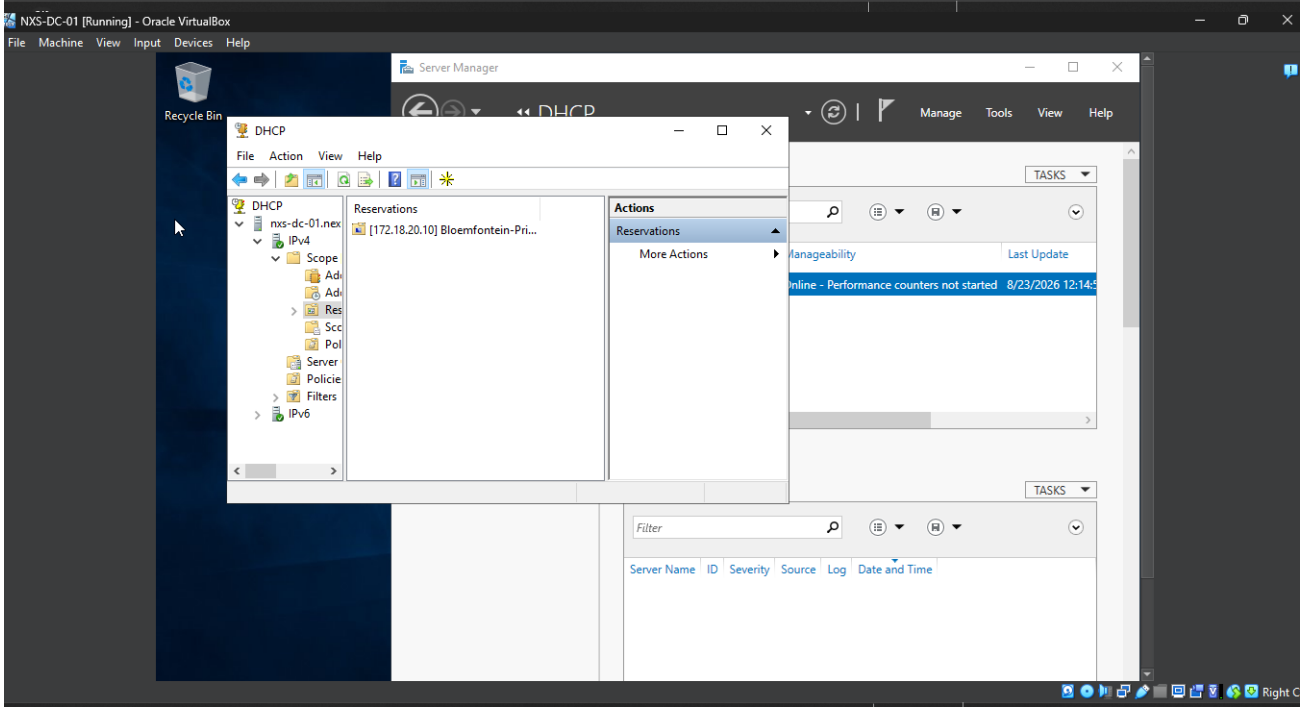

NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Server Manager
Server Manager ▸ Local Server
Manage Tools View Help
Active Directory Users and Computers
File Action View Help
Active Directory Users and Com
Saved Queries
nexusfreight.local
Builtin
Computers
Domain Controllers
ForeignSecurityPrincipal
Managed Service Accou
Nexus
Branches
Finance
Servers
Workstation
Users
Name Type Description
Finance-Users Security Group...
Thandiwe N... User
TASKS
Server Name ID Severity Source Log Date and Time


NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Recycle Bin
Server Manager
Manage Tools View Help
DHCP
File Action View Help
DHCP
nxs-dc-01.nex
Contents of DHCP
Status
nxs-dc-01.nexusfreight.local
Actions
DHCP
More Actions
NXS-DC-01
nexusfreight.local
Domain: On
Enabled
Disabled
Disabled
172.18.10.10, IPv6 enabled
Microsoft Windows Server 2019 Standard Evaluation
innotek GmbH VirtualBox
Mouse integration ...
Don't show again
Auto capture keyboard ...
Don't show again
EVENTS
All events | 32 total
TASKS
Filter
Server Name ID Severity Source
Right Ctrl

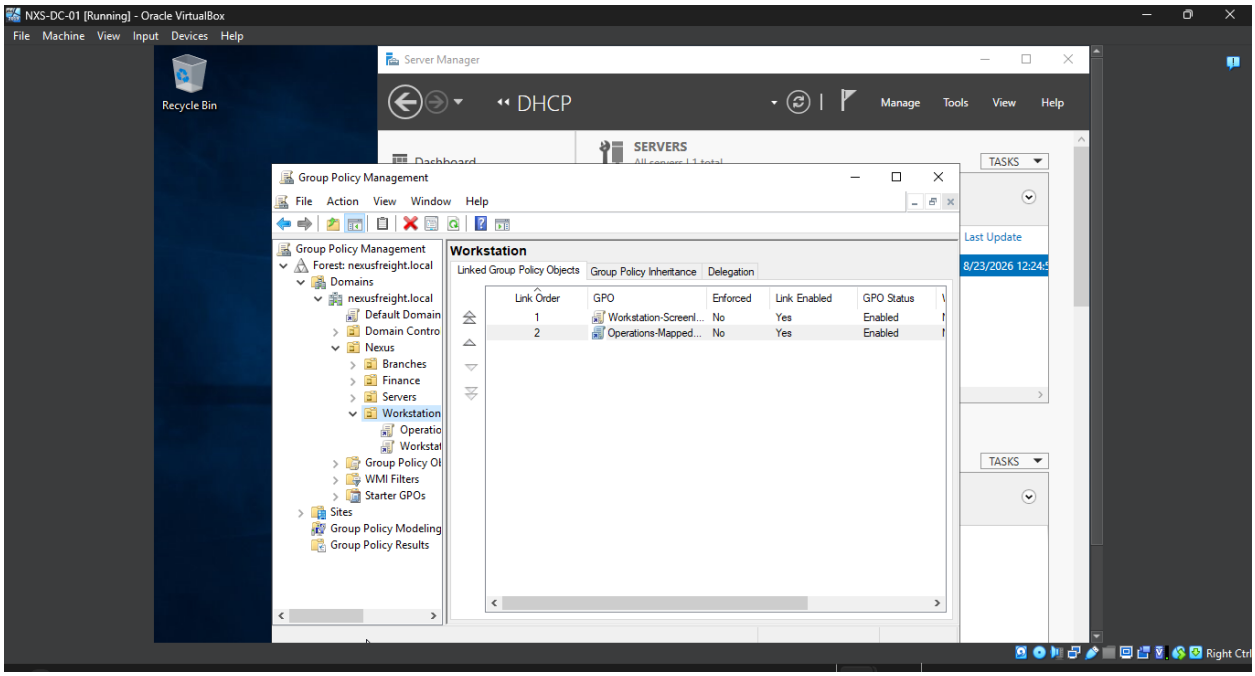
5.3

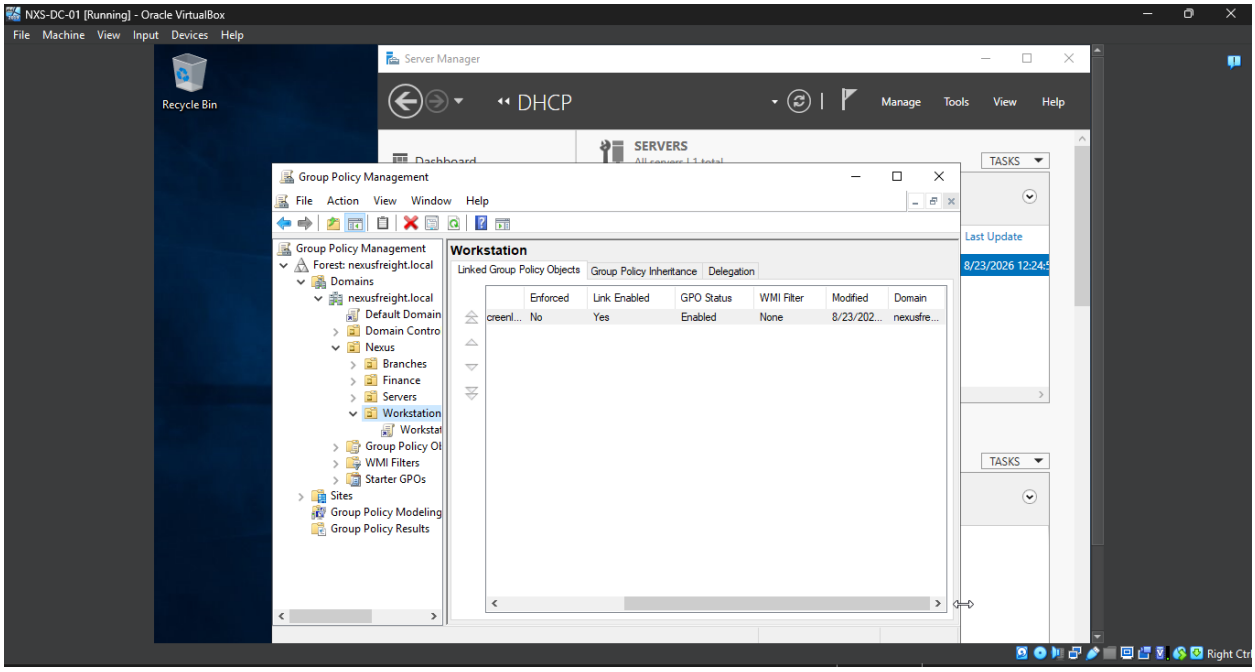

NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Recycle Bin
Server Manager
DHCP
Manage Tools View Help
File Action View Help
DHCP
nxs-dc-01.nex
IPv4
IPv6
Contents of DHCP Server
Scope [172.18.20.0] Bloemfontein-Branch
Server Options
Policies
Filters
Actions
IPv4
More Actions
TASKS
Manageability
Last Update
Online - Performance counters not started 8/23/2026 12:04:5
Filter
Server Name ID Severity Source Log Date and Time
Right Ctrl

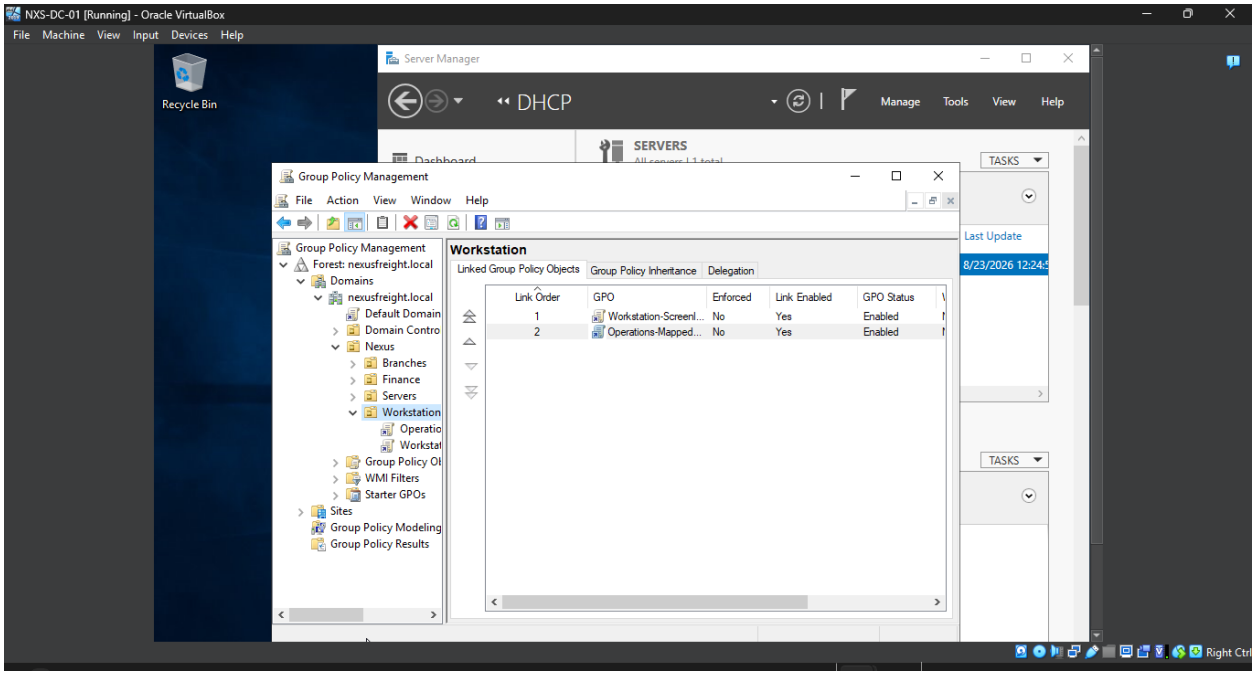

NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Recycle Bin
Server Manager
DHCP
Manage Tools View Help
File Action View Help
DHCP
nxs-dc-01.nex
IPv4
Scope
Server
Policie
Filters
IPv6
Start IP Address
End IP Address
172.18.20.50
172.18.20.200
Actions
Address Pool
More Actions
TASKS
Last Update
Online - Performance counters not started 8/23/2026 12:04:5
Filter
Server Name ID Severity Source Log Date and Time
Right Ctrl


NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Recycle Bin
Server Manager
DHCP
Manage Tools View Help
File Action View Help
DHCP
nxs-dc-01.nex
IPv4
Scope
Server
Policie
Filters
IPv6
Reservations
[172.18.20.10] Bloemfontein-Pri...
Actions
Reservations
More Actions
TASKS
Last Update
Online - Performance counters not started 8/23/2026 12:14:5
Filter
Server Name ID Severity Source Log Date and Time
Right C

5.4


NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Recycle Bin
Server Manager
DHCP
Manage Tools View Help
SERVERS
TASKS
Group Policy Management
File Action View Window Help
Group Policy Management
Forest: nexusfreight.local
Domains
nexusfreight.local
Default Domain
Domain Contro
Nexus
Branches
Finance
Servers
Workstation
Operatio
Workstat
Group Policy Ob
WMI Filters
Starter GPOs
Sites
Group Policy Modeling
Group Policy Results
Workstation
Linked Group Policy Objects
Group Policy Inheritance
Delegation
Link Order
GPO
Enforced
Link Enabled
GPO Status
1
Workstation-Screenl...
No
Yes
Enabled
2
Operations-Mapped...
No
Yes
Enabled
Last Update
8/23/2026 12:24:5
Right Ctrl


NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Recycle Bin
Server Manager
DHCP
Manage Tools View Help
SERVERS
TASKS
Group Policy Management
File Action View Window Help
Group Policy Management
Forest: nexusfreight.local
Domains
nexusfreight.local
Default Domain
Domain Contro
Nexus
Branches
Finance
Servers
Workstation
Workstat
Group Policy Ob
WMI Filters
Starter GPOs
Sites
Group Policy Modeling
Group Policy Results
Workstation
Linked Group Policy Objects
Group Policy Inheritance
Delegation
Enforced
Link Enabled
GPO Status
WMI Filter
Modified
Domain
creenl...
No
Yes
Enabled
None
8/23/202...
nexusfre...
Last Update
8/23/2026 12:24:5
Right Ctrl


NXS-DC-01 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
Recycle Bin
Server Manager
DHCP
Manage Tools View Help
SERVERS
TASKS
Last Update
Group Policy Management
File Action View Window Help
Group Policy Management
Forest: nexusfreight.local
Domains
nexusfreight.local
Default Domain
Domain Contro
Nexus
Branches
Finance
Servers
Workstation
Group Policy Ol
WMI Filters
Starter GPOs
Sites
Group Policy Modeling
Group Policy Results
Workstation
Linked Group Policy Objects
Group Policy Inheritance
Delegation
Link Order
GPO
Enforced
Link Enabled
GPO Status
1
Workstation-Screenl...
No
Yes
Enabled
2
Operations-Mapped...
No
Yes
Enabled
Right Ctrl