# Mizore: current application sequence

Main user journey: sign in, load saved paths, add a path, and browse files

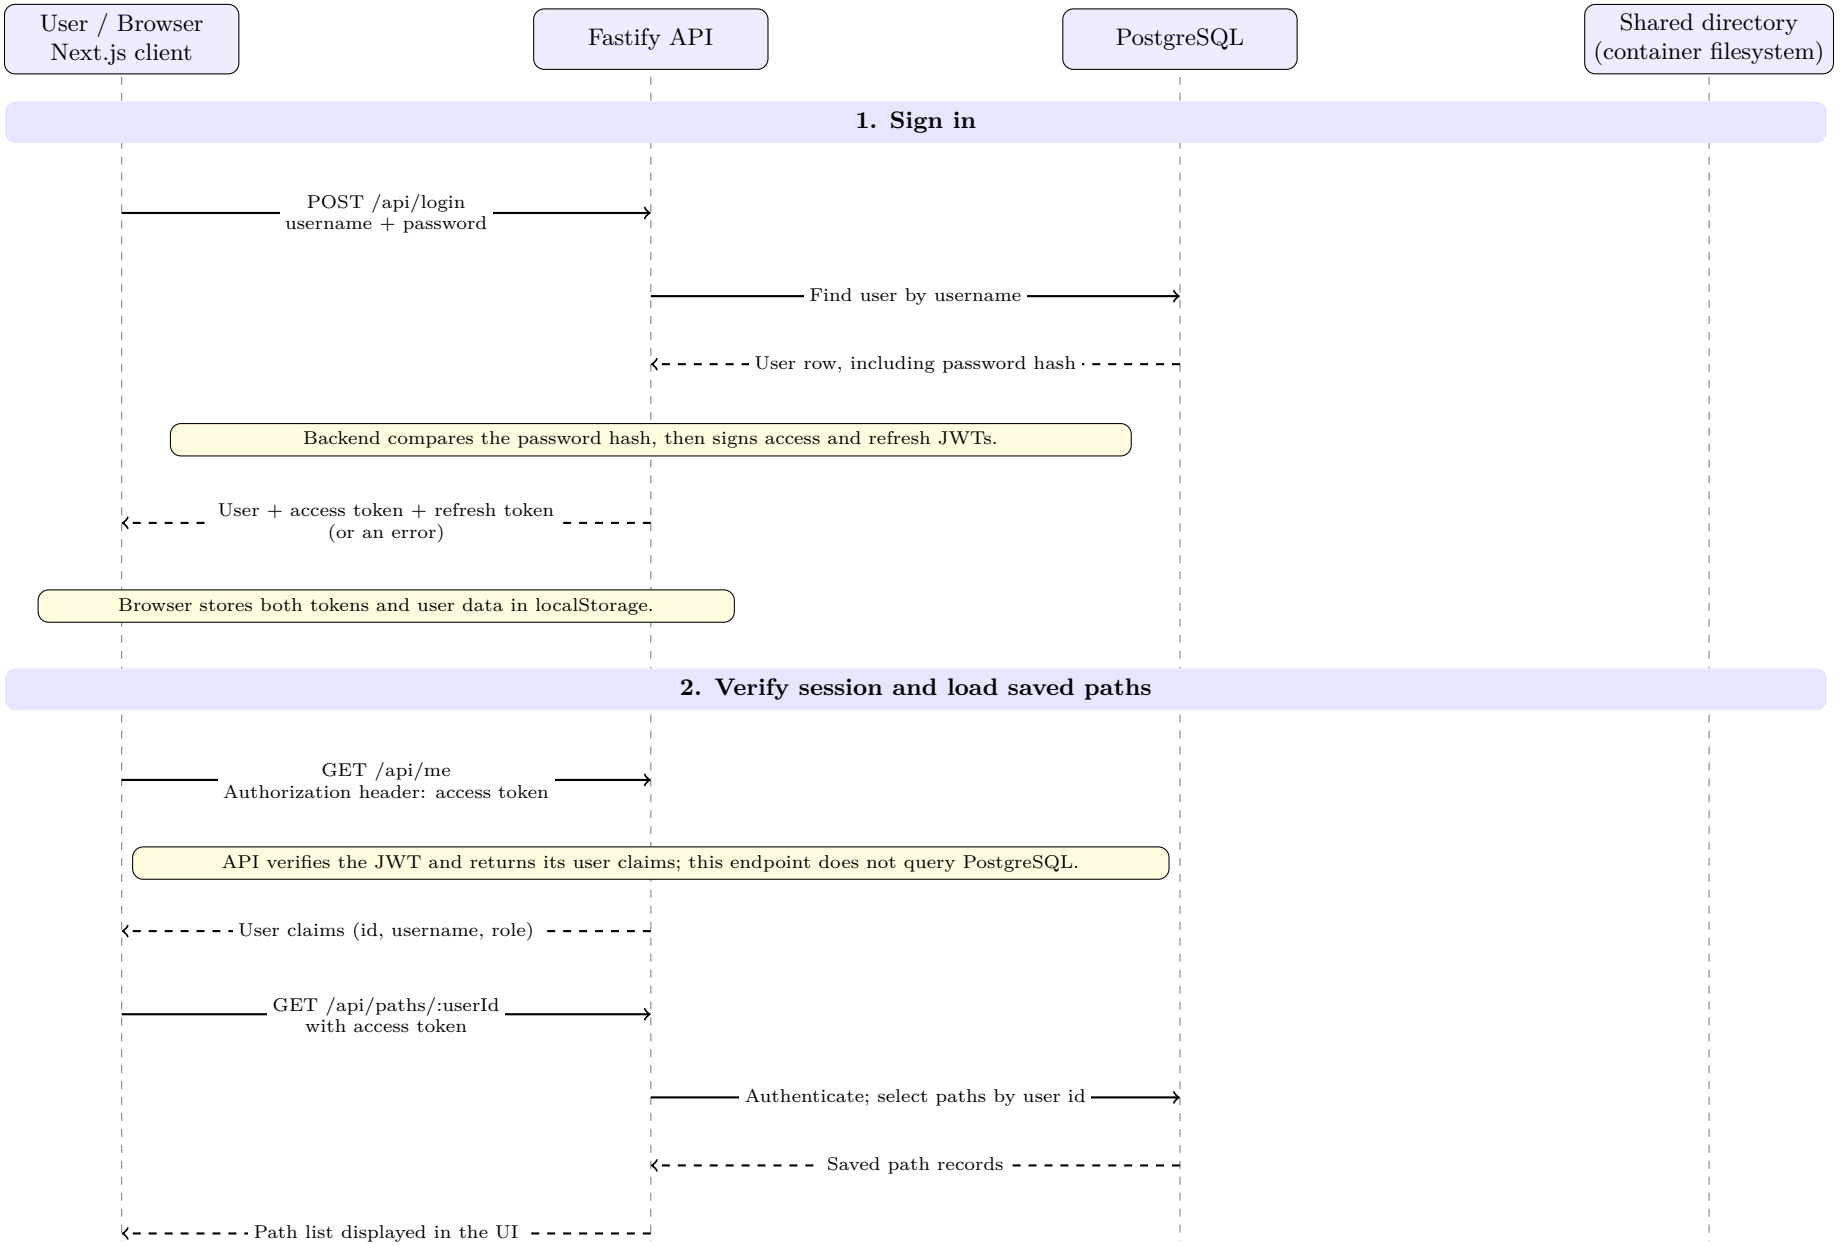

# Mizore: current application sequence (continued)

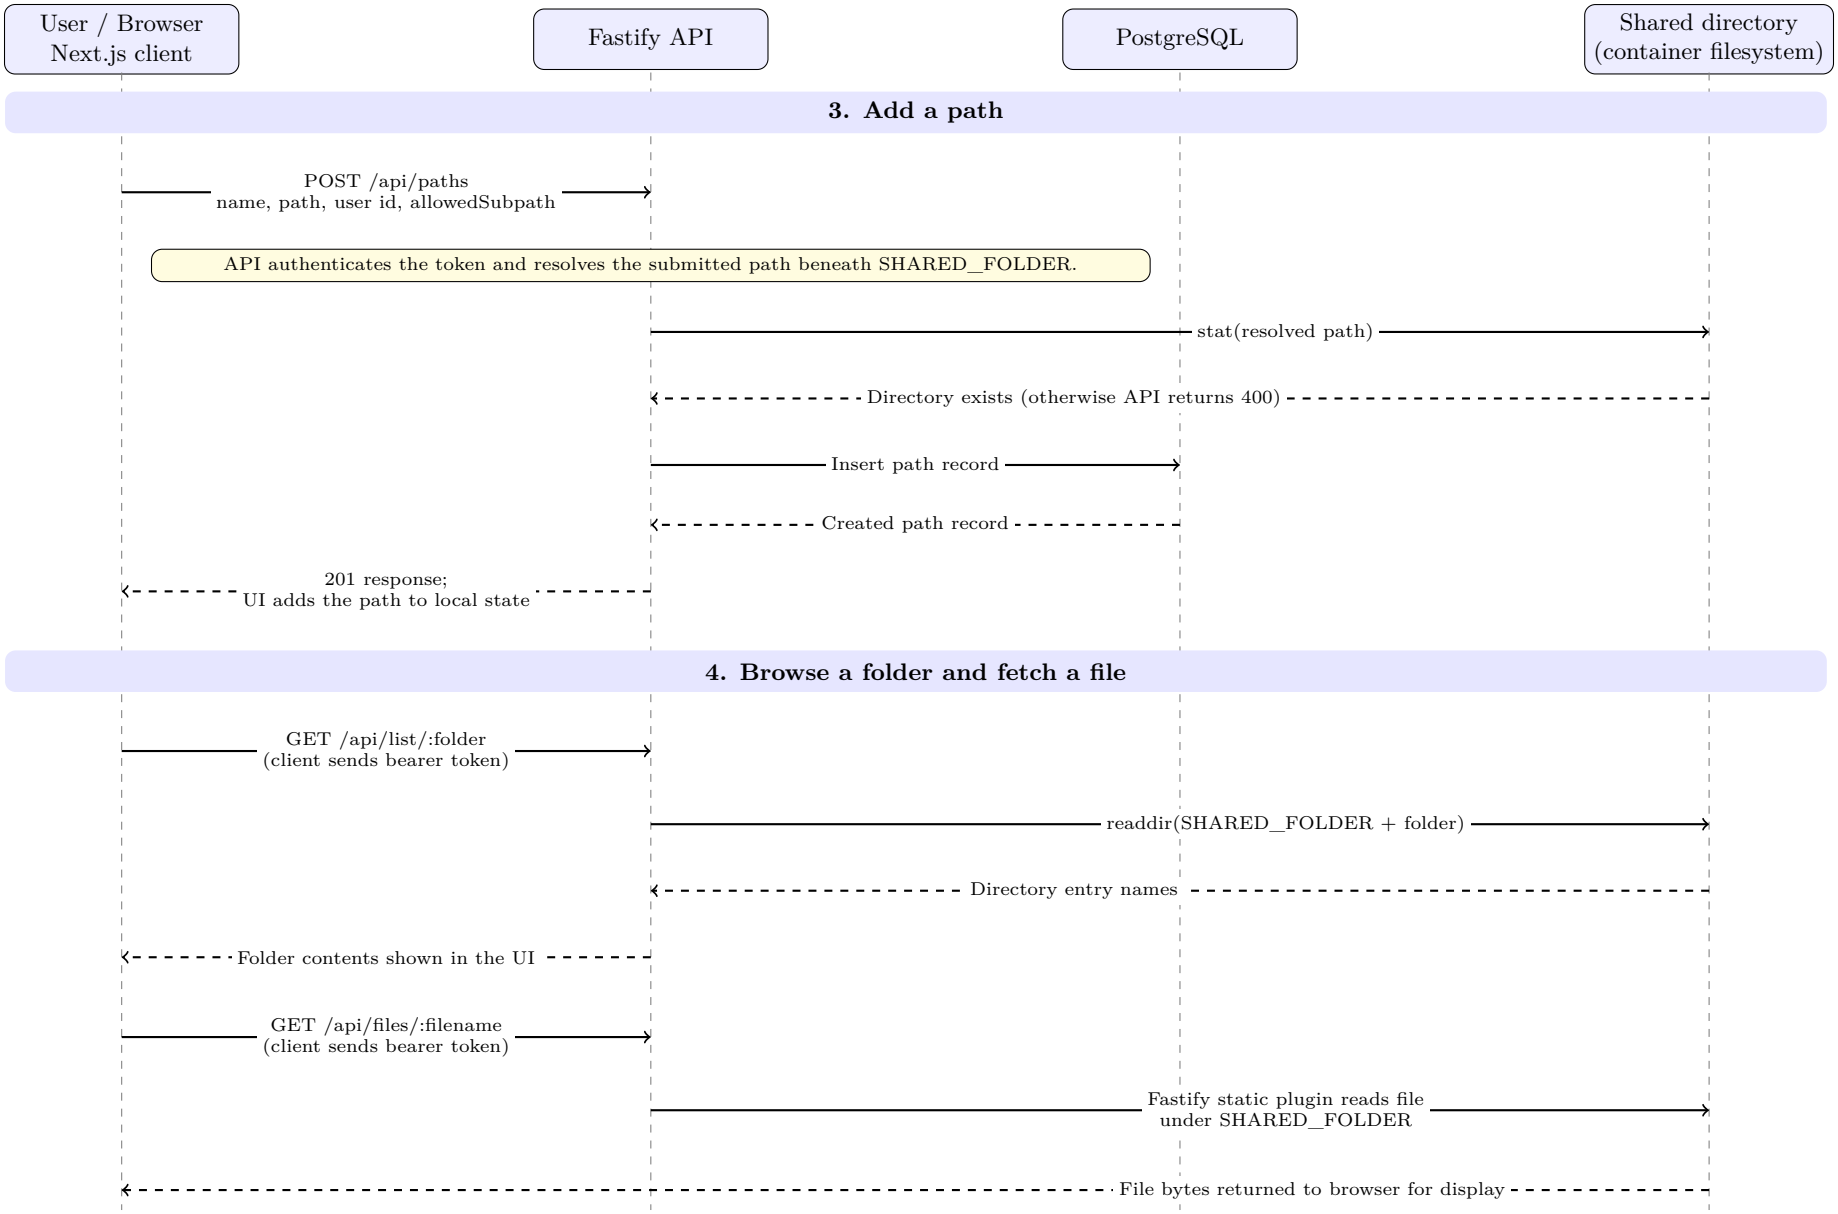

## How to read the diagram

**Important details from the current code:**

- `SHARED_FOLDER` is the backend's filesystem root for path checks, directory listings, and static file serving. A saved path is a database record, not a separate mount.
- In the checked-in Compose file, the bind mount target is `/home/yuki`, while `SHARED_FOLDER` defaults to `/files`. Unless the runtime environment changes one of these, they do not refer to the same container directory.
- The browser's shared-folder listing and file requests include the access token, but the current `/api/list/:file` and `/api/files/:filename` routes do not install authentication middleware. Path creation and retrieval do require authentication.
- The admin UI is gated to users with the `admin` or `owner` role. The shared-path list can also be requested twice: the sidebar fetches it after `/api/me`, while AppContext independently refreshes paths after session setup.
- Refresh tokens are stored, but this flow does not refresh an expired access token; an invalid token makes protected requests fail.