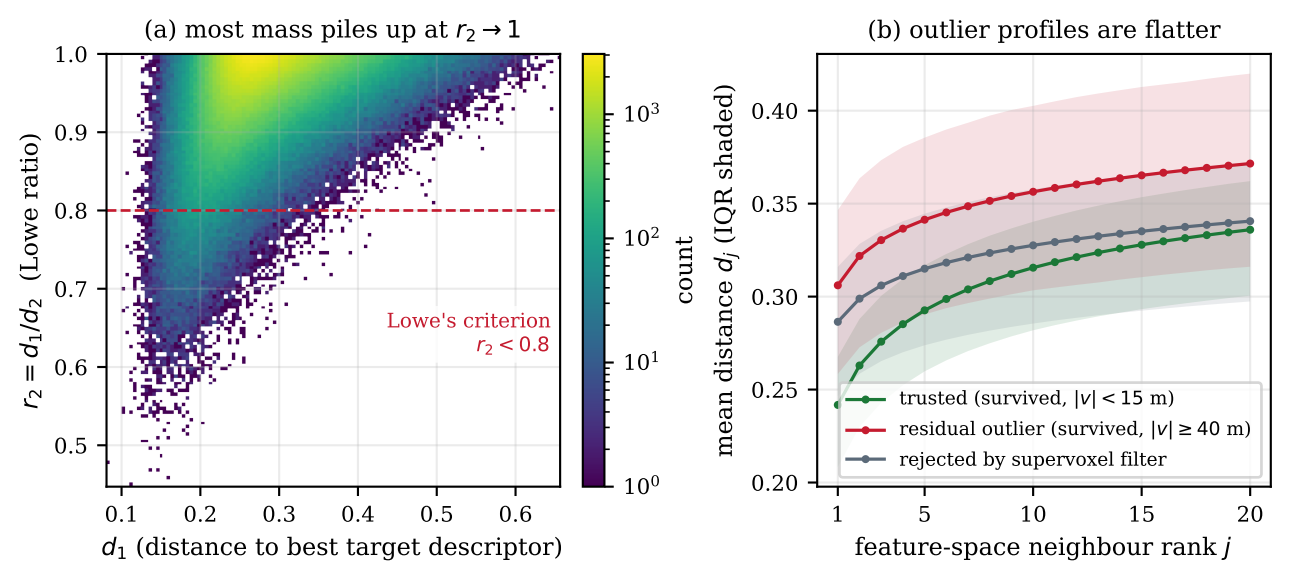
(a) most mass piles up at $r_2 \to 1$
$r_2 = d_1/d_2$ (Lowe ratio)
d_1 (distance to best target descriptor)
Lowe's criterion
$r_2 < 0.8$
count
(b) outlier profiles are flatter
mean distance d_j (IQR shaded)
feature-space neighbour rank j
trusted (survived, $|v| < 15$ m)
residual outlier (survived, $|v| \geq 40$ m)
rejected by supervoxel filter