


Homework 5

Answers

1. N.A.
2. What would be the respective result of the *print* if the parameter *a* of *foo* is passed by
 - a. Value
 - i. 10
 - b. Reference
 - i. 15
 - c. Value-result
 - i. 15
 - d. Result
 - i. 5
3. Consider the following program where *foo* uses pass by value for *a*:
 - a. Static memory for global variable “m”. “x” and “a” are in stack.
 - b.

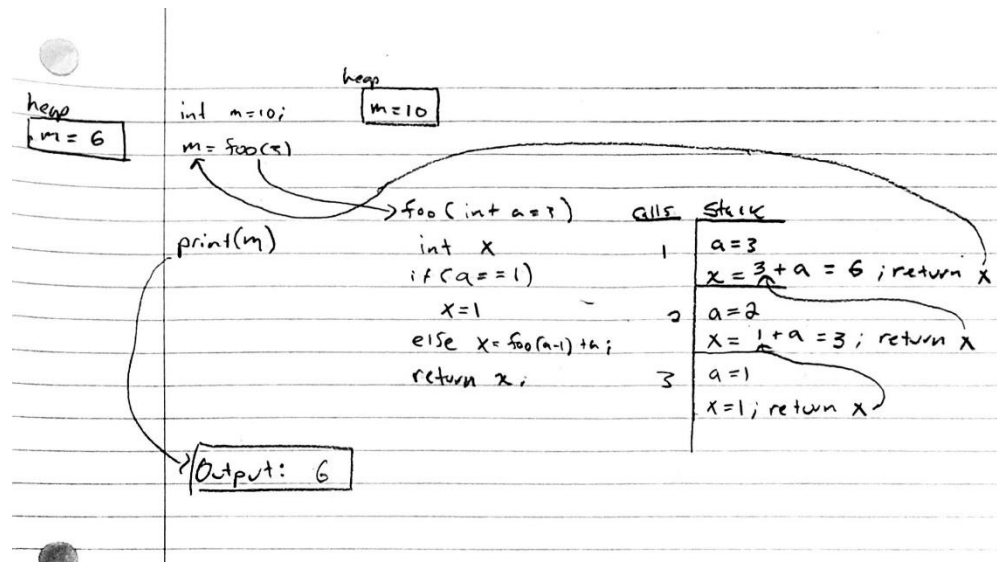

4. Lisp. Please refer to Q4.lisp.txt. Also, please note that the function name “*max*” is already defined. It is now called *max1*.