

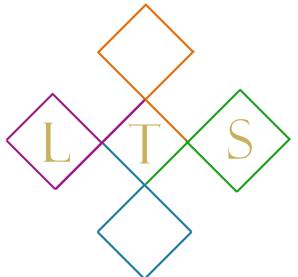
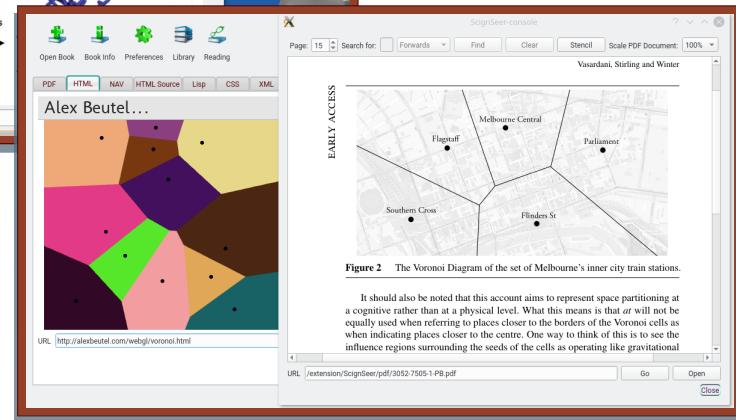


Dataset Creator ("dsC")

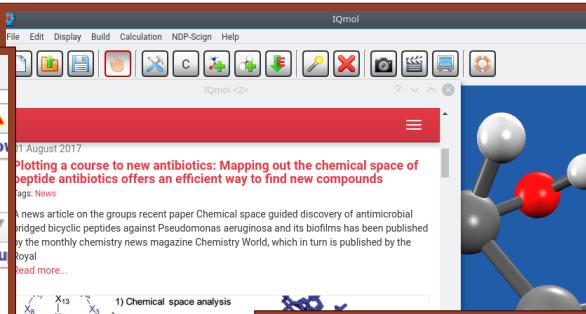

Linguistic Technology Systems (LTS)
Amy Neustein, Ph.D., Founder and CEO
amy.neustein@verizon.net
(917) 817-2184

Linguistic Technology Systems

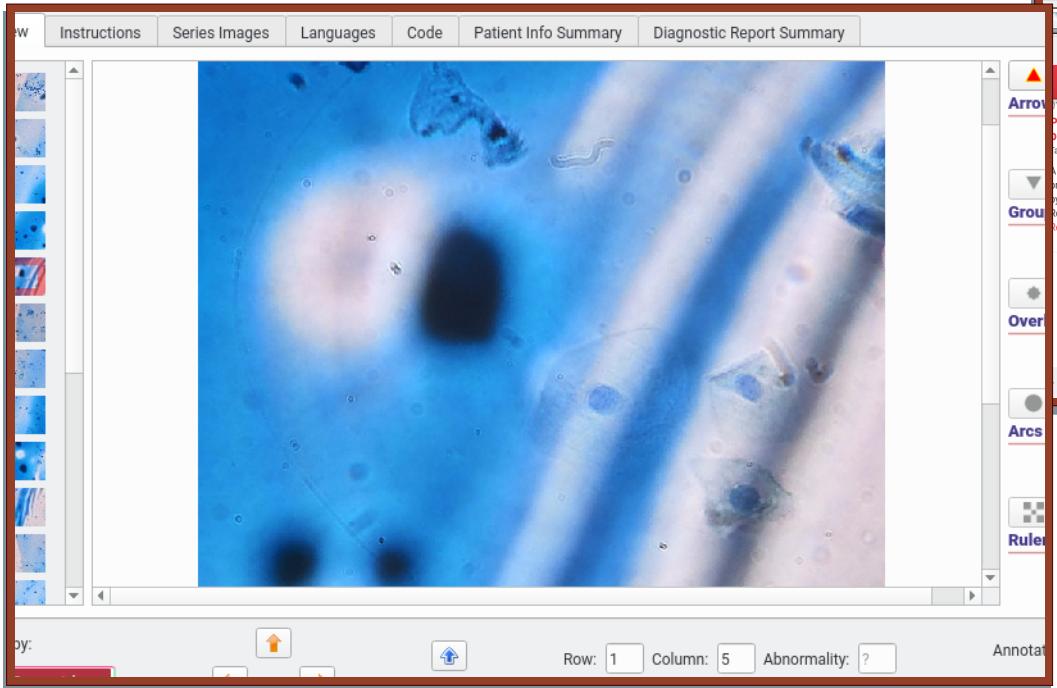

Group 1: Features of Dataset Applications


User Interface Features Typical of Dataset Applications

The code for each dsC data set includes a customized “Dataset Application” which displays individual samples and groups of samples via 2D, 3D, and native-compiled GUI controls. Each Dataset Application can thereby make use of advanced visual and interactive features that are uniquely possible when using customized, native-compiled GUI classes. The following screenshots will show several examples of these features, including:

Specialized Top-Level Controls Tree Widgets, Stacked Widgets, and Graphics Scenes.

Context Menus Systematically organize functionality around UI layouts.

Multi-Window Displays Divide application functionality in multiple specialized top-level windows and/or dialog boxes.

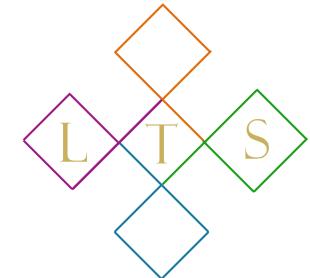

Linguistic Technology Systems



Initial Application Window

[Customize Build](#)[Activate TCP](#)[Screenshot](#)

Main Flow Temperature Oxygen

Index	Flow	Time With / Average	Time Against / Delta	Temperature C° / K°	Oxygen (calculated)
► 1	0.561	0.000219893	0.000220329	49.60	
▲ 2	1.17	0.000219764	0.000220614	49.70	
		0.000220189	8.49999e-7	322.15	93
	%	0.106536		67.3623	1
	#	159		322	394
► 3	5.133	0.000218866	0.000221751	49.70	
► 4	10.80	0.000218223	0.000223191	48.90	
► 5	10.80	0.000218854	0.000218854	49.50	
► 6	10.80	0.000219006	0.000219006	49.60	

Sample

Up/Down

Peer Up/Down

First



Peer First



DOUBLE

Graphics

2D 25x25 2D 12x12 2D 3x3 2D 37x75

3D 25x25 3D 12x12 3D 3x3 3D 37x75

In addition, nested rows can display supplemental information, such as data values' rank (3) and percentage (2) (on the scale of the least to greatest value) relative to all other values for each statistical parameter.

Using a "tree widget" (a two-layer spreadsheet), instead of a conventional spreadsheet, allows the Dataset Application to distinguish primary values (those measured directly by physical devices and experimental equipment) from intermediate values calculated via algorithms.

Interacting with the Main Window

Customize Build Activate TCP Screenshot

Main	Flow	Temperature	Oxygen		
Index	Flow	Time With / Average	Time Against / Delta	Temperature C° / K°	Oxygen (calculated)
33	0.589	0.00022861 0.000228828	0.000229046 4.35997e-7	5.40 278.15 7.25373 0 1 34	About/ Show in Document (may require XPDF) Copy Column to Clipboard (values) Copy Column to Clipboard (ranks)
%	0.0531...				
#	111				
34	1.098	0.000228924	0.000229746	5.40	
39	4.988	0.000228814	0.000231814	5.40	
35	5.044	0.000227894	0.000230985	5.40	
37	0.554	0.000229983	0.00023039	5.50	
38	1.057	0.000229819	0.000230657	5.50	
31	5.057	0.000229433	0.000232403	5.50	
30	1.108	0.000230476	0.000231223	5.70	
29	0.184	0.000230511	0.000230931	5.80	

Despite being implemented as a tree widget instead of a two-dimensional spreadsheet, the primary window for this Dataset Application has many spreadsheet-like features, such as copying columns of data (1) and sorting columns by switching notebook tabs (2); each notebook page shows the data sorted on a specific parameter.

Two different sets of navigation buttons enable the user to scroll through samples according to the currently selected sort parameter (3), or according to the primary index (4).

Sample Up/Down

Peer Up/Down

First

Peer First

Graphics

2D 25x25

2D 12x12

2D 3x3

2D 37x75


3D 37x75

* Minimize

OK Proceed Close

Coordinated Data Visualization


Customize Build Activate TCP Screenshot

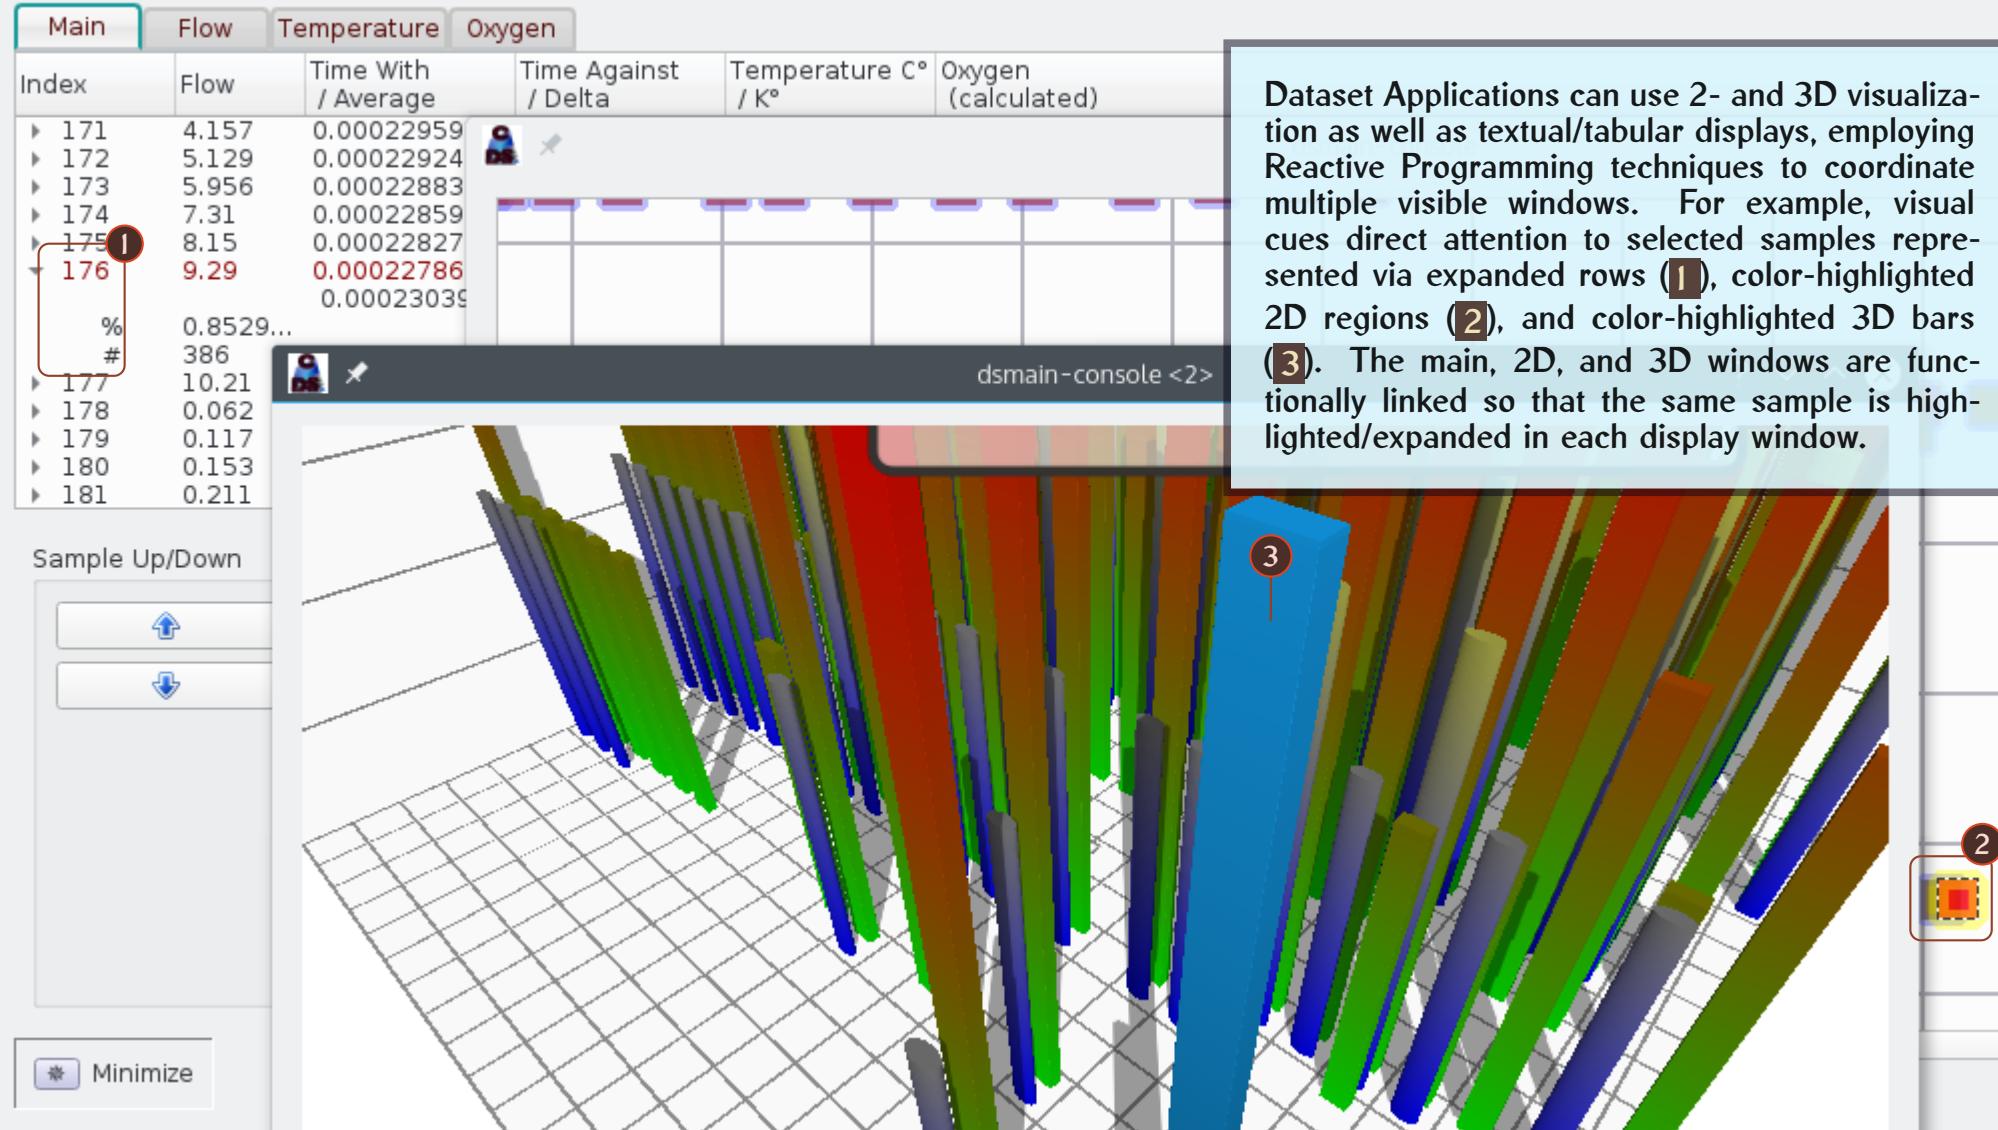

OK Close

Interacting with the Visuals

Customize Build Activate TCP Screenshot

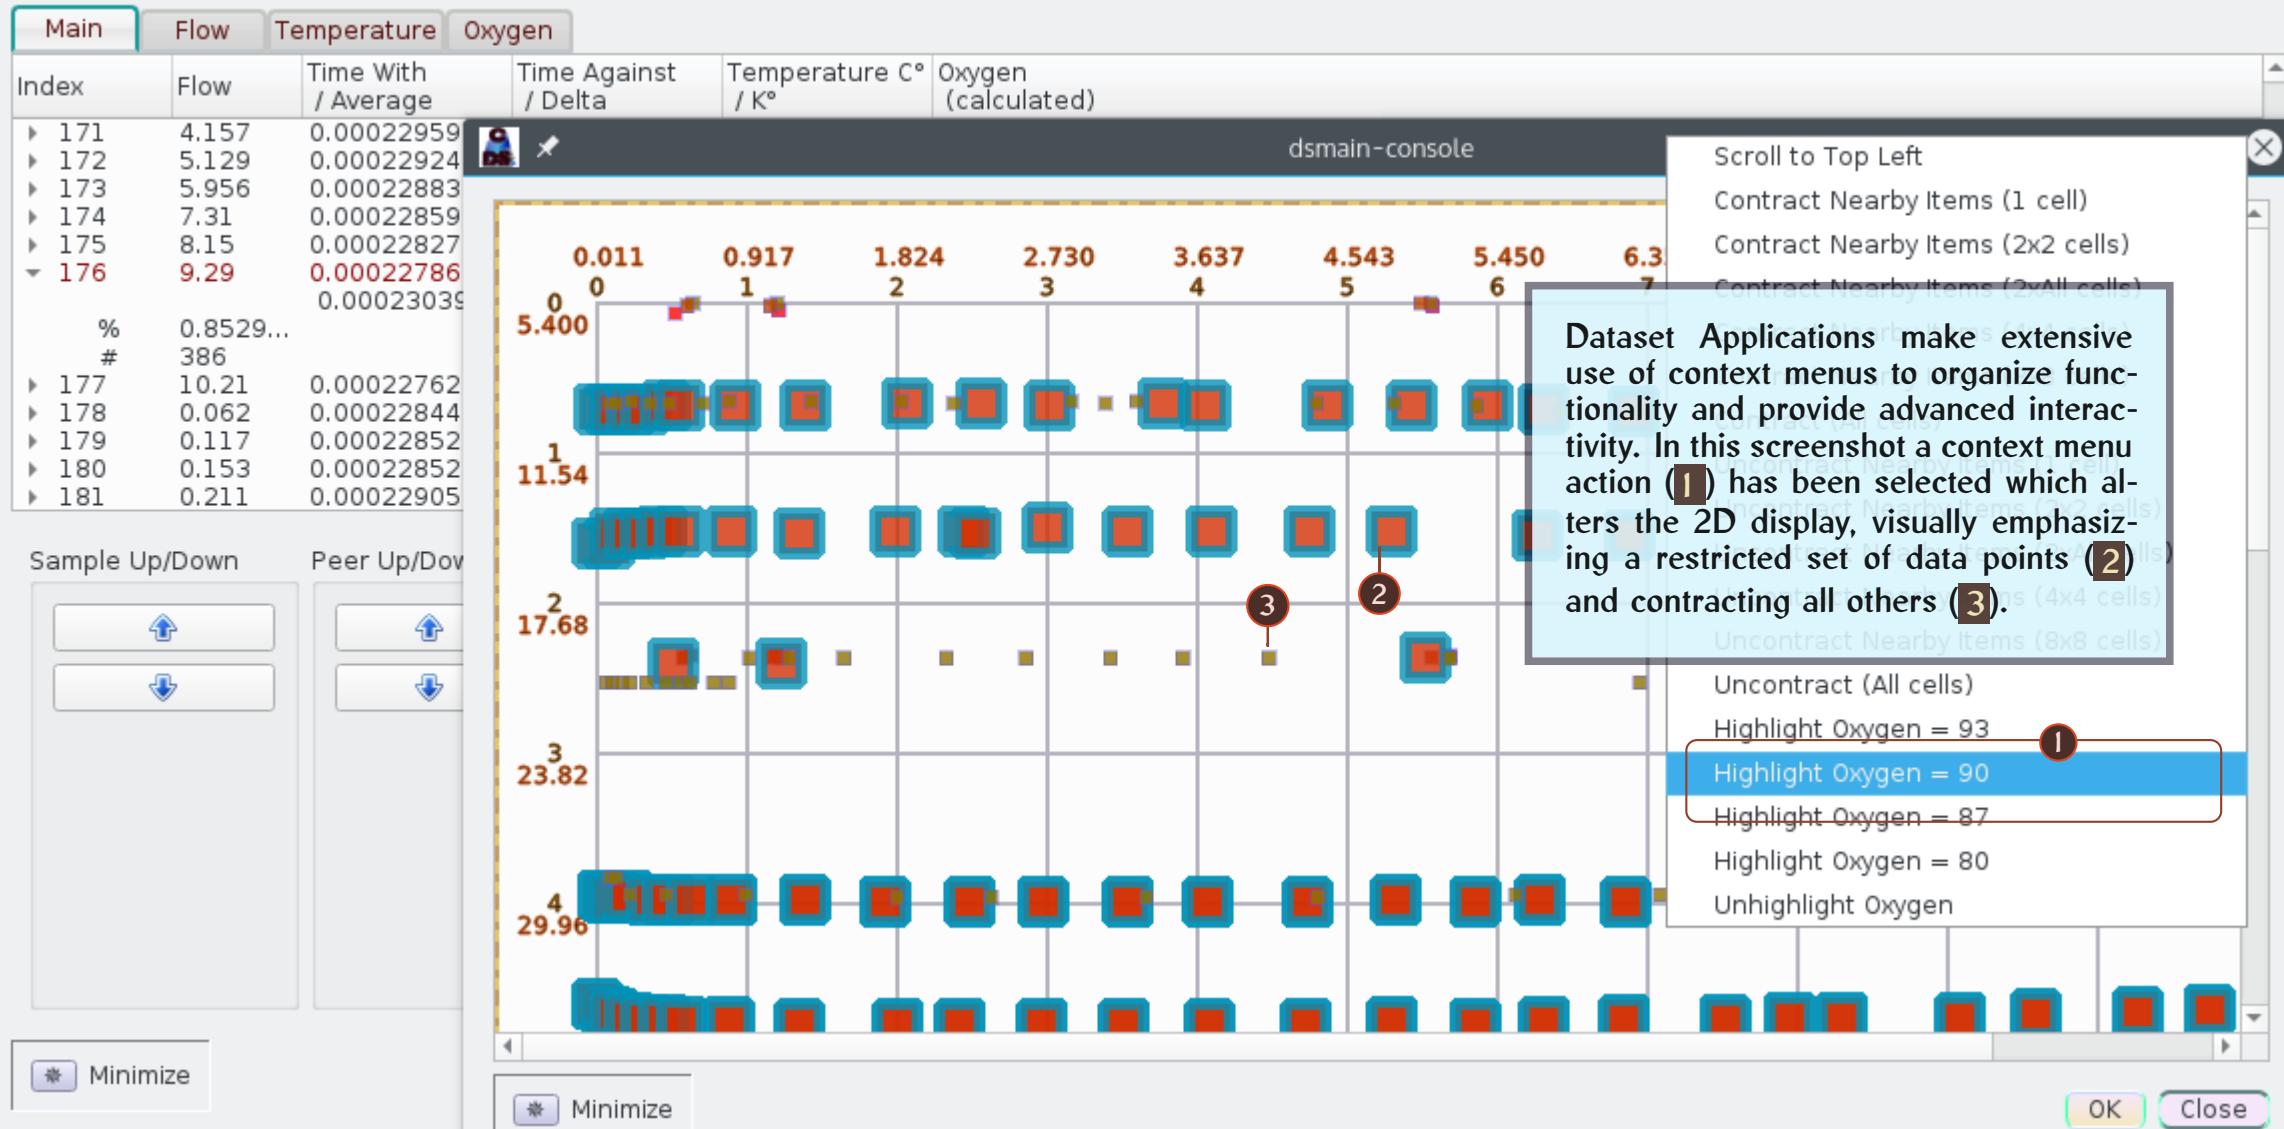

Getting Information About Modeling Parameters


Using Dataset Applications as Pedagogical Tools

In addition to interactive visualization, Dataset Applications are useful tools for understanding experimental protocols and research methods. Within Dataset Applications, modeling units such as statistical parameters and record fields are visible *in situ* within a GUI — identified by labels, buttons, and other interactive micro-controls. As a result, users encounter modeling elements in a structured visual-interactive context. To learn more about modeling elements, Dataset Applications are equipped with several pedagogical features shown on the following screenshots:

“About” Dialogs Brief summaries of research terms and parameters.

XPDF Links Links back to research articles read in an embedded PDF viewer.

XPDF Enhancements The XPDF viewer can be customized for each data set and included with dataset code, with extra features to integrate article or book texts with Dataset Applications.

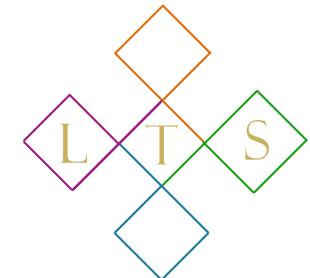

Linguistic Technology Systems



Obtaining Information About Parameters

[Customize Build](#)[Activate TCP](#)[Screenshot](#)

Main	Flow	Temperature	Oxygen
Index	Flow	Time With / Average	Time / Delta
▶ 33	0.589	0.00022861	0.00022861
▼ 34	1.098	0.000228924	0.000228924
%		0.000229335	8.23%
#	154		
▶ 39	4.988		
▶ 35	5.044		
▶ 37	0.554		
▶ 38	1.057		
▶ 31	5.057		
▶ 30	1.108		
◀ 29	0.481		

Sample Up/Down



Context menus also allow users to obtain information and explanations about individual parts of the data set, such as individual statistical parameters. In this screenshot, the user has right-clicked on a data column (Flow) and has chosen a context menu action which shows, via a dialog box, a precis of the quantities represented in that column and their significance for the data set as a whole.

Flow of Oxygenated Air

1



Click 'Show Details' for a summary or 'More' for PDF/Original Article links.

[More \(PDF\) ...](#)[Cancel](#)[Hide Details...](#)

The Flow measurements calculate the flow of oxygenated air (as needed for Continuous Positive Airway Pressure (CPAP) devices) given inputs of ambient temperature and sound time travel. The third (nested) row beneath the Flow value shows each sample's Flow 'rank' (where lower ranks mean that a sample has less Flow; the rank #1 is the sample with least flow). The second nested value shows each sample's flow measurement as a fraction of the maximum measurement.

[Minimize](#)[OK](#)[Proceed](#)[Close](#)

Embedding XPDF

[Customize Build](#)[Activate TCP](#)[Screenshot](#)

The screenshot shows the XPDF viewer interface. At the top, there's a toolbar with various icons. Below it is a menu bar with 'File' and 'Edit'. A status bar at the bottom displays the path '/home/nlevisrael/sci...' and page information '2 of 21'. The main area contains a PDF page from 'WILEY Expert Systems'. The page discusses the speed of sound in air as a function of temperature and humidity. A red box highlights a specific text block: 'In this example, after viewing a short description of a particular data field inside the Dataset Application, researchers have the option of studying that parameter further by reading at the location in the original publication where the field is introduced or described. The XPDF viewer is compiled as an embedded application within the main Dataset Application and can itself be customized for each data set.' A red circle with the number '1' is placed above this highlighted text, likely indicating it is the target of a link.

Each data set can be linked back to an original article or other publication reporting on the data set and experimental results. Different parts of the data set can be linked to textual anchors in the publication.

because we know that air is a relatively fixed mixture of gases, primarily consisting of nitrogen, oxygen, argon, and carbon dioxide, that in varying amounts of water vapour or humidity. The speed of sound in air is approximately 343 m/s at room temperature (20 °C or 70 °F). This is primarily a function of temperature; the only other factor that has any significant influence is relative humidity. However, humidity has only a slight influence; an increase in relative humidity by only a small amount of 0.5%, we can conclude that the speed of sound is lower at higher altitudes. This is because the temperature and relative humidity are lower at higher altitudes. The air pressure is lower at higher altitudes. The speed of sound goes up concurren-

In this example, after viewing a short description of a particular data field inside the Dataset Application, researchers have the option of studying that parameter further by reading at the location in the original publication where the field is introduced or described. The XPDF viewer is compiled as an embedded application within the main Dataset Application and can itself be customized for each data set.

we can calculate the speed of sound in dry air in metres per second (m/s) as being approximately equal to $v = 331.4 + 0.6TC$ m/s, where speed or velocity of sound and TC is the temperature in degrees Celsius. For example, if TC = 0 °C, then $v = 331.4 + 0 = 331.4$ m/s. Similarly, if TC = 20 °C, then $v = 331.4 + 0.6 * 20 = 331.4 + 12 = 343.4$ m/s. These equations also demonstrate that as the temperature of air goes up, the speed of sound goes up concurren-

Testing and Fine-Tuning Dataset Applications

Tools for Editors and Developers

Although ordinary users can explore and visualize dsC data sets “Out of the Box”, advanced users have many options for customizing their build of the application in terms of their specific roles and available 3rd-party libraries. These fine-tuning possibilities include:


Test Suites Tools for creating and/or running test suites to ensure that the Dataset Application works across platforms.

Data Export Tools for reusing data in other projects.

External Libraries Some features like XPDF and 3D graphics require libraries that cannot be published with the data set in source code form. Advanced users can select which of these libraries to incorporate into their version of the Dataset Application.

Scripting Data sets can compile their own scripting environment to automate testing and manipulation of research data.


Networking Dataset Applications can use an embedded TCP server to communicate with other applications, enabling multi-application workflows (this is also how testing is implemented).

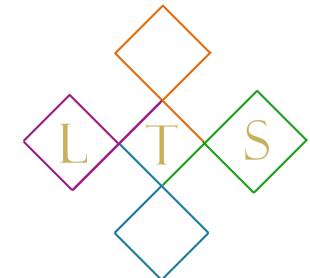

Linguistic Technology Systems



Configuring the Data Set Application

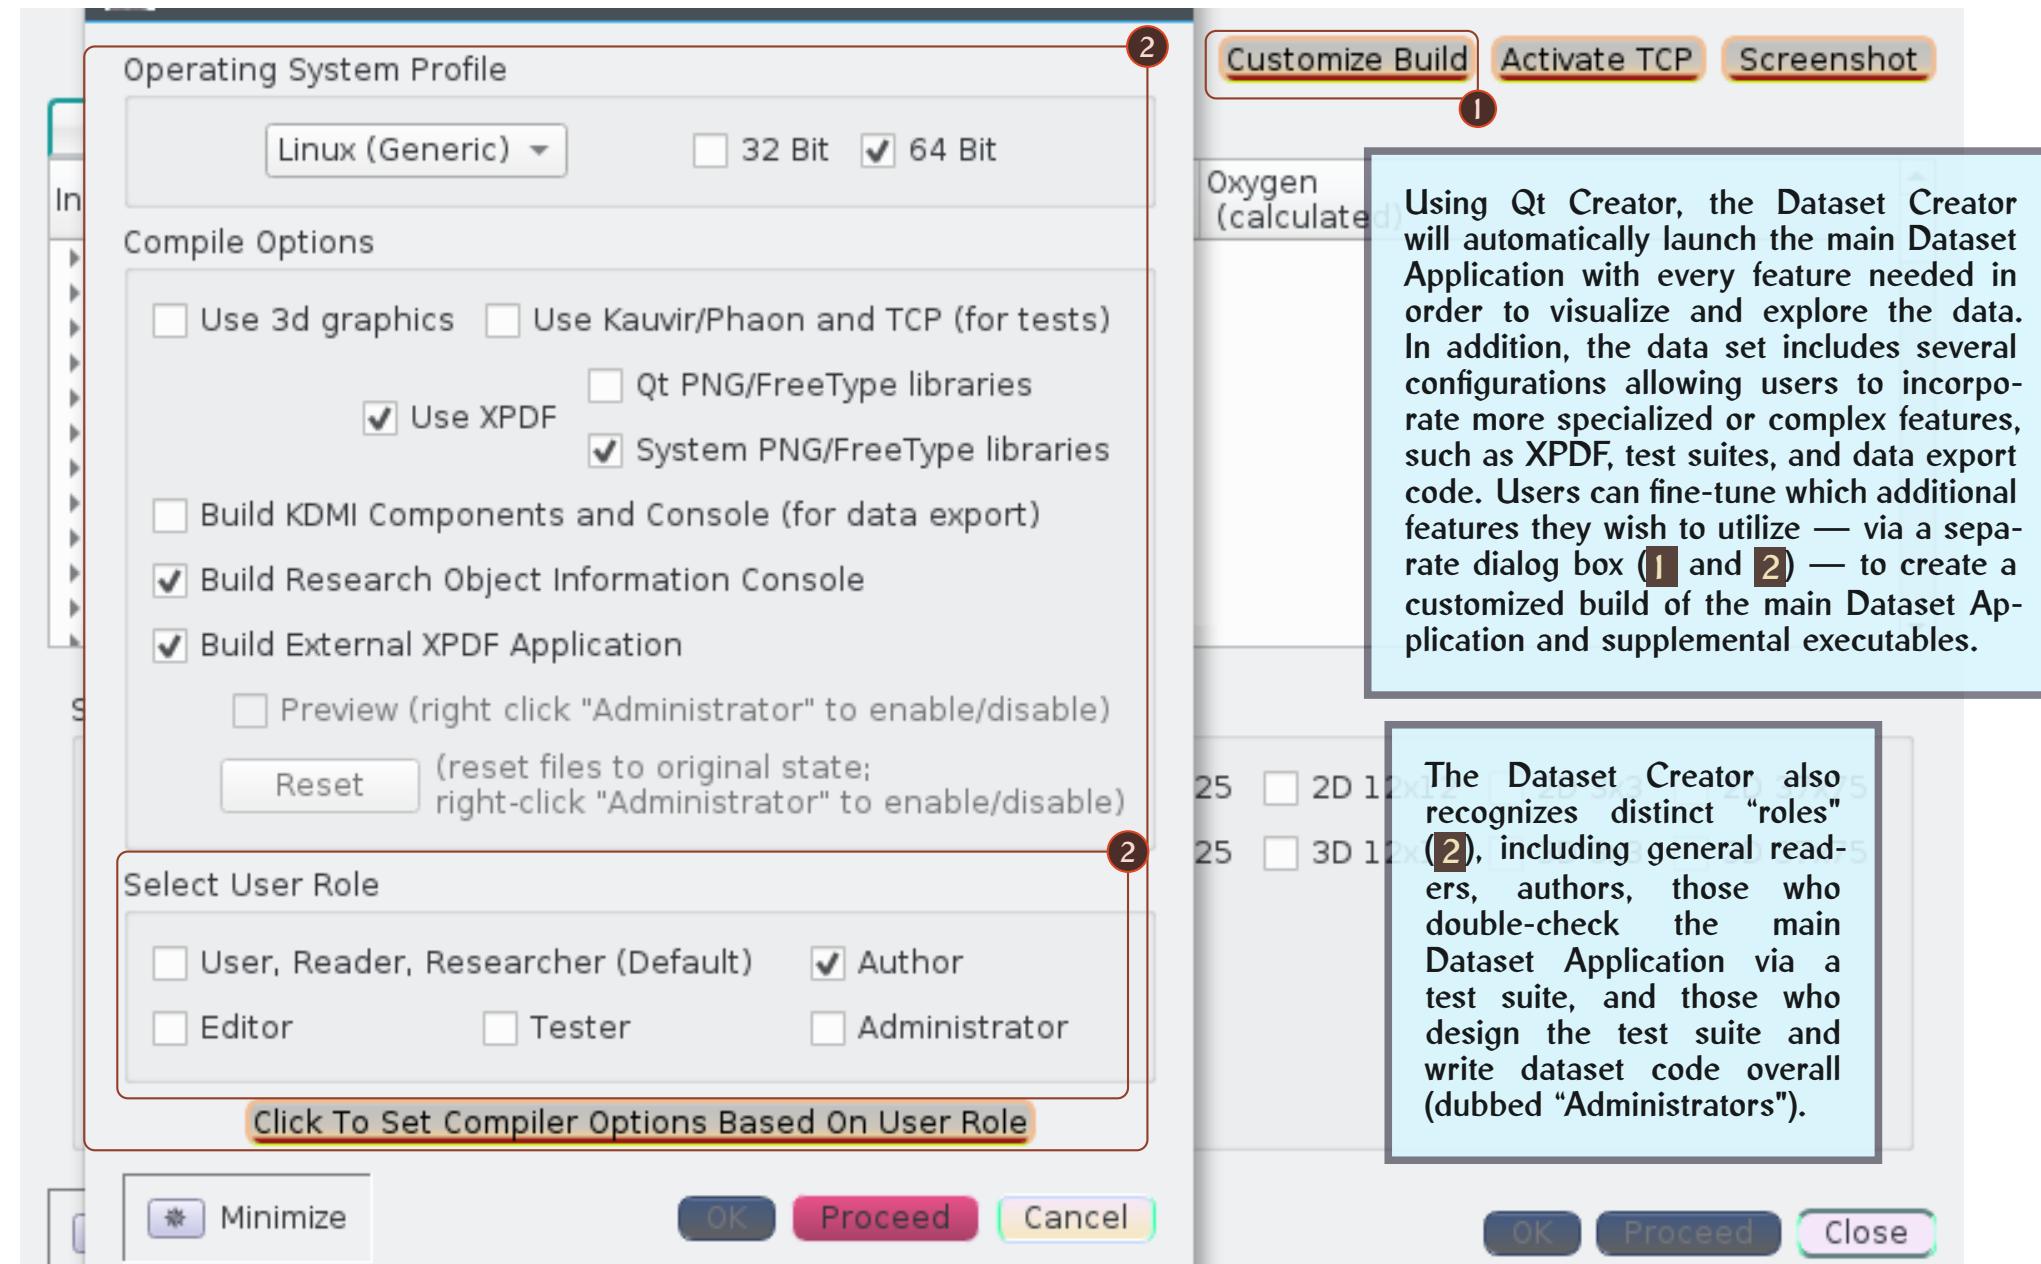

Testing the Data Set Application

Dataset Creator includes a sophisticated framework for building and running test suites to ensure that raw data is processed correctly and that User Interface components work properly on different Operating System platforms. This includes a separate testing application that sends instructions to the main Dataset Application via TCP (1).

The testing application has several features to facilitate running tests, including options to repeat tests, mark success or failure (2), and examine the system clipboard (3).

Customize Build (1) | Activate TCP (1) | Screenshot (1)

Test Returned (3)

Test Copy Temperature Ranks: Pass or Fail?

Pass | Fail | Hide Details...

Note: For tests which involve values copied to the system clipboard, you can use the text area below as a scratch pad to examine the clipboard contents.

Clipboard Content:

- 318
- 322
- 323
- 284
- 317

OK | Proceed | Close

Copy Flow Values /home/nlevisrael/scign/MSR/ar/cpp

Copy Oxygen Ranks /home/nlevisrael/scign/MSR/ar/cpp

Copy Oxygen Values /home/nlevisrael/scign/MSR/ar/cpp

Copy Temperature Ranks /home/nlevisrael/scign/MSR/ar/cpp

Copy Temperature Values ✓ /home/nlevisrael/scign/MSR/ar/cpp (2)

Expand Sample /home/nlevisrael/scign/MSR/ar/cpp

Minimize OK Cancel

i Copy Temperature Ranks: This test should result in the Temperature ranks (sorted by index) being copied to the system clipboard, which can be verified by pasting the clipboard into a blank file and comparing the lines (there should be one sample per line) to the Temperature column as viewed in the tree table dialog.

Testers can also read a description of each test (4), and view the scripts used to create them. (4)

Features of Dataset Applications for Books


Datasets Compiled From Book Examples

The remaining screenshots demonstrate how data sets can be used even outside of a lab context generating experiment data. The pictured data set represents a corpus of linguistic examples mined from Wiley's *Blackwell Handbook of Pragmatics*. Creating data sets from book-length publications can encompass several steps:

Text Mining In the case of linguistics, this involves locating example sentences within linguistics texts and storing them as an independent corpus.

Canonical Formatting If possible, linguistics texts should be annotated so that extracting examples can be automated.


Annotation Linguistic corpuses are often annotated to identify structural details, beyond raw text, in each sample.

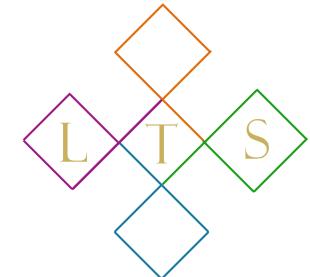

Linguistic Technology Systems



Creating a Data Set from a Book

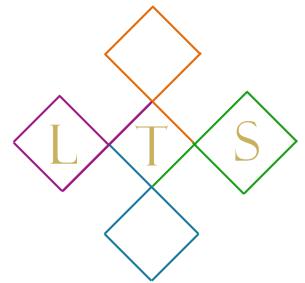

This screenshot shows a linguistics dataset that illustrates several advanced interactive features made possible by the Dataset Creator's Qt-based front-end technology. Useful features include context menus embedded with drop-down selections (1) and button/checkbox groups for filtered scrolling through a list of samples (2 and 3).

The screenshot displays a Qt-based application window for creating a dataset from a book. The interface includes:

- Filter Forms** and **Filter Issues** sections with checkboxes for selecting categories.
- A main text area showing a sentence: "I have received the e-mail. ?Nevertheless it's in Dutch."
- A tree view of text samples:
 - She'll be better off in a new place.
 - I have received the e-mail, but it's in Dutch.
 - I have received the e-mail. ?Nevertheless it's in Dutch.** (Selected item)
 - Her husband is in hospital. Yet she's seeing other men.
 - Her husband is in hospital. Yet she's seeing other men.
 - Her husband is in hospital and she's seeing other men.
 - Her husband is in hospital. But she's seeing other men.
 - Her husband is in hospital. Nevertheless she's seeing other men.
 - Oscar knocked the vase and it broke.
 - Did Oscar break the vase?
- Form**, **Dialog**, and **Text** buttons in the top right.
- Jump to Chapter** dropdown menu with numbered options (1-21).
- Filtered Up/Down**, **Examples Up/Down**, **Peer Up/Down**, **Chapter Start/End**, and **Chapter Up/Down** buttons at the bottom left.
- First** button, **Auto Expand** switch (ON), and **OK**/**Process** buttons at the bottom right.
- Minimize** button at the bottom left.

Annotations with red circles and numbers:

- Annotation 1: Points to a context menu with options like "Activate TCP", "<select>", "Customize", and "Cancel".
- Annotation 2: Points to the **Filter Issues** section, specifically the checkbox group for "Scope", "Polarity", "Belief", "Convention", and "Idioms".
- Annotation 3: Points to the **Chapter Up/Down** button in the bottom navigation bar.

Interacting with Data Samples

Filter Forms

Text
 Inton.

Filter Issues

Logic
 Scope
 Convention
 Idioms

The linguistic samples comprising this data set are all example sentences, phrases, or dialog-snippets that are used, in the *Blackwell Handbook of Pragmatics*, as expository samples for case-studies of various linguistic phenomenon and pragmatics, semantics, and grammatical theories.

Activate TCP Screenshot
Customize Build

Show Original

OFF

Text

- ▶ She was never really happy here. So she's leaving.
- ▶ She'll be better off in a new place.
- ▶ I have received the e-mail,
- ▶ I have received the e-mail.
 - I have received the e-mail.
- ▶ Her husband is in hospital.
- ▶ Her husband is in hospital
- ▶ Her husband is in hospital.
- ▶ Her husband is in hospital.
- ▶ Oscar knocked the vase ar
- ▶ Did Oscar break the vase?

Show in Document (requires XPDF)

Copy Text to Clipboard


Launch Triple-Link Dialog with Text

Copy Samples to Clipboard

Highlight (scroll from here)

Form	#	Issue	Page	Chapter
Text	19	(N_A)	256	10
Dialog	20	(N_A)	256	10
Text	21	(N_A)	257	10
Text	22	(N_A)	257	10
	22		257	10
Text	23	(N_A)	257	10
Text	24	(N_A)	257	10
Text	25	(N_A)	257	10
Text	26	(N_A)	257	10
Text	27	(N_A)	260	10
Dialog	28	(N_A)	260	10

Filtered Up/Down

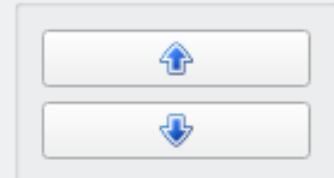

Examples Up/Down



Peer Up/Down



Chapter Start/End



Chapter Up/Down



First



Auto Expand
ON

Minimize

OK

Proceed

Close

Linking Back to the Book

Filter Forms Filter Issues

Text Dialog
 Intonation Paragraph
 Ambiguity Context
 Polarity Belief

In France, Watergate wouldn't have done Nixon any harm.

Text

- ▶ On the table.
- ▶ Every bottle is empty.
- ▶ She seized the knife and stabbed her husband.
- ▶ The Boston Marathon will take place next week. Max thought
- ▶ My friends were under the impression that I was running a
- ▶ Sue believes Luke has a child and that Luke's child will visit
- ▶ In France, Watergate wouldn't have done Nixon any harm.
 In France, Watergate wouldn't have done Nixon any harm
- ▶ In France, Watergate wouldn't have done Nixon any harm
- ▶ The crook paid them with fake money.
- ▶ The crook thought he was paying them with fake money, b
- ▶ We do not know much about this part of the brain, which p

Filtered Up/Down Examples Up/Down Peer Up/Down

XpdfReader: /home/nlevisrael/scign/HP/ar/cpp/about/about-files/main.pdf

File Edit View Window Help

690 / 867 | ← → | - + | 113% | find

/home/nlevisrael/scign/HP/ar/cpp/about/about-files/main.pdf

After browsing through the data set, users can link back to the original text to see the current author's discussion of particular examples.

Outline

- 15. The Pragmatics o...
- 16. Pragmatics of La...
- 17. Constraints on Ell...
- ▼ III Pragmatics and its Int...
- 18. Some Interaction...
- 19. Pragmatics and A...
- 20. Pragmatics and S...
- 21. Pragmatics and t...
- 22. Pragmatics and t...
- 23. Pragmatics and I...
- 24. Historical Pragma...
- 25. Pragmatics and L...
- 26. Pragmatics and C...
- ▼ IV Pragmatics and Cogni...
- 27. Relevance Theory
- 28. Relevance Theory...
- 29. Pragmatics and C...
- 30. Pragmatic Aspect...
- 31. The Pragmatics o...
- 32. Abduction in Nat...
- Bibliography
- Index

from the matched spaces to create a **blended mental space** with emergent structure. This creates a conceptual integration network of the form shown in figure 29.4. The generic space represents the structure shared by the inputs. The square in the blended space stands here for the emergent structure which arises in the blending.

So, for example, one way to understand the counterfactual in (6):

(6) In France, Watergate wouldn't have done Nixon any harm.

is to build a conceptual integration network that partially matches two input spaces with prominent aspects of the American political system and the French political system, respectively, and develops an emergent blended space

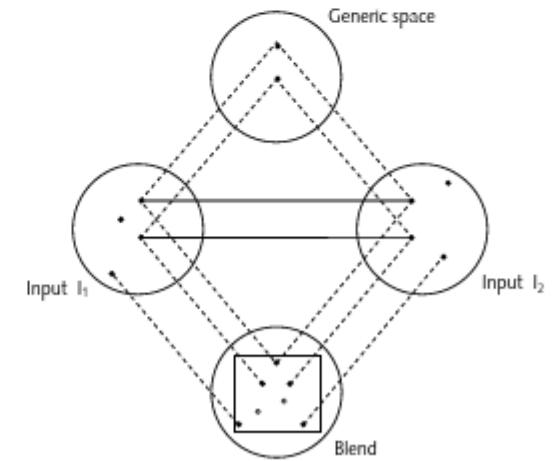


Figure 29.4 Diagram showing conceptual blending

A Linguistics Annotation System


Tools to Facilitate Annotating Linguistic Corpora

The final three screenshots show an example of how a custom-signed application can facilitate the task of building an annotated corpus from a linguistics text. The components demonstrated here enable several strategies (which can be combined) for describing parsing structures and the logical composition of language samples:

S-Expressions Representing linguistic units as semantic and syntactic transformations triggered by words assigned to “functional” types.

Dependency Grammar Representing phrase structures via inter-word syntactic relationships.

Link Grammar Representing linguistic structure via connectors internal to each word-sense. Inter-word links are activated when each word in the pair has a connector compatible with the other word's connector. Intuitively, a connector represents how one word's meaning or grammatical contribution can be “completed” by linking to a separate word.

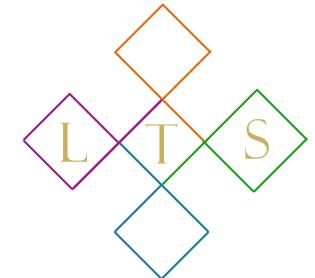

Linguistic Technology Systems



Building Parsing Models

The main Dataset Application for the demo Linguistics data set includes a distinct window for building annotations on language examples. Features of this component include an entry area for building S-Expression models of sentences with visual cues such as parenthesis-matching color highlights (1) and sidebars where users can add inter-word annotations using relations drawn from Link Grammar and CoNLL-U Dependency Grammar (2).

OK Proceed Cancel

Pivot	Ig:Source Expectation	Ig:Target Expectation	Ig: Description	Dg:Source Expectation	Dg:Ta Expect

Filter Issues

Dialog Ambig Polarit

Paragraph

She has invited at least Sarah and James.

Add (Pair/Triple) Reset

SXPR Mode

(has invited) 1

Link Grammar (Completion Layer)

AAA	AF	AJ	AL	AM	AN	AZ	B	BI	BT
BW	C	CC	CO	CP	CQ	CV	CX	D	DD
DG	DP	DT	E	EA	EB	EC	EE	EF	EI
EL	EN	EP	EQ	ER	EW	EZ	FL	FM	G
GN	H	HA	I	ID	IN	IV	J	JG	J
Q	JT	K	L	LE	LI	M	MF	MG	MJ
MV	MX	N	NA	ND	NF	NI	NJ	NM	NN
NO	NR	NS	NT	NW	O	OD	OF	ON	OT
OX	P	PF	PH	PP	Q	QI	QJ	QU	R
RJ	RS	RW	S	SF	SFI	SI	SJ	SX	SXI
TA	TD	TH	TI	TM	TO	TQ	TR	TS	TT
TW	TY	TZ	U	UN	V	VC	VJ	W	WN
WR	WV	X	XI	Y	YP	YS	Z	ZZZ	

Using Dock Widgets For Flexible Layout

The screenshot shows a software application window with several docked components. On the left, there's a vertical sidebar with 'Filter Forms' (Text, Intonation) and 'Text' sections. A large central area displays a table of sentences. A floating dock widget (1) contains text about link/dependency relations. Another docked window (2) shows dependency grammar details. A bottom navigation bar has 'OK', 'Proceed', and 'Cancel' buttons.

The list of link/dependency relations is also isolated as a "dock widget" that may be dragged to float above the other application windows (1), or "docked" at different positions (left or right) on its parent window. This screenshot also shows a dialog box used for a precis of the individual CoNLL-U (Conference on Natural Language Learning - Universal) and Link Grammar relations (2).

Dependency Grammar (Refinement)

acl	advcl	advmod
appos	aux	case
ccomp	clf	compound
cop	csubj	dep
discourse	dislocated	expl
flat	goeswith	iobj
mark	nmod	nsubj
obj	obl	orphan
punct	reparandum	root
xcomp		

nsbj: nominal subject

A nominal subject (nsbj) is a nominal which is the syntactic subject and the proto-agent of a clause. That is, it is in the position that passes typical grammatical tests for subjecthood, and

Ok Hide Details... Minimize

Issue Page
(N/A) 698
(N/A) 699
(N/A) 700
(N/A) 700
(N/A) 702
(N/A) 703
(N/A) 703
(N/A) 704
(N/A) 704
(N/A) 704
Proceed Cancel

Link and Dependency Grammar Annotations

dsmain-console <2>

Filter Forms

Text Intonation

She has invited at least Sarah and James

Add at least Reset

SXPR Mode

Clear <- (((->)) -> Copy Read Splice Back Splice

Text

- We do not know
- Fred won't order
- Him be a doctor
- It's not good, b
- Did Louise order
- She doesn't ha
- She didn't get
- You couldn't ge
- She has invited**
She has invited
at least five

Pivot Ig:Source Expectation Ig:Target Expectation Ig: Description dg:Source Expectation

0 {0}	has invited			
1 {1}	invited She			
2 {2}	Sarah James			
3 {3}	at least			

Users can select word-pairs from samples being annotated and then identify the relationship between the selected words, as understood according to Link or Dependency Grammars. The list of link/dependency relations provides an interface to research and read overviews about the relationships.

Dependency Grammar (Refinement Layer)

acl advcl advmod amod
appos aux case cc
ccomp clf compound conj
cop csubj dep det
discourse dislocated expl fixed
flat goeswith iobj list
mark nmod nsubj nummod
obj Show Info han parataxis
punct Unmark t vocative
xcomp Auto Insert

OK Proceed Cancel


* Minimize

* Minimize

Proceed

Technological Components of Dataset Creator

- ◆ **A3R (Application-as-a-Resource):** A3R Applications are self-contained, citable resources and tools which can conform to modern resource documentation standards, such as the Research Object protocol. Dataset Applications can use A3R tools and the A3R protocol to create custom desktop-style applications for viewing and analyzing research data, while bundling the dataset and application code into a citable Research Object.
- ◆ **HTXN (Hypergraph Text Encoding Protocol):** HTXN is a protocol for encoding documents' character streams and document structure via "standoff annotation" (i.e., character encoding is fully separate from structural representation). HTXN supports diverse kinds of document models, including L^AT_EX, XML, RDF, and Concurrent Markup.
- ◆ **MOSAIC (Multiparadigm Ontologies for Scientific and Academic Publishing):** Mosaic provides data-modeling capabilities which reflect a diversity of Information Representation paradigms, such as Hypergraphs, Conceptual Spaces, and Object-Oriented Simulation. Mosaic includes the Mosaic/HTXN Semantic Document InfoSet and Mosaic Plugin Framework (see below).

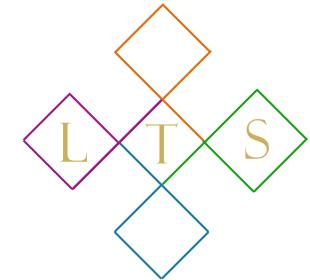


Linguistic Technology Systems



A3R Document Viewers

A3R applications may embed viewers for document formats such as e-Pub, HTML, and PDF; then supplement conventional publications with special components customized for individual manuscripts: e.g. (as in this case), a widget allowing readers to visually explore patterns in classical Indian music.

The screenshot shows a digital journal interface for 'ANTHROPOLOGY AND HUMANISM'. The top navigation bar includes icons for settings, library, and reading, and tabs for HTML Source, Lisp, CSS, and XML. The main content area displays the journal's masthead and a featured article titled 'Ethnographer as Apprentice: Embodying musical Knowledge in South India' by Michael Weidman, published on December 26, 2012, with a full publication history link. A central modal window titled 'Display Tala Types: Jhoomra/Dhamar (14 beats)' contains a visual representation of a musical pattern. It features a grid of colored rectangles (red, purple, green) arranged in a specific sequence. Below this is a slider labeled 'Patterns' with 'Pattern 1 (3-4-3-4)' on the left and 'Pattern 2' on the right. The file path '/extension/ScignSeer/articles/svg/tala.svg' is shown. At the bottom of the modal are 'OK' and 'Proceed' buttons. The journal's volume information (Volume 37, Issue 2, December 2012, Pages 214-235) and a thumbnail of the journal cover are also visible.


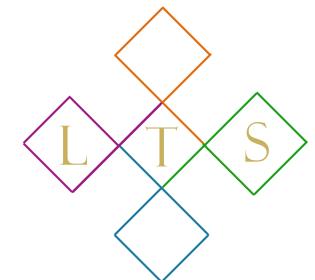


Linguistic Technology Systems



A3R Document Viewers as Embedded Components

Document Viewers may also be embedded in host applications which provide domain-specific visualization capabilities. For example, chemistry papers might be viewed within IQmol (a Qt-based program for molecular visualization and physical/chemical analysis) via an A3R document-viewer plugin.

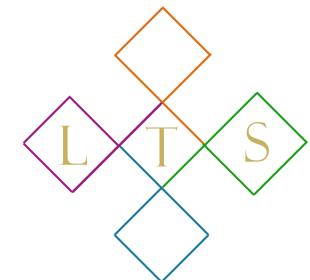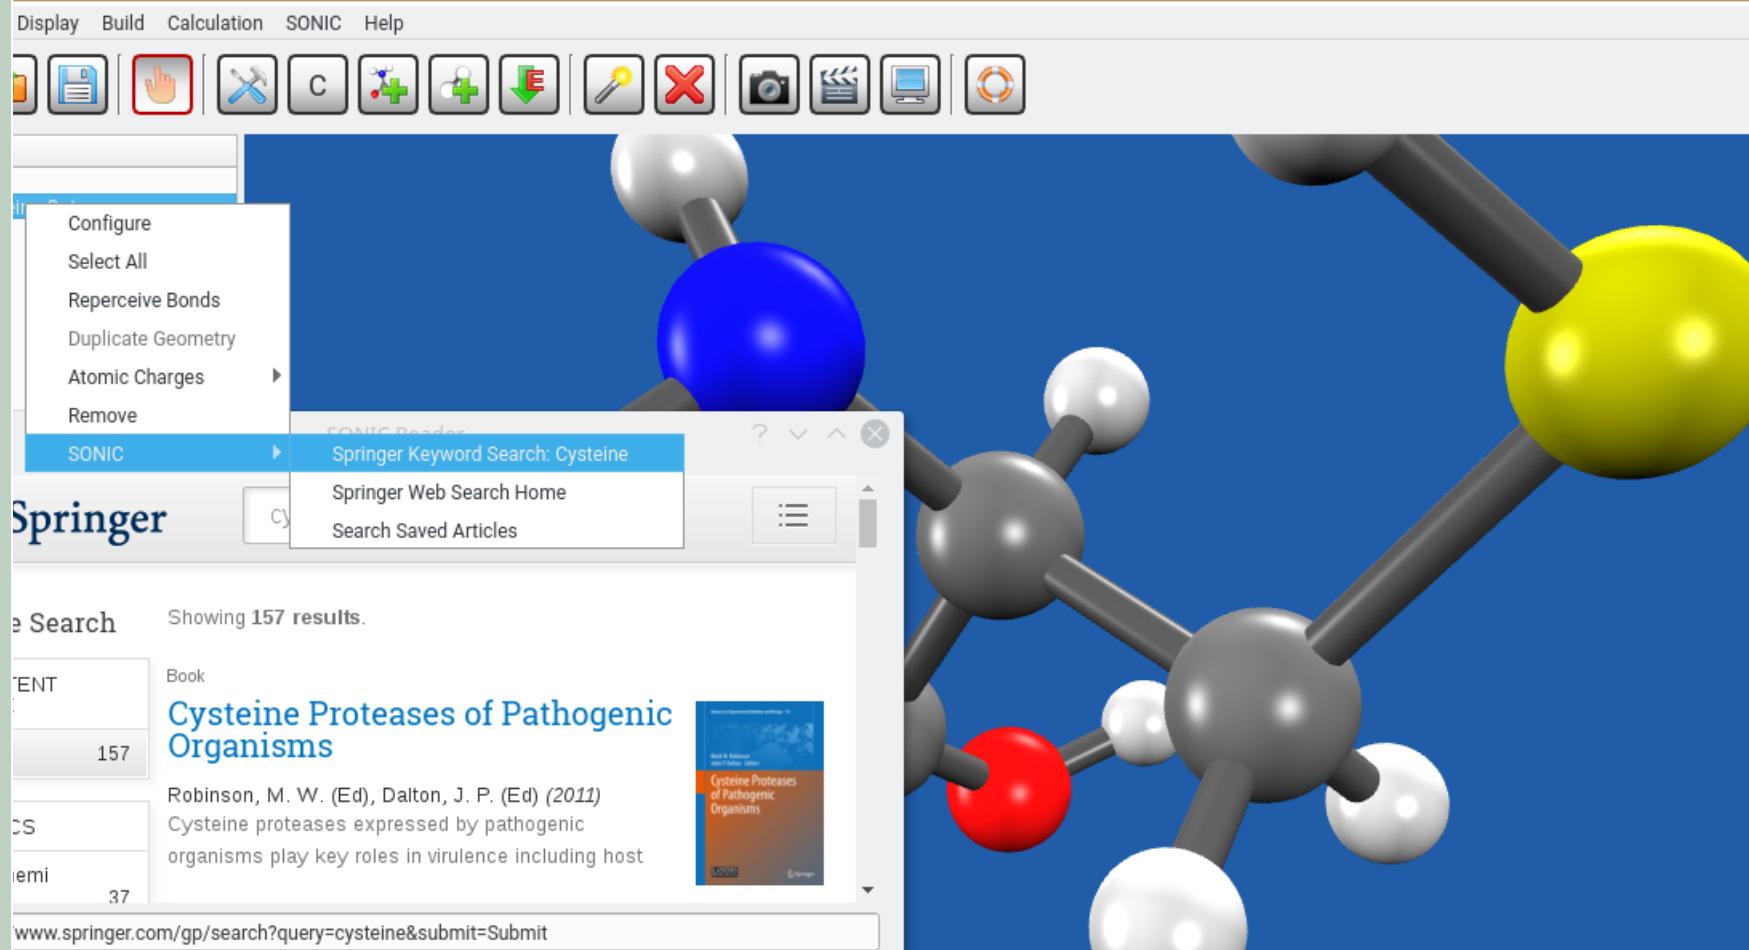


Linguistic Technology Systems



Document Viewers Augmented With APIs

Another strategy for interactive publications is linking documents with APIs maintained by publishers, or by cultural or educational institutions.

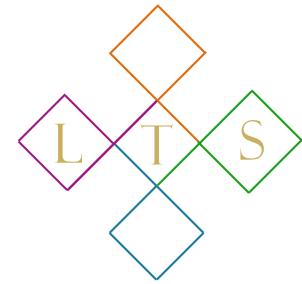

View Instructions

As an example, documents mentioning artifacts held in a museum can provide features to view more information about those museum-pieces through the host institution's API.



MEDAL

 Click the icon to save this object

This is a **MEDAL**. We acquired it in **1920**. Its model is a part of the **Product Design and Decorative Arts** department.

Cite this object as

Medal; bronze; 1920-31-1

Row: 0 Column: 0


Embedded Multimedia

Custom-built A3R document viewers can provide convenient access to multimedia content embedded in or linked to texts — including audio files, videos, and 3D graphics scenes or models.

Allurus fulgens styani (also known as *a. f. refulgens*). Only found in China (in the Hengduan

Mo
My
The
ab

In this case a video player is launched in a dialog box, floating above the article text. For those reading digital books or articles, videos and other multimedia content can be presented through secondary windows launched via context menus; text and multimedia may thereby be viewed side-by-side.

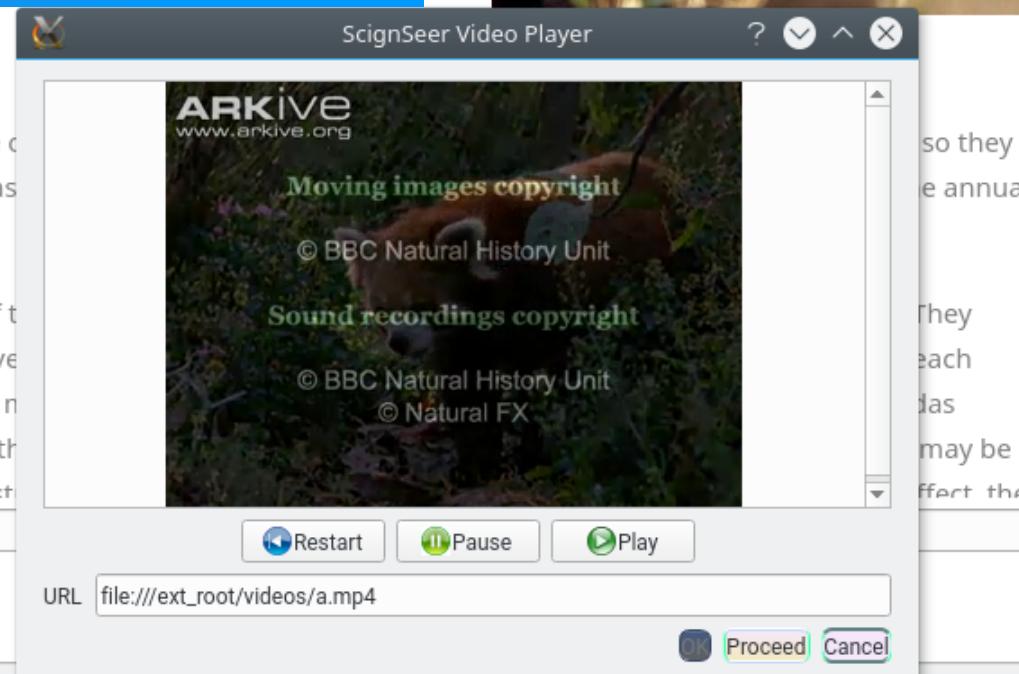


Behavior

Red pandas are generally solitary, but there are a couple of cases where they develop extended associations with their mothers that last throughout the breeding season.



In terms of territoriality, red pandas tend to have overlapping home ranges with other. This means that they may search for the same food sources, particularly during the breeding season.

arkive.org/red_panda/about-the-red-panda/

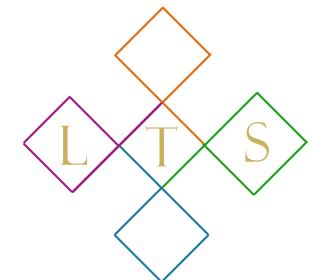


Linguistic Technology Systems



Components of Mosaic

- ◆ **Mosaic/HTXN Semantic Document Infoset (MH-SDI):** The Mosaic/HTXN Infoset is similar to an XML Infoset, embodying a machine-readable representation of documents' text, structure, and secondary resources which can be accessed according to different protocols (such as a Document Object Model). In contrast to XML, the MH-SDI supports more detailed semantic queries against document structures, such as identifying sentence boundaries and matching multimedia assets to manuscript locations.
- ◆ **Mosaic Plugin Framework (MPF):** The Mosaic Plugin Framework is a protocol for embedding plugins or extensions within document viewers, scientific applications, and multimedia software, with the plugins interoperating to implement multi-application networks. In particular, document viewers can launch and send data to scientific or multimedia applications so that readers can access multimedia content embedded in publications.

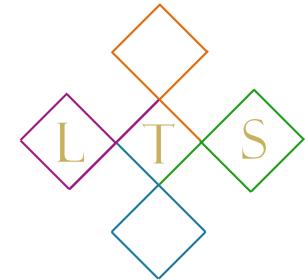


Linguistic Technology Systems



MOSAIC as an Alternative to Semantic Web Ontologies

Many experts have critiqued the Semantic Web for lacking conceptual rigor, adequate modeling for multi-scale information, and intrinsic representations for software requirements. To address these limitations, MOSAIC alternative Semantic Web paradigms with the following features:

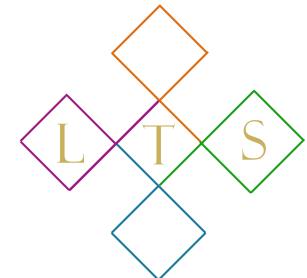

Inter-Application Networking Protocol

- Interoperability is achieved by applications sharing modular and mostly autonomous code libraries that implement data models via strong typing, with (de)serialization and network/request logic implemented at the type level.
- A hypergraph-based type theory presents an overarching type-theoretic data-modeling frameworks which subsumes the type systems of most programming languages.

Multiscale, Requirements-Focused Resource Description






- Hypergraph-based Resource Framework to intrinsically support multi-scale data structures.
- Workflow-oriented “Meta-Procedure” Interface Definition framework to enforce procedural alignment among applications.
- The Mosaic networking and Resource Description protocols can be concretely implemented via the Mosaic Plugin Framework (see the following slides).

Linguistic Technology Systems



Thank You!

Please contact Linguistic Technology Systems for more information about dsC and/or other Software Development and Software Language Engineering Solutions: (917) 817-2184.

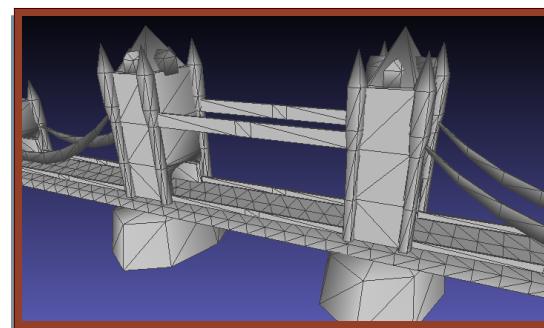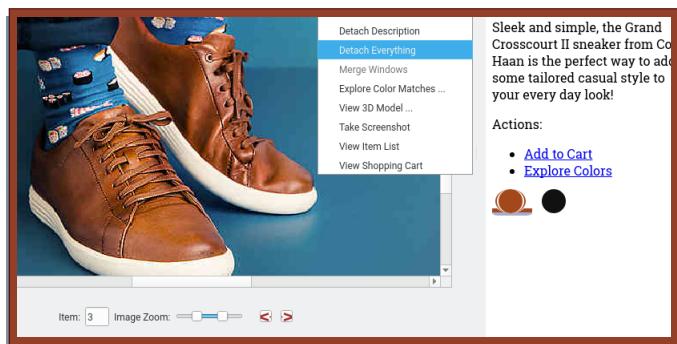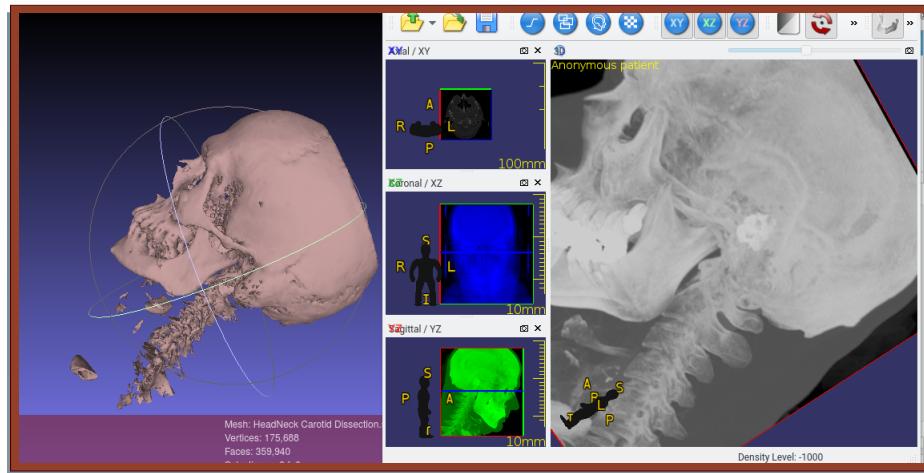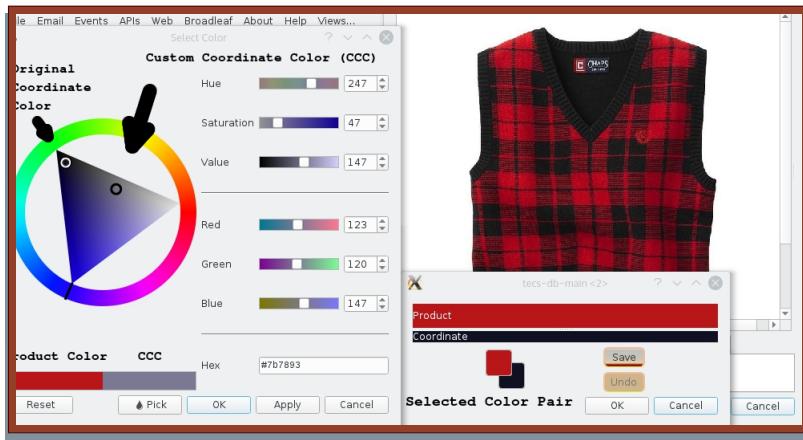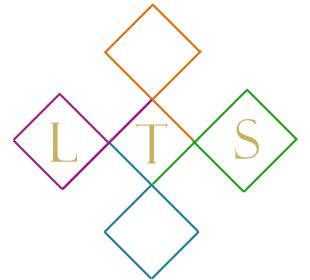

Linguistic Technology Systems

