Benchmark Report

Benchmarking of NQCH's

October 23, 2025

1. Report of Changes

Platform: sinq20
Calibration-id: *fdb93a3978fe6356741e31b98c93c68837767081*
Calibration date: *2025-09-19 10:30:45*
Calibration note: thisisanoteforcalibration...

Experiment-id: *1234*
Experiment date: *2025-10-20 10:30:45*
Experiment note: *this is a note for the run... oeairjgaisd!*

Platform: N/A
Calibration-id: *fdb93a3978fe6356741e31b98c93c68837767081*
Calibration date: *2025-09-19 10:30:45*
Calibration note: Niqeurgjoiuerhfasdif

Experiment-id: *1234*
Experiment date: *2025-10-20 10:30:45*
Experiment note: *this is a note for the run... oeairjgaisd!*

2. Version Comparison

Library	Version	Library	Version
qibo	0.2.19	numpy	2.2.6
qibolab	0.2.9	qibocal	0.2.3
matplotlib	3.10.3	scipy	1.15.3
scikit-learn	1.6.1	pandas	2.2.3
networkx	3.4.2	sympy	1.14.0
torch	2.7.0		

Library	Version	Library	Version
qibo	0.2.19	numpy	2.2.6
qibolab	0.2.9	qibocal	0.2.3
matplotlib	3.10.3	scipy	1.15.3
scikit-learn	1.6.1	pandas	2.2.3
networkx	3.4.2	sympy	1.14.0
torch	2.7.0		

3. One and two qubit fidelities

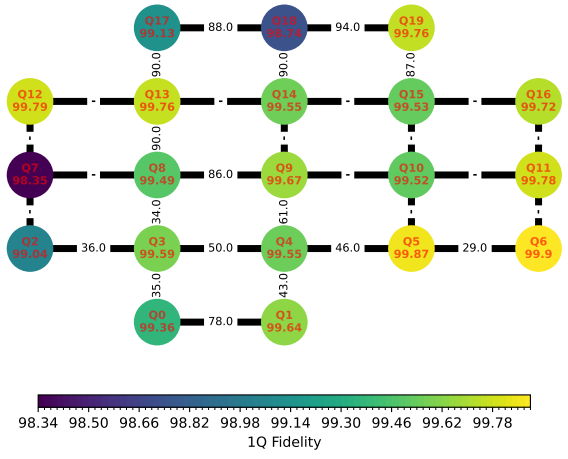

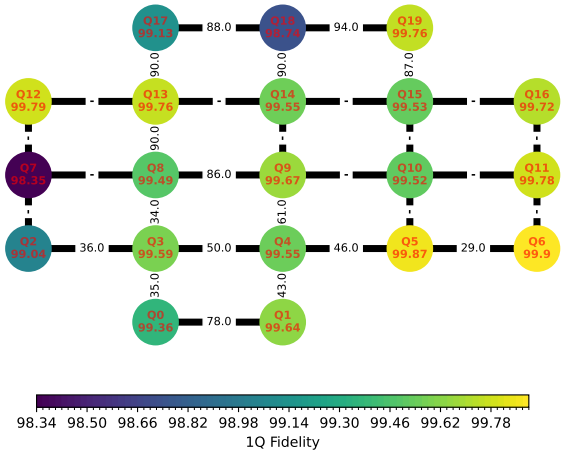

4. Statistics

	Average	Median	Min	Max
T1 (ns)	1.28e+04	1.23e+04	646	3.65e+04
T2 (ns)	2.36e+25	4.11e+03	125	9.43e+26
Fidelity	None	None	None	None
RO fidelity	0.794	0.777	0.777	0.927
Mermin Max	N/A			

	Average	Median	Min	Max
T1 (ns)	1.28e+04	1.23e+04	646	3.65e+04
T2 (ns)	2.36e+25	4.11e+03	125	9.43e+26
Fidelity	None	None	None	None
RO Fidelity	0.794	0.777	0.777	0.927
Mermin Max	N/A			

5. Best Qubits Selection

k-qubits	Best Qubits	Fidelity
2	18, 19	0.940
3	14, 18, 19	0.922
4	17, 14, 18, 19	0.908
5	13, 17, 14, 18, 19	0.907

k-qubits	Best Qubits	Fidelity
2	18, 19	0.940
3	14, 18, 19	0.922
4	17, 14, 18, 19	0.908
5	13, 17, 14, 18, 19	0.907

6. Benchmark Results

Qubit n	Fidelity	Error Bars

Qubit n	Fidelity	Error Bars

7. Mermin

- **Runtime:** 1.44030 seconds.
- **Qubits used:** — No “qubits_used” provided. —

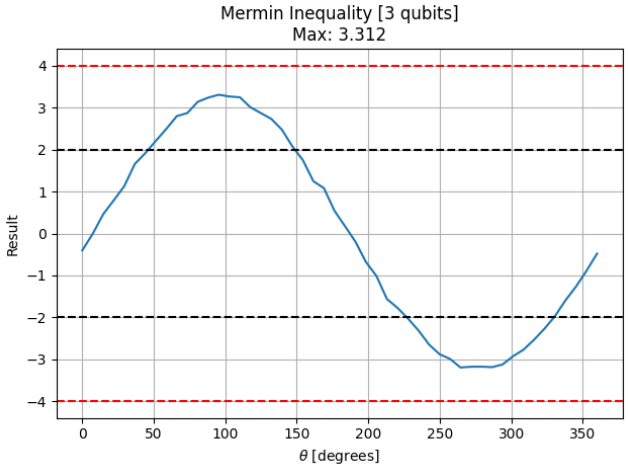

- **Runtime:** 1.44030 seconds.
- **Qubits used:** — No “qubits_used” provided. —

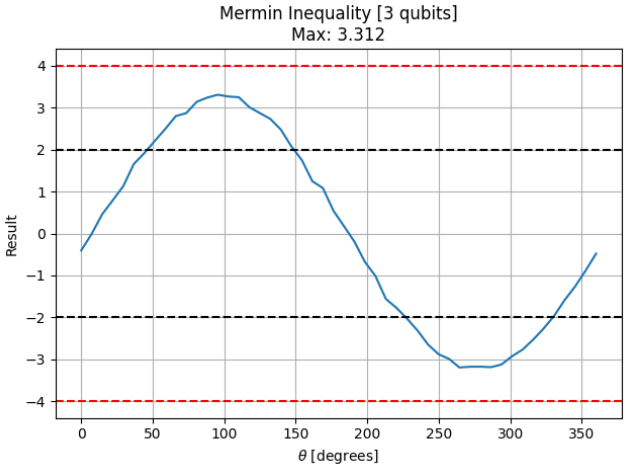

8. Grover - 2 qubits

- **Runtime:** 11.27258 seconds.
- **Qubits used:** — No “qubits_used” provided. —

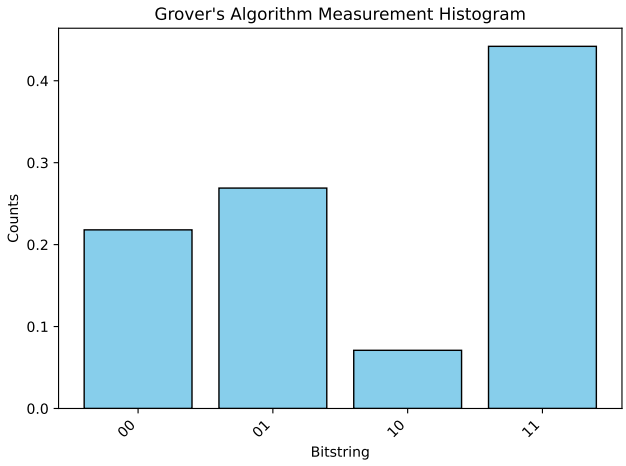

- **Runtime:** 11.27258 seconds.
- **Qubits used:** — No “qubits_used” provided. —

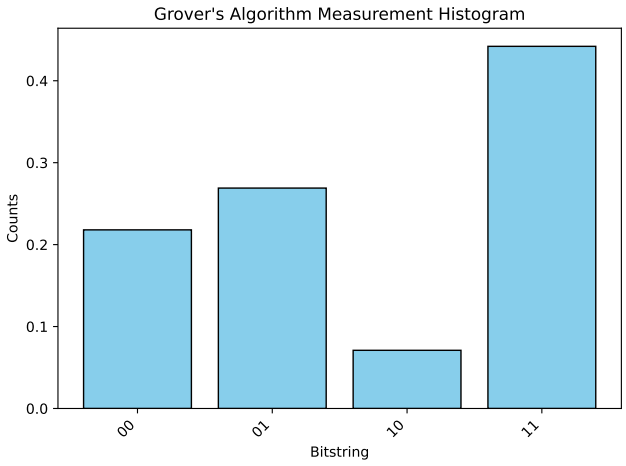

9. Grover - 3 qubits

Grover’s algorithm for 3 qubits executed on sinq20 backend with 1000 shots per circuit. We measure the success rate of finding the target state ’111’ for each pair of qubits in [[17, 13, 18, 14]].

- **Runtime:** 15.26296 seconds.
- **Qubits used:** — No “qubits_used” provided. —

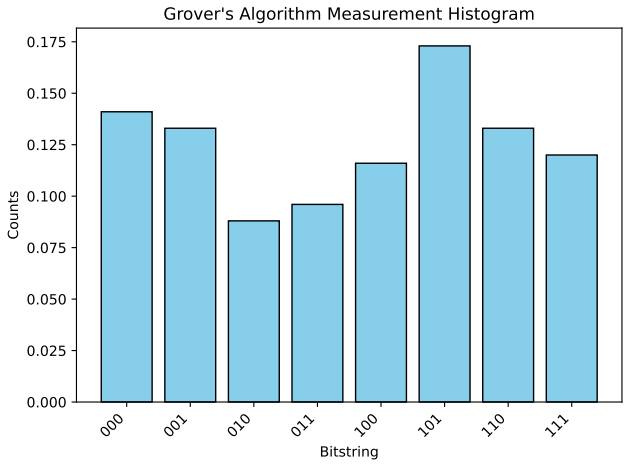

- **Runtime:** 15.26296 seconds.
- **Qubits used:** — No “qubits_used” provided. —

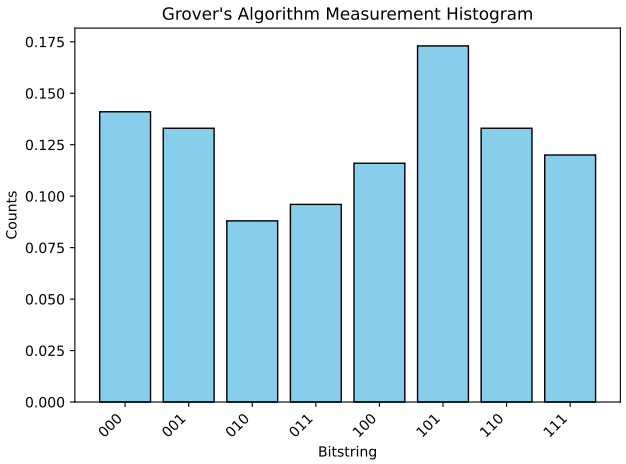

10. GHZ state preparation

GHZ circuit with 3 qubits executed on sinq20 backend with 1000 shots. We measure the success rate of obtaining the GHZ state (all 0s or all 1s).

- **Runtime:** 9.71072 seconds.
- **Qubits used:** — No “qubits_used” provided. —

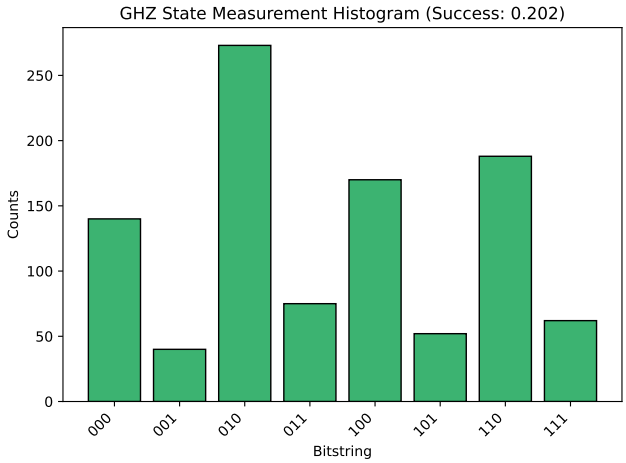

- **Runtime:** 9.71072 seconds.
- **Qubits used:** — No “qubits_used” provided. —

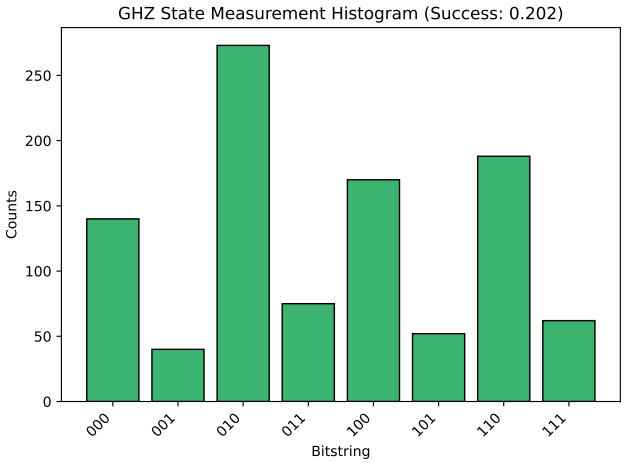

11. Process Tomography state preparation

- **Runtime:** — No runtime provided. —
- **Qubits used:**

cz_[]_qubits0_1_fdb93a3978fe6356741e31b98c93c68837767080

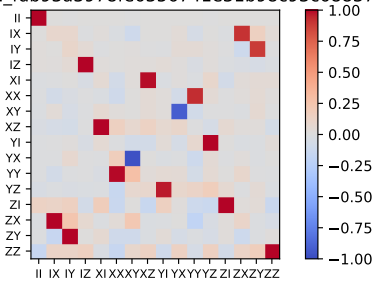

gpi2_[0.7854]_qubit0_fdb93a3978fe6356741e31b98c93c68837767080

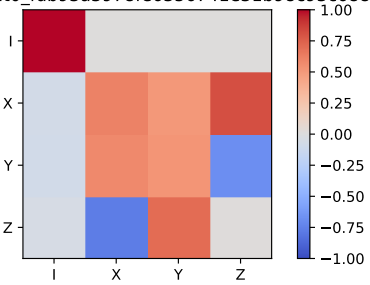

gpi2_[0.7854]_qubit1_fdb93a3978fe6356741e31b98c93c68837767080

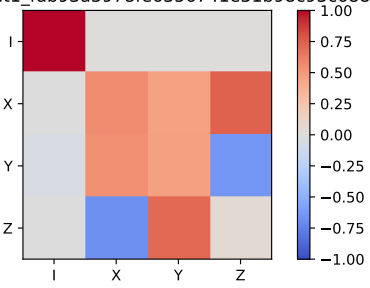

gpi2_[1.0472]_qubit0_fdb93a3978fe6356741e31b98c93c68837767080

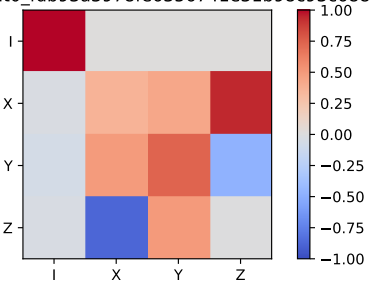

gpi2_[1.0472]_qubit1_fdb93a3978fe6356741e31b98c93c68837767080

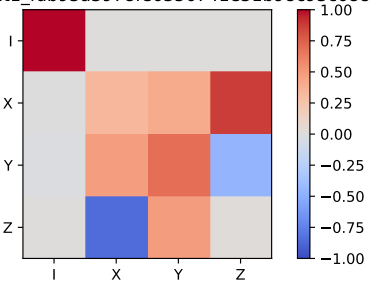

- **Runtime:** — No runtime provided. —
- **Qubits used:**

cz_[]_qubits0_1_fdb93a3978fe6356741e31b98c93c68837767080

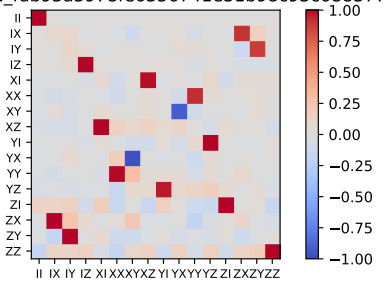

gpi2_[0.7854]_qubit0_fdb93a3978fe6356741e31b98c93c68837767080

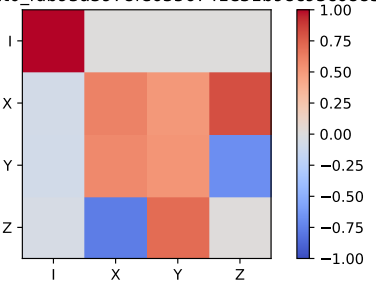

gpi2_[0.7854]_qubit1_fdb93a3978fe6356741e31b98c93c68837767080

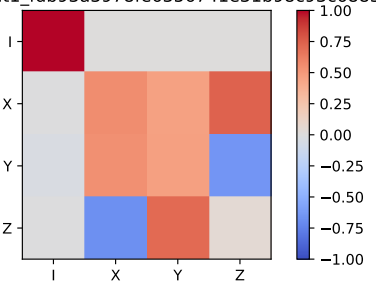

gpi2_[1.0472]_qubit0_fdb93a3978fe6356741e31b98c93c68837767080

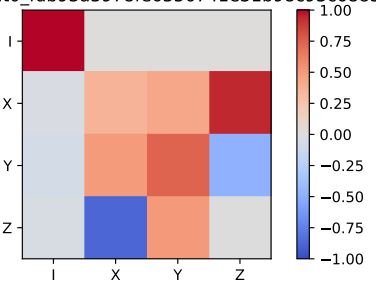

gpi2_[1.0472]_qubit1_fdb93a3978fe6356741e31b98c93c68837767080

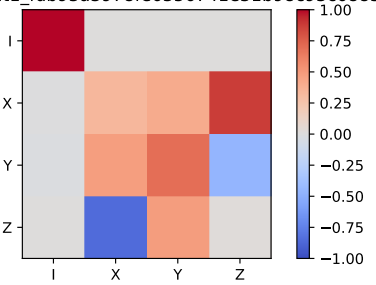

12. Reuploading Classifier

Reuploading classifier with 1 qubits, 10 layers, depth of 20, 500 shots.

- **Runtime:** None
- **Qubits used:** — No “qubits_used” provided. —

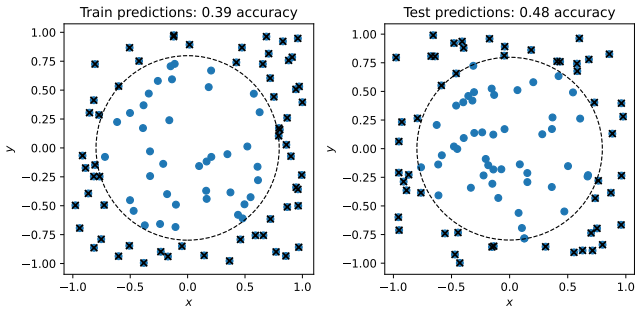

- **Runtime:** None
- **Qubits used:** — No “qubits_used” provided. —

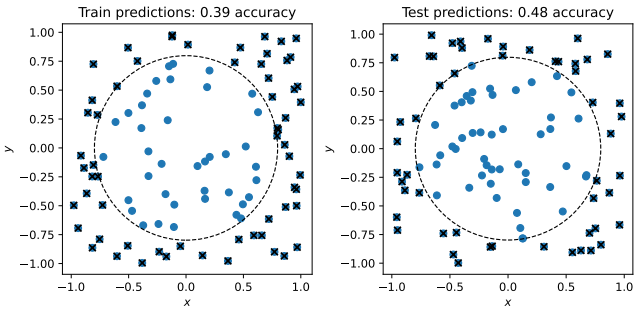

13. QFT Plots

Implementation of the Quantum Fourier Transform on different subsets of three qubits. The number of gates is 12, the depth of the circuit is 7

- **Runtime:** 13.192451105453074
- **Qubits used:** — No “qubits_used” provided. —

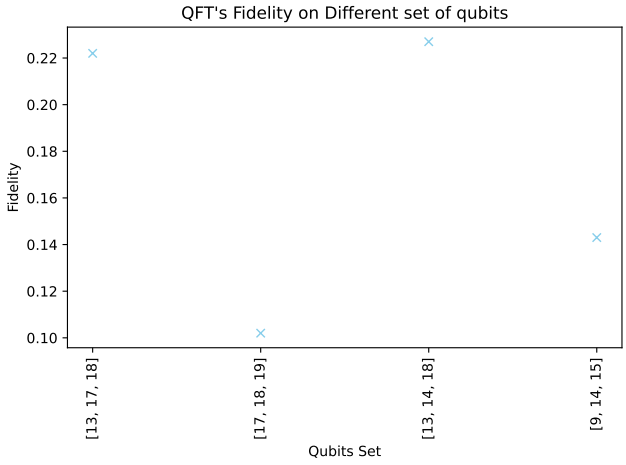

- **Runtime:** 13.192451105453074
- **Qubits used:** — No “qubits_used” provided. —

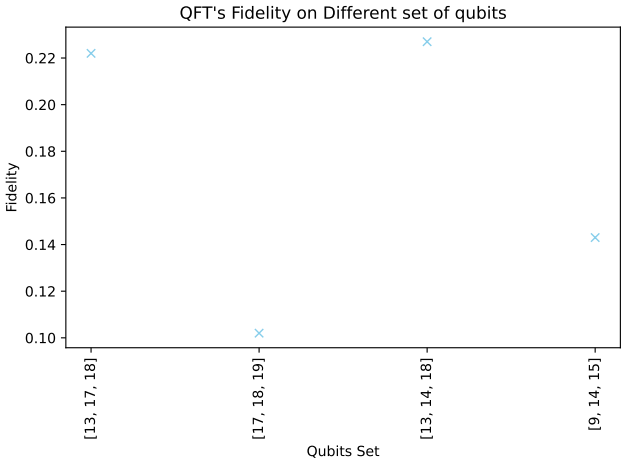

14. Amplitude Encoding

- **Runtime:** 11.75428 seconds.
- **Qubits used:** [0, 1, 4]

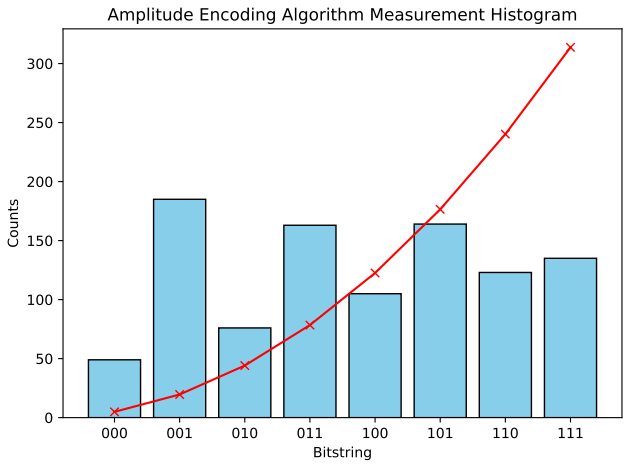

- **Runtime:** 11.75428 seconds.
- **Qubits used:** [0, 1, 4]