

Benchmark Report

Benchmarking of NQCH's quantum computer

November 23, 2025

1. Report of Changes

Platform: sinq20

Calibration-id: 1e1f7e1d1af58009eda1986bb3689e6b9b2356b6

Calibration date: 2025-11-20 03:59:33

Calibration note: chore(sinq20): Update CZ for Q4-Q5

Experiment-id: None

Experiment date: 2025-11-23 02:38:14

Experiment note: Scheduled runs of experiments

Platform: sinq20

Calibration-id: 2447f0fad33dfea493b4e7bc4143c8bd2e28d979

Calibration date: 2025-11-05 08:58:37

Calibration note: chore(sinq20): Retune CZ for Q5-Q6 and Q17-Q18

Experiment-id: 20251108115234

Experiment date: 2025-11-08 11:54:43

Experiment note: First execution after malfunctioning of cables.


2. Version Comparison

Library	Version	Library	Version
qibo	0.2.19	numpy	2.2.6
qibolab	0.2.9	qibocal	0.2.3
matplotlib	3.10.3	scipy	1.15.3
scikit-learn	1.6.1	pandas	2.2.3
networkx	3.4.2	sympy	1.14.0
torch	2.7.0		

Library	Version	Library	Version
qibo	0.2.19	numpy	2.2.6
qibolab	0.2.9	qibocal	0.2.3
matplotlib	3.10.3	scipy	1.15.3
scikit-learn	1.6.1	pandas	2.2.3
networkx	3.4.2	sympy	1.14.0
torch	2.7.0		

3. One and two qubit fidelities

The single qubit fidelity is obtained via Randomized-Benchmarking. The two-qubit fidelity is the "Bell-state fidelity".

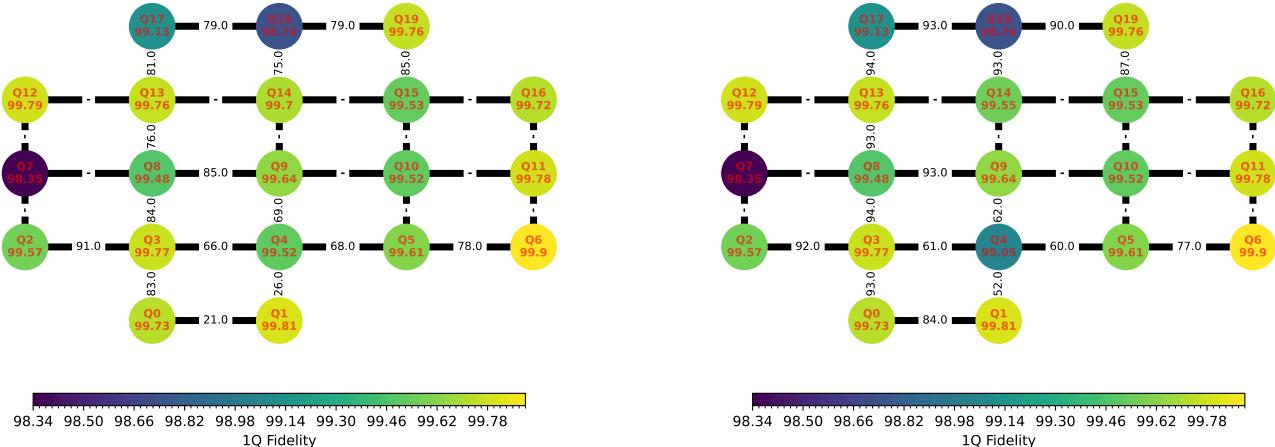

4. Statistics

	Average	Median	Min	Max
T1 (ns)	1.28e+04	1.23e+04	646	3.65e+04
T2 (ns)	2.36e+25	4.11e+03	125	9.43e+26
Fidelity	None	None	None	None
RO fidelity	0.794	0.777	0.777	0.927

	Average	Median	Min	Max
T1 (ns)	1.28e+04	1.23e+04	646	3.65e+04
T2 (ns)	2.36e+25	4.11e+03	125	9.43e+26
Fidelity	None	None	None	None
RO Fidelity	0.794	0.777	0.777	0.927

5. Best Qubits Selection

k-qubits	Best Qubits	Fidelity
2	2, 3	0.914
3	2, 3, 8	0.878
4	2, 3, 8, 9	0.869
5	0, 2, 3, 8, 9	0.858

k-qubits	Best Qubits	Fidelity
2	13, 17	0.945
3	13, 17, 18	0.938
4	3, 8, 13, 17	0.936
5	3, 8, 9, 13, 17	0.935

6. Benchmark Results

Qubit n	Fidelity	Error Bars
0	0.997	± 0.00041
1	0.998	± 0.0006
2	0.996	± 0.000236
3	0.998	± 0.000236
4	0.995	± 0.000486
5	0.996	± 0.000826
6	0.999	± 0.000308
7	0.983	± 0.00219
8	0.995	± 0.00054
9	0.996	± 0.000782
10	0.995	± 0.000441
11	0.998	± 0.000246
12	0.998	± 0.000396
13	0.998	± 0.000344
14	0.997	± 0.000357
15	0.995	± 0.000647
16	0.997	± 0.000463
17	0.991	± 0.0006
18	0.987	± 0.00163
19	0.998	± 0.00042

Qubit n	Fidelity	Error Bars
0	0.997	± 0.00041
1	0.998	± 0.0006
2	0.996	± 0.000236
3	0.998	± 0.000236
4	0.99	± 0.00167
5	0.996	± 0.000826
6	0.999	± 0.000308
7	0.983	± 0.00219
8	0.995	± 0.00054
9	0.996	± 0.000782
10	0.995	± 0.000441
11	0.998	± 0.000246
12	0.998	± 0.000396
13	0.998	± 0.000344
14	0.996	± 0.000846
15	0.995	± 0.000647
16	0.997	± 0.000463
17	0.991	± 0.0006
18	0.987	± 0.00163
19	0.998	± 0.00042

7. Mermin

- Runtime:
- Qubits used:




- Runtime:
- Qubits used:




8. Grover - 2 qubits

Grover's algorithm for 2 qubits executed on sinq20 backend with 1000 shots per circuit. We measure the success rate of finding the target state '11' for each pair of qubits in [[2, 3]].

- Runtime: 10.08 seconds
- Qubits used: [[2, 3]]

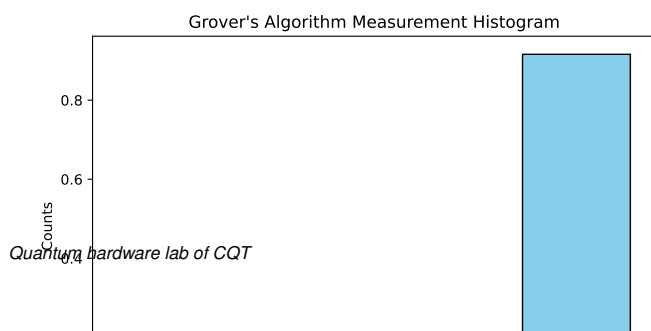


- Runtime:
- Qubits used:

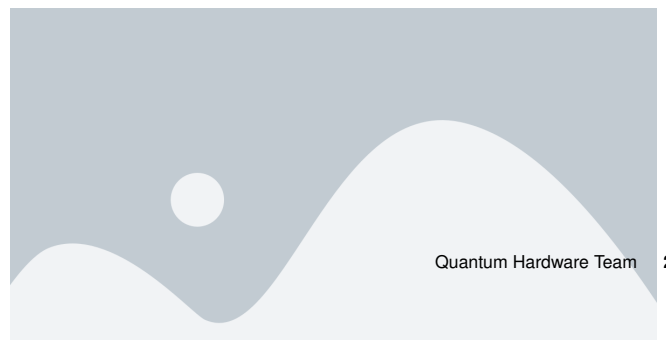

9. Grover - 3 qubits

Grover's algorithm for 3 qubits executed on `siq20` backend with 1000 shots per circuit. We measure the success rate of finding the target state '111' for each pair of qubits in `[[8, 3], [2, 3]]`.

- **Runtime:** 4.53 seconds
- **Qubits used:** [8, 2, 3]

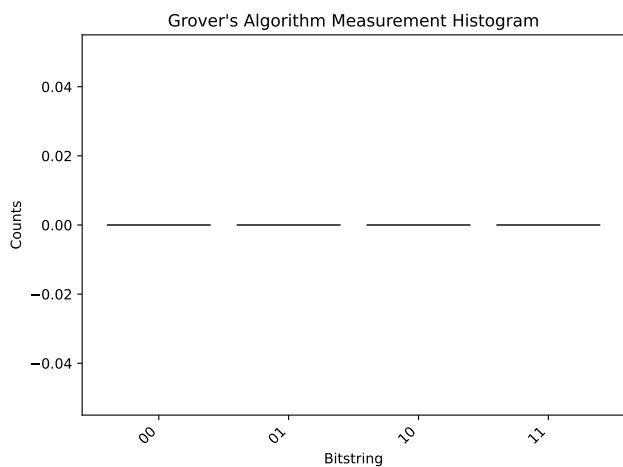


- **Runtime:**
- **Qubits used:**




10. GHZ state preparation

GHZ circuit with 3 qubits executed on `siq20` backend with 1000 shots.

- **Runtime:** 9.70 seconds
- **Qubits used:** [8, 3, 2]

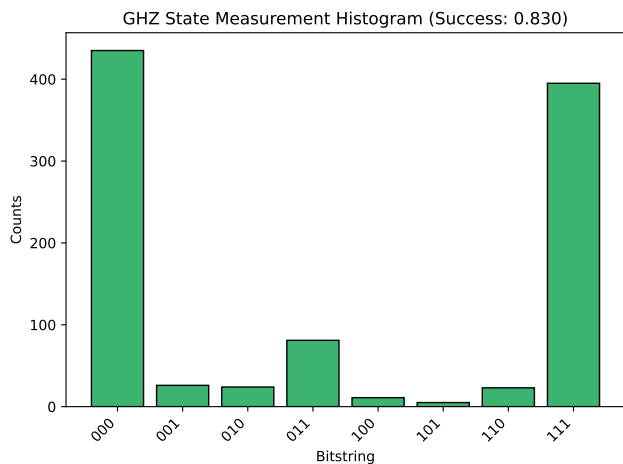

- **Runtime:** 4.32 seconds
- **Qubits used:** [13, 17, 18]

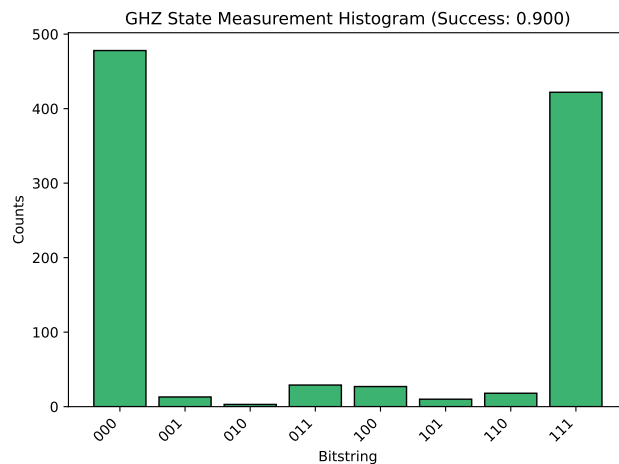


11. Process Tomography state preparation


Process tomography involves preparing a circuit particular set of states, appending a gate (process) to the circuit, and measuring the circuit in the Pauli basis. The data is processed to get the Pauli Liouville representation of a process (gate). - Single qubit process tomography executed on qubits: [2, 3] - Two qubit process tomography on coupled qubits: [[2, 3]]

- **Runtime:** 680.07 seconds
- **Qubits used:**


cz_[]_qubits2_3_1e1f7e1d1af58009eda1986bb3689e6b9b2356b6

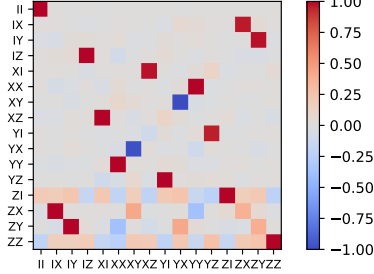


gpi2_[0.7854]_qubit2_1e1f7e1d1af58009eda1986bb3689e6b9b2356b6

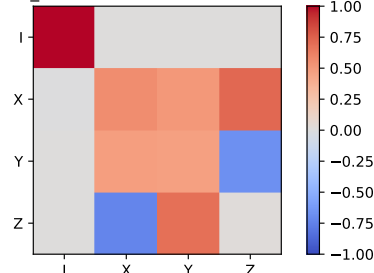


gpi2_[0.7854]_qubit3_1e1f7e1d1af58009eda1986bb3689e6b9b2356b6

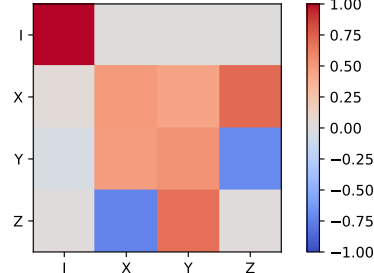

gpi2_[1.0472]_qubit2_1e1f7e1d1af58009eda1986bb3689e6b9b2356b6

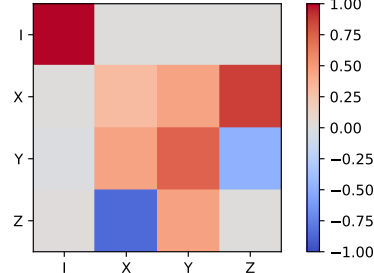


gpi2_[1.0472]_qubit3_1e1f7e1d1af58009eda1986bb3689e6b9b2356b6

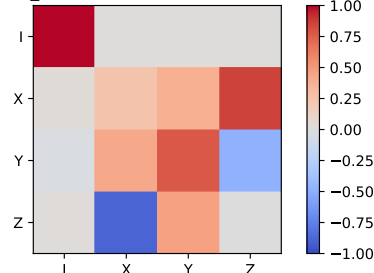


- **Runtime:** 705.76 seconds
- **Qubits used:**


cz_[]_qubits17_13_2447f0fad33dfea493b4e7bc4143c8bd2e28d979

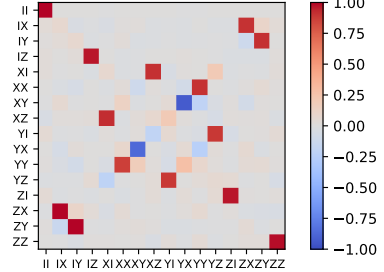


gpi2_[0.7854]_qubit13_2447f0fad33dfea493b4e7bc4143c8bd2e28d979

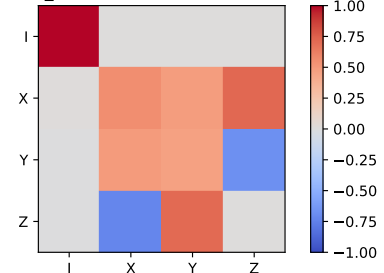


gpi2_[0.7854]_qubit17_2447f0fad33dfea493b4e7bc4143c8bd2e28d979

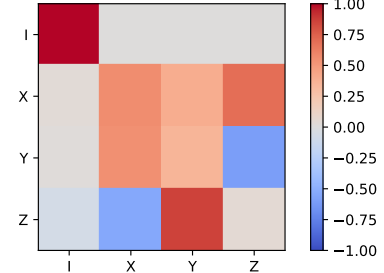

gpi2_[1.0472]_qubit13_2447f0fad33dfea493b4e7bc4143c8bd2e28d979

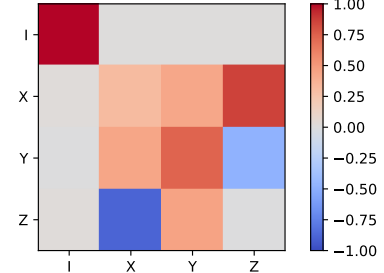


gpi2_[1.0472]_qubit17_2447f0fad33dfea493b4e7bc4143c8bd2e28d979

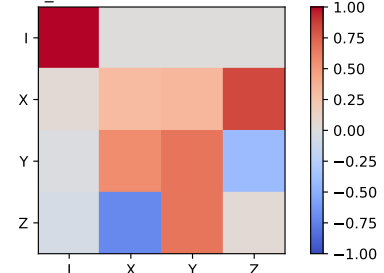


12. Reuploading Classifier

Reuploading classifier with 1 qubits, 10 layers, depth of 20, 500 shots.

- **Runtime:** N/A
- **Qubits used:** [7]

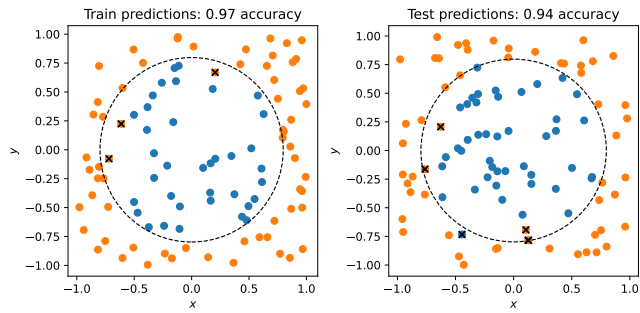


- **Runtime:** N/A
- **Qubits used:** — No “qubits_used” provided. —

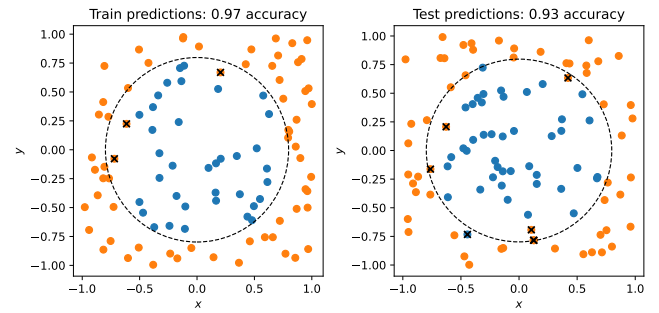

13. QML: Yeast dataset (3 qubits)

- **Duration:** 144.28 seconds
- **Accuracy:** 0.63
- **Qubits used:** 8, 3, 2

QML Confusion Matrices

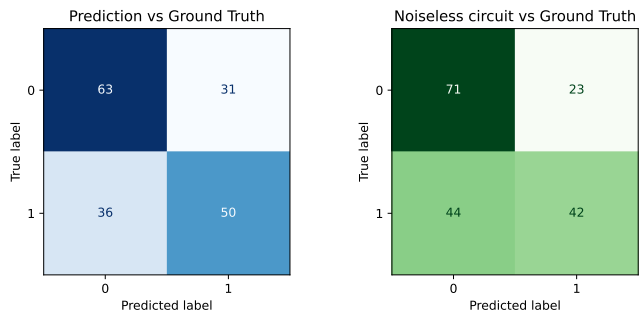

- **Duration:** 793.00 seconds
- **Accuracy:** 0.56
- **Qubits used:** 0, 1, 2, 3

QML Confusion Matrices

