

Benchmark Report

Benchmarking of NQCH’s quantum computer

May 5, 2026

1. Report of Changes

Platform: sinq20

Calibration-id: *ec305fcaf377a05f4fb391a8ee18282bfae18df6*

Calibration date: 2026-04-28 07:58:51

Calibration note: chore(sinq20): update readout parameters

Experiment-id: 20260504115618

Experiment date: 2026-05-04 11:56:19

Experiment note: *temporary note!!!*

Platform: sinq20

Calibration-id: *4dc4082f38a53222b3956c22202d32a520d4bc78*

Calibration date: 2026-01-15 02:03:03

Calibration note: chore(sinq20): 2q gates cal 0-1, 0-3, 2-3, 3-4, 1-4, 4-5, 4-9, 3-8, 8-9

Experiment-id: 20260118161538

Experiment date: 2026-01-18 16:15:38

Experiment note: *temporary note!!!*


2. Version Comparison

Library	Version	Library	Version
qibo	0.2.23	numpy	2.4.4
qibolab	0.2.9	qibocal	0.2.5
matplotlib	3.10.8	scipy	1.17.1
scikit-learn	1.8.0	pandas	2.3.3
networkx	3.6.1	sympy	1.14.0
torch	2.11.0		

Library	Version	Library	Version
qibo	0.2.22	numpy	2.2.6
qibolab	0.2.9	qibocal	0.2.4
matplotlib	3.10.3	scipy	1.15.3
scikit-learn	1.6.1	pandas	2.2.3
networkx	3.4.2	sympy	1.14.0
torch	2.7.0		

3. One and two qubit fidelities

The single qubit fidelity is obtained via Randomized-Benchmarking. The two-qubit fidelity is the "Bell-state fidelity".

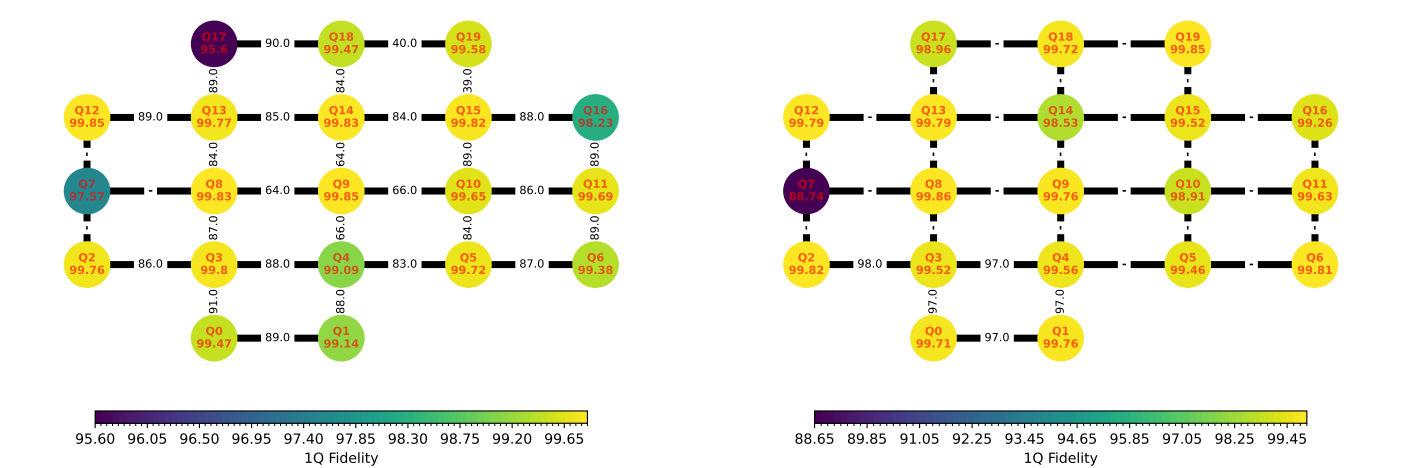

4. Statistics

	Average	Median	Min	Max
T1 (ns)	23.9	23.8	18.3	29.6
T2 (ns)	9.84	9.66	1.52	22.2
Fidelity	0.975	0.968	0.94	1
RO Fidelity	0.971	0.971	0.964	0.981
2q RB Fidelity	-	-	-	-
2q CZ Fidelity	-	-	-	-

	Average	Median	Min	Max
T1 (ns)	1.28e+04	1.23e+04	646	3.65e+04
T2 (ns)	2.36e+25	3.68e+03	125	9.43e+26
Fidelity	0.99	0.997	0.887	0.999
RO Fidelity	0.794	0.777	0.777	0.927
2q RB Fidelity	0.965	0.972	0.923	0.981
2q CZ Fidelity	0.975	0.974	0.967	0.991

5. Best Qubits Selection

k-qubits	Best Qubits	Fidelity
2	0, 3	0.909
3	0, 1, 3	0.899
4	12, 13, 17, 18	0.891
5	0, 1, 3, 4, 8	0.886

k-qubits	Best Qubits	Fidelity
2	2, 3	0.981
3	0, 2, 3	0.976
4	0, 1, 2, 3	0.970
5	0, 1, 2, 3, 4	0.965

6. Summary metrics

Benchmark	Metric	Value	Runtime
Mermin	Max	-3.246	207.94 sec
Grover 2q	Max prob	0.855	3.85 sec
Grover 3q	Max prob	0.294	2.46 sec
GHZ state prep.	Success	0.816	2.22 sec

Benchmark	Metric	Value	Runtime
Mermin	Max	-3.316	1.02 sec
Grover 2q	Max prob	0.89	2.36 sec
Grover 3q	Max prob	0.385	2.43 sec
GHZ state prep.	Success	0.910	3.95 sec

7. Randomized Benchmarking Results


Qubit n	Fidelity	Error Bars	Qubit n	Fidelity	Error Bars
0	0.995	± 0.000224	10	0.996	± 0.00012
1	0.991	± 0.000662	11	0.997	± 0.000156
2	0.998	± 8.9e-05	12	0.998	± 7.26e-05
3	0.998	± 7.97e-05	13	0.998	± 9.89e-05
4	0.991	± 0.000559	14	0.998	± 5.64e-05
5	0.997	± 0.000197	15	0.998	± 0.000118
6	0.994	± 0.00018	16	0.982	± 0.00376
7	0.976	± 0.00421	17	0.956	± 0.0121
8	0.998	± 6.71e-05	18	0.995	± 0.000286
9	0.998	± 8.32e-05	19	0.996	± 0.000122

Qubit n	Fidelity	Error Bars	Qubit n	Fidelity	Error Bars
0	0.997	± 0.000131	10	0.989	± 0.000582
1	0.998	± 7.47e-05	11	0.996	± 0.000218
2	0.998	± 7.57e-05	12	0.998	± 0.000126
3	0.995	± 0.000163	13	0.998	± 7.15e-05
4	0.996	± 0.000185	14	0.985	± 0.00183
5	0.995	± 0.000147	15	0.995	± 0.000469
6	0.998	± 8.34e-05	16	0.993	± 0.000558
7	0.887	± 0.0287	17	0.99	± 0.000502
8	0.999	± 4.48e-05	18	0.997	± 0.00026
9	0.998	± 7.2e-05	19	0.998	± 9.05e-05


8. Mermin

Mermin's algorithm for 3 qubits.

Runtime	Qubits	Max
207.94 sec	0, 1, 3	-3.246

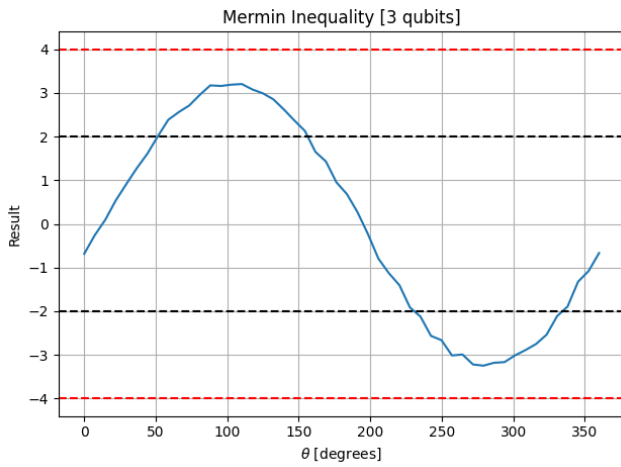


Runtime	Qubits	Max
1.02 sec	0, 2, 3	-3.316

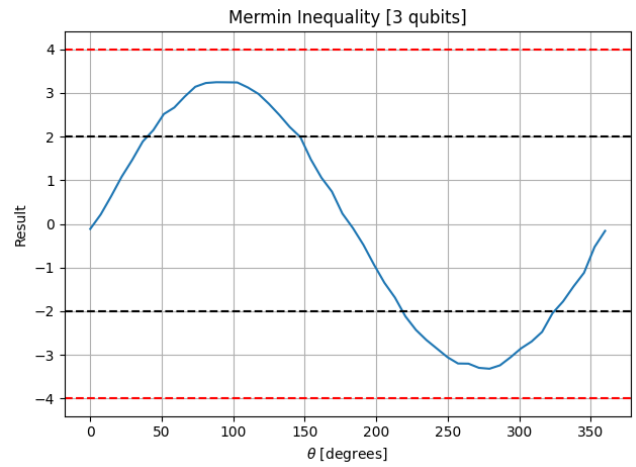


9. Grover - 2 qubits

Grover's algorithm for 2 qubits executed on sinq20 backend with 1000 shots per circuit. We measure the success rate of finding the target state '11' for each pair of qubits in $[[0, 3]]$.

Runtime	Qubits	Max prob
3.85 sec	0, 3	0.855

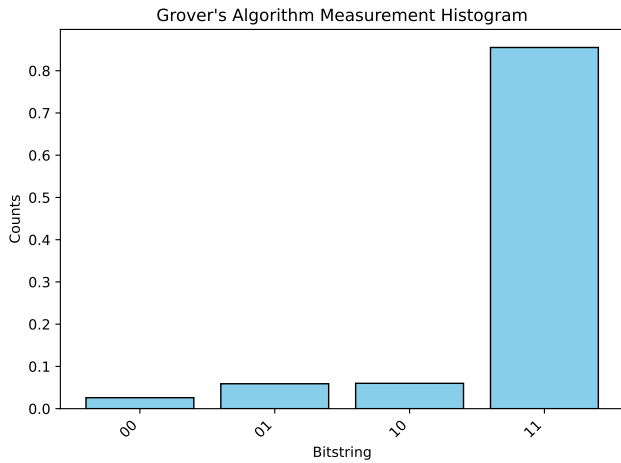


Runtime	Qubits	Max prob
2.36 sec	2, 3	0.89

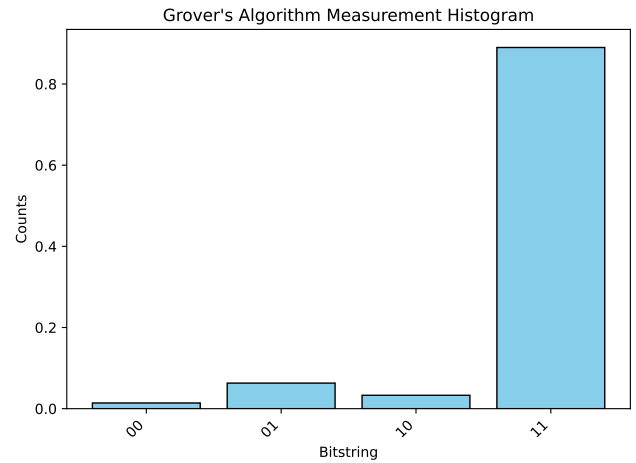


10. Grover - 3 qubits

Grover's algorithm for 3 qubits executed on sinq20 backend with 1000 shots per circuit. We measure the success rate of finding the target state '111' for each pair of qubits in $[[0, 1], [0, 3]]$.

Runtime	Qubits	Max prob
2.46 sec	1, 3, 0	0.294

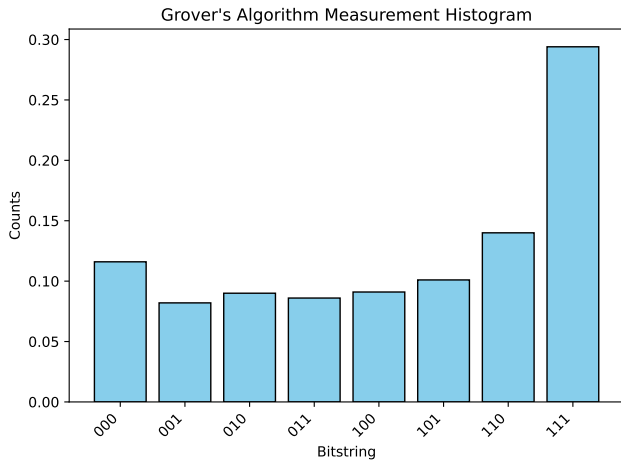


Runtime	Qubits	Max prob
2.43 sec	0, 2, 3	0.385

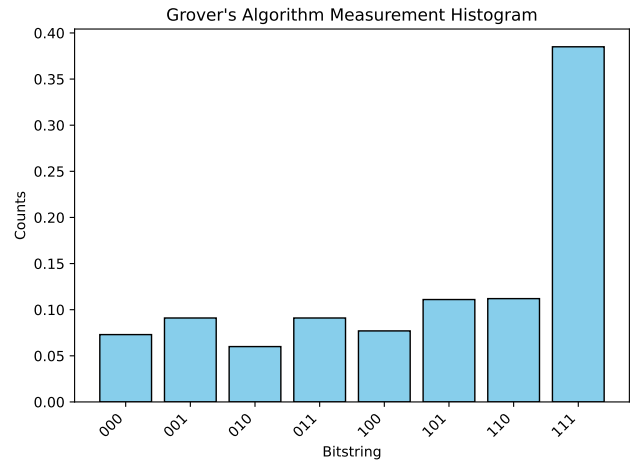

11. GHZ state preparation

GHZ circuit with 3 qubits executed on sinq20 backend with 1000 shots.

Runtime	Qubits	Success
2.22 sec	1, 0, 3	0.816

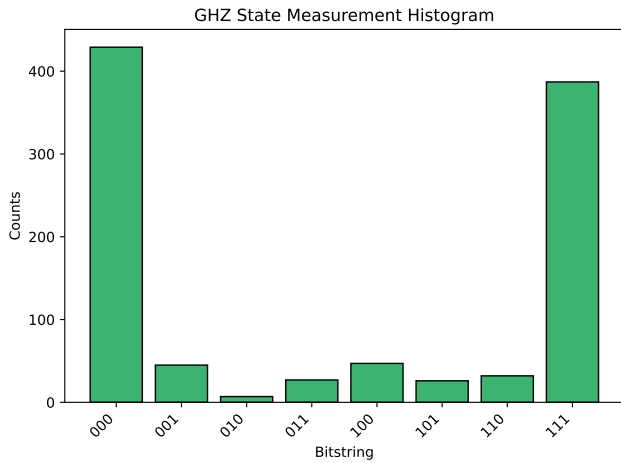

Runtime	Qubits	Success
3.95 sec	0, 3, 2	0.910

