

# Cvičení IV


Jak začít se semestrálním projektem

# Vytváření scény

---


- modely jednotkové velikosti umístěné v počátku  
⇒ snadné rozmístění ve scéně
- statická část
  - jeden velký samostatný model ⇒ vyexportovaný v jednom souboru
  - opakující se modely ve scéně ⇒ každý model samostatný soubor ⇒ vytvoření více instancí
- dynamické objekty ⇒ samostatné modely
- procedurální modely
- instancování modelů
  - společná geometrie (vao, vbo, ebo)
  - data závislá na instanci (pozice, velikost, rychlost...)
- společné shadery pro celou scénu x specializované
- vytváření modelů – načítání ze souborů přes assimp x procedurální

# Shadery

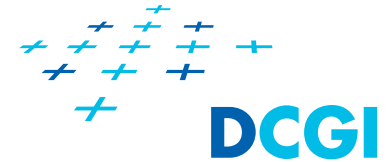

```
typedef struct _ShaderProgram {  
    // identifier for the shader program  
    GLuint program;    // = 0;  
  
    struct {  
        // vertex attributes locations  
        GLint pos;    // = -1;  
        // uniforms locations  
        GLint PVMmatrix; // = -1;  
        // ...  
    } locations;  
  
    // ...  
} ShaderProgram;
```

# Uložení geometrie objektů scény

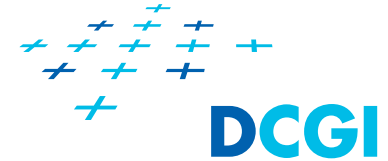

```
typedef struct _ObjectGeometry {
    GLuint vertexBufferObject; // vbo identifier
    GLuint elementBufferObject; // ebo identifier
    GLuint vertexArrayObject; // vao identifier
    unsigned int numTriangles; // number of triangles in the mesh

    // material
    glm::vec3    ambient;
    glm::vec3    diffuse;
    glm::vec3    specular;
    float        shininess;
    GLuint       texture;

    // geometry/object specific data
} ObjectGeometry;
```

one mesh  
x  
multiple meshes


# Instance objektů

---

```
struct ObjectInstance {  
    ObjectGeometry*geometry;  
    glm::mat4 modelMatrix;  
  
    // dynamic object data => used to derive model matrix  
    // glm::vec3 position;  
    // glm::vec3 direction;  
    // float      speed;  
    // float      size;  
  
    // ...  
  
} ObjectInstance;
```

- viz zdrojový kód ke cvičení

# Event processing through callbacks

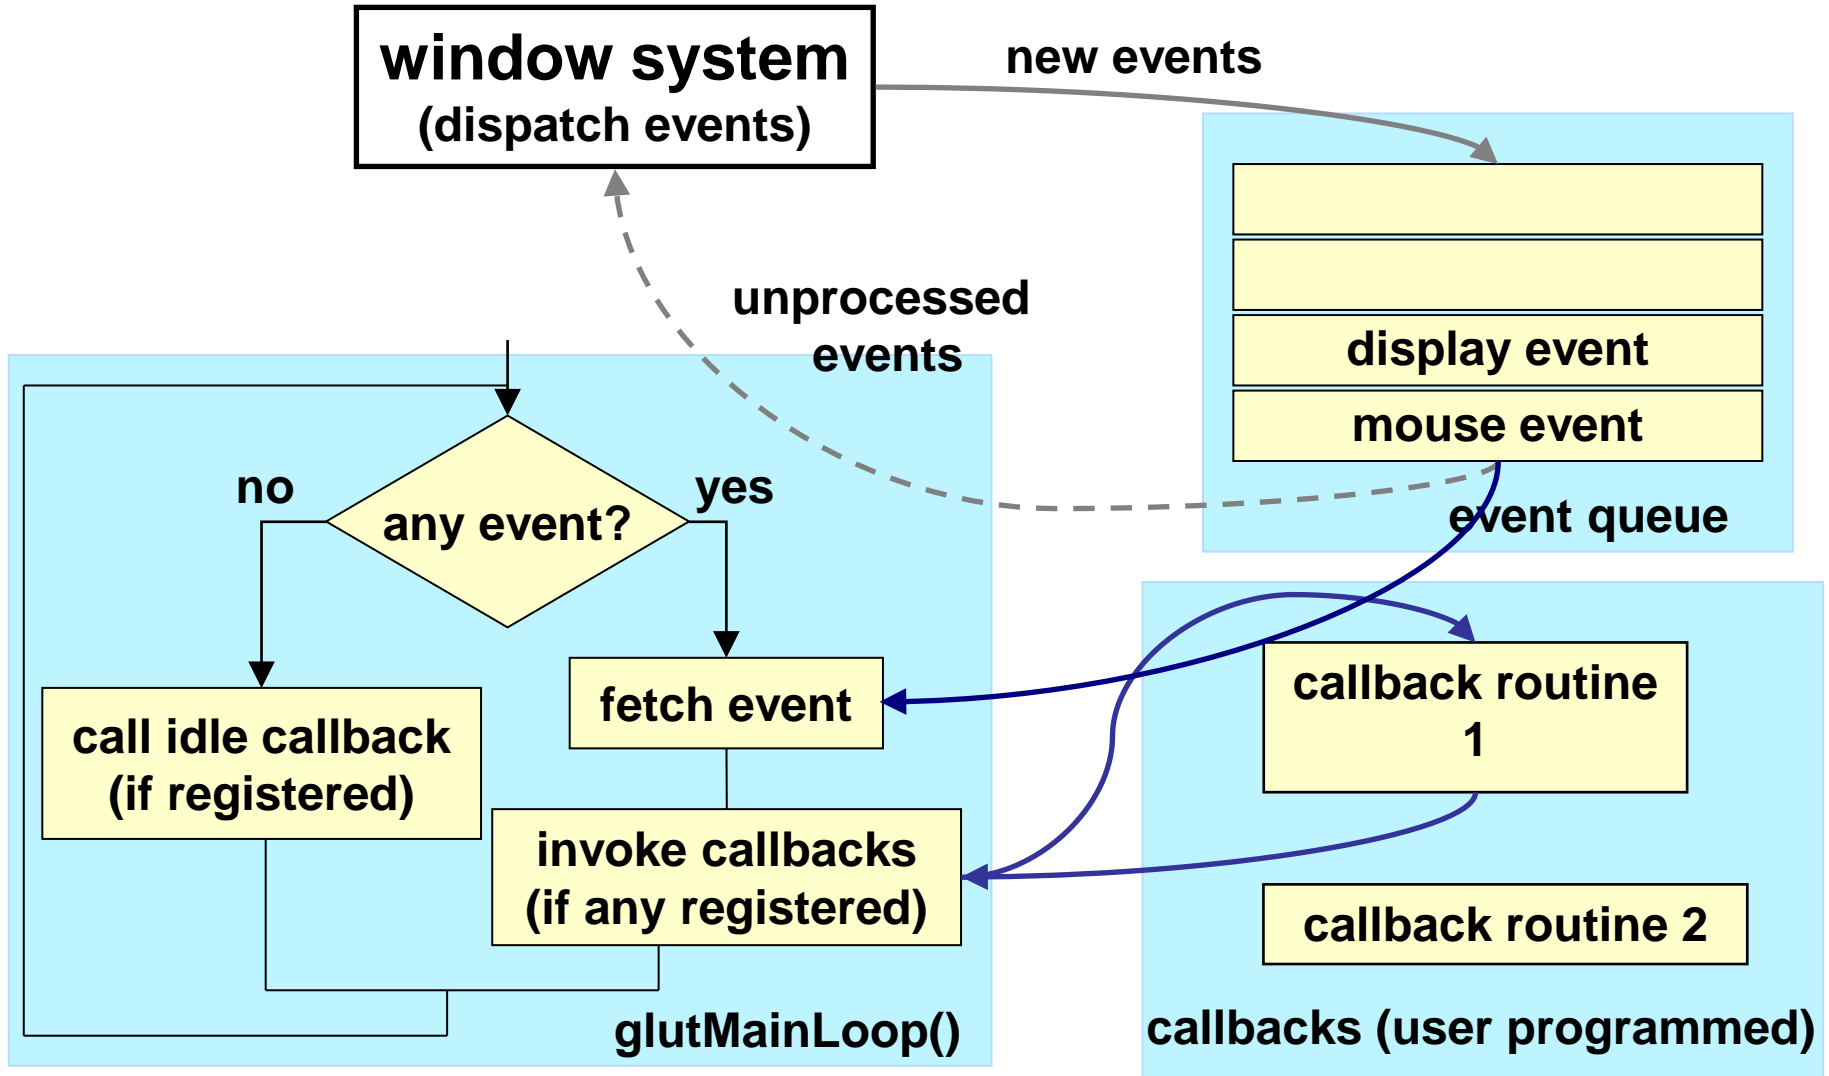

# Kombinace kláves



```
// keys used in the key map
enum {
    KEY_LEFT_ARROW, KEY_RIGHT_ARROW,
    KEY_UP_ARROW, KEY_DOWN_ARROW,
    KEY_SPACE,
    KEYS_COUNT
};

// key map
bool keyMap[KEYS_COUNT];

// handling of events based on the key map
if(keyMap[KEY_RIGHT_ARROW] && keyMap[KEY_UP_ARROW])
    moveRightUp();
```



# Kombinace kláves

```
// set up callbacks
glutKeyboardFunc(keyboardCallback);
glutKeyboardUpFunc(keyboardUpCallback);
glutSpecialFunc(specialCallback);
glutSpecialUpFunc(specialUpCallback);

// special key released callback
void specialUpCallback(int releasedKey, int mouseX, int mouseY) {
    switch (releasedKey) {
        case GLUT_KEY_RIGHT:
            keyMap[KEY_RIGHT_ARROW] = false; break;
        //...
    }
}
```

# Vytvoření animace

```
void timerFunc(int id) {  
    // possible processing of id value  
    glutTimerFunc(33, timerFunc, 0);           /* register new animation step */  
    spin += spinStep;                           /* set new angle for rotation */  
    glutPostRedisplay();                       /* redraw window */  
}  
  
int main(int argc, char **argv) {  
    ...  
    glutTimerFunc(33, timerFunc, 0);           /* register this event after 33ms */  
    ...  
    glutMainLoop();                           /* finally, enter event loop */  
}
```

# Reprezentace objektu


---

- objektový x neobjektový přístup

```
class ObjectInstance {  
protected:  
    ObjectGeometry* geometry;  
    glm::mat4 localModelMatrix;  
public:  
    virtual void update(float elapsedTime) {  
        // update model transformation - localModelMatrix  
        // ...  
    }  
    virtual void draw(const glm::mat4& viewMatrix, const  
        glm::mat4& projectionMatrix) {  
        // draw node geometry using globalModelMatrix  
        // ...  
    }  
}
```

# Reprezentace scény


---

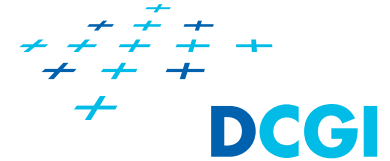


- lineární seznam objektů x graf scény

# Nonhierarchical approach

- geometric object is represented as a sequence of segments (linear data structure)
- each segment contains
  - definition of graphical elements and their attributes
  - transformations

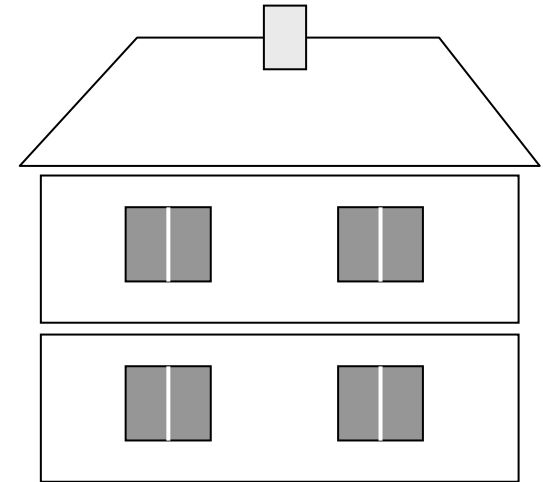

house

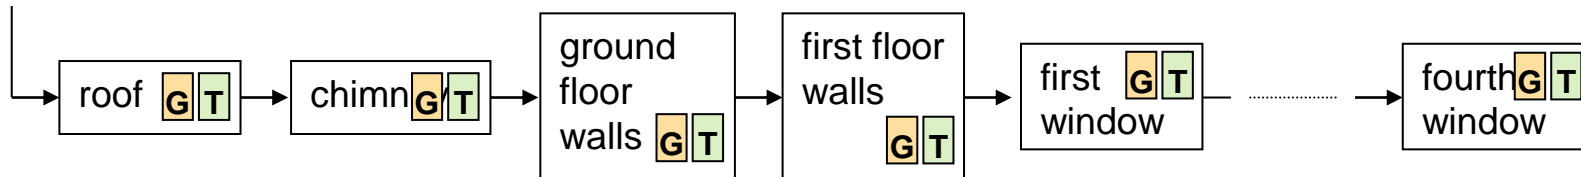


- this modeling technique contains no information about relationship among objects (*i.e. model/scene logical structure is not known/expressed*)
  - ⇒ we can easily manipulate individual segments of the model but more complex structures like ground floor are hard to reach

# Nonhierarchical approach (contd.)

- how to encode this data structure in your program?  
 ⇒ each segment is represented by a drawing function  
 (including transformations)

```
void house(void) {           /* the whole model of the house */
    roof();                  /* roof segment */
    chimney();
    groundFloorWalls();
    firstFloorWalls();
    firstWindow();
    ...
    fourthWindow();
}
```

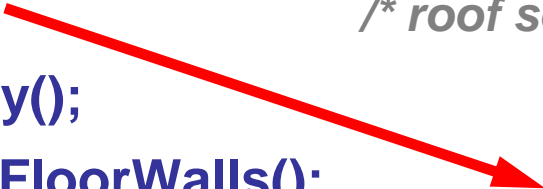

```
void roof(void) {
    T /* set transformations */
    G /* set attributes like color, etc */
    /* draw geometric primitives */
}
```


# Hierarchical models

---

- we can represent the relationship among segments of the model with graphs
- most common type of graph is **connected tree** (*directed graph without closed path or loops and every node, except the root, has a parent node*)  
⇒ represents very well the logical model structure (i.e. composition of the model)
- typically:
  - leaves represent geometry (graphical primitives)
  - internal nodes represent superior/parent segments (details)  
(e.g. roof, ground floor, first floor, etc.)
- **drawing** an object described **by** a tree requires performing **a tree traversal**
  - depth-first search
  - breadth-first search
- the **same algorithm for traversing** graph in a program **should be always used** ⇒ the same result/model
- attributes are inherited or redefined by the nodes

# Directed acyclic graph (DAG)

- internal nodes represent superior/parent segments (details)
- leaves represent graphical primitives
- relationship between nodes is represented by edges (parent-children relation)
- transformations are used to label the edges of the graph
- transformations represent the incremental change when we go from the parent to the child

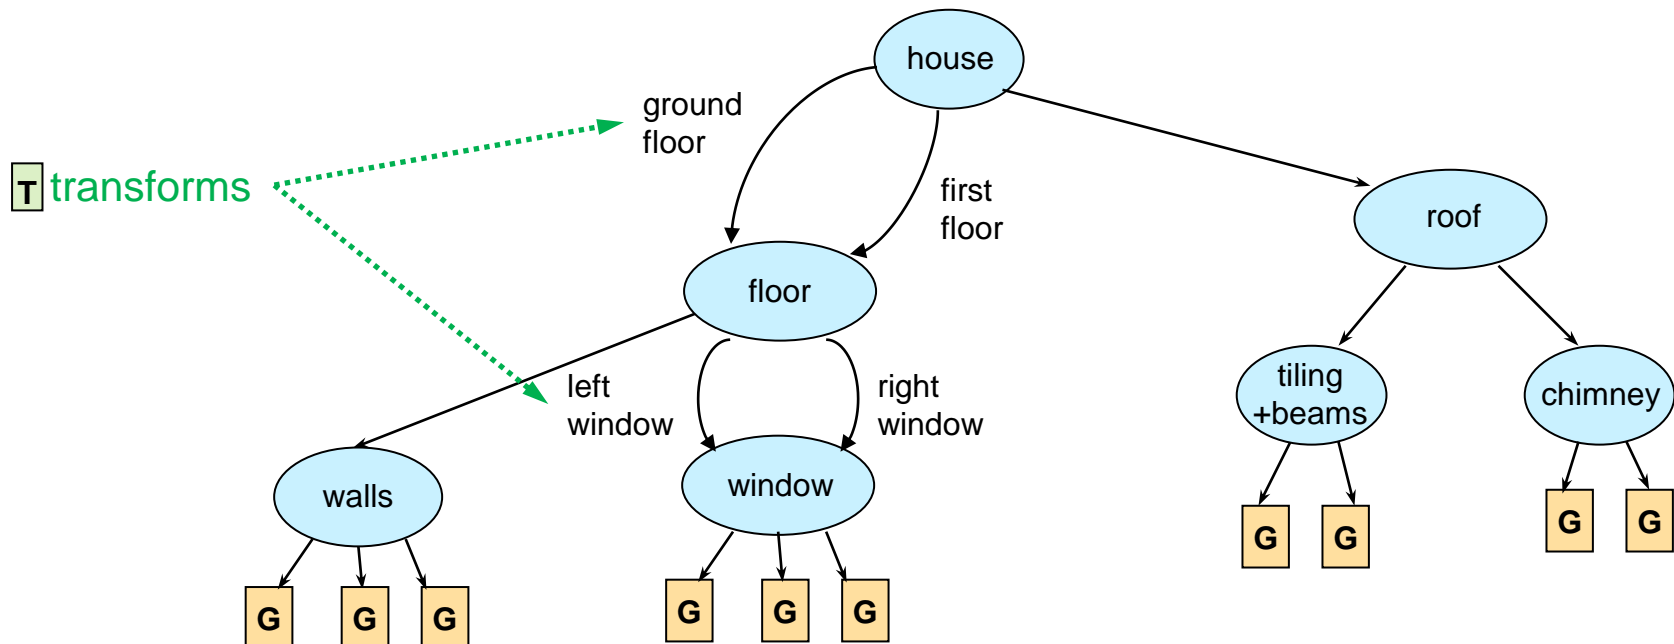



# Directed acyclic graph (contd.)

how to encode this tree structure into a code sequence?

- internal nodes  $\Rightarrow$  store references to children
- edges  $\Rightarrow$  attributes and transformations of children T
- leaves  $\Rightarrow$  represented by drawing functions G
- drawing an object  $\Rightarrow$  requires performing a tree traversal

} encoded into function

```
/* model of the whole house */
void house(void) {
T /* set transformations for the ground floor */
    floor();
T /* set transformations for the first floor */
    floor();
T /* set transformations for the roof */
    roof();
}
```





```
/* model of the window */
void window(void) {
    /* draw window geometry */
G drawGeometry();
}
```

static version

# Where to store transformations?

- A. transformation in parent
- B. transformation in child
- C. transformation on edge  $\Rightarrow$  represented as an extra node

dynamic version

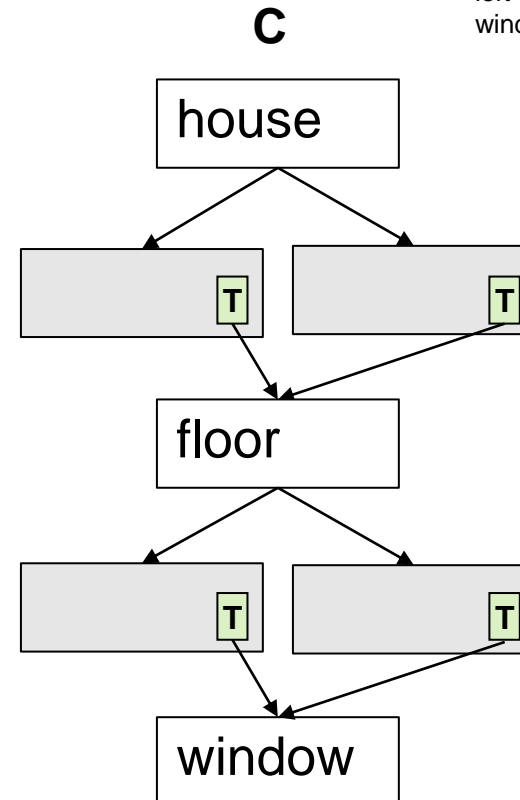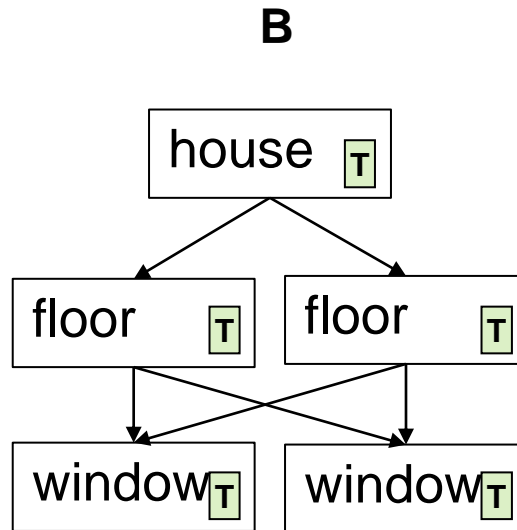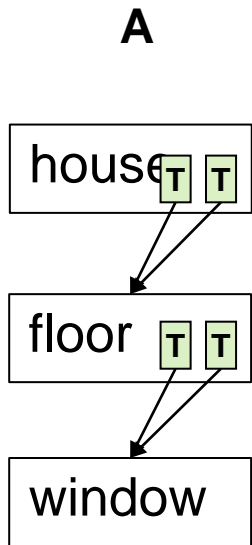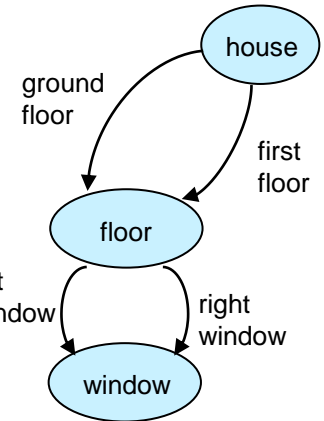

# Directed acyclic graph (contd.)

how to encode this tree structure into a code sequence?

- internal nodes  $\Rightarrow$  class storing references to children + transformations T
- leave nodes  $\Rightarrow$  class drawing geometry G

```
class Node {
    /* common data */
    virtual void draw() {
        /* node specific behavior */
    }
}
```

```
class innerNode : public Node {
    /* incremental transformation */
T glm::mat4 modelMatrix;
    void draw() {
        /* process child nodes */
    }
}
```

```
class leafNode : public Node {
    void draw() {
G /* draw model geometry */
    }
}
```

dynamic version