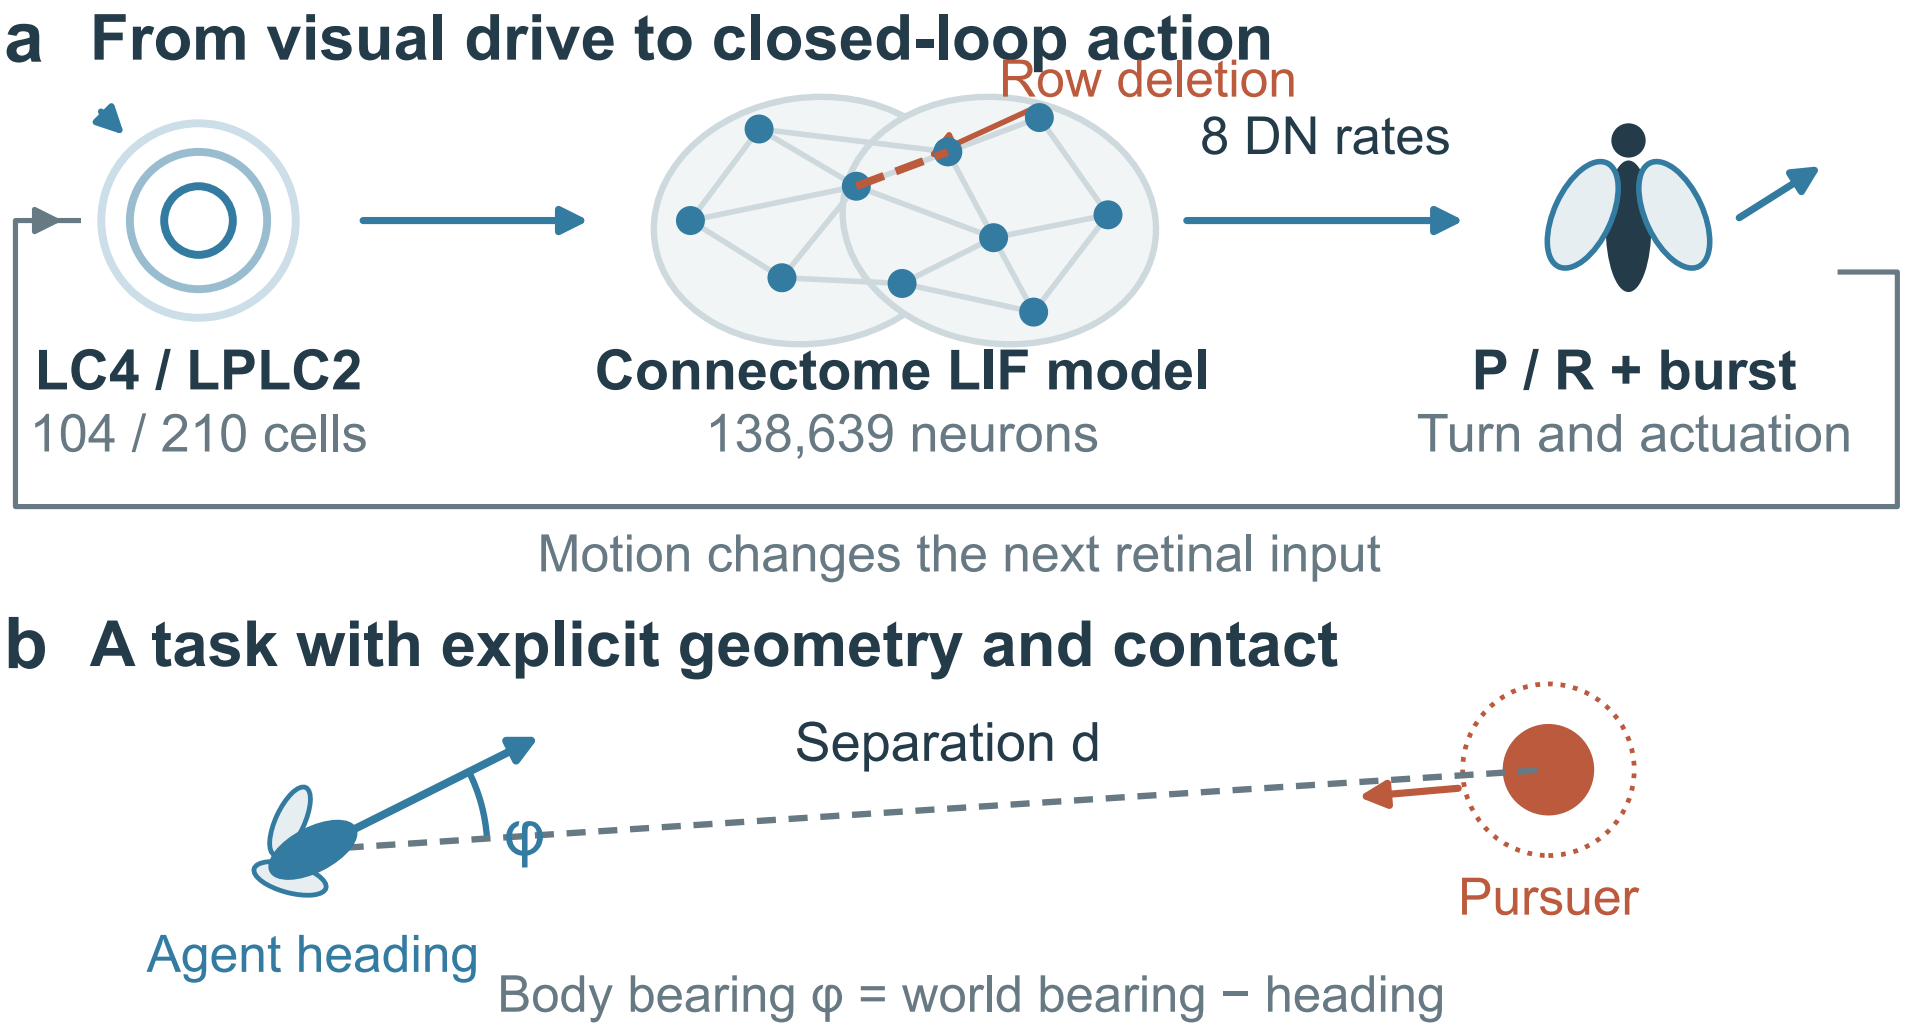

a From visual drive to closed-loop action
Row deletion
8 DN rates
LC4 / LPLC2
104 / 210 cells
Connectome LIF model
138,639 neurons
P / R + burst
Turn and actuation
Motion changes the next retinal input
b A task with explicit geometry and contact
Separation d
φ
Pursuer
Agent heading
Body bearing φ = world bearing − heading
c Separate neural, actuator and task clocks
Cue
Assess
Task
0
100
400
1000
t_d = 200 ms
250 ms delay
450 ms burst
One paired seed: 2 bearings × 2 laws × 3 conditions