# Admin Dashboard Manual

Audience: `Admin` users

Generated: RPL-KPIs

Mind Over Mountains Dashboard Guide

## Contents

Contents ..... 2
1. Introduction ..... 4
2. What the Admin role is for ..... 5
3. Before you make changes ..... 5
4. Signing in and moving around ..... 6
5. Main areas of the Admin Dashboard ..... 6
6. Password reset requests ..... 7
6.1 When to use this section ..... 7
6.2 Step-by-step reset workflow ..... 7
6.3 What should happen next ..... 7
6.4 Good practice ..... 8
7. Creating a new user ..... 8
7.1 When to create a new account ..... 8
7.2 Step-by-step workflow ..... 8
7.3 Choosing the correct role ..... 8
7.4 Good practice ..... 9
8. Updating an existing user ..... 9
8.1 Reset Password ..... 9
8.2 Update Role ..... 9
8.3 Update User Details ..... 10
8.4 Delete User ..... 10
9. Sync Performance ..... 11
9.1 What this section is for ..... 11
9.2 What to review ..... 11
9.3 How to interpret it ..... 11
10. Beacon API Sync ..... 12
10.1 Smoke test ..... 12
10.2 Manual sync ..... 12
10.3 Stop or clear a stuck sync ..... 13
11. Beacon CSV Upload ..... 13
12. Data reset and rebuild actions ..... 13
13. Audit Logs ..... 14
14. Data Request Form and Temporary Access ..... 14
14.1 Reviewing requests ..... 14
14.2 Granting temporary access ..... 15

14.3 How temporary access behaves ..... 15
15. Using the other dashboards as an Admin ..... 16
14.1 KPI Dashboard ..... 16
14.2 Custom Reports Dashboard ..... 16
14.3 ML Dashboard ..... 16
14.4 Funder Dashboard ..... 17
14.5 Case Studies ..... 17
16. Recommended Admin working pattern ..... 17
17. Troubleshooting ..... 17
`Admin client not available` ..... 17
A user cannot sign in ..... 17
The dashboard looks out of date ..... 18
A sync looks stuck ..... 18
A user has the wrong access ..... 18

*Update the table in Word if entries do not appear immediately.*

# Admin Dashboard Manual

Audience: Admin users

Scope: user accounts, password resets, data refresh, audit review, and full reporting access

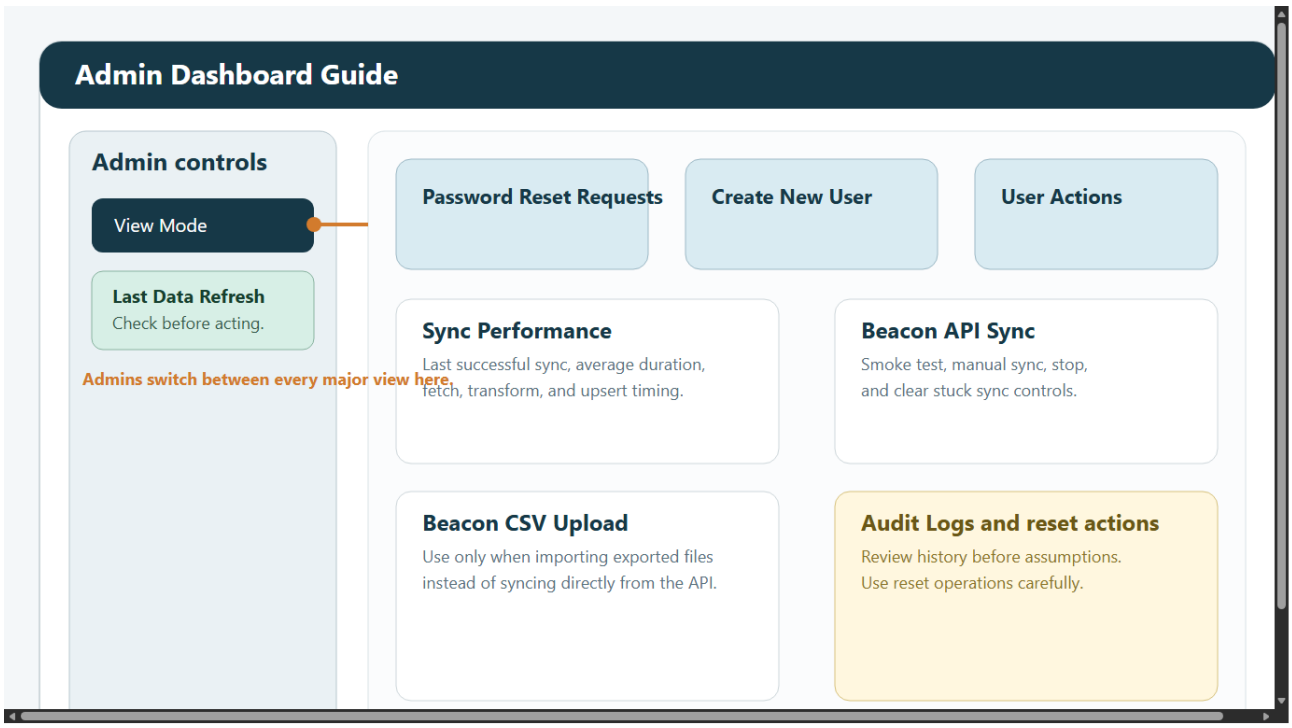


## 1. Introduction

This manual explains how to use the dashboard as an Admin.

Admins are responsible for keeping the system working safely and making sure the right people have the right access.

Admin users can open:

- Admin Dashboard
- KPI Dashboard

- `Custom Reports Dashboard`
- `Case Studies`
- `Data Request Form`
- `Funder Dashboard`
- `ML Dashboard`

Admin access should be used carefully. Many actions affect other users. Some actions affect the whole dataset or the overall health of the dashboard.

## 2. What the Admin role is for

The `Admin` role is designed for:

- user account management
- role assignment
- password support
- sync monitoring
- manual sync actions
- controlled data maintenance
- audit review
- support investigations

The Admin role is not simply a stronger reporting role. It is an operational support role with governance responsibility.

## 3. Before you make changes

Before making any important change:

1. Confirm that you are signed in with your own named Admin account.
2. Check `Last Data Refresh`.
3. Be clear about what problem you are solving.
4. Use the smallest action that solves it.
5. Record a clear reason for any significant access change or destructive action.

Good Admin habits:

- avoid shared accounts
- avoid deleting users unless removal is genuinely required
- prefer updating an existing user rather than recreating them
- check the audit log if you are not sure what already happened

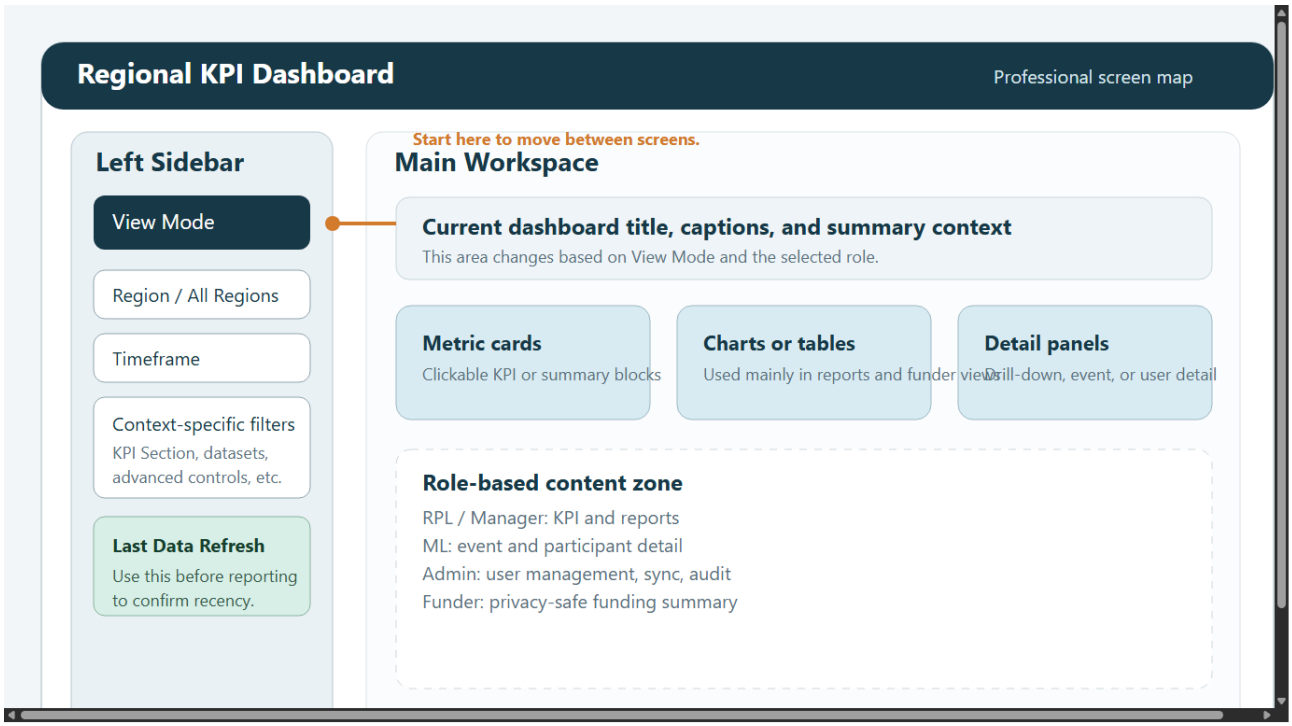


## 4. Signing in and moving around

6. Open the dashboard link.
7. Enter your email address and password.
8. Change your password if prompted.
9. Use `View Mode` in the left sidebar to move between screens.

If you see a message such as `Admin client not available`, some Admin configuration is missing. In that situation, user-management functions may not work correctly and should be checked before you continue.

## 5. Main areas of the Admin Dashboard

The `Admin Dashboard` is the control centre for administration and support.

Main sections usually include:

- `Password Reset Requests`
- `Create New User`
- `Existing Users & Actions`
- `Sync Performance`
- `Beacon API Sync`
- `Beacon CSV Upload`
- reset or rebuild actions
- `Audit Logs`

Think of the page in three broad areas:

10. user access and security
11. sync and data operations
12. audit and investigation

## 6. Password reset requests

### 6.1 When to use this section

Use `Password Reset Requests` when a user has triggered `Forgot password?` and cannot complete sign-in.

### 6.2 Step-by-step reset workflow

13. Open `Password Reset Requests`.
14. Select the user's email address from the pending list.
15. Enter a temporary password.
16. Click `Set Temporary Password`.
17. Tell the user to sign in and change the password immediately.

### 6.3 What should happen next

After a successful reset:

- the reset request should be marked as completed
- the user should be prompted to change password at next sign-in
- the action should be recorded in the audit log

### 6.4 Good practice

- use a temporary password that is strong but can still be communicated safely
- avoid sending repeated resets unless necessary
- if the same user needs multiple resets, investigate whether there is a wider login problem

## 7. Creating a new user

### 7.1 When to create a new account

Create a new account when:

- a new staff member needs access
- an existing person needs a separate account
- a new funder contact needs a restricted reporting account

### 7.2 Step-by-step workflow

18. Open `Create New User`.
19. Enter the person's full name.
20. Enter their email address.
21. Enter a starting password.
22. Choose the role or roles.
23. If the user is not a funder, choose the correct region.
24. If the user is a funder, choose or enter the correct funder name.
25. Click `Create User`.
26. Confirm the creation result.

### 7.3 Choosing the correct role

Use least privilege.

Typical role choices:

- `RPL` for summary reporting and regional monitoring
- `Manager` for operational review across multiple views
- `ML` for event-by-event delivery work
- `Funder` for restricted summary access
- `Admin` only for people who genuinely need administrative control

### 7.4 Good practice

- use a named work email where possible
- avoid shared accounts
- check the region carefully
- check funder mapping carefully for funder users
- review the saved record after creation

## 8. Updating an existing user

The `Existing Users & Actions` area lets you manage current users without deleting and recreating them.

You can usually:

- reset a password
- update roles
- update user details
- delete a user

### 8.1 Reset Password

Use this when the user needs immediate access help and the self-service route is not enough.

Steps:

27. Open `Reset Password`.
28. Select the user.
29. Enter the temporary password.
30. Apply the change.
31. Tell the user to change the password after sign-in.

### 8.2 Update Role

Use this when a user's job changes or they need different access.

Steps:

32. Open `Update Role`.
33. Select the user.
34. Choose the correct role or roles.
35. If `Funder` is included, confirm the funder name carefully.
36. Enter the reason for the change.
37. Confirm the action.
38. Click `Update Role`.

Checks to make:

- does the user still need their previous role
- is the requested access broader than necessary
- is the reason clear enough for later audit review

### 8.3 Update User Details

Use this when a name, email address, or region needs correction.

Steps:

39. Open `Update User Details`.
40. Select the user.
41. Edit the full name if needed.
42. Edit the email address if needed.
43. Choose the correct region, or confirm the funder mapping for funder users.
44. Enter the reason for the update.
45. Confirm the action.
46. Click `Update User Details`.

### 8.4 Delete User

Delete a user only when the person should no longer retain access at all.

Steps:

47. Open `Delete User`.
48. Select the user.

49. Enter the reason for deletion.
50. Confirm the action.
51. Click `Delete User`.

Before deleting, ask:

- should the account be updated rather than deleted
- should the role simply be reduced
- is the reason clear enough for audit review

## 9. Sync Performance

### 9.1 What this section is for

`Sync Performance` helps you understand whether the data pipeline is healthy.

Use it when:

- the dashboard looks stale
- data appears to be missing
- a manual sync seems slow
- you need to know whether the latest refresh completed normally

### 9.2 What to review

Typical indicators may include:

- last total sync duration
- fetch time
- transform time
- upsert time
- average recent duration
- whether the latest run was automatic or manual

### 9.3 How to interpret it

Use this section to answer questions such as:

- did a sync actually complete
- was it unusually slow
- did the issue begin after a particular run

If the figures look normal but the data still looks wrong, the issue may be with source data rather than sync speed.

## 10. Beacon API Sync

### 10.1 Smoke test

Use `Run Beacon API Smoke Test` as the first low-risk check when troubleshooting connectivity or refresh issues.

It helps confirm:

- the Beacon connection is reachable
- the response shape is valid
- the dashboard can talk to the source

### 10.2 Manual sync

Use a manual sync when:

- the data is out of date
- you need the latest records immediately
- you are checking a support issue and need a fresh import

Step-by-step:

52. Open `Beacon API Sync`.
53. If you are troubleshooting, run a smoke test first.
54. Click `Sync Beacon API to Database`.
55. Watch the progress messages.
56. Wait for the success or error result.
57. Recheck the relevant dashboard view.

### 10.3 Stop or clear a stuck sync

Use `Stop Manual API Sync` only when a sync is genuinely stuck or was started in error.

Use `Clear Stuck Sync` only after checking that no live sync still is running.

These are intervention actions, not routine buttons.

## 11. Beacon CSV Upload

Use this when you are intentionally importing exported CSV files instead of relying on the API.

Typical reasons:

- API access is unavailable
- you have been asked to use a controlled export file set
- you are supporting a recovery or special maintenance task

Before using CSV upload:

58. Confirm why CSV upload is needed.
59. Confirm the files are the correct files.
60. Confirm the scope of what will be affected.

## 12. Data reset and rebuild actions

Reset or rebuild actions should be treated as controlled maintenance work.

Use them only when:

- a bad import needs to be cleared
- support work has agreed that a rebuild is required
- the dataset is clearly in a broken state

Before using a reset action:

61. Confirm the reason.
62. Confirm the target scope.
63. Check whether a smaller corrective action would solve the issue.
64. Record the reason clearly.

## 13. Audit Logs

The audit log is the main place to check what happened in the system.

Use it to answer questions such as:

- who changed a role
- who changed a profile
- who reset a password
- who started a sync
- who deleted a user

Use the audit log whenever the history of an issue is unclear.

## 14. Data Request Form and Temporary Access

Admins can use `Data Request Form` to both review requests and manage temporary access.

### 14.1 Reviewing requests

When a request is submitted:

- it is saved in the system
- `Admin` and `Manager` users are notified in the dashboard
- the request appears in the review section of `Data Request Form`

Admins can review the request list and change the request status to:

- `Pending`
- `In Review`
- `Completed`

## 14.2 Granting temporary access

Admins can also grant temporary access permissions to a single user from the same page.

This feature is designed for time-limited access only.

Required inputs include:

- the target user
- one or more temporary roles
- an expiry date and time
- the reason for the temporary access

Good practice:

- grant the smallest access needed
- set the shortest realistic expiry
- write a clear reason
- revoke access early if it is no longer needed

## 14.3 How temporary access behaves

Temporary access is additive. It adds temporary role access on top of the user's normal role until the expiry time or until it is revoked.

Use it when:

- a single user needs short-term access for a defined task
- permanent role change would be too broad
- a request has been reviewed and approved for limited-duration access

## 15. Using the other dashboards as an Admin

### 14.1 KPI Dashboard

Use this for:

- headline KPI review
- checking what operational users see
- opening drill-downs
- validating figures with `Show KPI Debug`

### 14.2 Custom Reports Dashboard

Use this for:

- detailed analysis
- exports
- charts
- advanced filtering
- comparison work
- distance analysis

Admins can also use it to:

- combine multiple datasets in one report
- validate whether row-level data supports a KPI
- compare groups directly with `Comparison Analysis`
- inspect travel patterns with `Distance Analysis`
- confirm what other roles will or will not see

### 14.3 ML Dashboard

Use this for:

- one-event-at-a-time checking
- operational detail review
- participant, medical, and emergency review where supported by source data

### 14.4 Funder Dashboard

Use this to check:

- what funder-facing users see
- whether sponsor-facing figures make sense
- whether the restricted presentation is appropriate

### 14.5 Case Studies

Use this for:

- reading supporting stories
- checking date and region tagging
- uploading new qualitative evidence

## 16. Recommended Admin working pattern

For most support issues:

65. Check `Last Data Refresh`.
66. Review `Sync Performance` if the data looks old or unusual.
67. Run a smoke test before a manual sync if troubleshooting.
68. Make access changes carefully and always record a clear reason.
69. Check `Audit Logs` if the history is unclear.
70. Verify the result in the relevant dashboard view after making a change.

## 17. Troubleshooting

### `Admin client not available`

Check the Admin-side configuration and confirm the required credentials are loaded correctly.

### A user cannot sign in

71. Check whether they requested a password reset.
72. Reset the password manually if needed.
73. Confirm the account still has a valid role.

74. Confirm the email address is correct.

## The dashboard looks out of date

75. Check `Last Data Refresh`.
76. Review `Sync Performance`.
77. Run a smoke test.
78. Run a manual sync if appropriate.

## A sync looks stuck

79. Review the current sync status.
80. Use `Stop Manual API Sync` only if needed.
81. Use `Clear Stuck Sync` only after confirming nothing active is still running.

## A user has the wrong access

82. Review the user's current role.
83. Confirm what access they actually need.
84. Update the role with a clear reason.
85. Ask the user to sign out and back in if needed.