

Painterly Rendering for WebGL

May 1, 2014

Andy Hanson*

Scott Todd†



Abstract

TODO.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Vivamus dignissim, ligula tristique ullamcorper semper, lacus tortor adipiscing ipsum, in auctor ipsum nunc ac orci. Etiam a tincidunt ante. Fusce pulvinar aliquet dolor, vel pharetra leo. Etiam adipiscing, sapien quis condimentum iaculis, risus ligula facilisis magna, ac vehicula odio mauris ac augue. Ut fermentum eros metus, id dictum mi vestibulum eu. Aliquam euismod sem id hendrerit iaculis. In id nibh sem. Mauris non arcu vitae sem pulvinar porttitor. Curabitur ac convallis turpis, a fermentum ipsum. Praesent vestibulum iaculis sem vitae viverra.

Keywords: Painterly Rendering, Non-Photorealistic Rendering, Particle Systems, Painting, Interactive Techniques, GPU Processing

1 Introduction

Non-photorealistic rendering (NPR) aims to bridge the gap between the creativity and expressivity of traditional art and the interactive and automated world of digital computer graphics. Various NPR techniques have applications in games, films, architecture, and scientific visualization. Painterly rendering is a subset of NPR that

tries to create images that have a painted appearance, as if the image was created from a sequence of brush strokes on a canvas.

Painterly rendering research typically focuses on brush stroke properties, methods of user interaction, potential aesthetic styles, rendering techniques, and other methods of approximating natural artwork.

Many past painterly algorithms [Hertzmann 1998], [Lu et al. 2010] have first generated a “real” image using other methods, then attempted to draw it as a painting. This brings with it the computational cost of fully rendering the scene twice, as well as a “shower door” visual effect where 2D strokes do not move perfectly in sync with 3D geometry.

Like others [Meier 1996], we instead keep a scene of brush strokes. There is no “real” rendering but the paint, and brush strokes store their own color and calculate their own light.

(Link to GitHub and hosted url)

1.1 Related Work

The use of particle systems to create painted images was explored in “Painterly Rendering for Animation” [Meier 1996]. Paint particles are distributed onto 3D objects and undergo the same transformation. During the rendering phase, a reference picture rendering is first created using traditional methods. Then every particle is sorted by depth, and particles are drawn back-to-front. Particles take on the color of the reference picture, or a solid color may be used per-particle and the reference picture ignored. The color is applied to a stroke texture (called the “brush image”), which is finally applied to the screen at the particle’s (projected) location.

In [Hertzmann 1998], 2D input images are painted over by layers of spline brush strokes. Strokes are placed along areas of high gradient on a source image blurred proportionally to the current brush size. In this manner, progressive emphasis is placed on regions of high

*email: hanson2@rpi.edu

†email: todds@rpi.edu

visual interest. An intuitive collection of parameters is chosen such that a user may easily select between a spectrum of visual styles. Parameter sets are presented for “Impressionist”, “Expressionist”, “Colorist Wash”, and “Pointillist” styles.

[Kalnins et al. 2002] explores interactive techniques that allow artists to create non-photorealistic renderings of 3D models. Artists are given control over brush styles, paper textures, basecoats, background styles, and the position and styling of each stroke. Their system uses information supplied from one or more viewpoints to render the models at any new viewpoint while preserving the desired aesthetic.

2 Painterly Rendering System

2.1 Algorithm Overview

We represent brush strokes as particles within particle systems. (The particles will be referred to as “strokes”.) Each object in the scene is represented as any number of layers; each layer has its own particle system.

Our system creates stroke meshes out of three.js geometries. Other inputs will include layer, color, and lighting information. The system outputs an image to a WebGL canvas.

Algorithm 1: Painterly Rendering Overview

```
[Section 2.2] At load time : foreach object do
  foreach layer do
    | Create a “stroke mesh” particle system
  end
end
[Section 2.3] At run time : foreach frame do
  Render a depth image
  foreach object do
    foreach layer from bottom to top do
      foreach stroke do
        Compute stroke properties in the vertex shader
        1. [Section 2.3.1] Compute zQuality
           (closeness to desired depth) and discard
           strokes with negative zQuality
        2. [Section 2.3.2] Compute diffuse and
           specular lighting and discard strokes with
           specular less than the minimum
        3. [Sections 2.3.3 - 2.3.6] Compute the
           “drawing gradient” at the stroke’s position,
           which provides the stroke’s orientation and
           curvature
        [Section 2.3.6] In the fragment shader, render an
        oriented, curved, colored version of the stroke
        texture according to the above parameters
      end
    end
  end
end
```

2.2 Stroke Mesh Creation

2.2.1 Stroke Selection

Rather than storing models directly as stroke systems, our system loads three.js JSON object files. These are transformed into stroke systems in the client using a method similar to that of [Meier 1996].

The total number of particles to be placed on the mesh is a parameter. Then for each face on the mesh, the number of particles on that face is in proportion to its area; in other words, it is that face’s fraction of the total area, times the total number of particles. Random Barycentric coordinates are selected, and position, normal, and u/v values are interpolated between the face’s vertices.

Particles of a single layer are drawn in the same order every time, so if particles are generated one face at a time in this way, rendered images will show an undesirable ordering of particles. So, a stroke particles are shuffled once during the loading phase.

2.2.2 Colors

To color particles, the user may select random hue, saturation, and luminance ranges for particles to be chosen from. This produces aesthetically pleasing representations of what are essentially “solid” colored objects.

We are also exploring the use of textures.

2.3 Stroke Rendering

Both the original triangle mesh and stroke meshes are needed for rendering. We render in two passes. First, we render the original geometry into a (floating point) depth texture. Then, we may render objects in any order, but render lower stroke layers before higher layers. Some higher-layer strokes will decide to discard themselves. (As WebGL does not yet support geometry shaders, discarding a stroke is done by shrinking it to 0 size and moving it offscreen.)

We also render object borders by fattening the original and drawing only triangles which face away from the camera. This is visually pleasing, but not necessary for our method.

2.3.1 zQuality

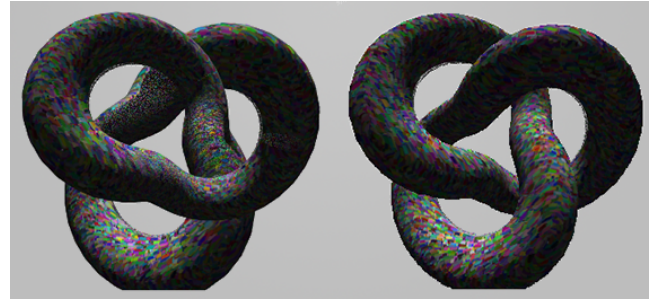


Figure 1: The image on the right discards fragments whose depth values differ from the value stored in the depth buffer texture while the image on the left does not. Note the intersections and other artifacts on the left.

Good results may be achieved by sorting particles by depth, but at the cost of performance. Blending particles is also unsuccessful because the number of overlapping particles is unpredictable. So, within each layer, particles are always drawn in the same order and always draw on top of each other. This leads to occlusion issues when a layer overlaps itself, shown in Figure 1.

To mitigate this effect, we render in two passes. First, we render the original geometry into a floating point depth buffer texture.

In the first iteration of our algorithm, we discarded fragments whose depth values differ from the value stored in the depth buffer at that position. This method performs a sharp cut-off around the silhou-

ette of each object, so it conflicted with the painterly rendering focus of our project.

This depth texture is passed as a uniform into the vertex shader for paint strokes. Each stroke measures its depth compared to the expected depth, and fades out when there is a discrepancy. (A simple on/off threshold would work, but strokes just showing up coming around the edge of an object would suddenly “pop” into existence.)

There is still another problem for strokes just at the edge of an object, which do not frames share its depth buffer. A slight fattening of the original mesh ensures that all of its strokes fit within its borders. We expanded the original mesh by pushing each vertex a small distance along the normal at that vertex.

2.3.2 Lighting

Each stroke is shaded the same throughout, using the light calculated at its center. We use the Phong equations. Light is calculated per stroke (in the vertex shader), rather than per-fragment. The total diffuse and specular lighting are calculated separately (see section 2.3.8).

2.3.3 Use of Gradient

For each stroke, we calculate a “gradient” property which strokes will be drawn perpendicular to. We would like strokes to satisfy the following attributes: they should follow the contours of objects and not extend far beyond the edges; and they should circle around centers of light. To satisfy these, we calculate the “net gradient” of the image based on both position and lighting attributes. These two parts are called the “edge gradient” and “light gradient”.

We calculate their contributions with this formula:

$$\begin{aligned} edgePart &= ||edgeGradient|| \\ lightPart &= \min(lightFactor \times ||lightGradient||, \\ &\quad (1 - edgePart)^2) \\ netGradient &= edgePart \times norm(edgeGradient) + \\ &\quad lightPart \times norm(lightGradient) \end{aligned}$$

Near the edges, only the edge gradient will factor in. It is more important that strokes align along the silhouette edges than that they circle the light. “lightFactor” is a parameter measuring how important the light gradient is, but “lightPart” can never exceed $(1 - edgePart)^2$. This quantity is squared to strictly reduce it; without squaring, strokes would still occasionally leak past the edges.

2.3.4 Edge gradient

The edge gradient is simply the x and y of the projected normal. Strokes whose normals point straight at the viewer have no edge gradient, meaning that there is no desire to orient them along the edges of the object, as they are likely in the middle. Strokes whose normals point straight to the side have a “edge gradient” of length 1, meaning that they are on the very edge of the object and there is a strong desire to orient them along it.

2.3.5 Light gradient

The lighting gradient is estimated without the expense of creating a reference image, meaning a Sobel filter is not used. Instead, we consider the changes in lighting as a viewer looks across the surface of an object. To do this, we calculate the direction from the camera to each stroke. This direction is then moved an epsilon to

the camera’s right or up (for the gradient’s dx and dy, respectively). A second ray is then fired from the camera and assumed to hit the same object. We approximate the local surface as a sphere and use a ray/sphere collision solver to find the new intersection (The sphere’s radius is the mesh’s curvature at that position. We currently hard-code this, but it may be calculated at load-time [Gatzke and Grimm 2006].). The lighting intensity is then calculated with the new position and normal there to find the difference in light. So, the lighting equation is run 3 times per stroke.

2.3.6 Orientation and Curvature

Strokes orientation is decided simply by rotating the gradient through a right angle. The amount of curvature is determined by multiplying the gradient length by the parameter “curveFactor”; strokes always curve along the gradient (towards the center of light or away from the object’s edges). Since strokes are point sprites, orientation and curvature are done using image transformations in the fragment shader.

First, the fragment coordinate is rotated around the stroke center by the orientation. Then it is distorted according to curvature. Fragments with $x = 0.5$ will remain unaffected, while fragments near $x = 0$ or $x = 1$ will sag down in a parabola whose height scales with the curvature amount.

$$yDistort = curveAmount * (x - 0.5)^2$$

The stroke texture sampling is then taken at $(x, y - yDistort)$. The stroke texture controls opacity, not color. The fragment shader’s output is the stroke’s shaded color, with an opacity value or the stroke texture sampling.

2.3.7 Layering

As in [Hertzmann 1998], [Meier 1996], [Lu et al. 2010], we use multiple layers of brush strokes for each object. Usually, the base layers will contain fewer, larger brush strokes. The base layers capture rough, un-detailed areas and completely cover object’s silhouette, while the top layers show fine details and may leave gaps between each other. We found that three layers of strokes was sufficient for the scenes that we tested. Layers have completely separate properties, making for interesting visual effects; for example, a base layer may be unsaturated and have a rougher stroke texture.

2.3.8 Specular Fade In

We support having higher-layer strokes fade in to only areas of high specular light. If the specular lighting contribution at a stroke does not exceed a (user-specified) minimum value, it is discarded. Strokes with low specular will be partly transparent, allowing for a smooth transition. This allows us to approximate the visual interest sampling in [Hertzmann 1998] and (other reference).

2.4 Parameters List

The following properties may be specified per-layer:

1. Number of strokes
2. Stroke size
3. Stroke texture
4. Curve factor
5. Color range (hue, sat, lum)
6. Specular amount and power



Figure 2: From left to right: no orientation or curvature, orientation with no curvature, orientation and exaggerated curvature (2.0).

7. Specular fade-in range

These may be specified by calling our API or through a user interface we created for this purpose.

3 Results

TODO.

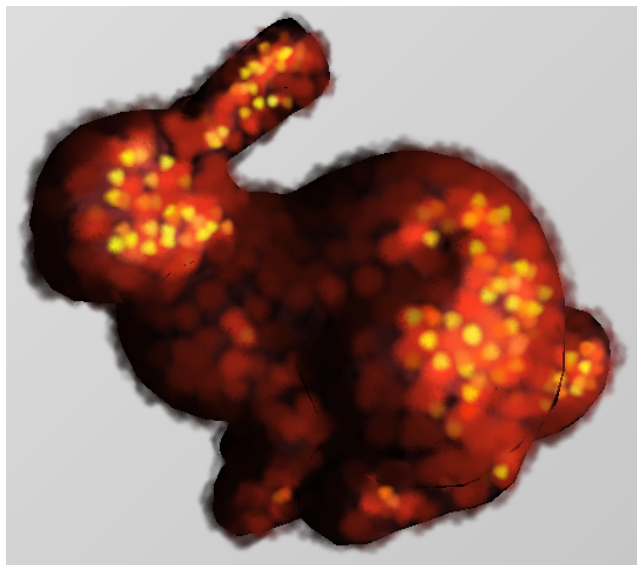


Figure 3: The Stanford bunny rendered using three layers of brush strokes. The topmost layer uses a minimum specular cutoff of 0.95 and a specular fade-in of 0.63.

4 Limitations and Future Work

Our method achieves smooth zooming by scaling strokes down when they are further away. Thus, objects in the distance may be drawn with many small strokes rather than with a few well-placed strokes.

The primary efficiency issue with our method is that every stroke is stored as a particle with position, normal, and coloring information. For large objects with many small strokes this would use a large amount of data. Also, most strokes are discarded in most frames,

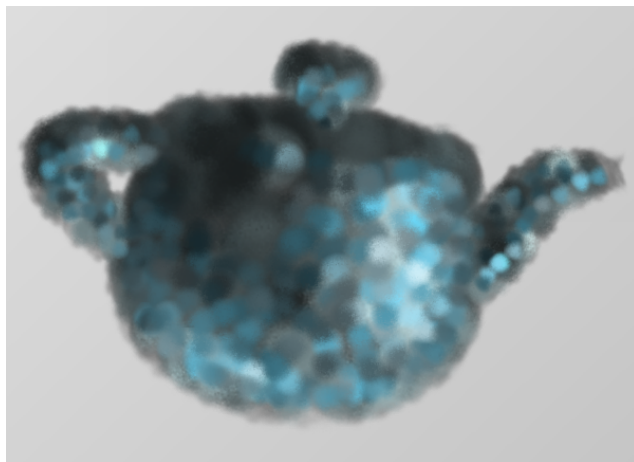


Figure 4: The Utah teapot rendered using three layers of brush strokes. The topmost layer uses a specular fade-in of 0.03.

whether because they are occluded or do not reach their minimum specular value. One improvement might be to perform stroke generation in a geometry shader and only store the mesh as data. Unfortunately, WebGL does not yet support geometry shaders.

Our method does not cull strokes at object boundaries, instead curving them inwards. This would not work well for objects with corners. However, per-fragment culling could be easily added, at the cost of unappealingly slicing strokes in two.

Acknowledgements

(TODO) Three.js

LaTeX: (TODO: write)

SIGGRAPH (TODO: LaTeX style)

References

- GATZKE, T., AND GRIMM, C. M. 2006. Estimating curvature on triangular meshes. *International journal of shape modeling* 12, 1, 1–28.
- HERTZMANN, A. 1998. Painterly rendering with curved brush strokes of multiple sizes. In *Proceedings of the 25th Annual*

Conference on Computer Graphics and Interactive Techniques, ACM, New York, NY, USA, SIGGRAPH '98, 453–460.

KALNINS, R. D., MARKOSIAN, L., MEIER, B. J., KOWALSKI, M. A., LEE, J. C., DAVIDSON, P. L., WEBB, M., HUGHES, J. F., AND FINKELSTEIN, A. 2002. Wysiwyg npr: Drawing strokes directly on 3d models. In *Proceedings of the 29th Annual Conference on Computer Graphics and Interactive Techniques*, ACM, New York, NY, USA, SIGGRAPH '02, 755–762.

LU, J., SANDER, P. V., AND FINKELSTEIN, A. 2010. Interactive painterly stylization of images, videos and 3d animations. In *Proceedings of the 2010 ACM SIGGRAPH Symposium on Interactive 3D Graphics and Games*, ACM, New York, NY, USA, I3D '10, 127–134.

MEIER, B. J. 1996. Painterly rendering for animation. In *Proceedings of the 23rd Annual Conference on Computer Graphics and Interactive Techniques*, ACM, New York, NY, USA, SIGGRAPH '96, 477–484.