

Sales Order Import

Collaborative Development Design

ID 66847

February 2020

Sales Order Import

Table of Contents

Introduction.....	3
Objective.....	3
Scope	3
Programming Requirements	4
Sales Order Import	4
Header Icons	5
Imports To Process	6
Import Logs.....	8
Configuration	9
Program Option Security	10
Ship-To Determination	11
Configuration File	13
Processing.....	14
Email	16
Defaults	17
Address Columns	18
Header Columns	20
Detail Columns.....	23
Configuration Validation.....	26

Sales Order Import

Introduction

Create a Sales Order Import process to automatically import orders from a csv file.

Objective

Add a Sales Order Import option to the Import portal to allow the user to add orders from an uploaded csv file. The import process will provide the following functionality:

- A configuration xml file will be used to define column mapping, default values and processing controls.
- Program Option Security will control which users can create, process and delete import and configuration files.
- Logging will provide a cross reference between the imported orders and the HDS Sales Orders created.

Scope

This project will be designed and delivered with the following release and version levels:

HarrisData HD5.0 115166
IBM i V7R1M0

This project will be based on the HTML User Interface. The Legacy User Interface will continue to work as it does today.

Minor changes may be made to the design as the enhancement is coded. These changes are made to correct issues discovered in developing the enhancement that were not found during the design. If any changes are made they will be included in the copy of the design you receive with the final product delivery. This design will also serve as your documentation until the User Documentation is updated.

Sales Order Import

Programming Requirements

Sales Order Import

The Sales Order Import option will be added to the Import portal. Refer to the Program Option Security section for authority setup. The Sales Order Import page (Figure 1) provides the following functionality:

Sales Order Import





Imports To Process

Import Logs

Configuration

Imports To Process (2 Of 2 Rows)

Opt	Description	Attachment Name	User	Date	Time
	GoodsonShopifyOrders	GoodsonShopifyOrders.csv	Brian	02-06-2020	05:45:39
	Invalid Import Extension	InvalidImportExtension.xlsx	Brian	01-28-2020	07:26:56

Import Logs (3 Of 3 Rows)

Opt	Description	Attachment Name	User	Date	Time
	Test2Orders	Test2Orders.csv	Brian	02-05-2020	07:01:38
	total variance with special charges	total variance.csv	Brian	01-30-2020	13:10:20
	Order with total variance	Order with total variance.csv	Brian	01-24-2020	14:30:10

Configuration (3 Of 3 Rows)

Opt	Description	Attachment Name	User	Date	Time
	Shopify	ShopifyConfig.xml	Brian	02-05-2020	07:01:06
	Invalid Configuration File Extension	InvalidConfigExtension.csv	Brian	01-28-2020	07:28:08
	SalesOrderImportConfig	SalesOrderImportConfig.xml	Brian	01-20-2020	07:30:20

Figure 1


Sales Order Import

Header Icons

The header icons allow the user to add files to the *Import To Process* or *Configuration* sections.

-  Only displays if the user has 'Add' authority and allows the user to upload import files to the *Imports To Process* section.
-  Only displays if the user has 'Configuration' authority and allows the user to upload a configuration file to the *Configuration* section.

Selecting either icon will display the standard attachment page.

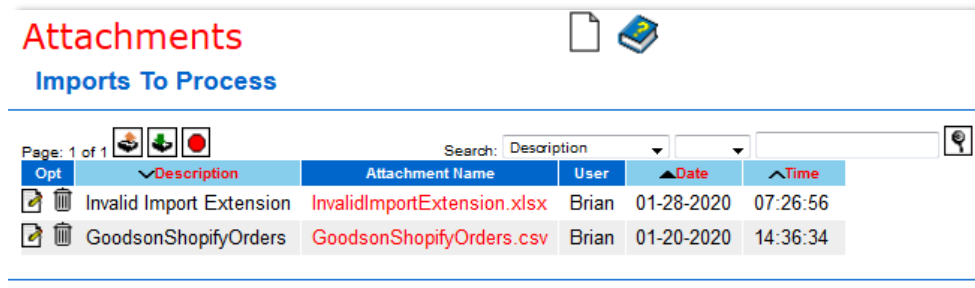

Attachments


Imports To Process

Page: 1 of 1

Search: Description

Opt	Description	Attachment Name	User	Date	Time
	Invalid Import Extension	InvalidImportExtension.xlsx	Brian	01-28-2020	07:26:56
	GoodsonShopifyOrders	GoodsonShopifyOrders.csv	Brian	01-20-2020	14:36:34

Use the 'Add' icon  to upload a new file. Make sure to attach the correct file extensions. A csv extension for *Imports To Process* and an xml extension for *Configuration*.

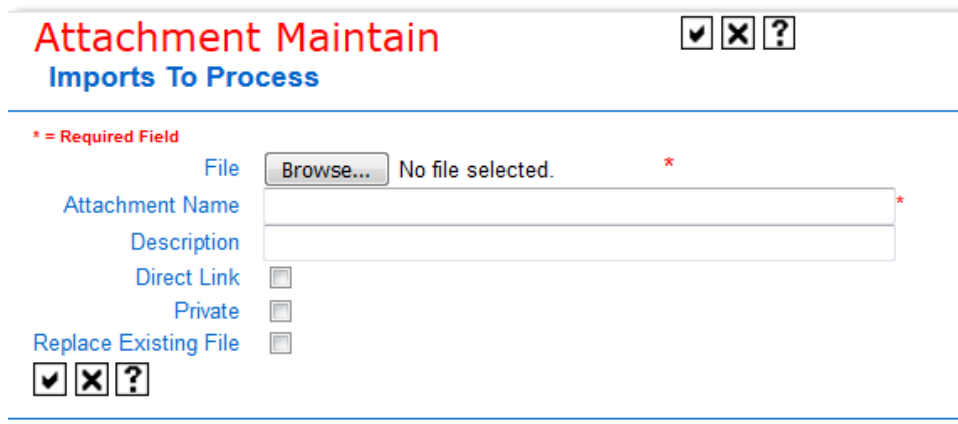

Attachment Maintain

Imports To Process

* = Required Field

File No file selected. *

Attachment Name *

Description

Direct Link ☐

Private ☐

Replace Existing File ☐

☒ ☐ ☐

Sales Order Import

Imports To Process

The *Imports To Process* section displays all files added using the  upload icon.

-  Only displays if the user has 'Process' authority and the file extension is 'csv'.

When this icon is selected, the following occurs:

- If multiple Configuration xml files exist, the following page is displayed. Select the appropriate Attachment Name to be used to process the import file. If there is only one configuration file, it is automatically selected.

Sales Order Import 

File: Test2Orders [Test2Orders.csv]

Select configuration file:

Description	Attachment Name	User	Date	Time
Shopify	ShopifyConfig.xml	Brian	02-03-2020	13:51:06
SalesOrderImportConfig	SalesOrderImportConfig.xml	Brian	01-20-2020	07:30:20

- The Configuration xml file is validated and any errors will be displayed and no orders are processed. Refer to Configuration Validation for more information.
- If the Configuration xml file is valid, the <key_column> is checked to make sure the heading exists in the import file. The <key_column> groups the imported detail lines together on a single order. It must be repeated for each detail line being imported. If not found, a message similar to the following will display:

Key Column (Name222222) defined in SalesOrderImportConfig.xml was not found in the Import File (Test2Orders.csv) 

- If no errors are found, the following page will be displayed while orders are being created:

Processing Sales Order Import

File: ShopifyF5Items [ShopifyF5Items.csv]



Sales Order Import

- For each <key_column> in the import file, perform the following steps:
 - Determine the Ship-To for the order (see Ship-To Determination)
 - Create the Order Header Work (OEHDWK)
 - Create the Order Detail Work (OEDTWK) for each Item with the same <key_column>. If the Item is not found in HDIMST then check Customer Item if processing->use_customer_item is true. If still not found, add it to the order as a non-stock item using values from the defaults->non_stock_item. If the Item is found, but an Item/Whs is not, add it to the order as non-stock item 'StkItemNoItemWh' and set the Item Description to the import Item.
 - If any errors found (i.e. non-stock items created), set the Hold Code (H1HOLD) to the defaults->hold_code->error value.
 - When the <key_column> changes (new order):
 - Calculate the taxes
 - If the <import_total_column> is mapped and found in the import file, compare the calculated order total to the value of the <import_total_column> and add any difference to the Special Charge Amount (H1CHRG).
 - Add the order to the Order Entry Data Queue
 - If <log_transactions> is true, add the order to the log.
- After all orders are processed:
 - If <log_transactions> is true, add the csv log file to the *Import Logs* section.
 - Delete the import file from the *Imports To Process* section
-  Only displays if the user has 'Delete' authority and allows the user to delete a file from the *Imports To Process* section.

Sales Order Import

- Attachment Name – if the attachment is found and the extension is csv, the link will display the contents of the csv file in a separate tab formatted as a simple html table as shown below.

Imports To Process

GoodsonShopifyOrders

Name	Email	Financial Status	Paid at	Fulfillment Status	Fulfilled at	Accepts Marketing	Currency	Subtotal	Shipping	Taxes	Total	Discou
GDSN18917	fap.machine.239@gmail.com	paid	11/25/2019 14:36	fulfilled	11/25/2019 14:36	yes	USD	82.98	10.88	6.11	99.97	
GDSN18917	fap.machine.239@gmail.com											
GDSN18918	timothy.brunet@nissan-usa.com	paid	11/25/2019 14:07	fulfilled	11/25/2019 14:07	no	USD	100.93	11.4	0	112.33	
GDSN18918	timothy.brunet@nissan-usa.com											
GDSN18918	timothy.brunet@nissan-usa.com											
GDSN18918	timothy.brunet@nissan-usa.com											
GDSN18918	timothy.brunet@nissan-usa.com											
GDSN18918	timothy.brunet@nissan-usa.com											
GDSN18918	timothy.brunet@nissan-usa.com											
GDSN18919	GBlethyn@Aol.com	paid	11/25/2019 14:08	fulfilled	11/25/2019 14:08	no	USD	19.99	9.13	1.46	30.58	
GDSN18920	kralls693@gmail.com	paid	11/25/2019 14:24	fulfilled	11/25/2019 14:22	no	USD	219.98	37.63	15.46	273.07	
GDSN18920	kralls693@gmail.com											
GDSN18921	cwilkesauto@gmail.com	paid	11/25/2019 14:29	fulfilled	11/25/2019 14:29	no	USD	59.98	15.53	0	75.51	
GDSN18922	cheffeymachine@gmail.com	paid	11/25/2019 14:32	fulfilled	11/25/2019 14:32	no	USD	147.72	16.89	0	164.61	
GDSN18922	cheffeymachine@gmail.com											

Import Logs

An import log csv file is created when the processing->log_transactions is true.

-  Allows the user to download the csv file.
-  Only displays if the user has 'Delete' authority. Allows the user to delete a file from the Import Logs section.
- Attachment Name – if the attachment is found and the extension is csv, the link will display the contents of the csv file in a separate tab formatted as a simple html table. If the Order Number exists in the Order Header table (OEORHD), it will be a link to the Open Order page. Customer links to the Customer Select page.

Import Log

ShopifyF5DropShip

Reference	Order Number	Customer	Name	Hold Code	Terms	Sub Total	Tax	Freight	Special Charge	Order Total	Line Count	Drop Ship	Name
GDSN18917	8191	5	Drexel Distributors		S2	82.98	7.97	10.88	-1.86	99.97	2	0	
GDSN18918	8192	171	Timothy Brunet	PVAR	S2	100.93	10.93	11.40	-10.93	112.33	7	0	
GDSN18919	8193	405	Advanced Technology	LATE	5	19.99	1.61	9.13	-.15	30.58	1	193	Import Drop Ship
GDSN18920	8194	139	jim krall		30	219.98	13.14	37.63	2.32	273.07	2	195	Johnny Doe
GDSN18921	8195	140	Pat Allen		30	59.98	4.35	15.53	-4.35	75.51	1	0	
GDSN18922	8196	141	steve cheffey		30	147.72	1.01	16.89	-1.01	164.61	4	0	
GDSN18923	8197	142	Christopher Collum		30	149.99	0	33.27	.00	183.26	1	0	
GDSN18924	8198	143	Bruce Hevner	PVAR	30	25.98	2.56	10.58	-2.56	36.56	1	0	

Sales Order Import

Configuration

The *Configuration* section only displays if the user has 'Configuration' authority.

-  Only displays if the file extension is 'xml' and allows the user to validate the configuration file without creating Sales Orders. Refer to Configuration Validation for more information.
-  Only displays if the user has 'Delete' authority. Allows the user to delete a file from the *Configuration* section.
- Attachment Name – if the attachment is found and the extension is xml, the link will display the contents of the xml file in a separate tab. The formatting may vary depending on the browser being used.

```
-<sales_order_import>
-<processing>
  <key_column>Name</key_column>
  <!-- Groups rows to an order -->
  <import_total_column>Total</import_total_column>
  <!--
    if defined and found in the csv, any variance between the calculated total and the import total to Special Charges
  -->
  <accept_prices>true</accept_prices>
  <!--
    (true/false) if true and the Selling Price column (01SLPR) is mapped that price will be retained
  -->
  <log_transactions>true</log_transactions>
  <!--
    (true/false) if true, a <csv>.log file will be created and displayed on the Sales Order Import page
  -->
  <address_match>true</address_match>
  <!--
    (true/false) if true and customer number not provided, search for using address 1, city and state
  -->
  <phone_match>true</phone_match>
  <!--
    (true/false) if true and a customer number was not found based on address, check using phone number
  -->
  <copy_default_customer>false</copy_default_customer>
  <!--
    (true/false) if true and a customer is not found, copy the defaults->customer and update with the address_columns->ship_to information
  -->
  <use_customer_item>false</use_customer_item>
  <!--
    (true/false) if true and item number is not found and ship-to customer was found, check for item using the customer item number
  -->
  <email_column/>
</processing>
-<defaults>
  <customer>5555555</customer>
  <!--
    if a customer number was not found based on address/phone (if used), use as ship-to customer
  -->
  <non_stock_item>W2</non_stock_item>
```

Sales Order Import

Program Option Security

A program name of 'IMPORT' will be added to Security->Program Option Security to control processing of the Sales Order Import with the following options:

- Add – user can upload files to the *Imports To Process* section.
- Process – user can process the file in *Imports To Process* to create Sales Orders.
- Delete – user can delete files from the sections they have access to.
- Configuration – the user can upload configuration files and the *Configuration* section will be displayed.

Once the users are setup that should be able to process the Sales Order Import, you should add the 'HDS' user profile with no options selected to prohibit all other users.

Program Option Security Maintenance

Program Name: [IMPORT]

User Profile	Name	Role

Page: 1 of 1

Opt	User Profile	Name	Role	Add	Process	Delete	Configuration
	HDS	HDS	HD_ALL	☐	☐	☐	☐
	RDBHRPR	Brian	RD_ALL	☒	☒	☒	☒

Sales Order Import

Ship-To Determination

The determination of the Ship-To and Bill-To Customer Numbers assigned to the Sales Order will be based on the following spreadsheet. A 'mapped' value of 'Y' indicates that the column is defined in the Configuration xml file. A 'found' value of 'Y' indicates that the import value was found in the HarrisData table. The 'Addr Found' value of 'Y' indicates that either the address or phone number (if used) were found in the Customer table (HDCUST).

The Order Ship-To and Order Bill-To columns show what values will be used to create the Sales Order. If Order Ship-To is 'New using Ship-To' and the configuration processing->copy_default_customer is false, the Order Ship-To will be set to the defaults->customer.

Drop Ship address columns:

- If the Drop Ship Number (H1DSHP) is mapped and the import contains a value, it will be validated against the Drop Ship table (HDDSHP) using the Ship-To Number found. If valid, the Drop Ship Number will be assigned to the Sales Order.
- If the Drop Ship Number is invalid or not mapped, but a Name & Address are, the Drop Ship table (HDDSHP) will be searched for the address and phone number (if used) for the Ship-To Number found. If found, use that Drop Ship Number. Otherwise, create a new Drop Ship (HDDSHP) using the Name & Address from the import and assign the new Drop Ship Number to the Sales Order.

Sales Order Import

	A	B	C	D	E	F	G	H	I	J	K
	H1BLTO mapped	H1BLTO found	H1SHTO mapped	H1SHTO found	Ship-To Addr Mapped	Ship-To Addr Found	Bill-To Addr Mapped	Bill-To Addr Found	Ship-To/Bill-To Same	Order Ship-To	Order Bill-To
1											
2	Y	Y								H1BLTO	
3	Y	Y	Y	Y						H1SHTO	HDCUST/CMBLTO
4	Y	Y	Y	N						H1BLTO	
5	Y	Y			Y	Y				Ship-To	HDCUST/CMBLTO
6	Y	Y			Y	N				New using Ship-To	H1BLTO
7	Y	Y			Y	Y	Y	Y	N	Ship-To	HDCUST/CMBLTO
8	Y	Y			Y	Y	Y	Y	Y	Ship-To	HDCUST/CMBLTO
9	Y	Y			Y	N	Y	N	N	New using Ship-To	H1BLTO
10			Y	Y						H1SHTO	HDCUST/CMBLTO
11			Y	N	Y	Y				Ship-To	HDCUST/CMBLTO
12			Y	N	Y	N				New using Ship-To	Order Ship-To
13			Y	N	Y	Y	Y	Y	N	Ship-To	HDCUST/CMBLTO
14			Y	N	Y	N	Y	Y	N	New using Ship-To	Bill-To
15					Y	N	Y	N	Y	New using Ship-To	Order Ship-To
16					Y	N	Y	Y	N	New using Ship-To	Bill-To
17							Y	Y		Bill-To	Bill-To
18							Y	N		New using Bill-To	Order Ship-To

Sales Order Import

Configuration File

A configuration template file named SalesOrderImportConfig.xml will be supplied in your /HarrisData/EIP folder. You must copy and maintain to create your own custom import configuration file which you will then upload on the Sales Order Import page (Figure 1). The configuration template consists of the following sections:

- <processing>
- <defaults>
- <email>
- <address_columns>
- <header_columns>
- <detail_columns>

A detailed explanation of each sections follows.

Note: In order for the configuration file to pass validation, **do not** remove or move any elements from any of the sections.

Sales Order Import

Processing

Column	Required	Valid values	Description
key_column	Y	import column name	This column groups the imported detail lines together on a single order. It must be repeated for each detail line being imported.
import_total_colum	N	import column name	If defined and a valid column name, the imported total will be compared to the calculated total and any variance will be added to the Special Charge column.
accept_prices	Y	true/false	If true , the value of the import column mapped to O1SLPR will be used and the List Price Override flag in Order Detail (OEORDT/ ODLPOV) will be set to 'Y'. If false , the standard HDS pricing will be used.
log_transactions	Y	true/false	If true , when the import is processed and removed from the Imports To Process section, an Import Log will be created
address_match	Y	true/false	If true and the address columns are mapped, it will attempt to find a Customer using the address 1, city and zip code columns. This will only be used if a Ship-To Number has not been found.
phone_match	Y	true/false	If true and the phone_number column is mapped, search for a Customer using the phone number supplied. This will only be used if a Ship-To Number has not been found.
copy_default_customer	Y	true/false	If Ship-To Customer was not found using H1BLTO, H1SHTO, address_match or phone_match: true –the defaults->customer will be copied to a new customer and updated with the import ship-to information false – the defaults->customer will be used as the Ship-To
use_customer_item	Y	true/false	If true and the item number for detail column O1ITEM was not found in the Item table (HDIMST) check for a Customer Item in HDVCIT using the Ship-To Customer.

Sales Order Import

```
<processing>
  <key_column></key_column> <!-- Groups rows to an order -->
  <import_total_column></import_total_column> <!-- if defined and found in the csv, any variance between the calculated total and the import total to Special Charges -->
  <accept_prices>true</accept_prices> <!-- (true/false) if true and the Selling Price column (01SLPR) is mapped that price will be retained as a price override -->
  <log_transactions>true</log_transactions> <!-- (true/false) if true, a <csv>.log file will be created and displayed on the Sales Order Import page -->
  <address_match>false</address_match> <!-- (true/false) if true and customer number not provided, search for using address 1, city and state -->
  <phone_match>false</phone_match> <!-- (true/false) if true and a customer number was not found based on address, check using phone number -->
  <copy_default_customer>false</copy_default_customer> <!-- (true/false) if true and a customer is not found, copy the defaults->customer and update with the address_columns->ship_to
  <use_customer_item>false</use_customer_item> <!-- (true/false) if true and item number is not found and ship-to customer was found, check for item using the customer item number-->
</processing>
```

Sales Order Import

Email

Column	Required	Valid values	Description
import_column	N	import column name	This identifies the column from the import file that contains the email address.
update_customer	N	true/false	If true , the Vendor/Customer Fax table (HDVCFM) will be created for each of the documents set to true that don't already exist.
acknowledgment	N	true/false	If true , add the email to the Acknowledgment
invoice	N	true/false	If true , add the email to the Invoice
pick_ticket	N	true/false	If true , add the email to the Pick Ticket
packing_list	N	true/false	If true , add the email to the Packing List

```

<email>
  <import_column></import_column>
  <update_customer>>false</update_customer> <!-- (true/false) if true and Customer/Fax (HDVCFM) not found for a document set to true, create it -->
  <documents>
    <acknowledgment>>false</acknowledgment> <!-- (true/false) if true and email import column defined, add the email to the Acknowledgment -->
    <invoice>>false</invoice> <!-- (true/false) if true and email import column defined, add the email to the Invoice -->
    <pick_ticket>>false</pick_ticket> <!-- (true/false) if true and email import column defined, add the email to the Pick Ticket -->
    <packing_list>>false</packing_list> <!-- (true/false) if true and email import column defined, add the email to the Packing List -->
  </documents>
</email>

```


Sales Order Import

Defaults

Column	Required	Valid values	Description
customer	Y	HDCUST/CMCUST	Must be a valid Customer in HDCUST that will be used if a Ship-To Customer is not matched.
non_stock_item	Y	HDIMST/IMITEM	Must be a valid Item in HDIMST that will be used if the imported item is not matched.
order_type	Y	HDOTYP/OTOTCD	Must be a valid Order Type in HDOTYP for Order Entry and cannot be a reserved type of C, I, P or R. This will be used if the header column H1ORTY is not defined or the import value is blank.
hold_code->order	N	HDHLCD/ HCHLCD	Must be a valid Hold Code in HDHLCD for Order Entry. Will be the default value if defined and the header column H1HOLD is not defined and there are no errors.
hold_code->error	Y	HDHLCD/ HCHLCD	Must be a valid Hold Code in HDHLCD for Order Entry. Will default if there are errors on the order (i.e. non-stock items)
required_date_offset	N		If the header column H1RQDT is not defined and the offset is defined, it will be added to the current date. Examples of an offset: + 3 days

```

<defaults>
  <customer></customer> <!-- if a customer number was not found based on address/phone (if used), use as ship-to customer -->
  <non_stock_item></non_stock_item> <!-- if item number was not found, use this item's values to create a non-stock item -->
  <order_type></order_type>
  <hold_code>
    <order></order> <!-- If defined, always set the Order Hold Code to this value -->
    <error></error> <!-- If defined and any errors occur, set the Order Hold Code to this value -->
  </hold_code>
  <required_date_offset></required_date_offset> <!-- If the header required date is not provided, the offset will be applied to the current date -->
</defaults>

```

Sales Order Import

Address Columns

The Address Columns element provides the ability to define Bill-To, Ship-To or Drop Ship information.

Column	Required	Valid values	Description
H1BLTO/H1SHTO/H1DSHP	N	import column name	Customer or Drop Ship Number
name	N	import column name	Name of the customer
address_1	N	import column name	Address 1
address_2	N	import column name	Address 2
address_3	N	import column name	Address 3
city	N	import column name	City
state	N	import column name	State
zip_code	N	import column name	Zip Code
phone_number	N	import column name	Phone Number

Sales Order Import

```
<address_columns>
  <bill_to>
    <H1BLTO></H1BLTO>          <!-- Bill-To Number (7N) -->
    <name></name>                <!-- Name (26A) -->
    <address_1></address_1>      <!-- Address 1 (26A) -->
    <address_2></address_2>      <!-- Address 2 (26A) -->
    <address_3></address_3>      <!-- Address 3 (19A) -->
    <city></city>                <!-- City (26A) -->
    <state></state>              <!-- State (2A) -->
    <zip_code></zip_code>        <!-- Zip Code (13A) -->
    <phone_number></phone_number><!-- Phone Number (11N) -->
  </bill_to>
  <ship_to>
    <H1SHTO></H1SHTO>          <!-- Ship-To Number (7N) -->
    <name></name>                <!-- Name (26A) -->
    <address_1></address_1>      <!-- Address 1 (26A) -->
    <address_2></address_2>      <!-- Address 2 (26A) -->
    <address_3></address_3>      <!-- Address 3 (19A) -->
    <city></city>                <!-- City (26A) -->
    <state></state>              <!-- State (2A) -->
    <zip_code></zip_code>        <!-- Zip Code (13A) -->
    <phone_number></phone_number><!-- Phone Number (11N) -->
  </ship_to>
  <drop_ship>
    <H1DSHP></H1DSHP>          <!-- Drop Ship Number (7N) -->
    <name></name>                <!-- Name (26A) -->
    <address_1></address_1>      <!-- Address 1 (26A) -->
    <address_2></address_2>      <!-- Address 2 (26A) -->
    <address_3></address_3>      <!-- Address 3 (19A) -->
    <city></city>                <!-- City (26A) -->
    <state></state>              <!-- State (2A) -->
    <zip_code></zip_code>        <!-- Zip Code (13A) -->
    <phone_number></phone_number><!-- Phone Number (11N) -->
  </drop_ship>
</address_columns>
```

Sales Order Import

Header Columns

The following table contains the columns from the Order Entry Header Work table (OEHDWK) that can be mapped to from your import file. There are no columns that are required to be mapped to be able to process an import. For each column you want to map, enter the header column name from your import file into the <import_column> element.

In the example below, I have entered **MyOrderType** as the column that will be mapped from the import file to column H1ORTY in the OEHDWK. If you don't have an import column to map to or wish to supply a value if the mapped column is empty, add the <default_value> element with a value. If the mapped to column requires a format of MMDDYY and the import column format is a timestamp, add the <format> element and enter a value of 'timestamp'.

```
<H1ORTY><!-- Order Type (1A) -->
  <import_column>MyOrderType</import_column>
  <default_value></default_value>
</H1ORTY>

<H1RQDT><!--Required Date (6N) -->
  <import_column>Req Date</import_column>
  <format>timestamp</format><!-- defines the format of a date column -->
</H1RQDT >
```

Sales Order Import

The following header columns are available in the xml file to be mapped:

Column	Description	Size/Type
H1ORTY	Order Type	1A
H1CTRM	Terms Code	2A
H1FRT	Freight Amount	9,2
H1CHRG	Special Charge Amount	9,2
H1LOC	Location Number	3N
H1BDTE	Order Date	6N (MMDDYY)
H1RQDT	Required Date	6N (MMDDYY)
H1DTE2	User-Defined Date 2	6N (MMDDYY)
H1DTE3	User-Defined Date 3	6N (MMDDYY)
H1DTE4	User-Defined Date 4	6N (MMDDYY)
H1ATTN	Attention	22A
H1ORRF	Reference Number	22A
H1STOR	Store Number	20A
H1UCA1	Customer User-Defined Alpha 1	2A
H1UCA2	Customer User-Defined Alpha 2	2A
H1UCA3	Customer User-Defined Alpha 3	2A
H1UCA4	Customer User-Defined Alpha 4	2A
H1UCA5	Customer User-Defined Alpha 5	2A
H1UDF1	Order Header User-Defined 1	15A
H1UDF2	Order Header User-Defined 2	15A
H1UDF3	Order Header User-Defined 3	15A
H1UDF4	Order Header User-Defined 4	15A
H1UDF5	Order Header User-Defined 5	15A
H1UDF6	Order Header User-Defined 6	30A
H1UDF7	Order Header User-Defined 7	30A
H1UDF8	Order Header User-Defined 8	30A
H1UDF9	Order Header User-Defined 9	30A
H1UDF0	Order Header User-Defined 0	30A

Sales Order Import

This is a partial view of the header columns section of the SalesOrderImportConfig.xml template:

```
<header_columns><!-- OEHDWK -->
  <!-- An optional <default_value></default_value> element can be added within a column element -->
  <H1ORTY><!-- Order Type (1A) -->
    <import_column></import_column>
  </H1ORTY>
  <H1CTRM><!-- Terms Code (2A) -->
    <import_column></import_column>
  </H1CTRM>
  <H1FRT><!-- Freight Amount (9,2) -->
    <import_column></import_column>
  </H1FRT>
  <H1CHRG><!-- Special Charge Amount (9,2) -->
    <import_column></import_column>
  </H1CHRG>
  <H1LOC><!-- Location Number (3N) -->
    <import_column></import_column>
  </H1LOC>
  <H1BDTE><!-- Order Date (MMDDYY) -->
    <import_column></import_column>
    <format></format><!-- defines the format of the column -->
  </H1BDTE>
  <H1RQDT><!-- Required Date (MMDDYY) -->
    <import_column></import_column>
    <format></format><!-- defines the format of the column -->
  </H1RQDT>
  <H1DTE2><!-- User Date 2 (MMDDYY) -->
```

Sales Order Import

Detail Columns

The following table contains the columns from the Order Entry Detail Work table (OEDTWK) that can be mapped to from your import file. The only columns that are required to be mapped to be able to process an import are Item Number (O1ITEM) and Order Quantity (O1QORD). For each column you want to map, enter the header column name from your import file into the <import_column> element.

In the example below, I have entered **MYITEM** as the column that will be mapped from the import file to column O1ITEM in the OEDTWK. If you don't have an import column to map to or wish to supply a value if the mapped column is empty, add the <default_value> element with a value. If the mapped to column requires a format of MMDDYY and the import column format is a timestamp, add a <format> element as shown below and enter a value of 'timestamp'.

```
<O1ITEM><!-- Item Number (15A) -->
  <import_column>MYITEM</import_column>
  <default_value></default_value>
</O1ITEM>

<O1RQDT><!--Required Date (6N) -->
  <import_column>Req Date</import_column>
  <format>timestamp</format><!-- defines the format of a date column -->
</O1RQDT >
```

Sales Order Import

The following detail columns are available in the xml file to be mapped:

Column	Description	Size/Type
O1RQDT	Required Date	6N (MMDDYY)
O1ITEM	Item Number	15A
O1IMDS	Item Description	30A
O1ORCS	Customer Item Number	30A
O1PCLS	Product Class	4A
O1WH	Warehouse Number	3N
O1QORD	Order Quantity	9,4
O1SLPR	Selling Price	8,5
O1TAXC	Taxable	1A
O1UDF1	User-Defined Alpha 1	15A
O1UDF2	User-Defined Alpha 2	15A
O1UDF3	User-Defined Alpha 3	15A
O1UDF4	User-Defined Alpha 4	15A
O1UDF5	User-Defined Alpha 5	15A
O1UDF6	User-Defined Alpha 6	30A
O1UDF7	User-Defined Alpha 7	30A
O1UDF8	User-Defined Alpha 8	30A
O1UDF9	User-Defined Alpha 9	30A
O1UDF0	User-Defined Alpha 10	30A
O1UDN1	User-Defined Numeric 1	8,5
O1UDN2	User-Defined Numeric 2	8,5
O1UDN3	User-Defined Numeric 3	8,5
O1UDN4	User-Defined Numeric 4	8,5
O1UDN5	User-Defined Numeric 5	8,5

Sales Order Import

This is a partial view of the detail columns section of the SalesOrderImportConfig.xml template:

```
<detail_columns><!-- OEDTWK -->
  <!-- An optional <default_value>/</default_value> element can be added within a column element -->
  <O1RQDT><!-- Required Date (MMDDYY) -->
    <import_column></import_column>
    <format>date_time_format</format><!-- defines the format for a date/time column -->
  </O1RQDT>
  <O1ITEM><!-- Item Number (15A) -->
    <import_column>MYITEM</import_column>
  </O1ITEM>
  <O1IMDS><!-- Item Description (30A) -->
    <import_column></import_column>
  </O1IMDS>
  <O1ORCS><!-- Customer Item Number (30A) -->
    <import_column></import_column>
  </O1ORCS>
  <O1PCLS><!-- Product Class (4A) -->
    <import_column></import_column>
  </O1PCLS>
  <O1WH><!-- Warehouse Number (3N) -->
    <import_column></import_column>
  </O1WH>
  <O1QORD><!-- Order Quantity (9,4) -->
    <import_column>IMPORTQTY</import_column>
  </O1QORD>
  <O1SLPR><!-- Selling Price (8,5) -->
    <import_column></import_column>
  </O1SLPR>
  <O1TAXC><!-- Taxable Y/N (1A) -->
    <import_column></import_column>
  </O1TAXC>
  <O1UDF1><!-- User-Defined Alpha 1 (15A) -->
```

Sales Order Import

Configuration Validation

When the validate configuration icon  from the *Configuration* section or the Process Order icon  from the *Imports To Process* section are selected, the configuration file is validated.

If valid and the Process Order icon was selected, the selected file from *Imports To Process* will be processed.

If valid and the validate configuration icon was selected, the following message will be displayed:

Sales Order Import configuration file (ShopifyConfig.xml) is valid



If there are errors in the configuration file, error messages similar to the following will be displayed.

Sales Order Import configuration file (ShopifyConfig.xml) is **NOT** valid



Error 1824: Element 'accept_prices': 'tru' is not a valid value of the atomic type 'xs:boolean'. on line 7

Error 1824: Element 'phone_match': " is not a valid value of the atomic type 'xs:boolean'. on line 10

Error 1871: Element 'defaults': Missing child element(s). Expected is (required_date_offset). on line 15

Error 1871: Element 'H1SH': This element is not expected. Expected is (H1SHTO). on line 49

Use the home icon  to return to the Sales Order Import page (Figure 1).