



OFFLINE RECOVERY REFERENCE

YellowSphere v1.6.6

Programmer's Manual and User Guide

A shelf-ready guide to the standalone HTML application, Python wrapper, Tauri desktop package, cryptographic export formats, deterministic derivation behavior, QR workflows, and operational procedures.

Primary GUI	Standalone HTML application
Desktop GUI	PySide6 WebEngine wrapper
Desktop Package	Tauri wrapper with native export bridge
CLI	Python derivation and export interface
Manual Scope	User workflow plus byte-faithful technical reference sections
Generated	June 18, 2026

Contents

Use this guide from front to back for operational setup, or jump directly to the reference sections when validating exact derivation, encryption, file-format, QR, and test-vector behavior.

■YellowSphere v1.6.6 - Byte-Level User and Operator Guide	3
Interface Guide	18
Encryption Scheme Diagrams	22
Coin Derivation Diagrams	24
■YellowSphere v1.6.6 - Recovery Procedure and Data Boundary Specification	30
■YellowSphere v1.6.6 - Operational Security Specification	44
YellowSphere v1.6.6 - Linux Release Notes	61
■YellowSphere - Build Reproducibility Specification	64
■YellowSphere v1.6.6 - Passphrase and Secret Handling Specification	72
■YellowSphere v1.6.6 - Byte-Level File Format Specification	86
■YellowSphere v1.6.6 - Encryption Subsystem Internals	102
■YellowSphere v1.6.6 - Derivation Engine Internals	128
■YellowSphere v1.6.6 - QR Payload and Encoder Specification	151
■YellowSphere v1.6.6 - Canonical Test Vector Specification	165

■YellowSphere v1.6.6 - Byte-Level User and Operator Guide

Release Boundary

This guide describes the promoted production YellowSphere.html v1.6.6. The coin selector contains Bitcoin, Bitcoin Cash, Litecoin, Dogecoin, Ethereum / ERC-20, Tron / TRC-20, BNB Chain, Avalanche C-Chain, Polygon, Cosmos / ATOM, Solana, Stellar, Cardano, and XRP. The Advanced Testnet toggle selects a testnet profile for each currency. Polkadot and Monero are not production v1.6.6 browser options.

Version 1.6.6 adds live case-insensitive partial filtering of derived rows. The search covers addresses, private keys, and other displayed row fields, reports visible and total row counts, remains available in expanded output, and is never written into exported data.

The archived browser builds are:

```
lts/YellowSphere_v1.6.4_LTS.html
lts/YellowSphere_v1.6.2_LTS.html
lts/YellowSphere_v1.6.0_LTS.html
lts/YellowSphere_v1.5.0_LTS.html
```

Monero guidance retained later is archived v1.6.0 LTS/Python compatibility material. Version 1.6.6 writes protected internal YellowSphere ARC V3 bundles using AES-256-GCM and writes AES-256-GCM encrypted-keyfile version 2 files. It continues to read legacy YellowSphere ARC V2, older YellowSphere ARC formats, and encrypted-keyfile version 1. The outer .arc armor header remains YELLOWSPHERE-ARC-V2, so operators should use the decoded bundle version rather than the armor line to identify the cipher format. See Encryption.txt and the repository README release notes for the exact KDF, padding, authentication, and compatibility rules.

Source of Truth

This guide describes the standalone browser application implemented by the repository root file YellowSphere.html with APP_VERSION equal to v1.6.6. The HTML file is the authoritative implementation for the UI, mnemonic normalization, key derivation, address construction, YellowSphere ARC seed-file encryption, QR generation, export formatting, and runtime clearing behavior.

The application is designed to run fully offline in a browser. The v1.6.6 HTML embeds its cryptographic and serialization dependencies directly, including:

```
BIP39 English word list
PBKDF2-HMAC-SHA512
HMAC-SHA512
SHA-256
SHA-512
RIPEMD-160
Keccak-256
secp256k1 scalar and point arithmetic
Ed25519 arithmetic
Bech32
Bech32m
CashAddr
Bitcoin Base58Check
XRPL Base58Check
archived v1.6.0 LTS Monero base58 block encoding
QR encoding and PNG canvas rendering
jsPDF PDF export
```

The network indicator reflects navigator.onLine only. It does not create a network request and does not prove that the browser, host operating system, or extensions are isolated. Recovery work should be performed in an environment where the operator controls the machine, browser profile, clipboard, screen capture, and downloaded files.

Release Signature Verification

Version 1.6.6 standalone HTML, Python, and Windows release artifacts include detached PGP signatures. The release-signing public key is:

```
docs/YellowSphere_Release_Signing_2026_pubkey.asc
```

Release signing key:

```
YellowSphere Release Signing (2026) <release@yellowsphere.local>
Fingerprint: 6A88 D329 DCF6 1A44 EF69 101B 019E C328 3B45 1469
```

Before trusting a signature, inspect the public key and confirm that the fingerprint matches the value above:

```
gpg --show-keys docs/YellowSphere_Release_Signing_2026_pubkey.asc
```

To verify the signed checksum manifest:

```
gpg --import docs/YellowSphere_Release_Signing_2026_pubkey.asc
gpg --verify docs/SHA256SUMS.asc docs/SHA256SUMS
```

To verify a release artifact:

```
gpg --verify YellowSphere.html.asc YellowSphere.html
gpg --verify releases/tauri/windows/YellowSphere_1.6.6_x64-setup.exe.asc releases/tauri/
windows/YellowSphere_1.6.6_x64-setup.exe
```

PGP signatures confirm that the artifact matches the key holder's signature. They do not make Windows treat the installer as Authenticode-signed.

Supported Recovery Scope

YellowSphere v1.6.6 derives keys and addresses. It does not scan balances, query account state, broadcast transactions, import funds, sign transactions, fetch token metadata, check address reuse, infer wallet gap limits, or contact wallet-provider APIs.

The supported visible seed sizes are:

```
12 words
24 words
```

Both sizes are BIP39 English mnemonics. A 12-word mnemonic encodes 128 entropy bits plus 4 checksum bits. A 24-word mnemonic encodes 256 entropy bits plus 8 checksum bits. Other BIP39-valid word counts such as 15, 18, and 21 are not accepted by v1.6.6.

The production selector and Advanced Testnet toggle expose:

```
Bitcoin
Bitcoin Cash
Litecoin
Dogecoin
Ethereum / ERC-20
Tron / TRC-20
BNB Chain
Avalanche C-Chain
Polygon
Cosmos / ATOM
Solana
Stellar
Cardano
XRP
```

Initial UI State

On load, the title row displays "YellowSphere" and v1.6.6. The default input state is:

```
mnemonic textarea: empty
seed length radio: 12 words
numbered word grid: 24 cells present; active cells follow seed length
passphrase input: empty, type=password
coin selector: Bitcoin
derivation path: m/0'
script selector: P2WPKH
address count: 5
range: empty
export format: PDF
root fingerprint display: Root Fingerprint:
status: Ready
```

Changing the coin selector resets the derivation path to the coin default and also updates the script selector:

```
Bitcoin: P2WPKH
Bitcoin Cash: P2PKH
Litecoin: P2WPKH
```

```
Dogecoin: P2PKH
Ethereum / ERC-20: Auto
Tron / TRC-20: Auto
BNB Chain: Auto
Avalanche C-Chain: Auto
Polygon: Auto
Cosmos / ATOM: Auto
Solana: Auto
Stellar: Auto
Cardano: Auto
XRP: Auto
```

The derivation-path info marker is displayed when the active path is exactly `m/0'`. That marker exists because the YellowSphere default path is a single hardened account level rather than the BIP44-style `m/44'/coin_type'/account'` path used by many other wallets.

Mnemonic Input Model

Seed input can be supplied through either:

- a single textarea containing whitespace-separated words
- the numbered word grid with one word per cell

The active mnemonic used by validation, derivation, seed export, and seed copy is selected as follows:

- If an imported, generated, or masked seed state exists, use that hidden internal mnemonic.

- Otherwise, use the visible mnemonic textarea value.

The normalization algorithm is:

```
input_string = input or empty string
trimmed = input_string.trim()
tokens = trimmed.split(/\s+/).filter(Boolean)
joined = tokens.join(" ")
normalized = joined.normalize("NFKD")
words = normalized === "" ? [] : normalized.split(" ")
```

Important byte-level properties:

- The join separator is one ASCII space, byte `0x20` after UTF-8 encoding.
- The mnemonic is normalized with Unicode NFKD before BIP39 seed derivation.
- Word lookup is against the embedded lowercase BIP39 English list.
- The visible text area placeholder is not part of the mnemonic.
- The passphrase is never appended to the displayed mnemonic.

Validation rejects:

- word counts other than 12 or 24
- words absent from the embedded BIP39 English list
- valid words whose checksum bits do not match `SHA-256(entropy)`

When the visible mnemonic is successfully derived for the first time, v1.6.6 promotes it into the protected hidden seed state. The textarea and word cells are replaced by mask tokens, and later derivations use the hidden internal seed unless Clear All is pressed.

Generated Seed Workflow

Generate Random Seed uses `crypto.getRandomValues` to sample entropy. The seed length radio controls the entropy length:

- 12 words: 16 random bytes, 128 entropy bits, 4 checksum bits
- 24 words: 32 random bytes, 256 entropy bits, 8 checksum bits

Generation steps:

- Sample entropy bytes with `crypto.getRandomValues`.
- Compute `SHA-256(entropy)`.
- Take the leftmost ENT / 32 checksum bits.
- Concatenate entropy bits || checksum bits.
- Split into 11-bit unsigned indexes.

- Map each index to BIP39_WORDS[index].
- Store the mnemonic in hidden seed state.
- Replace the visible textarea and word grid with mask tokens.

The generated mnemonic is ready for validation, derivation, copy, QR-free export, and YellowSphere ARC export without revealing it on screen. Hold Show Seed to reveal the words temporarily. Release the button, move the pointer away, or end the touch event to re-mask the phrase.

Passphrase Handling

The Passphrase field is the optional BIP39 passphrase, sometimes called the 25th word in wallet UI language. It is not a BIP39 word and is not validated against the BIP39 word list.

The BIP39 seed calculation is:

```
password bytes = UTF8(NFKD(normalized_mnemonic))
salt bytes = UTF8(NFKD("mnemonic" + passphrase))
PBKDF2 algorithm = PBKDF2-HMAC-SHA512
PBKDF2 iterations = 2048
output length = 64 bytes
```

An empty passphrase is a distinct wallet from any non-empty passphrase. A mistyped passphrase can produce valid-looking derived addresses that do not match the intended wallet. v1.6.6 shows a passphrase warning in validation output when the mnemonic is valid and the passphrase field is empty.

The passphrase visibility button toggles the HTML input type between password and text. Toggling visibility does not change the stored value, derived seed, root fingerprint, or export bytes.

Validate Mnemonic

Validate Mnemonic runs analyzeMnemonic against the active mnemonic and the current passphrase. It writes a JSON diagnostic object to the raw output area. On success or structured failure the object contains:

```
validation
word_count
wordlist_validity
entropy_bits
checksum_bits
checksum_match
bip39_compliance
bip39_seed_512_bit
master_private_key
master_chain_code
root_fingerprint
keystore_type
seed_format_detection
passphrase_warning
message
```

For a valid mnemonic, the BIP39 seed is 64 bytes and is rendered as lowercase hex. The secp256k1 master private key and master chain code are produced by:

```
HMAC-SHA512(key = ASCII("Bitcoin seed"), data = BIP39 seed)
master_private_key = output bytes 0..31
master_chain_code = output bytes 32..63
```

The root fingerprint is:

```
HASH160(compressed_master_public_key)[0..3]
```

The displayed root fingerprint is also refreshed when the passphrase changes.

Derivation Path Rules

The path parser accepts:

```
m/0'
0'
m/44h/60h/0h
m/84H/0H/0H
```

```
m/1852'/1815'/0'/0/0
```

The path parser behavior is:

```
Split the path on "/".
If the first component is "m", skip it.
Empty components are ignored by the parser.
A hardened suffix is "'", "h", or "H".
The numeric component must match decimal digits only.
The pre-hardened value must satisfy 0 <= n < 2147483648.
Hardened values are encoded as n | 0x80000000.
normalizePath renders the path back with leading m and apostrophes.
```

Auto script selection is based on the first path component after removing the hardened bit:

```
purpose 86: p2tr
purpose 84: p2wpkh
purpose 49: p2wpkh-p2sh
all other purposes: p2pkh
```

Ethereum, Tron, BNB Chain, Avalanche C-Chain, Polygon, Cosmos, and XRP ignore the selected UTXO script type and use their own account address families. Solana, Stellar, and Cardano use Ed25519-family derivation and do not emit UTXO script addresses.

Default Derivation Paths

The v1.6.6 default account paths are:

```
bitcoin: m/0'
bitcoincash: m/0'
litecoin: m/84'/2'/0'
dogecoin: m/44'/3'/0'
ethereum: m/44'/60'/0'
tron: m/44'/195'/0'
bnbchain: m/44'/60'/0'
avalanche: m/44'/60'/0'
polygon: m/44'/60'/0'
cosmos: m/44'/118'/0'
solana: m/44'/501'/0'
stellar: m/44'/148'/0'
cardano: m/1852'/1815'/0'/0/0
xrp: m/44'/144'/0'
```

For secp256k1 account-style outputs, displayed receiving rows append /0/i and displayed change rows append /1/i to the selected account path.

For Solana and Stellar, displayed rows are hardened account rows. For Cardano, the selected path is the payment key path and the staking key path is m/1852'/1815'/0'/2/0.

Address Count and Range

Without a range, the count field controls how many indexes are derived per branch. The raw count is:

```
countRaw = Math.max(1, Number(count.value || 5))
```

With count 5, UTXO-style and secp256k1 account-style coins derive 5 receiving rows and 5 change rows. Single-branch Ed25519 account families derive the visible receiving/account rows defined by their coin-specific function.

When the Range field is populated, it overrides count if and only if it matches:

```
^(\d+)\s*-\s*(\d+)$
```

Range behavior:

```
startIdx = Math.max(0, parsed_start)
endIdx = Math.max(startIdx, parsed_end)
count = endIdx - startIdx + 1
```

When the range field is non-empty, the count input is blanked, disabled, and visually dimmed. Clearing the range restores the saved manual count or 5.

Derive Keys + Addresses

Derive Keys + Addresses runs the full derivation pipeline and updates:

```
progress bar
lastDerivedOutput object
raw JSON output
table view
extended keys pane
root seed masking state
status line
```

The top-level output shape is:

```
{
  "coin": string,
  "network": "mainnet",
  "word_count": 12 or 24,
  "accounts": [
    account_object
  ]
}
```

For Bitcoin-family UTXO coins, Ethereum, and XRP, account_object contains:

```
derivation
account_script_type_used
root_xprv
root_xpub
optional root_yprv/root_ypub
optional root_zprv/root_zpub
optional root_trprv/root_trpub
account_xprv
account_xpub
optional account_yprv/account_ypub
optional account_zprv/account_zpub
optional account_trprv/account_trpub
receiving array
change array
```

For each UTXO row:

```
path = derivation + "/" + branch + "/" + index
branch 0 = receiving
branch 1 = change
public_key_hex = compressed secp256k1 public key, 33 bytes
private_key_hex = secp256k1 scalar, 32 bytes
private_key_wif = Base58Check WIF when the coin defines WIF
```

For Ethereum rows:

```
address = EIP-55 address
public_key_hex = compressed secp256k1 public key, 33 bytes
ethereum_public_key_hex = uncompressed x||y public key without 0x04, 64 bytes
private_key_hex = secp256k1 scalar, 32 bytes
erc20_address = same string as address
```

For XRP rows:

```
address = XRPL classic r-address
xrp_classic_address = same string as address
public_key_hex = compressed secp256k1 public key, 33 bytes
private_key_hex = secp256k1 scalar, 32 bytes
destination tags are not derived
```

For Taproot rows:

```
address = Bech32m v1 output key address
taproot_internal_public_key_hex = x-only internal key, 32 bytes
taproot_internal_private_key_hex = internal scalar, 32 bytes
taproot_internal_private_key_wif = WIF for internal scalar
taproot_tweak_hex = tagged TapTweak scalar bytes
taproot_output_public_key_hex = x-only output key, 32 bytes
taproot_output_private_key_hex = tweaked scalar, 32 bytes
taproot_output_private_key_wif = WIF for tweaked scalar
taproot_output_key_parity = output y-coordinate parity
```

Coin-Specific Output Notes

Bitcoin:

P2PKH uses version byte 0x00 and Base58Check display.
P2WPKH-P2SH uses redeem script 0x00 0x14 HASH160(pubkey), P2SH version 0x05.
P2WPKH uses Bech32 HRP "bc", witness version 0.
P2TR uses Bech32m HRP "bc", witness version 1.
WIF uses version byte 0x80 and compressed-key suffix 0x01.

Bitcoin Cash:

Default display is CashAddr with prefix "bitcoincash".
Advanced legacy mode displays Base58Check P2PKH using version byte 0x00.
P2WPKH, P2WPKH-P2SH, and P2TR are not supported for Bitcoin Cash in v1.6.6.

Litecoin:

P2PKH uses address version 0x30.
P2SH uses address version 0x32.
P2WPKH uses Bech32 HRP "ltc".
WIF uses version byte 0xB0.
Litecoin P2WPKH extended display keys use zpub/zprv version bytes.

Dogecoin:

P2PKH uses address version 0x1E.
P2SH uses address version 0x16 when relevant.
WIF uses version byte 0x9E.
P2TR is not supported and must fail before output.

Ethereum / ERC-20:

The private key is a secp256k1 scalar.
The address is the last 20 bytes of Keccak-256(uncompressed_public_key_x_y).
Display casing follows EIP-55.
ERC-20 tokens use the same account address; token contract addresses are not derived.

Solana:

Derivation uses SLIP-0010 Ed25519 hardened child derivation.
Address bytes are the 32-byte Ed25519 public key.
Display is Bitcoin Base58 over raw public-key bytes with no checksum.

Stellar:

Derivation uses SLIP-0010 Ed25519 hardened child derivation.
Public account display uses Stellar StrKey with version byte 0x30.
Secret seed display uses Stellar StrKey with version byte 0x90.
StrKey checksum is CRC16-XModem stored little-endian before base32 encoding.

Archived v1.6.0 LTS Monero:

Derivation uses the v1.6.6 Monero Ed25519 path logic.
Output includes private spend key, private view key, public spend key, and public view key.
Standard mainnet address construction uses network byte 0x12 and a 4-byte Keccak checksum.
The tool does not scan subaddresses or account balances.

Cardano:

Derivation uses CIP-1852/Icarus Ed25519-BIP32 logic.
The payment path comes from the Derivation Path field.
The staking path for the displayed base address is m/1852'/1815'/0'/2/0.
The address is a Shelley mainnet base address using Bech32 HRP "addr".

Output Views

After a successful derivation, the output tabs become available:

Table View
Raw JSON
Extended Keys
Expand

Table View renders flattened address rows. Raw JSON is the complete lastDerivedOutput object with two-space indentation. Extended Keys displays root and account extended keys available for the active account and script family.

The Expand control enlarges the output area for review. It does not modify the derived object or exported bytes.

Export Derived Keys and Addresses

The Export button exports lastDerivedOutput. If no derivation has completed, the status line reports that there is nothing to export.

JSON export:

```
filename: YellowSphere_Derived_Keys_Addresses.json
MIME type: application/json;charset=utf-8
bytes: JSON.stringify(lastDerivedOutput, null, 2) || 0a
```

CSV export:

```
filename: YellowSphere_Derived_Keys_Addresses.csv
MIME type: text/csv;charset=utf-8
row separator: LF, byte 0x0a
final byte: LF, byte 0x0a
quoting: fields containing comma, quote, CR, or LF are wrapped in quotes
quote escaping: " becomes ""
```

TXT export:

```
filename: YellowSphere_Derived_Keys_Addresses.txt
MIME type: text/plain;charset=utf-8
row separator: LF, byte 0x0a
final byte: LF, byte 0x0a
```

PDF export:

```
filename: YellowSphere_Key_Export_<CoinDisplayName>.pdf
library: embedded jsPDF
orientation: landscape
unit: points
page size: A4
title: YellowSphere Key Export
metadata line: coin, YellowSphere v1.6.6, UTC timestamp, optional root fingerprint
```

PDF column selection:

```
branch
path
address
private_key_wif for Bitcoin-family UTXO coins
private_key_hex for Ethereum, Solana, Stellar, Cardano, XRP
private_spend_key_hex for archived v1.6.0 LTS/Python Monero output
```

The PDF also renders an Extended Keys section when account extended keys are present in lastDerivedOutput.

YellowSphere ARC Seed Export Overview

Encrypt/Export Seed writes:

```
filename: YellowSphere_Encrypted_Seed.arc
MIME type: text/plain;charset=utf-8
armor line 1: YELLOWSPHERE-ARC-V2
armor line 2: base64(UTF8(JSON.stringify(bundle)))
final byte: LF
```

The export dialog supports four protection choices:

```
Password
Keyfile
Keyfile + Password
Advanced: no key or password
```

Seed export always validates that the active mnemonic is a valid 12-word or 24-word BIP39 mnemonic before creating the .arc file.

YellowSphere ARC V3 Password Mode

Password mode uses the password text from the export dialog as the .arc encryption secret. The password is NFKD-normalized inside the YellowSphere ARC V3 KDF.

New YellowSphere ARC V3 encrypted seed bundles use:

```
magic: YELLOWSPHERE-ARC
format: yellowsphere-encrypted-seed-v3
version: 3
credential_mode: password
kdf.name: PBKDF2
kdf.hash: SHA-512
kdf.iterations: 1000000
kdf.salt_b64: 32 random bytes encoded as base64
cipher.name: AES-256-GCM
cipher.nonce_b64: 12 random bytes encoded as base64
padding.name / padding.length: ZERO / 512
ciphertext_b64: 512 ciphertext bytes plus 16-byte GCM tag
```

Plaintext JSON before encryption contains:

```
mnemonic
word_count
created_at
```

The compact payload JSON is copied into a zero-filled 512-byte plaintext. All metadata fields preceding ciphertext_b64 are serialized as compact JSON and authenticated as AES-GCM additional data. The BIP39 passphrase is not stored.

YellowSphere ARC V3 Keyfile Mode

Keyfile mode generates or loads at least 32 bytes of key material. The normal generated keyfile contains 64 random bytes.

Generated raw keyfile:

```
filename: YellowSphere_Keyfile.key
MIME type: application/json;charset=utf-8
magic: YELLOWSPHERE-KEYFILE
format: yellowsphere-keyfile-v1
version: 1
key_b64: 64 random bytes encoded as base64
```

The HKDF input key material is:

```
"arc-keyfile-v1:" || base64(keyfile_bytes)
```

Accepted import forms for raw keyfiles:

```
JSON object with magic YELLOWSPHERE-KEYFILE and format yellowsphere-keyfile-v1
JSON object with legacy magic KEYFILE and key field
plain base64 key material text
```

A raw keyfile must decode to at least 32 bytes. Generated v1.6.6 keyfiles are 64 bytes.

YellowSphere ARC V3 Keyfile + Password Mode

Keyfile + Password mode uses both possession of keyfile bytes and knowledge of the password. For new exports, v1.6.6 generates 64 random keyfile bytes and writes them in encrypted keyfile form.

Generated encrypted keyfile:

```
filename: YellowSphere_Keyfile.enc.key
MIME type: application/json;charset=utf-8
magic: YELLOWSPHERE-KEYFILE-ENC
format: yellowsphere-keyfile-enc-v1
version: 2
kdf.algo: PBKDF2-SHA512
kdf.iterations: 1000000
kdf.salt_b64: 16 random bytes encoded as base64
kdf.prehash: SHA-512
cipher.name: AES-256-GCM
cipher.nonce_b64: 12 random bytes encoded as base64
ciphertext_b64: 64 encrypted keyfile bytes plus 16-byte GCM tag
```

Encrypted keyfile KDF:

```
password bytes = UTF8(NFKD(password))
password hash = SHA-512(password bytes)
salt = decoded kdf.salt_b64
PBKDF2-HMAC-SHA512 iterations = 1000000
output = AES-256-GCM key
```

The .arc encryption secret for combined mode is:

```
input = keyfile_bytes || UTF8(NFKD(password))
bits = HKDF-SHA512(input, YellowSphere ARC salt, UTF8("yellowsphere-arc-v3-combined-key"),
64)
secret = "arc-combined-v1:" || base64(bits)
```

The password encrypts the .enc.key file and also participates in the combined .arc secret. Losing either the password or the matching keyfile prevents import.

Unprotected YellowSphere ARC Export

The Advanced option "Save .arc file without key or password" writes a plaintext seed bundle. It exists for controlled offline workflows and test data only.

Plain seed bundle fields:

```
magic: YELLOWSPHERE-ARC
format: yellowsphere-plain-seed-v1
version: 1
created_at: ISO-8601 timestamp
mnemonic: normalized mnemonic words
word_count: 12 or 24
encrypted: false
```

Even unprotected seed bundles are armored with YELLOWSPHERE-ARC-V2 line 1 and base64 JSON line 2. The protection difference is inside the decoded JSON bundle.

Import Seed Workflow

Import Seed accepts:

```
.arc files
JSON files containing supported YellowSphere ARC bundle JSON
application/json files selected by the browser file picker
```

Import parsing:

If text begins with YELLOWSPHERE-ARC-V2, remove the first line, concatenate the remaining lines, base64-decode them, UTF-8 decode the result, and parse JSON.

Otherwise, parse the selected file text directly as JSON.

If the bundle is plaintext YELLOWSPHERE-ARC / yellowsphere-plain-seed-v1, no credential dialog is needed. If the bundle is encrypted, the dialog asks for password, keyfile, or keyfile + password. If the bundle has a credential_mode hint, the matching mode is selected and locked.

After decryption:

```
The mnemonic is normalized.
The word_count field must match the normalized word count.
The mnemonic must pass BIP39 word-list and checksum validation.
The seed is stored in hidden imported seed state.
Visible seed fields are replaced by mask tokens.
The output area reports imported_seed, source, word_count, and hidden_on_screen.
```

The BIP39 passphrase is not stored in the .arc file. If the recovered wallet requires a BIP39 passphrase, enter it in the Passphrase field after import and before validation or derivation.

Copy Seed and Clipboard Handling

Copy Seed copies the active normalized mnemonic words to the system clipboard only after a browser confirmation prompt. The copied text is:

```
words.join(" ")
```

The separator is ASCII space, byte 0x20. No trailing newline is added by the application.

After a successful copy, the status line starts a 60-second countdown. Browser and operating-system clipboard APIs do not provide a universal reliable wipe mechanism. Treat the clipboard as exposed until the operating environment is cleared.

Show Seed Behavior

Show Seed is a hold-to-reveal control. It reveals hidden generated, imported, or post-derive manually entered seed words only while the control is active.

Reveal starts on:

```
mousedown  
touchstart
```

Reveal ends on:

```
mouseup  
mouseleave  
touchend
```

When reveal ends, the visible fields are replaced with mask tokens again.

Clear All and Idle Timeout

Clear All runs `handleClearAll`. It clears:

```
imported or generated hidden seed state  
mnemonic textarea  
numbered word grid values  
word valid/invalid styling  
passphrase value  
raw output textarea  
table and tab view state  
root fingerprint display  
lastDerivedOutput  
credential-dialog password and confirmation fields  
selected credential keyfile input and keyfile-secret state
```

Clear All does not delete files already downloaded by the browser and does not wipe host clipboard history.

The idle watcher listens for:

```
mousedown  
keydown  
touchstart  
scroll
```

Default idle timing:

```
4 minutes after last watched event: show warning banner  
5 minutes after last watched event: run Clear All  
5 seconds after clearing: hide the idle-cleared banner
```

The idle warning text is:

```
Idle timeout in 60 seconds. All fields will be cleared.
```

The post-clear text is:

```
Session cleared due to inactivity.
```

Advanced Session Timeout values are 2 minutes, 5 minutes, 15 minutes, and Off. The selection is stored as `yellowsphereSessionTimeout`. Finite selections show the warning 60 seconds before clearing.

Tab-Switch Grace Period is enabled by default. Hiding the page starts a 15-second clear timer; returning before expiry cancels it. Disabling the toggle restores immediate visibility-loss clearing. The selection is stored as `yellowsphereVisibilityGrace`.

Settings

Theme settings:

```
Light  
Dark  
Dark+  
Terminal
```

Theme selection is stored in `localStorage` under:

```
yellowsphereTheme
```

If localStorage is unavailable, the theme still applies to the current page but may not persist.

Advanced settings:

- Auto-Derive on Settings Change
- Tab-Switch Grace Period
- Session Timeout: 2 minutes / 5 minutes / 15 minutes / Off
- Legacy Address Format (Bitcoin Cash)

Auto-Derive only runs after at least one successful derivation has populated lastDerivedOutput. It is debounced by 600 ms. It is triggered by changes to:

- coin
- script type
- derivation path
- count
- range

Legacy Address Format applies only to Bitcoin Cash. When enabled, Bitcoin Cash P2PKH addresses are displayed with legacy Base58Check instead of CashAddr.

QR Export

QR Export opens a modal with an address input. It does not require a derived output object; any pasted address-like string can be encoded.

For most addresses, Generate immediately renders a QR. XRP-like r-addresses open a Destination Tag / Memo prompt first. The operator may enter a numeric destination tag or skip.

QR rendering:

- normal QR canvas: 256 x 256 CSS/display pixels
- XRP QR canvas: 320 x 320 CSS/display pixels
- quiet zone: 4 modules
- dark color: #000000
- light color: #ffffff
- saved image MIME type: image/png
- filename prefix: qr_

Filename sanitization for saved QR PNG:

```
safeName = address.replace(/^[^a-zA-Z0-9]/g, "_").slice(0, 40) || "address"
filename = "qr_" || safeName || ".png"
```

QR Copy Address copies only the address input value, not the URI label and not the XRP destination tag.

QR URI Construction

If the address input already begins with a URI scheme matching `^[a-z]+:/i`, the input is used unchanged.

Otherwise v1.6.6 generates these QR payload strings:

```
Solana:
  "solana:" || address

Stellar:
  "web+stellar:pay?destination=" || encodeURIComponent(address)

Archived v1.6.0 LTS Monero:
  "monero:" || address

Cardano:
  address

Bitcoin:
  "bitcoin:" || address

Bitcoin Cash with bitcoincash: prefix:
  address

Bitcoin Cash without prefix:
  "bitcoincash:" || address

Litecoin:
  "litecoin:" || address
```

```
Dogecoin:
  "dogecoin:" || address

Ethereum:
  "ethereum:" || address

XRP:
  address || "?dt=" || destination_tag
```

For XRP, an empty destination tag is encoded as:

```
?dt=000000
```

This behavior is scanner-focused and does not imply that every receiving service accepts an empty or zero destination tag. If a service requires a tag, use the tag supplied by that service.

Python 1.6.6 Automation Surface

The synchronized Python package and launcher report APP_VERSION 1.6.6 for scripted derivation. YellowSphere.html v1.6.6 remains the interactive source of truth. The supported command-line coin ids are:

```
bitcoin
avalanche
bitcoincash
bnbchain
cardano
cosmos
litecoin
dogecoin
ethereum
polygon
solana
stellar
tron
xrp
```

CLI default behavior:

```
command:
  python YellowSphere.py --mnemonic "<words>" --coin <coin> --output-format json

version string:
  YellowSphere 1.6.2

default script type:
  auto

output formats:
  json
  csv
  txt

testnet:
  configured only for coins whose Python network table defines testnet
  parameters.
```

Python CLI JSON/CSV/TXT exports contain private key material when derivation is successful. Treat command output redirected to files exactly like browser JSON, CSV, and TXT exports. Terminal scrollbar, shell history, transcript logging, PowerShell history, and CI logs are all out-of-band copies of secret material.

Python GUI behavior is determined by the packaged HTML asset under the Python package. For byte-level derivation conformance, compare Python output against docs/TestVectors.txt. If Python output ever differs from the canonical HTML and the vectors, the Python implementation is wrong until the difference is explicitly documented as an intentional compatibility boundary.

Operational Procedure

Recommended offline recovery procedure:

- Open YellowSphere.html from local storage on a trusted machine.
- Confirm the title shows v1.6.6.
- Disconnect the machine from networks when practical.

- Paste, import, or generate the mnemonic.
- Enter the BIP39 passphrase if the wallet used one.
- Click Validate Mnemonic.
- Confirm word count, checksum, seed status, and root fingerprint.
- Select coin and derivation path.
- Select script type or leave Auto where appropriate.
- Set count or range.
- Click Derive Keys + Addresses.
- Compare the expected receiving address with a known address from the wallet when available.
- Export only the minimum format needed for the recovery workflow.
- Store any .arc, .key, .enc.key, JSON, CSV, TXT, PDF, and QR PNG files according to the sensitivity of private keys.
- Press Clear All.
- Clear clipboard history and browser downloads according to the host operating system.

If imported funds are being recovered into a new wallet, prefer deriving enough addresses to locate funds and then sweep or transfer using a transaction signer that is outside the scope of this tool. Do not treat derived private-key exports as long-term storage unless they are protected by an offline storage process.

File Sensitivity

Exported derived-key files contain private keys unless the operator manually removes them after export. Treat these as seed-equivalent:

```
YellowSphere_Derived_Keys_Addresses.json
YellowSphere_Derived_Keys_Addresses.csv
YellowSphere_Derived_Keys_Addresses.txt
YellowSphere_Key_Export_<CoinDisplayName>.pdf
```

Encrypted seed bundle:

```
YellowSphere_Encrypted_Seed.arc
```

Raw keyfile:

```
YellowSphere_Keyfile.key
```

Encrypted keyfile:

```
YellowSphere_Keyfile.enc.key
```

QR PNG files may contain deposit addresses or payment URIs. Address QR files do not contain private keys unless the operator manually pastes private material into the QR dialog.

Failure Handling

Common failure states:

Unknown mnemonic word:
At least one token is absent from the embedded BIP39 English list.

Invalid checksum:
All words are valid BIP39 words, but the checksum bits do not match the entropy-derived SHA-256 checksum.

Wrong passphrase:
Validation still succeeds, but derived root fingerprint and addresses differ from the intended wallet.

Unsupported script type:
The selected coin does not define the requested script family.

Wrong .arc password or keyfile:
Import reports that the password may be incorrect or the file may be corrupted. The error intentionally does not distinguish the cause.

Missing keyfile:
Keyfile mode cannot continue until a keyfile is generated or selected.

Encrypted keyfile wrong password:
Keyfile decryption fails before the .arc seed can be decrypted.

PDF library unavailable:
PDF export fails if the embedded jsPDF object is absent or damaged.

Byte-Level Boundaries

The following values are hard requirements in v1.6.6:

APP_VERSION: 1.6.6
YellowSphere ARC armor header: YELLOWSPHERE-ARC-V2
YellowSphere ARC encrypted format: yellowsphere-encrypted-seed-v3
YellowSphere ARC plaintext format: yellowsphere-plain-seed-v1
YellowSphere ARC encrypted version: 3
YellowSphere ARC plaintext version: 1
YellowSphere ARC V3 Password KDF: SHA-512 prehash then PBKDF2-HMAC-SHA512
YellowSphere ARC V3 Password KDF iterations: 1000000
YellowSphere ARC V3 Keyfile/combined KDF: HKDF-SHA512
YellowSphere ARC V3 salt length: 32 bytes
YellowSphere ARC V3 nonce length: 12 bytes
YellowSphere ARC V3 tag length: 16 bytes
YellowSphere ARC V3 padded plaintext length: 512 bytes
YellowSphere ARC V3 ciphertext/tag length: 528 bytes
YellowSphere ARC V3 cipher name: AES-256-GCM
generated keyfile bytes: 64 bytes
encrypted keyfile KDF iterations: 1000000
encrypted keyfile salt length: 16 bytes
encrypted keyfile nonce length: 12 bytes
BIP39 seed length: 64 bytes
BIP39 seed PBKDF2 iterations: 2048
supported word counts: 12 and 24
default idle clear timeout: 5 minutes
selectable idle timeouts: 2, 5, 15 minutes, Off
default visibility-loss grace: 15 seconds
idle warning lead time: 60 seconds
clipboard countdown: 60 seconds

Non-Goals

YellowSphere v1.6.6 does not:

create transactions
sign transactions
broadcast transactions
query balances
discover token contracts
derive exchange destination tags
store the BIP39 passphrase in .arc files
guarantee clipboard erasure
erase downloaded files
validate that a receiving address has ever held funds
validate that a third-party wallet uses the same derivation path
protect against a compromised browser, extension, operating system, or display capture path

The tool is a deterministic offline recovery and export utility. Its outputs are exact key material and address data; operational security around those outputs remains the responsibility of the recovery environment.

Interface Guide

The screenshots below show the primary user-facing layout and theme variants. The HTML application is the canonical GUI surface. PySide6 and Tauri package the same interface for desktop use, so the screenshots apply to all GUI editions.

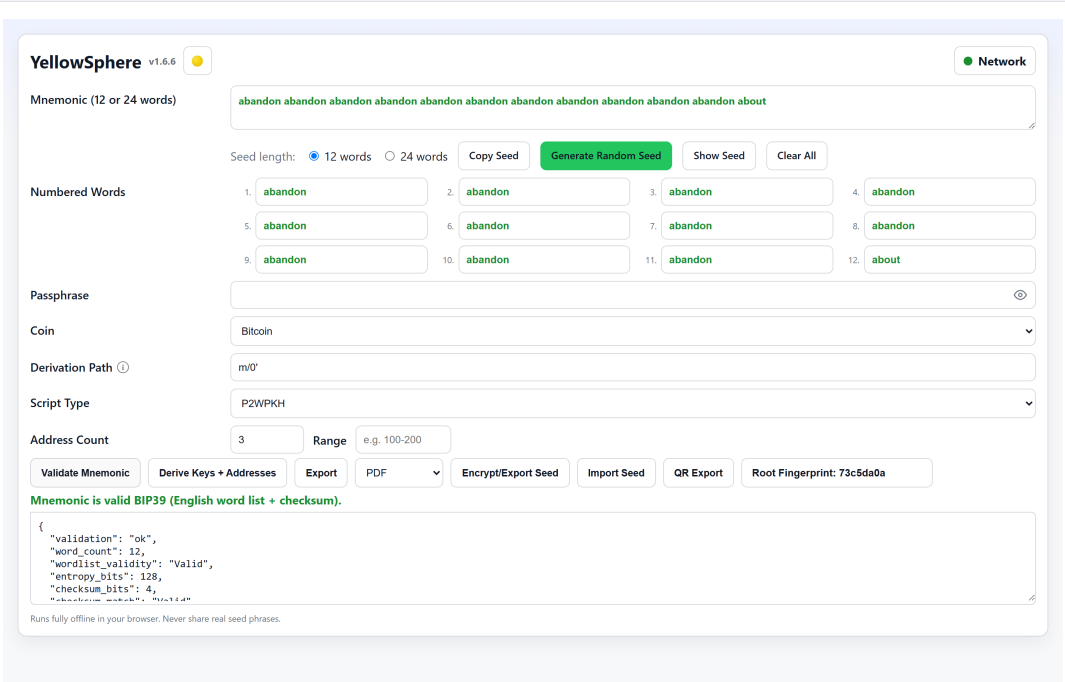


Figure 1. Main recovery workspace with test-vector mnemonic validation controls.

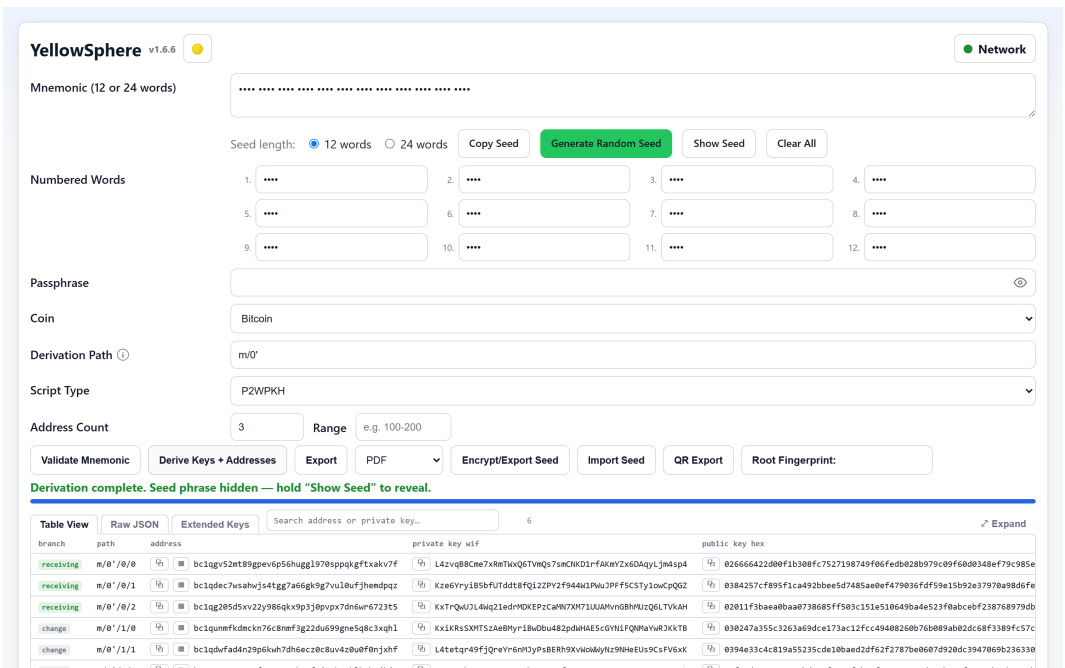


Figure 2. Derived output table after address derivation, with output tabs and export controls.

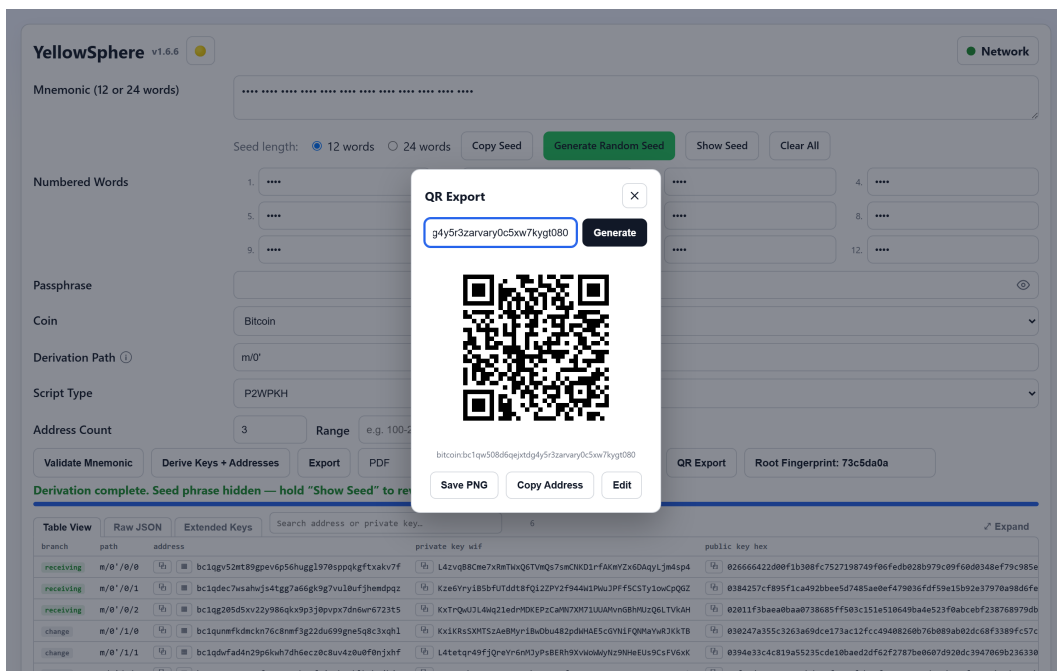


Figure 3. QR Export modal generating an address QR code without external services.

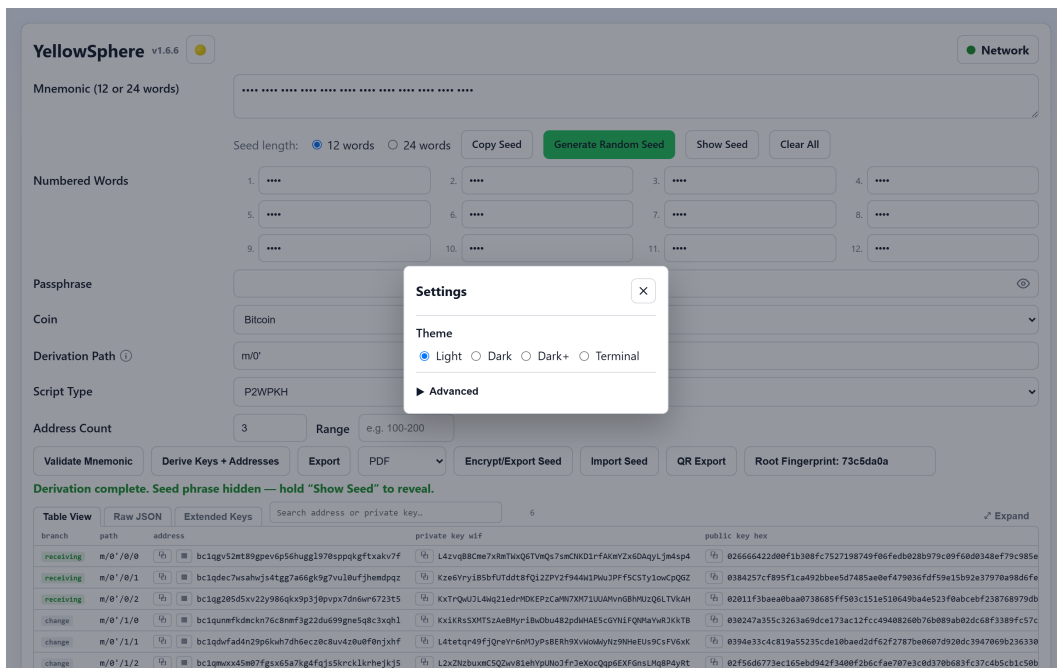


Figure 4. Settings dialog with theme selection and advanced recovery preferences.

YellowSphere v1.6.6

Network

Mnemonic (12 or 24 words)

abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon about

Seed length:

12 words

24 words

Copy Seed
Generate Random Seed
Show Seed
Clear All

Numbered Words

1. abandon

2. abandon

3. abandon

4. abandon

5. abandon

6. abandon

7. abandon

8. abandon

9. abandon

10. abandon

11. abandon

12. about

Passphrase

Coin

Bitcoin

Derivation Path ⓘ

m/0'

Script Type

P2WPKH

Address Count

3
Range
e.g. 100-200

Validate Mnemonic
Derive Keys + Addresses
Export
PDF
Encrypt/Export Seed
Import Seed
QR Export
Root Fingerprint: 73c5da0a

Mnemonic is valid BIP39 (English word list + checksum).

```

{
  "validation": "ok",
  "word_count": 12,
  "wordlist_validity": "Valid",
  "entropy_bits": 128,
  "checksum_bits": 4,
  "checksum_valid": "Valid"
}

```

Runs fully offline in your browser. Never share real seed phrases.

Figure 5. Light theme interface.

YellowSphere v1.6.6

Network

Mnemonic (12 or 24 words)

abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon about

Seed length:

12 words

24 words

Copy Seed
Generate Random Seed
Show Seed
Clear All

Numbered Words

1. abandon

2. abandon

3. abandon

4. abandon

5. abandon

6. abandon

7. abandon

8. abandon

9. abandon

10. abandon

11. abandon

12. about

Passphrase

Coin

Bitcoin

Derivation Path ⓘ

m/0'

Script Type

P2WPKH

Address Count

3
Range
e.g. 100-200

Validate Mnemonic
Derive Keys + Addresses
Export
PDF
Encrypt/Export Seed
Import Seed
QR Export
Root Fingerprint: 73c5da0a

Mnemonic is valid BIP39 (English word list + checksum).

```

{
  "validation": "ok",
  "word_count": 12,
  "wordlist_validity": "Valid",
  "entropy_bits": 128,
  "checksum_bits": 4,
  "checksum_valid": "Valid"
}

```

Runs fully offline in your browser. Never share real seed phrases.

Figure 6. Dark theme interface.

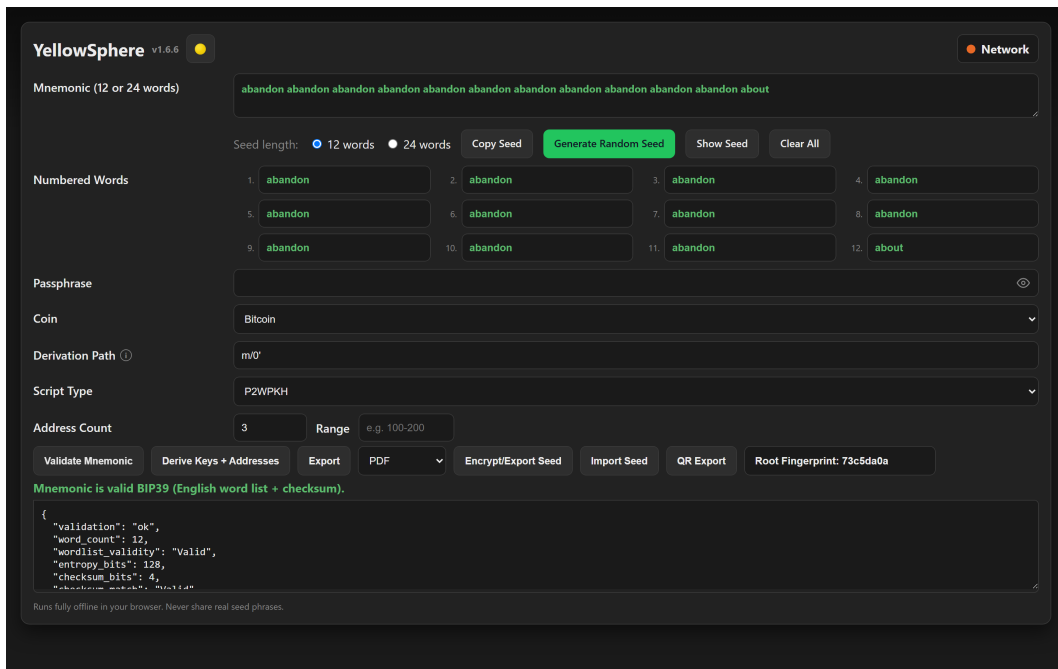


Figure 7. Dark+ theme interface.


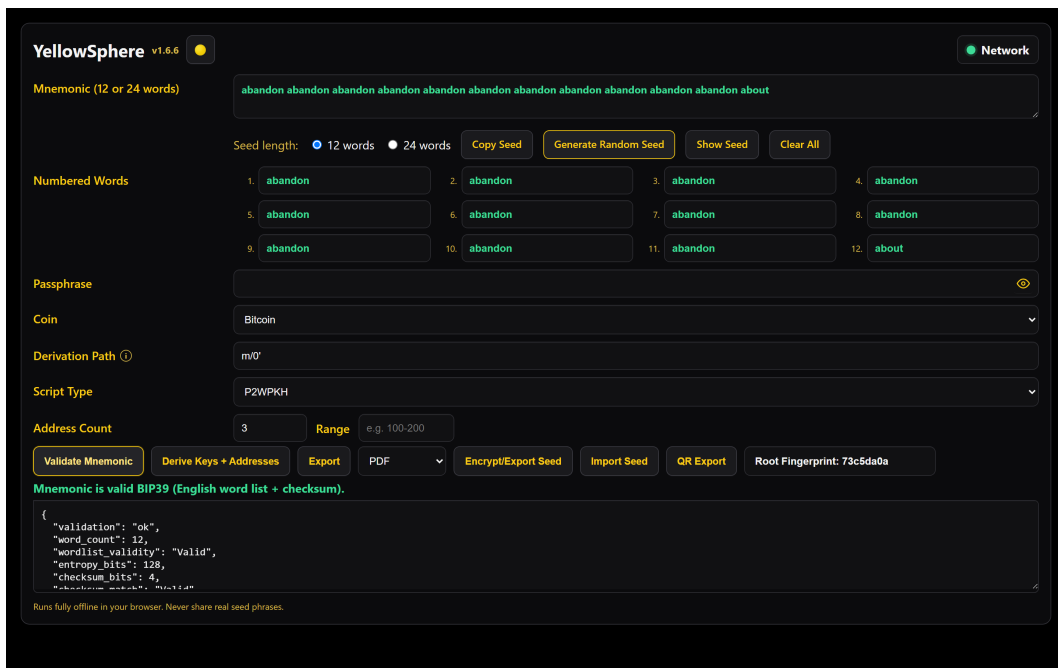


Figure 8. Terminal theme interface.

Encryption Scheme Diagrams

These diagrams summarize the protected seed and encrypted keyfile paths before the byte-level specification. They do not replace the normative field ordering, lengths, and validation rules in the Encryption Subsystem Internals section.

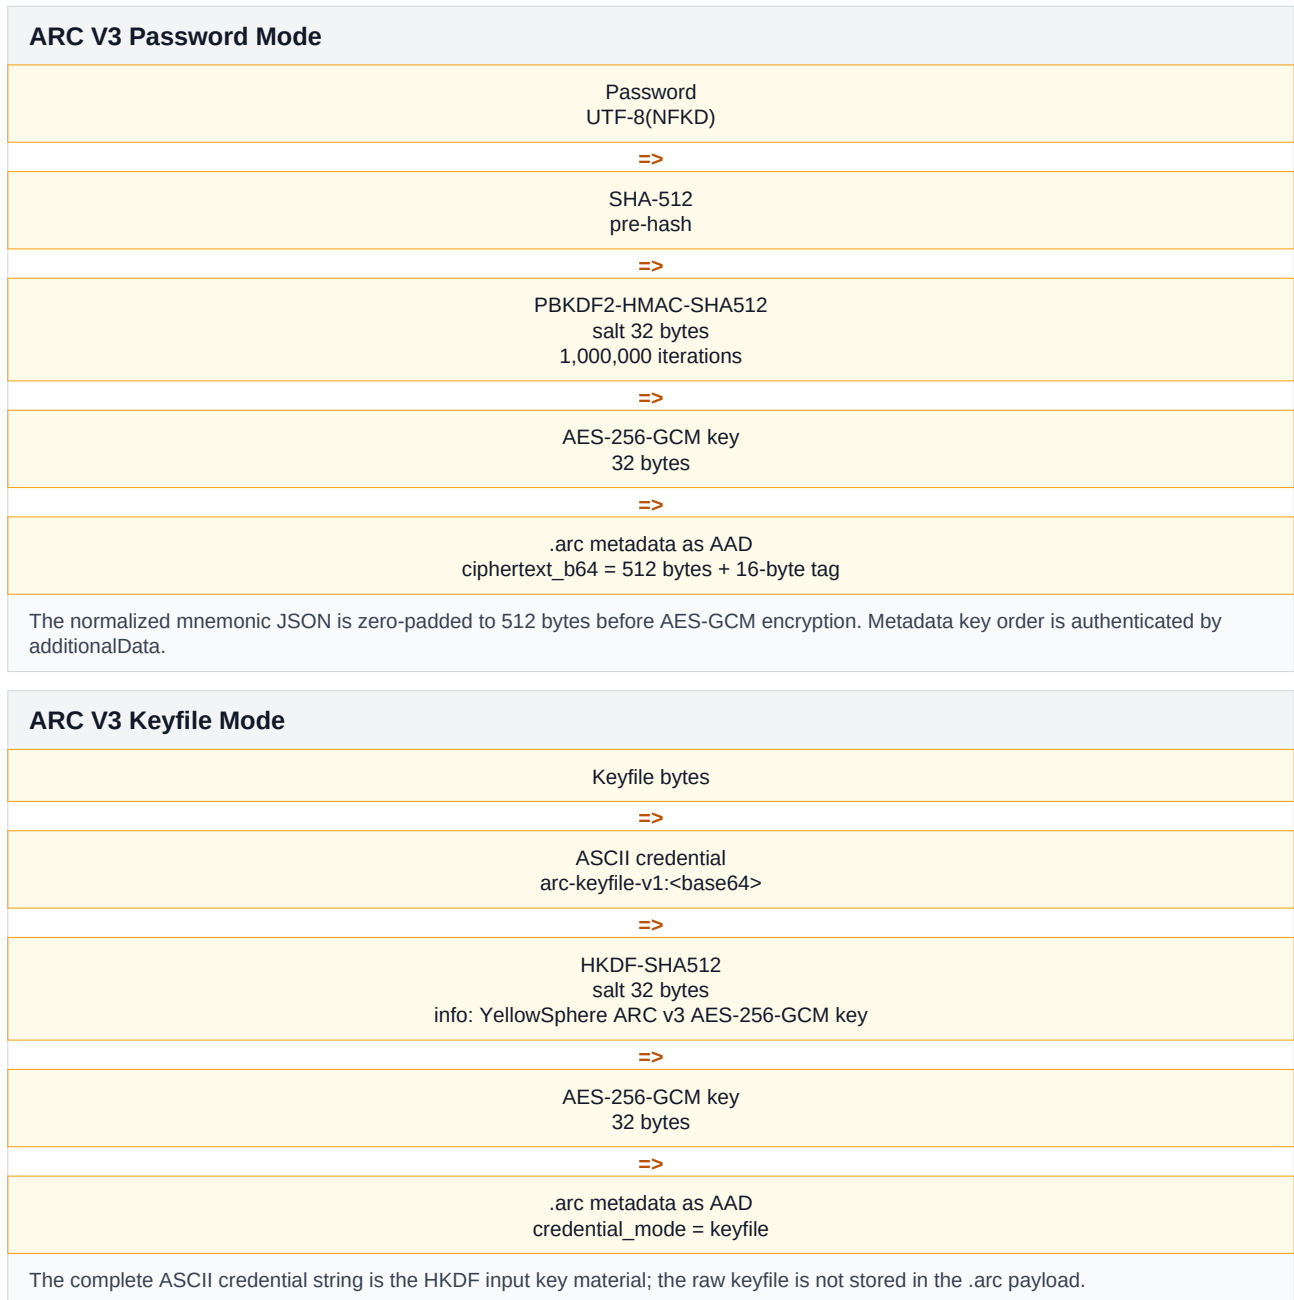

ARC V3 Keyfile + Password Mode

keyfile_bytes || UTF8(NFKD(password))

=>

HKDF-SHA512
info: yellowsphere-arc-v3-combined-key
len 64

=>

combined_secret
arc-combined-v1:<base64>

=>

HKDF-SHA512
ARC AES-key info
len 32

=>

AES-256-GCM key
credential_mode = both

Combined mode first builds a 64-byte combined secret and then follows the ARC V3 HKDF AES-key derivation path.

Encrypted-Keyfile Version 2

Keyfile plaintext
64 bytes

=>

Password
UTF-8(NFKD) -> SHA-512

=>

PBKDF2-HMAC-SHA512
salt 16 bytes
1,000,000 iterations

=>

AES-256-GCM
nonce 12 bytes
AAD magic+format

=>

ciphertext_b64
64 bytes + 16-byte tag

The encrypted keyfile keeps magic and format strings stable while version 2 selects AES-256-GCM and the SHA-512 password pre-hash.

Coin Derivation Diagrams

Each production v1.6.6 coin below shows the deterministic route from mnemonic material to exported address rows. The diagrams preserve the implementation defaults while leaving the full byte-level mechanics in the Derivation Engine Internals section.

Bitcoin	
Default path: m/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32, HMAC-SHA512 key 'Bitcoin seed'
1	Account node
2	branch 0/1
3	index i
4	compressed public key
5	P2PKH, P2WPKH-P2SH, P2WPKH, or P2TR address
Note	Auto script type follows path purpose; testnet script defaults use coin type 1 paths.

Bitcoin Cash	
Default path: m/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Account node
2	branch 0/1
3	index i
4	compressed public key
5	HASH160
6	CashAddr bitcoincash:q... or legacy Base58
Note	Only P2PKH is supported; the legacy-address toggle changes display/export encoding, not private-key derivation.

Litecoin	
Default path: m/84'/2'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Account node
2	branch 0/1
3	index i
4	compressed public key
5	Litecoin P2PKH, nested SegWit, native SegWit, or P2TR
Note	Mainnet uses Litecoin version bytes where applicable; native SegWit uses ltc Bech32 HRP.

Dogecoin	
Default path: m/44'/3'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Account node
2	branch 0/1
3	index i
4	compressed public key
5	HASH160
6	Dogecoin Base58 address
Note	Dogecoin uses Dogecoin BIP32 versions and WIF prefixes; Taproot is not configured.

Ethereum / ERC-20	
Default path: m/44'/60'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Account node
2	branch 0/1
3	index i
4	uncompressed public key
5	Keccak-256 public-key tail
6	0x EIP-55-style account address
Note	ERC-20 tokens use the same Ethereum account address; token state is not queried.

BNB Chain	
Default path: m/44'/60'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Ethereum-compatible account node
2	branch 0/1
3	index i
4	uncompressed public key
5	Keccak-256
6	0x EVM address
Note	BNB Chain shares the Ethereum coin type and address construction in YellowSphere.

Avalanche C-Chain	
Default path: m/44'/60'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Ethereum-compatible account node
2	branch 0/1
3	index i
4	uncompressed public key
5	Keccak-256
6	0x EVM address
Note	Only the C-Chain EVM account format is represented; no X-Chain or P-Chain discovery is performed.

Polygon	
Default path: m/44'/60'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Ethereum-compatible account node
2	branch 0/1
3	index i
4	uncompressed public key
5	Keccak-256
6	0x EVM address
Note	Polygon PoS uses the same secp256k1 account key and 0x address form as Ethereum.

Tron / TRC-20	
Default path: m/44'/195'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Account node
2	branch 0/1
3	index i
4	uncompressed public key
5	Keccak-256 public-key tail
6	0x41-prefixed payload
7	Base58Check T... address
Note	TRC-20 tokens use the same Tron account address; the hex address is also exported.

Cosmos / ATOM	
Default path: m/44'/118'/0'	
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Account node
2	branch 0/1
3	index i
4	compressed public key
5	HASH160
6	Bech32 HRP cosmos address
Note	YellowSphere derives account addresses only; staking state, validators, and balances are external.

Solana	Default path: m/44'/501'/0'
Derivation family	BIP39 seed -> SLIP-0010 Ed25519 hardened derivation
1	Ed25519 master key
2	hardened account path
3	accountPathForIndex / direct path
4	Ed25519 public key
5	Base58 address
Note	SLIP-0010 Ed25519 derivation accepts hardened path indexes only.

Stellar	Default path: m/44'/148'/0'
Derivation family	BIP39 seed -> SLIP-0010 Ed25519 hardened derivation
1	Ed25519 master key
2	hardened account path
3	accountPathForIndex
4	Ed25519 public key
5	StrKey public address + secret seed
Note	The exported Stellar secret seed is derived from the same Ed25519 child key.

Cardano	Default path: m/1852'/1815'/0'/0/0
Derivation family	Mnemonic entropy + passphrase -> Cardano Icarus Ed25519-BIP32
1	Icarus root from entropy
2	payment path
3	staking path
4	payment and stake public keys
5	Shelley base address addr... / addr_test...
Note	Cardano uses CIP-1852 style paths and builds a Shelley base address from payment and staking keys.

XRP	Default path: m/44'/144'/0'
Derivation family	BIP39 seed -> secp256k1 BIP32
1	Account node
2	branch 0/1
3	index i
4	compressed public key
5	account identifier
6	XRP classic r... address
Note	Destination tags are never derived and must be supplied separately by exchanges or custodians.

■YellowSphere v1.6.6 - Recovery Procedure and Data Boundary Specification

Release Boundary

This document specifies recovery with the promoted production YellowSphere.html v1.6.6. The production selector contains Bitcoin, Bitcoin Cash, Litecoin, Dogecoin, Ethereum / ERC-20, Tron / TRC-20, BNB Chain, Avalanche C-Chain, Polygon, Cosmos / ATOM, Solana, Stellar, Cardano, and XRP. Every listed currency has an Advanced Testnet profile. Polkadot and Monero are not production browser recovery routes.

The archived LTS files are `lts/YellowSphere_v1.6.4_LTS.html`, `lts/YellowSphere_v1.6.2_LTS.html`, `lts/YellowSphere_v1.6.0_LTS.html`, and `lts/YellowSphere_v1.5.0_LTS.html`. Monero procedures retained later apply only to the archived v1.6.0 file or a separate compatibility surface. Use the verified YellowSphere.html hash published in `docs/SHA256SUMS`.

Scope

This document defines recovery procedures for YellowSphere.html v1.6.6. It covers direct mnemonic entry, generated/imported seed handling, protected and unprotected .arc import, credential-mode selection, BIP39 passphrase checks, derivation path recovery, address range selection, output export, QR generation, and session cleanup.

The tool is a deterministic offline recovery engine. It does not sign transactions, broadcast transactions, query balances, discover used addresses, estimate fees, identify token holdings, or validate exchange memo requirements.

Recovery Model

Every recovery result is a deterministic function of local inputs:

```
mnemonic
BIP39 passphrase
coin
derivation path
script type
address count or range
.arc credential if importing a protected .arc file
```

No external service is contacted. If an address does not appear, the tool cannot discover the correct path from chain state. The operator must supply or search the correct derivation settings.

Required Inputs

At minimum:

- 12- or 24-word BIP39 English mnemonic, or importable .arc seed file
- target coin
- intended derivation path
- intended address range

Conditionally required:

- BIP39 passphrase if the wallet used one
- script type for UTXO-like coins if Auto is not sufficient
- .arc password for password-protected .arc
- keyfile for keyfile-protected .arc
- keyfile plus password for combined-mode .arc
- encrypted keyfile password if the keyfile is encrypted

For exchange or custodian deposits:

- XRP destination tag if required by receiver
- Stellar memo if required by receiver

Destination tags and memos are not derived from the seed.

Pre-Session Checklist

Before entering real recovery material:

- Confirm local file is YellowSphere.html v1.6.6.
- Disconnect networking.
- Disable browser sync and extensions where practical.
- Use a private physical environment.
- Decide whether the goal is verification, seed backup, address discovery, private-key export, QR export, or migration.
- Know whether a BIP39 passphrase was used.
- Gather any known historical addresses or root fingerprint.
- Prepare storage for any exported artifacts.

Do not start recovery on a machine you believe is compromised.

Mnemonic Entry Procedure

Use direct mnemonic entry when the words are available.

Procedure:

- Select 12 or 24 words.
- Enter words in the mnemonic textarea or numbered word grid.
- The internal mnemonic normalization is:

```
NFKD((text || "").trim()).split(/\s+/).filter(Boolean).join(" ")
```
- Validate word count.
- Validate every word against the BIP39 English list.
- Reconstruct the BIP39 bitstring from 11-bit indexes.
- Split entropy and checksum bits.
- Compute SHA-256(entropy).
- Compare expected checksum bits.
- If checksum is invalid, stop and correct the phrase.

Supported word counts:

- 12 words: 128 entropy bits, 4 checksum bits
- 24 words: 256 entropy bits, 8 checksum bits

v1.6.6 does not support 15-, 18-, or 21-word mnemonic recovery.

Generated Seed Procedure

Generate Seed creates a new mnemonic, not a recovery of an existing wallet.

Procedure:

- Select 12 or 24 words.
- Click Generate Seed.
- Entropy bytes are sampled with `crypto.getRandomValues`.
- Checksum bits are computed with SHA-256(entropy).
- 11-bit indexes map into BIP39_WORDS.
- The generated mnemonic is validated.

- The seed phrase is hidden on screen.

Use generated seeds only when intentionally creating a new recovery phrase. Generating a seed cannot recover an existing wallet.

BIP39 Passphrase Procedure

If the wallet used a BIP39 passphrase, enter it in the main Passphrase field before validation/derivation.

BIP39 seed:

```
PBKDF2-HMAC-SHA512(
  password = UTF-8(NFKD(normalized mnemonic)),
  salt     = UTF-8("mnemonic" + NFKD(passphrase)),
  iterations = 2048,
  dkLen    = 64
)
```

Rules:

- Empty passphrase is valid.
- Wrong passphrase gives no error.
- Wrong passphrase gives valid wrong keys.
- The .arc file does not store the BIP39 passphrase.
- The .arc password is a different secret.

Verification:

- Compare root fingerprint when known.
- Compare known addresses.
- Do not rely on checksum alone.

.arc Import Procedure

Seed file import reads the selected file as text and calls parseSeedBundle.

Armor path:

```
if trimmed file starts with "YELLOWSPHERE-ARC-V2":
  remove first line
  join remaining lines
  base64-decode
  parse decoded UTF-8 JSON
```

Raw JSON path:

```
if no armor header:
  parse file text as JSON
```

Plain .arc:

```
magic == "YELLOWSPHERE-ARC"
format == "yellowsphere-plain-seed-v1"
```

The mnemonic is read directly, normalized, and BIP39-validated. No credential is requested.

Protected .arc:

```
magic == "YELLOWSPHERE-ARC"
format == "yellowsphere-encrypted-seed-v3"
version == 3
```

The user supplies the required credential mode. AES-GCM authentication occurs before plaintext is accepted. If authentication fails, the password/keyfile is wrong or the file is corrupted/tampered.

Credential hint:

credential_mode, credentialMode, or protection can select/lock the import

dialog mode. In YellowSphere ARC V3 it is authenticated as additional data, but it remains a mode identifier rather than an authorization mechanism.

After import:

- The mnemonic is hidden on screen.
- Seed state remains available internally for validation, copy, export, and derivation.
- The root fingerprint refresh is scheduled.

Protected .arc Credential Decision

Password mode:

Need exact YellowSphere ARC password.

Keyfile mode:

Need exact keyfile bytes.

Combined mode:

Need exact keyfile bytes and exact combined-mode password.

Encrypted keyfile:

Need exact encrypted-keyfile password to recover keyfile bytes.

If import fails:

- Check that the credential mode is correct.
- Check that the selected keyfile is the original one.
- Check password spacing and capitalization.
- Check whether the keyfile itself is encrypted.
- Do not assume the BIP39 passphrase can open the .arc; it cannot unless it was deliberately reused as the YellowSphere ARC credential.

Default Derivation Paths

v1.6.6 default paths:

bitcoin	m/0'
bitcoincash	m/0'
litecoin	m/84'/2'/0'
dogecoin	m/44'/3'/0'
ethereum	m/44'/60'/0'
tron	m/44'/195'/0'
bnbchain	m/44'/60'/0'
avalanche	m/44'/60'/0'
polygon	m/44'/60'/0'
cosmos	m/44'/118'/0'
solana	m/44'/501'/0'
stellar	m/44'/148'/0'
cardano	m/1852'/1815'/0'/0/0
xrp	m/44'/144'/0'

The Bitcoin and Bitcoin Cash default m/0' reflects YellowSphere-specific recovery behavior. Other wallets often use BIP44/BIP49/BIP84/BIP86 account paths.

Common Path Reference

Bitcoin:

Legacy P2PKH:
m/44'/0'/0'
addresses begin 1

Wrapped SegWit:
m/49'/0'/0'
addresses begin 3

Native SegWit:
m/84'/0'/0'
addresses begin bc1q

Taproot:
m/86'/0'/0'

addresses begin bc1p

YellowSphere native:
m/0'

Bitcoin Cash:

YellowSphere/native default:
m/0'

Common BIP44:
m/44'/145'/0'

Litecoin:

Legacy:
m/44'/2'/0'

Wrapped SegWit:
m/49'/2'/0'

Native SegWit:
m/84'/2'/0'

Dogecoin:

Default:
m/44'/3'/0'

Ethereum:

m/44'/60'/0'

Solana:

m/44'/501'/0'

Stellar:

m/44'/148'/0'

Archived v1.6.0 LTS Monero:

m/44'/128'/0'

Cardano:

m/1852'/1815'/0'/0/0

XRP:

m/44'/144'/0'

Path Parser Rules

parsePath(path):

- trims path
- splits on "/"
- skips leading "m" if present
- ignores empty path components
- hardened suffixes: "'", "h", "H"
- indexes must match /^d+\$/
- index must be ≥ 0 and $< 0x80000000$ before hardening
- hardened index adds $0x80000000$

normalizePath(path):

- parses the path
- emits "m" for empty path

- emits "m/<index>" for hardened components and "m/<index>" otherwise

Invalid path components stop derivation.

Auto Script Resolution

purposeToScript(path):

- parse path
- if no components: p2pkh
- first component without hardened bit determines purpose

Mapping:

```
86 -> p2tr
84 -> p2wpkh
49 -> p2wpkh-p2sh
otherwise -> p2pkh
```

Therefore:

```
m/0' maps to p2pkh
m/44'/... maps to p2pkh
m/49'/... maps to p2wpkh-p2sh
m/84'/... maps to p2wpkh
m/86'/... maps to p2tr
```

If the original wallet used a non-standard script type, select it explicitly instead of relying on Auto.

Address Count and Range

Without range:

count input determines indexes:

0 through count - 1

With range A-B:

```
start = max(0, A)
end = max(start, B)
count = end - start + 1
```

UTXO-style secp256k1 output:

For each requested index, derive:

```
branch 0 receiving
branch 1 change
```

Account-style output:

Solana, Stellar, and Cardano use coin-specific row generation specified in Derivation.txt. Tron, BNB Chain, Avalanche C-Chain, Polygon, Cosmos, and XRP use their secp256k1 account-family rules.

Recovery rule:

If a known address is missing, increase range and check both branches before concluding the path/passphrase is wrong.

Verification Procedure

Before using private key material:

- Confirm mnemonic checksum is valid.
- Confirm the BIP39 passphrase state: empty or exact non-empty string.
- Compare root fingerprint if known.
- Confirm coin.
- Confirm derivation path.

- Confirm script type.
- Confirm receive address at expected index.
- For UTXO coins, confirm change branch when relevant.
- Confirm address encoding form.
- Export only after verification.

Minimum evidence:

At least one known historical address should match. For stronger confidence, match multiple addresses across expected indexes/branches.

Address Location Procedure

If original settings are unknown:

1. Start with empty BIP39 passphrase unless documentation says otherwise.
2. Try the wallet's known default path if known.
3. For Bitcoin:
 - m/0'
 - m/44'/0'/0'
 - m/49'/0'/0'
 - m/84'/0'/0'
 - m/86'/0'/0'
4. For Bitcoin Cash:
 - m/0'
 - m/44'/145'/0'
5. For Litecoin:
 - m/44'/2'/0'
 - m/49'/2'/0'
 - m/84'/2'/0'
6. For account coins, try the documented default first.
7. Increase range gradually.
8. Check receiving and change branches for UTXO coins.
9. If no match and a passphrase may have been used, test documented passphrase candidates carefully.

Do not brute-force personal passphrases on the recovery workstation unless that is an intentional incident-response activity. Every candidate derives a real wallet tree and may create confusion if exported.

Bitcoin Cash Display Choice

v1.6.6 default Bitcoin Cash display/export uses CashAddr when the legacy toggle is off.

Operational issue:

Some older systems recorded legacy Base58 Bitcoin Cash addresses. The same key can correspond to CashAddr and legacy display forms.

Recovery rule:

If a BCH address appears not to match, verify whether the historical record is legacy Base58 or CashAddr before changing the seed/path.

XRP Recovery Boundary

XRP derives a classic r-address and private key material.

Destination tags:

- not derived
- not stored in the seed
- not inferable from private key
- assigned by exchanges/custodians

If recovering funds sent to an exchange, obtain the required destination tag from that exchange. The QR subsystem can include a user-entered tag in QR payloads, but derivation does not produce it.

Stellar Memo Boundary

Stellar account keys and addresses derive from the seed. Exchange memo fields do not. A Stellar address alone may not be sufficient for custodial deposits.

Confirm memo requirements with the receiving service before moving funds.

Ethereum and ERC-20 Boundary

Ethereum derivation yields the account address and private key. ERC-20 tokens share the same address/private key relationship as ETH on the same chain.

The tool does not:

- identify token balances
- identify chain IDs
- identify L2 networks
- verify contract addresses
- estimate gas

Verify the intended chain/network in the wallet used for sweeping.

Archived v1.6.0 LTS Monero Boundary

Monero output includes spend/view material as specified in Derivation.txt.

The tool does not scan the Monero blockchain. It cannot determine balance or transaction history. Wallet restore height and chain scanning happen in Monero wallet software, not in YellowSphere.

Cardano Boundary

Cardano output uses the v1.6.6 Icarus/CIP-1852 behavior specified in Derivation.txt.

The tool derives address/key material. It does not query staking state, rewards, UTXOs, or wallet account discovery. Confirm address compatibility with the wallet you use for recovery.

Export Selection

Derived JSON:

Most complete machine-readable export. Contains nested account fields and all generated row fields.

CSV:

Flattened rows for spreadsheet review. Not lossless.

TXT:

Human-readable deterministic text. Not lossless.

PDF:

Visual report with selected columns and extended key section. Not encrypted.

.arc:

Seed backup. Protected .arc restores mnemonic only. It does not store BIP39 passphrase.

QR PNG:

Address payload image. Not seed backup.

Export only the artifact required for the recovery. Plaintext private-key exports are often more sensitive than a protected .arc file.

Sweeping Procedure

YellowSphere does not sign or broadcast transactions. To move funds:

1. Derive and verify the target private key or account secret offline.
2. Transfer only the minimum private material needed to a trusted signing wallet.
3. Sweep funds to a new wallet generated outside the compromised context.
4. Verify transaction details on the signing device/software.
5. Broadcast from an online machine that does not retain broader seed material.

Prefer sweeping to a new mnemonic rather than continuing to use a seed that was entered into a general-purpose environment.

Cleanup Procedure

After recovery:

1. Close QR modal if open.
2. Export or record only required artifacts.
3. Delete unneeded plaintext exports.
4. Click Clear All.
5. Confirm mnemonic, word grid, passphrase, output, and root fingerprint are cleared.
6. Close browser or desktop wrapper.
7. Power off live OS or reboot before reconnecting network.

Clear All is not memory erasure. Treat full power-off of a live environment as the stronger cleanup step.

Common Failure Modes

Valid mnemonic, no funds:

Possible causes:

- wrong BIP39 passphrase
- wrong path
- wrong script type
- wrong branch
- wrong account index
- wrong coin
- address range too narrow

.arc will not open:

Possible causes:

- wrong YellowSphere ARC password
- wrong keyfile
- wrong combined-mode password
- encrypted keyfile not decrypted
- corrupted/tampered file
- unsupported legacy file

QR accepted but payment fails:

Possible causes:

- missing XRP destination tag
- missing Stellar memo
- wrong network/chain
- receiving wallet does not accept URI form
- address copied without memo/tag metadata

PDF/CSV missing fields:

Use JSON for complete machine-readable output. PDF/CSV/TXT are projections.

Out-of-Scope Behavior

The recovery tool does not:

- broadcast transactions
- sign transactions
- query balances

- discover used addresses
- estimate fees
- identify token balances
- validate XRP destination tags
- validate Stellar memos
- validate exchange deposit policies
- recover forgotten BIP39 passphrases
- recover forgotten .arc passwords
- recover missing keyfiles

Final Recovery Rule

Do not act on a private key until the derived address has been verified against known wallet history or a known fingerprint/path record. Correct-looking output is not enough; deterministic recovery requires all inputs to be correct at the same time.

Procedure: Direct Mnemonic Recovery

Use this procedure when the mnemonic is available on paper or another offline record.

1. Prepare the offline environment according to OpSec.txt.
2. Open YellowSphere.html locally.
3. Confirm v1.6.6.
4. Select 12 or 24 words.
5. Enter the mnemonic.
6. Enter BIP39 passphrase if used. Leave empty only if no passphrase was used or if testing the empty-passphrase candidate.
7. Validate the mnemonic.
8. Compare root fingerprint if known.
9. Select coin.
10. Confirm derivation path.
11. Confirm script type.
12. Set a small address count or range.
13. Derive.
14. Compare known address.
15. Expand range or test alternate path only if no known address matches.
16. Export only what is required.
17. Clear all and close session.

Do not export private keys before at least one known address matches.

Procedure: Protected .arc Recovery

Use this procedure when a protected .arc file is the mnemonic backup.

- Prepare offline environment.
- Place .arc file on local/removable media.
- Open YellowSphere.html locally.
- Click Import Seed.
- Select .arc file.
- If credential hint selects a mode, verify it matches your backup notes.
- Enter password, select keyfile, or provide both factors.
- If keyfile is encrypted, enter encrypted-keyfile password.
- Import.
- If import succeeds, seed is hidden on screen.
- Enter BIP39 wallet passphrase if the wallet used one.

- Validate root fingerprint/address as usual.

If import fails, do not keep trying random passwords in the same session without notes. Record the failure, verify mode and files, and restart cleanly if needed.

Procedure: Backup Migration

Use this when converting an older or uncertain backup into current v1.6.6 form.

- Import the old .arc or mnemonic offline.
- Validate mnemonic checksum.
- Enter BIP39 passphrase if used.
- Confirm root fingerprint or known address.
- Export a new protected .arc.
- Choose password, keyfile, or combined mode intentionally.
- Save all required factors.
- Clear session.
- Re-import the new .arc using the saved factors.
- Confirm the same root fingerprint.
- Only then retire the old backup.

Never delete the only known-good backup before verifying the replacement.

Procedure: Address Discovery

Use this when the mnemonic is known but the original wallet path is unknown.

For each candidate:

- Set BIP39 passphrase candidate.
- Set coin.
- Set path.
- Set script type or Auto.
- Derive a modest range, for example 0-20.
- Check receiving branch.
- Check change branch for UTXO coins.
- Record candidate result without exporting private keys.

Candidate order should prioritize documented wallet defaults over guesses.

Stop when:

- a known historical address matches
- root fingerprint matches and path-specific address evidence matches
- all documented candidates are exhausted and further work becomes passphrase recovery rather than path recovery

Procedure: Single Private Key Recovery

Use this when the target is one known address.

1. Recover mnemonic/passphrase.
2. Set coin/path/script.
3. Use Range around the suspected index if known.
4. Derive.
5. Locate exact address match.
6. Export JSON or copy the single required private field manually from the

- offline display.
- 7. Avoid full-account PDF/JSON export if one key is enough.
- 8. Sweep funds to a new wallet.
- 9. Delete temporary exports.

Single private key recovery reduces blast radius compared with exporting an entire account key set.

Procedure: Full Account Recovery

Use this when the target wallet software needs an account-level import or when many addresses must be recovered.

1. Verify mnemonic/passphrase with root fingerprint.
2. Verify path/script with known address.
3. Export JSON if machine-readable account fields are needed.
4. Export PDF only for human review/printing.
5. Treat account xprv fields as Class B secrets.
6. Import/sweep in trusted wallet software.
7. Move funds to a newly backed-up wallet if the seed was exposed beyond the intended offline environment.

An account extended private key can derive many child private keys. Handle it with broader caution than a single WIF key.

Decision Tree: No Known Address Match

If no known address matches:

1. Is mnemonic checksum valid?
 - no -> fix mnemonic
 - yes -> continue
2. Is BIP39 passphrase known?
 - no -> test empty and documented candidates
 - yes -> continue
3. Does root fingerprint match?
 - no -> mnemonic/passphrase mismatch
 - yes -> path/script/range issue likely
4. Is coin correct?
 - no -> switch coin
 - yes -> continue
5. Is path correct?
 - unknown -> test common paths
 - yes -> continue
6. Is script type correct?
 - unknown -> test P2PKH, P2WPKH-P2SH, P2WPKH, P2TR where supported
 - yes -> continue
7. Is range wide enough?
 - no -> expand range
 - yes -> continue
8. For UTX0, was change branch checked?
 - no -> check change
 - yes -> reassess source records

Documentation to Preserve

For future recovery, preserve non-secret metadata:

- app version used for backup
- root fingerprint
- coin
- derivation path
- script type
- first receive address
- whether BIP39 passphrase was used

- .arc credential mode
- storage locations of .arc/keyfile/password records

Do not put mnemonic words or private keys in the same metadata note unless that note is stored as a full secret.

Recovery Artifact Sensitivity

Protected .arc:

Contains encrypted mnemonic. Needs credential.

Unprotected .arc:

Contains plaintext mnemonic. Treat as mnemonic.

Raw keyfile:

Can unlock Keyfile-mode .arc. Treat as Class A when paired with .arc.

Encrypted keyfile:

Needs password. Still sensitive.

Derived JSON:

Most complete private-key export. Treat as highly sensitive.

CSV/TXT:

Plaintext private-key material if exported after derivation. Treat as highly sensitive.

PDF:

Plaintext visual private-key material. Treat as highly sensitive.

QR PNG:

Address payload only if used correctly. Privacy-sensitive but not a private key artifact.

Post-Recovery Seed Retirement

Retire the original seed when:

- mnemonic was entered on a machine that may have been online or compromised
- private-key exports were copied to unsafe media
- derived JSON/PDF was exposed
- protected .arc and credential were exposed together
- raw keyfile and .arc were exposed together
- screen capture or camera exposure may have recorded seed/private keys

Retirement procedure:

- Generate a new wallet in a trusted environment.
- Back up the new seed and passphrase if used.
- Move funds from old wallet to new wallet.
- Confirm receipt.
- Stop using the old seed.

Implementation Compatibility Checklist

A v1.6.6-compatible recovery implementation must:

- Support 12- and 24-word BIP39 English mnemonics.
- Normalize mnemonic whitespace before BIP39 seed derivation.
- Apply NFKD to mnemonic and BIP39 passphrase.

-
- Use PBKDF2-HMAC-SHA512 with 2048 iterations for BIP39 seed.
 - Use current default paths listed in this document.
 - Parse paths with "'", h, and H hardened suffixes.
 - Map Auto script type by first purpose component.
 - Derive UTX0 receiving and change branches.
 - Route Solana/Stellar/Cardano to their current v1.6.6 derivation families.
 - Import YELLOWSPHERE-ARC-V2 protected and plain bundles.
 - Preserve the distinction between BIP39 passphrase and .arc credentials.

■YellowSphere v1.6.6 - Operational Security Specification

Release Boundary

This document specifies the promoted production YellowSphere.html v1.6.6. The default session timeout is five minutes; supported values are 2, 5, 15 minutes, or Off. Visibility loss starts a default 15-second grace period and clears secrets if the user does not return. The live derived-output search can match private-key fields; operators must treat search text, visible matches, screen captures, and expanded output as secret-bearing display state even though search state is not exported.

The archived browser builds now reside under `lts/`. Monero-specific guidance retained later applies only to `lts/YellowSphere_v1.6.0_LTS.html` or a separate compatibility tool, not to the v1.6.6 browser selector.

The configurable timeout, visibility-loss grace period, stricter CSP, embedded favicon, credential-dialog clearing, typed-array cleanup, and serialized sensitive operations are normative v1.6.6 requirements.

Scope

This document defines the operational security requirements for using YellowSphere.html v1.6.6. It is tied to the actual implementation behavior: mnemonic generation and entry, BIP39 passphrase use, `.arc` export/import, password and keyfile credential modes, derived-output exports, QR generation, clipboard behavior, idle clearing, browser runtime limits, and native Tauri save behavior.

This document is not a cryptographic proof. `Encryption.txt` defines the cryptographic envelope. `Derivation.txt` defines how secrets are transformed into keys and addresses. `FileFormat.txt` defines the serialized artifacts. This document defines how an operator should handle those artifacts and runtime surfaces so the byte-level protections are not defeated by the environment.

Primary Rule

Treat every recovery session as handling live private key material.

Even if the UI currently shows only an address, the same session can contain:

- mnemonic words
- BIP39 wallet passphrase
- YellowSphere ARC password
- keyfile bytes
- combined credential material
- BIP39 seed
- root private keys
- account extended private keys
- address private keys
- Monero spend/view keys
- Stellar secret seeds
- Cardano private keys
- exported files containing any of the above

The correct operational stance is that the browser, operating system, display, clipboard, filesystem, removable media, and room are all part of the security boundary.

Threat Model

In scope:

Offline file acquisition:

An attacker obtains a protected `.arc` file or encrypted keyfile after the session. Protection depends on credential entropy and the implemented KDF

and MAC. Weak passwords remain weak even with PBKDF2.

File tampering:

An attacker modifies protected .arc metadata, salt, nonce, ciphertext, or MAC. YellowSphere ARC v2 detects this through MAC verification before decryption.

Wrong-path recovery error:

The mnemonic is correct, but the operator uses the wrong coin, BIP39 passphrase, derivation path, script type, branch, or address index range. The tool will derive valid but wrong keys without an error.

Clipboard exposure:

Mnemonic or address data is copied to the OS clipboard and observed by clipboard history, sync, remote desktop, or malware.

Export mishandling:

JSON, CSV, TXT, PDF, raw keyfile, or unprotected .arc artifacts are stored on unsafe media or copied to a networked environment.

Browser/runtime residue:

JavaScript strings, ArrayBuffers, object URLs, downloads, caches, swap, crash dumps, or hibernation files retain sensitive data after the UI is cleared.

Out of scope:

- A compromised operating system before the session begins.
- A malicious browser or browser extension with access to page memory.
- Firmware compromise, hardware implants, or physical keyloggers.
- Cameras or observers with screen/keyboard visibility.
- Coercion.
- An attacker who already knows the mnemonic or correct .arc credential.
- A malicious copy of YellowSphere.html.

For high-value recovery, assume an ordinary daily-use online computer is not an acceptable secret-handling environment.

Secret Classes

Class A: whole-wallet recovery secrets

- BIP39 mnemonic
- BIP39 wallet passphrase when one was used
- protected .arc credential that unlocks the mnemonic
- raw keyfile used as sole .arc credential
- combined-mode password plus keyfile together

Class B: subtree or account secrets

- root xprv/yprv/zprv/tpv
- account xprv/yprv/zprv/tpv
- Cardano account private material
- Monero private spend/view key pair
- Stellar secret seed

Class C: single-address secrets

- private_key_hex
- private_key_wif
- taproot output private key
- Solana private key material

- XRP private key material

Class D: privacy-sensitive public data

- addresses
- xpub/ypub/zpub/tpub
- root fingerprint
- QR PNG files
- derivation paths and account ranges

Class E: operational metadata

- filenames
- created_at timestamps
- credential_mode hints
- app version

Class A, B, and C must never be copied to networked storage or ordinary cloud sync. Class D is public on-chain once used, but still links wallet activity and should be handled deliberately.

Offline Workstation Requirement

The safest operating mode is a machine disconnected from all networks before any secret is entered and kept disconnected until after the session is cleared and the application is closed.

Disable:

- Wi-Fi
- Ethernet
- Bluetooth
- cellular modem
- cloud sync clients
- remote desktop
- browser profile sync
- browser extensions where practical

The v1.6.6 UI uses `navigator.onLine` for the network indicator:

```
online:
  networkStatus class "online"
  title "Network route detected"

offline:
  title "No network connection detected"
```

This indicator is a convenience signal, not proof of isolation. Physical disconnection and OS-level controls are authoritative.

Recommended Session Procedure

Before the session:

1. Obtain the intended YellowSphere.html build from trusted local media.
2. Verify the visible app version is v1.6.6.
3. Use a fresh live OS or a dedicated offline machine for high-value work.
4. Disable networking before opening the file.
5. Close unrelated applications.
6. Disable clipboard managers and screenshot tools.
7. Confirm no cameras or observers can see the screen or keyboard.
8. Decide the exact recovery goal: verify mnemonic, export .arc, derive a specific path, produce QR for an address, or recover a private key.

During the session:

1. Enter or import only the required mnemonic.
2. Enter the BIP39 wallet passphrase only if the original wallet used one.
3. Validate the mnemonic before deriving.
4. Compare the root fingerprint if a known fingerprint exists.
5. Select the coin and derivation path intentionally.
6. Derive the smallest address range that solves the task.
7. For UTXO wallets, check both receiving and change branches if funds are missing.
8. Export the minimum artifact required.
9. Prefer protected .arc over unprotected .arc for mnemonic storage.
10. Avoid clipboard use for seeds and private keys.

After the session:

- Use Clear All.
- Confirm derived output is no longer displayed.
- Close the browser or Tauri wrapper.
- Move required artifacts to controlled storage.
- Delete temporary files from unsafe locations.
- Power off the live OS; do not hibernate.
- For high-value work, reboot before reconnecting networks.

Mnemonic Handling

Mnemonic input and generated mnemonics are Class A secrets.

v1.6.6 behavior:

- Generated seeds use browser CSPRNG.
- Generated/imported seeds are hidden after generation/import.
- Manually entered seeds are promoted to importedSeedState and hidden after successful derivation.
- Hidden seed fields are displayed as bullet masks.
- "Show Seed" temporarily reveals the seed while held.

Operational rules:

- Do not type a real mnemonic into a networked browser.
- Do not paste a mnemonic from a clipboard populated on another machine.
- Do not photograph the word grid.
- Do not screen-share a session.
- Do not leave the session unattended while Show Seed is active.
- Do not rely on UI masking as memory erasure.

Masking prevents casual shoulder viewing. It does not remove the mnemonic from JavaScript memory.

BIP39 Wallet Passphrase Boundary

The passphrase input next to the mnemonic is the BIP39 wallet passphrase. It is not the .arc encryption password.

Operational consequences:

- Same mnemonic + different BIP39 passphrase = different wallet tree.
- Incorrect BIP39 passphrase does not produce an error.
- Incorrect BIP39 passphrase produces valid-looking wrong addresses.
- The BIP39 passphrase is not stored in protected .arc plaintext.
- The BIP39 passphrase must be backed up separately if used.

Before moving funds, verify known addresses under the intended passphrase.

Root Fingerprint Discipline

The UI displays:

```
Root Fingerprint: <hex>
```

Use it as a compact verification artifact when available. It is not a secret on the level of a private key, but it links a session to a wallet root.

Procedure:

- Record a root fingerprint from a known-good wallet before emergency use.
- After entering/importing a mnemonic and passphrase, compare the fingerprint.
- If the fingerprint differs, stop before exporting or sweeping keys.

A matching fingerprint does not prove path correctness. It only verifies the mnemonic/passphrase root.

Derivation Path and Script-Type Risk

The tool derives exactly what the UI requests. A wrong path is not a runtime error. It is a valid derivation of a different subtree.

High-risk inputs:

- coin selector
- derivation path
- script type
- address count
- range input
- BIP39 passphrase

Verification rules:

- Compare the first known address before using private keys.
- For Bitcoin-like wallets, check both receiving branch 0 and change branch 1.
- For restored exchange deposit addresses, verify destination tag or memo requirements separately.
- For Cardano, verify Shelley-era address expectations.
- For Monero, recognize that view/spend material is sensitive even when only one address is shown.

.arc Export Security

Protected .arc files contain the mnemonic encrypted under one credential mode:

```
password
keyfile
keyfile + password
```

Unprotected .arc files contain the plaintext mnemonic inside base64 armor.

Protected .arc requirements:

- Use high-entropy credentials.
- Verify import immediately after export.
- Store credential material separately from the .arc file.
- Do not upload .arc files to cloud storage unless the threat model explicitly accepts offline password guessing risk.

Unprotected .arc requirements:

- Use only for test data or controlled offline transfer.
- Treat as equivalent to the mnemonic.
- Do not store on general-purpose disks.

Default saved filename:

```
YellowSphere_Encrypted_Seed.arc
```

The filename does not prove the file is encrypted. v1.6.6 uses this filename for both protected and unprotected seed exports. Inspect the decoded bundle format if protection status matters:

```
Protected:
  format == "yellowsphere-encrypted-seed-v3"

Unprotected:
  format == "yellowsphere-plain-seed-v1"
```

Password Mode

Password mode normalizes and SHA-512 pre-hashes the password, then derives the YellowSphere ARC V3 AES key with PBKDF2-HMAC-SHA512 at 1000000 iterations.

Minimum operational requirements:

- Do not reuse an account password.
- Do not use a PIN, date, name, address, phone number, phrase from personal history, or single dictionary word.
- Prefer a randomly generated multi-word passphrase or long random string.
- Record the password offline.
- Store it separately from the .arc file.

Losing the password makes the protected .arc file unrecoverable.

Keyfile Mode

Keyfile mode converts keyfile bytes to:

```
"arc-keyfile-v1:" + base64(keyfile_bytes)
```

and uses that string as the .arc credential.

Generated raw keyfiles contain 64 random bytes and are saved as:

```
YellowSphere_Keyfile.key
```

Operational requirements:

- Treat the raw keyfile as a Class A secret.
- Store it separately from the .arc file.
- Do not leave a raw keyfile on a networked machine.
- Keep at least one verified backup copy.
- Verify that the .arc imports with the stored keyfile before relying on it.

If an attacker obtains both the protected .arc and raw keyfile, password guessing is unnecessary for Keyfile mode.

Keyfile + Password Mode

Combined mode requires both:

- keyfile bytes
- password

The app derives with HKDF-SHA512:

```
"arc-combined-v1:" + base64(HKDF(keyfile_bytes || NFKD password, YellowSphere ARC salt))
```

and uses that as the .arc credential.

Generated encrypted keyfiles are saved as:

```
YellowSphere_Keyfile.enc.key
```

Operational requirements:

- Store the .arc, encrypted keyfile, and password separately.

- Verify the full import path immediately after export.
- Do not assume the encrypted keyfile password is recoverable from the .arc.
- Do not assume the .arc password can open the encrypted keyfile unless that was the password used when generating it.

Losing any required component prevents recovery.

Encrypted Keyfile Security

Encrypted-keyfile v2 protects keyfile bytes with SHA-512 password pre-hashing, PBKDF2-HMAC-SHA512 at 1000000 iterations, and AES-256-GCM. It is safer to store than a raw keyfile but still require a high-entropy password.

Operational notes:

- The 128-bit GCM tag authenticates ciphertext and the exact magic/format AAD.
- YellowSphere ARC V3 authenticates its complete metadata object as AES-GCM AAD.
- The decrypted keyfile bytes exist in browser memory during import.
- The encrypted keyfile password is separate from the BIP39 wallet passphrase.

Derived Output Exports

Derived JSON, CSV, TXT, and PDF exports are plaintext secret-bearing artifacts.

They can contain:

- root extended private keys
- account extended private keys
- private_key_hex
- private_key_wif
- taproot private keys
- Stellar secret material
- Monero private spend/view keys
- Cardano payment and stake private keys
- XRP private keys

JSON is the most complete export. CSV and TXT flatten or display fields. PDF is optimized for human reading and clips long cells in the table, while extended keys are printed separately when present.

Operational rules:

- Export only the format needed.
- Prefer deriving a narrow range.
- Do not email, cloud-sync, or chat-share exports.
- Delete temporary exports after use.
- Remember that PDF files may be indexed by desktop search tools.
- Remember that browser downloads may persist in download history.

QR Export Boundary

QR export is designed for address payloads, not seeds or private keys.

v1.6.6 behavior:

- QR modal accepts a user-entered address.
- XRP r-address input prompts for an optional destination tag.

- XRP QR payload is address + "?dt=" + tag-or-00000.
- Non-XRP QR payloads may add coin URI schemes.
- Cardano QR payload is the raw address.
- Save PNG writes qr_<sanitized-address>.png.
- Copy Address copies the address input, not necessarily the full QR label.

Operational risks:

- Address QR codes can link wallet activity when scanned by online services.
- XRP destination tags are operational payment metadata and must be verified with the receiving service.
- QR PNG files can persist in downloads, photo libraries, or synced folders.

Never encode seed words or private keys in the QR modal.

Clipboard Boundary

Copy Seed:

- Shows a confirmation prompt.
- Copies normalized mnemonic words joined by spaces.
- Displays a 60-second countdown.
- Attempts to clear the clipboard by writing an empty string.

Constants:

```
CLIPBOARD_CLEAR_SECS = 60
```

Fallback copy path:

```
If navigator.clipboard.writeText is unavailable, the app creates a temporary
textarea, selects it, calls document.execCommand("copy"), and removes it.
```

Limitations:

- Clipboard managers can retain history.
- Cloud clipboard sync can copy secrets to other devices.
- Remote desktop software can observe clipboard data.
- Some operating systems or browsers may reject clipboard clearing.
- Clearing the clipboard does not erase prior clipboard-manager records.

Operational rule:

```
Treat clipboard use as an explicit secret export.
```

Idle Timeout and Clear All

Constants and persisted settings:

```
DEFAULT_IDLE_TIMEOUT_MINUTES = 5
allowed values = "2", "5", "15", "off"
localStorage key = "yellowsphereSessionTimeout"
VISIBILITY_CLEAR_GRACE_MS = 15000
localStorage key = "yellowsphereVisibilityGrace"
warning time = 60 seconds before a finite timeout
```

Events that reset the timer:

```
mousedown
keydown
touchstart
scroll
```

At warning:

```
Banner:
```

Idle timeout in 60 seconds. All fields will be cleared.

At timeout:

```
handleClearAll()  
Banner:  
  Session cleared due to inactivity.
```

Clear All behavior:

- clears imported seed state
- clears mnemonic textarea
- clears word-grid inputs
- removes valid/invalid classes from mnemonic inputs
- clears BIP39 passphrase input
- closes the credential dialog and clears password/confirmation inputs
- clears the selected keyfile input and in-memory keyfile-secret string
- clears raw output textarea
- clears root fingerprint display
- resets output view
- sets lastDerivedOutput = null
- reports "All fields cleared."

Visibility-loss behavior:

- With grace enabled (default), hiding the page starts a 15-second timer.
- Returning before expiry cancels the timer.
- With grace disabled, sensitive state clears immediately when hidden.
- Credential-dialog password/keyfile state counts as sensitive even before a mnemonic has been imported.

Limitations:

Clear All does not guarantee erasure from JavaScript engine internals, browser process memory, WebCrypto internals, OS swap, hibernation files, crash dumps, GPU/compositor memory, clipboard managers, download history, or already-saved files.

Browser Runtime Risk

YellowSphere.html is a local offline browser application, but browser runtimes are not hardened secret vaults.

Risks:

- JavaScript strings cannot be reliably zeroized.
- Browser extensions may observe page content.
- Developer tools can inspect memory and DOM state.
- Autofill, history, screenshots, accessibility tools, and crash reporters can retain data depending on environment.
- Downloads and object URLs are explicit egress paths.
- The browser profile may sync settings or metadata.

Controls:

- Use a clean browser profile.
- Disable extensions.
- Disable sync.
- Avoid developer tools.
- Prefer a live OS for high-value sessions.
- Close the browser after use.

Tauri Native Save Risk

When running inside a Tauri wrapper, saveBlob can pass file content to a native save bridge as base64:

```
save_export(filename, contentBase64)
```

Operational consequences:

- Secret-bearing exports cross from the webview into native code.
- The native layer may write to paths outside browser downloads.
- The UI may display "Export saved to <path>".
- Native export failure is reported and logged to console.

Treat Tauri native save paths as normal filesystem writes of the underlying secret-bearing artifact.

Storage Media

Recommended:

- encrypted removable media
- write-once archival media for finalized backups where appropriate
- physically separate storage for .arc, keyfile, and password
- printed or engraved password backups for high-value offline storage

Avoid:

- cloud-synced folders
- email attachments
- chat uploads
- unencrypted USB drives
- daily-use Downloads folders
- network shares
- managed corporate endpoints

SSD warning:

Secure deletion on SSDs is not reliable because of wear leveling and spare blocks. Avoid writing plaintext secrets to SSDs rather than relying on later deletion.

Verification Before Funds Movement

Before sweeping, importing, or moving funds:

- Confirm coin.
- Confirm network is mainnet if intended.
- Confirm BIP39 passphrase.
- Confirm derivation path.
- Confirm script type.
- Confirm address index range.
- Compare at least one known historical address.
- For UTXO assets, check receiving and change branches.
- For XRP, confirm destination tag requirements separately.
- For Stellar, confirm memo requirements separately.

- For Ethereum/ERC-20, confirm chain/network in the destination wallet.

Never conclude that a seed is empty until plausible alternate paths and change branches have been checked.

Incident Response

If a mnemonic was exposed:

- Assume all assets controlled by that mnemonic are at risk.
- Use a clean offline environment to derive needed keys.
- Move funds to a new seed generated on trusted hardware/software.
- Do not reuse the exposed seed.

If an account extended private key was exposed:

- Treat all descendants below that account as compromised.
- Move funds from affected paths.
- Do not keep using that account subtree.

If a single private key was exposed:

- Move funds from that address.
- For UTXO wallets, consider address reuse and change-output exposure.

If a protected .arc file was exposed:

- Evaluate credential entropy.
- If the credential was weak or reused, treat the mnemonic as compromised.
- If using Keyfile mode, determine whether the keyfile was also exposed.
- If using combined mode, determine whether both factors were exposed.
- Re-export with stronger credentials if the mnemonic remains trusted.

If a raw keyfile was exposed:

1. Treat any .arc protected only by that keyfile as exposed if the .arc file is also accessible to the attacker.
2. Re-export affected .arc files with a new keyfile or combined mode.

If an encrypted keyfile was exposed:

- Evaluate encrypted-keyfile password entropy.
- If weak, generate a new keyfile and re-export.

Disposal Procedure

After recovery:

- Close the QR modal.
- Clear visible seed and output state.
- Delete unneeded derived exports.
- Empty browser downloads only if doing so is meaningful for the storage medium.
- Remove temporary files from removable media.
- Power down the offline system.
- Store required backups in separate physical locations.

For high-value sessions, prefer destroying the live session by full power-off rather than trusting in-app clearing.

Minimum Acceptable Handling by Artifact

Protected .arc:

- Store on encrypted removable media. Store password/keyfile separately.

Unprotected .arc:

Store only like a raw mnemonic. Avoid except for controlled test/offline use.

Raw keyfile:

Store like a high-value secret. Separate from .arc.

Encrypted keyfile:

Store separately from .arc and password. Use a high-entropy password.

Derived JSON/CSV/TXT/PDF:

Treat as plaintext private-key export. Delete after use unless there is a deliberate archival reason.

QR PNG:

Treat as address metadata. Avoid cloud photo sync and public sharing if wallet privacy matters.

Printed notes:

Store in tamper-evident physical controls. Separate mnemonic, passphrase, .arc credential, and keyfile where possible.

Operator Checklist

Before entering a real seed:

- v1.6.6 build confirmed
- offline state confirmed
- clean browser/profile confirmed
- no extensions or sync
- private physical environment
- intended path/coin/range known
- output destination selected

Before exporting:

- mnemonic checksum valid
- root fingerprint checked if available
- BIP39 passphrase checked
- credential mode chosen intentionally
- export type understood

Before ending:

- import-tested any new .arc backup
- copied required keyfile/password material
- deleted unneeded plaintext exports
- Clear All executed
- app closed
- offline machine powered down

Non-Negotiable Warnings

- A protected .arc is only as strong as the credential needed to open it.
- A raw keyfile plus its .arc is equivalent to the ability to recover the mnemonic.
- A derived-output JSON file can be more immediately dangerous than a protected .arc because it may contain private keys in plaintext.
- The BIP39 wallet passphrase is not saved in the .arc file.
- UI masking is not memory erasure.
- Clipboard clearing is best effort.
- Browser offline operation is necessary but not sufficient on a compromised machine.
- Wrong derivation settings produce valid wrong addresses.

Airgap Preparation Detail

For high-value sessions, perform these checks before opening the HTML file:

- Remove Ethernet cables physically.
- Disable Wi-Fi in firmware or hardware controls where possible.
- Disable Bluetooth in firmware or hardware controls where possible.
- Remove USB network adapters.
- Disable cellular modems.
- Use a local copy of YellowSphere.html, not a remote URL.
- Confirm the browser did not restore prior tabs into online services.
- Confirm password managers and form-fill extensions are disabled.
- Confirm no cloud storage client is syncing the working directory.

The navigator.onLine indicator can be wrong in both directions. It can report offline when a specialized route exists, and it can report online due to local network conditions. Treat it as a reminder, not an attestation.

Live OS Guidance

The preferred high-value environment is a live operating system that does not write session state to persistent storage.

Recommended properties:

- no persistent home directory
- no swap partition
- hibernation disabled
- browser profile created fresh for the session
- no browser sync
- no extensions
- no network autoconnect

If a live OS is not available, use a dedicated offline machine. A dedicated machine is still weaker than a live OS if it has persistent storage, because secrets can survive in swap, browser cache, crash dumps, filesystem journals, thumbnails, or search indexes.

Password Entropy Guidance

Use high-entropy credentials for protected .arc files and encrypted keyfiles.

Unacceptable:

- one dictionary word
- names

- dates
- phone numbers
- addresses
- keyboard patterns
- reused website passwords
- short phrases from memory
- PINs

Acceptable:

- randomly generated multi-word passphrase from a large wordlist
- randomly generated long character string
- password-manager-generated secret recorded offline

The KDF slows each guess. It does not make a predictable password safe. A captured protected .arc file can be tested offline without interacting with the original machine.

Backup Separation Patterns

Password mode:

Location A:
protected .arc

Location B:
password record

Optional Location C:
BIP39 wallet passphrase record if used

Keyfile mode:

Location A:
protected .arc

Location B:
raw keyfile

Optional Location C:
BIP39 wallet passphrase record if used

Combined mode:

Location A:
protected .arc

Location B:
keyfile or encrypted keyfile

Location C:
combined-mode password

Optional Location D:
BIP39 wallet passphrase record if used

Do not store all factors in one bag, one cloud account, one password manager entry, one USB drive, or one safe if the threat model includes theft of that container.

Validation of New Backups

Every newly created seed backup must be tested before it is trusted.

Protected .arc validation:

- Export protected .arc.
- Clear the current session or open a fresh offline session.

- Import the .arc with the intended credential.
- Confirm BIP39 validation succeeds.
- Confirm the root fingerprint matches the pre-export session.
- Confirm at least one expected address derives.

Keyfile validation:

- Verify the stored keyfile can be selected and read.
- Verify encrypted keyfiles decrypt with the recorded password.
- Verify the keyfile opens the protected .arc.

Failure to test a backup is equivalent to not having a backup.

Handling Legacy Files

v1.6.6 can import older seed formats. Legacy import support is for migration, not for continued archival use.

After importing a legacy .arc:

1. Confirm the mnemonic and root fingerprint.
2. Export a new protected v1.6.6 .arc.
3. Test import of the new file.
4. Retire the legacy file according to the sensitivity of the original storage medium.

Legacy files may have lower KDF cost or weaker metadata authentication. Keeping them indefinitely preserves the older risk profile.

Printing and Paper Handling

Printing derived outputs or recovery material changes the risk from digital storage to physical custody.

Rules:

- Do not print from a networked printer.
- Do not use office or shared printers.
- Do not print through cloud print services.
- Verify printer memory and job history behavior if possible.
- Retrieve pages immediately.
- Destroy misprints.
- Store paper in tamper-evident physical controls.

PDF export is not encrypted. Printing a PDF does not erase the PDF file.

Camera and Optical Risks

Seed words, private keys, QR codes, and addresses can be captured optically.

Controls:

- Cover laptop cameras if not needed.
- Remove phones and smart watches from the workspace.
- Avoid rooms with security cameras.
- Avoid reflective surfaces facing the display.
- Do not use video calls during recovery.
- Do not create screenshots as notes.

QR images are easy to scan at a distance when shown full-size. Treat QR display as public disclosure of the payload.

Multi-Asset Recovery Planning

When recovering wallets that may contain multiple coins:

- Work one coin at a time.
- Record derivation settings used for each coin.
- Verify addresses before exporting private keys.
- Avoid exporting all coins if only one asset needs recovery.
- Avoid mixing test mnemonics and real mnemonics in the same session.
- Clear state between unrelated recoveries.

The blast radius of a full JSON export is larger than the blast radius of a single address private key. Choose the smallest artifact that completes the recovery.

Audit Trail Without Secret Leakage

For operational records, keep non-secret metadata separate from secrets.

Safe-ish metadata to record:

- app version v1.6.6
- date of backup creation
- coin
- derivation path
- script type
- address count or range
- root fingerprint
- storage location labels

Do not include:

- mnemonic
- BIP39 passphrase
- .arc password
- keyfile bytes
- private keys
- xprv values
- screenshots of the app

Even public addresses can be privacy-sensitive. If privacy matters, record only the minimum needed to reproduce the recovery.

End-State Decision

After an emergency recovery, decide whether the original seed remains trusted.

Keep using the seed only if:

- it was never exposed outside the intended offline environment
- no plaintext private-key exports were mishandled
- no weak .arc credential was exposed with the .arc file
- no malware or physical observer risk was discovered

Retire the seed if:

-
- mnemonic was copied to a networked clipboard
 - derived JSON/PDF with broad private material was uploaded or synced
 - a raw keyfile and protected .arc were both exposed
 - a weak password protected an exposed .arc
 - the recovery was performed on a machine later believed compromised

Seed retirement means moving funds to a newly generated wallet under a new mnemonic and new backup set.

YellowSphere v1.6.6 - Linux Release Notes

Release status

This file records the published v1.6.6 Linux artifacts with their measured filenames, metadata, and hashes. YellowSphere.html v1.6.6 is the promoted production source. See Release_v1.6.6.txt for the completed release checklist.

Scope

This document records Linux-specific release, installation, verification, and operational notes for the v1.6.6 Tauri desktop build.

The canonical application remains YellowSphere.html v1.6.6. The Linux Tauri build packages that same offline application inside a native WebKitGTK desktop wrapper with the Tauri save_export bridge.

Release Artifacts

The v1.6.6 Linux release set currently contains amd64 artifacts only:

```
releases/tauri/linux/yellowsphere
releases/tauri/linux/YellowSphere_1.6.6_amd64.deb
releases/tauri/linux/YellowSphere-1.6.6-1.x86_64.rpm
```

The binary artifact is an x86-64 Linux ELF executable. The Debian package is for amd64 systems. The RPM package is for x86_64 systems.

No Linux arm64/aarch64 package was produced for this release.

No Applmage artifact is part of the v1.6.6 Linux release set. The v1.6.6 build published only the raw ELF, .deb, and .rpm files. The earlier v1.6.0 Applmage retry reached Tauri's linuxdeploy packaging step and failed inside the Docker amd64 build environment.

Verified Artifact Metadata

The Linux binary was verified as:

```
ELF 64-bit LSB pie executable, x86-64, dynamically linked
```

The Debian package metadata was verified as:

```
Package: yellow-sphere
Version: 1.6.6
Architecture: amd64
Depends: libwebkit2gtk-4.1-0, libgtk-3-0
Description: Offline BIP39/BIP32 recovery and key-derivation tool
```

The RPM package metadata was verified as:

```
Name: yellow-sphere
Version: 1.6.6
Release: 1
Architecture: x86_64
Signature: none
Summary: Offline BIP39/BIP32 recovery and key-derivation tool
```

The installed command is still `yellowsphere`. The Linux package name is `yellow-sphere`.

The RPM package is not signed. Verify the SHA-256 digest from docs/SHA256SUMS before installation.

SHA-256 Verification

The Linux artifact hashes are recorded in docs/SHA256SUMS:

```
baac9c3a8da73db7792c12382f135567ee50760b7f8b7649e21b8add18c2f81b releases/tauri/linux/
yellowsphere
92be81e6704138c0a6549e1277fab601973c29763f639d5676bd6d0d649bab82 releases/tauri/linux/
YellowSphere_1.6.6_amd64.deb
162ec234d05376b7b43da72a79eecd34e2a6f594b6bd764a1aafb08494b20211 releases/tauri/linux/
YellowSphere-1.6.6-1.x86_64.rpm
```

Verify from the repository root with:

```
shasum -a 256 releases/tauri/linux/*
```

or on systems using GNU coreutils:

```
sha256sum releases/tauri/linux/*
```

Compare the output byte-for-byte against docs/SHA256SUMS before entering seed material.

Debian or Ubuntu Installation

Install the .deb package with:

```
sudo apt install ./releases/tauri/linux/YellowSphere_1.6.6_amd64.deb
```

or:

```
sudo dpkg -i ./releases/tauri/linux/YellowSphere_1.6.6_amd64.deb
sudo apt -f install
```

The package declares these runtime dependencies:

```
libwebkit2gtk-4.1-0
libgtk-3-0
```

If the host distribution does not provide WebKitGTK 4.1 packages, use a distribution release that does or run the standalone HTML application directly in an offline browser.

RPM Installation

Install the RPM package on Fedora-like systems with:

```
sudo dnf install ./releases/tauri/linux/YellowSphere-1.6.6-1.x86_64.rpm
```

On systems using rpm directly:

```
sudo rpm -i ./releases/tauri/linux/YellowSphere-1.6.6-1.x86_64.rpm
```

The RPM is unsigned, so hash verification is mandatory before installation.

Standalone Binary Use

The raw Linux binary can be run directly on compatible amd64 Linux systems with the required WebKitGTK and GTK runtime libraries installed:

```
chmod +x releases/tauri/linux/yellowsphere
./releases/tauri/linux/yellowsphere
```

The standalone binary is useful for controlled testing, but package installation is preferred for normal desktop launcher integration and runtime dependency handling.

Operational Notes

Linux desktop packaging does not change the recovery security model:

- The application still handles mnemonic words and private key material.
- The Tauri wrapper still passes exports through native save_export.
- Exported JSON, CSV, TXT, PDF, .arc, keyfile, and QR files are ordinary filesystem writes.
- Browser and WebView memory are not hardened secret vaults.
- The host clipboard, display server, crash reporting, shell history, and filesystem remain part of the security boundary.

For high-value recovery, use an offline Linux environment, disable networking and sync services, avoid remote desktop sessions, verify hashes before launch, export only the required artifacts, and clear the session before shutdown.

Build Reference

The v1.6.6 Linux amd64 release was built in a Linux amd64 Docker environment from the prepared Tauri assets without editing HTML files.

The package build command was:

```
cargo tauri build --bundles deb,rpm --ci
```

No ApplImage command was run for v1.6.6. Do not document an ApplImage as available unless a future release successfully produces and verifies one.

■YellowSphere - Build Reproducibility Specification

v1.6.6 Python release boundary (2026-06-26)

The v1.6.6 Python release was built with Python 3.14.5 using the PEP 517 setuptools backend in an isolated environment. The source tree was staged on a Windows workspace with AppleDouble sidecar files excluded before building.

The measured Python release artifacts are:

```
bd8086ad38dc2939dbfc8238dcebcd35f10b38a9baee4df21373875ba2c702c7  releases/python/
yellowsphere-1.6.6-py3-none-any.whl
a8f5e8854624cf18a4124e333fa309ae1d01fa7c6fe92459a4b62ced2fef26d1  releases/python/
yellowsphere-1.6.6.tar.gz
```

Their byte sizes are 345,509 (wheel) and 349,199 (source archive). The wheel metadata reports yellowsphere 1.6.6 with Python >=3.10 and includes the v1.6.6 offline HTML GUI asset. The console entry point reported 1.6.6 from the source tree. All 14 Python tests passed with `PYTHONPATH=src`. Neither archive contains AppleDouble entries.

v1.6.4 macOS release boundary (2026-06-19)

The v1.6.4 macOS release was built from the promoted YellowSphere.html source on macOS 15.7.7 (Build 24G720), arm64, using rustc 1.96.0 and tauri-cli 2.11.2. The app bundles are ad-hoc signed and are not Apple-notarized.

The measured macOS release artifacts are:

```
f2e6b3eddc7c07e3b85b4b508e59de5f5ed254b5c5803caf3c3f18acfc17e4f4  releases/tauri/macos/
YellowSphere_1.6.4_x64.dmg
1abe22796badb58bc367ec99dcd7f0b01f3cba81281c66952665b261c585b16c  releases/tauri/macos/
YellowSphere_1.6.4_aarch64.dmg
021c57d56145212c29553236ece95c16e4877f4c341469a5225d46494ee98805  releases/tauri/macos/
YellowSphere_1.6.4_universal.dmg
```

Their byte sizes are 4,010,962 (x64), 3,852,018 (aarch64), and 6,913,634 (universal). Each app reports CFBundleShortVersionString and CFBundleVersion 1.6.4. The binaries report x86_64, arm64, and x86_64/arm64 respectively. All three app signatures pass codesign --verify --deep --strict, and all three DMGs pass hdiutil verify.

The v1.6.2 and v1.6.0 artifact sections below remain immutable historical reproduction records. Do not substitute their hashes for v1.6.4 artifacts.

v1.6.4 Linux release boundary (2026-06-19)

The v1.6.4 Linux amd64 release was built in the documented Ubuntu 22.04 linux/amd64 Docker builder on a macOS arm64 host. The builder used rustc 1.96.0 and tauri-cli 2.11.2. Rust unit tests passed before the release build.

The measured Linux release artifacts are:

```
9f847f0ee83bee76fc197fb28116dc48ebb6482eddb85d9a56ef621bf26616ea  releases/tauri/linux/
yellowsphere
25feb4f563350259a9bd5d4149b74e7d241bea9096c2c7d980a3d6224b4267b7  releases/tauri/linux/
YellowSphere_1.6.4_amd64.deb
61ea1426bcf4b08c02db005a9c5f22a0a2555006d93bbe1754fe7a9358f9d9d5  releases/tauri/linux/
YellowSphere-1.6.4-1.x86_64.rpm
```

Their byte sizes are 13,680,488 (raw ELF), 4,395,528 (Debian), and 4,396,158 (RPM). The raw binary is an x86-64 ELF64 position-independent executable. The Debian package reports Package yellowsphere, Version 1.6.4, Architecture amd64. The RPM reports Name yellowsphere, Version 1.6.4, Release 1, Architecture x86_64, and is unsigned.

Archived v1.6.2 release boundary (2026-06-18)

This specification defines the current v1.6.2 release set and preserves the host records required to reproduce archived v1.6.0 artifacts. The production standalone browser file is YellowSphere.html v1.6.2. Archived browser builds reside under lts/. See Release_v1.6.2.txt and SHA256SUMS for authoritative artifact identities.

Scope

This document defines build inputs, host environments, commands, outputs, and verification rules for the current v1.6.2 release and the explicitly labeled archived v1.6.0 compatibility set.

The filename preserves the project-local spelling:

```
BuildReproducibility.txt
```

The canonical source of truth for current application behavior is:

```
YellowSphere.html
```

The release hash manifest for official current and archived release surfaces is:

```
docs/SHA256SUMS
```

This document does not replace SHA-256 verification. It records the build procedure and the expected artifact boundary so rebuilders can determine whether their outputs are byte-equivalent to the published v1.6.0 files.

Release Surfaces

The v1.6.0 release set covered by docs/SHA256SUMS is:

```
lts/YellowSphere_v1.6.0_LTS.html
YellowSphere.py
releases/tauri/linux/YellowSphere_1.6.0_amd64.deb
releases/tauri/linux/YellowSphere-1.6.0-1.x86_64.rpm
releases/tauri/macos/YellowSphere_1.6.0_aarch64.dmg
releases/tauri/macos/YellowSphere_1.6.0_universal.dmg
releases/tauri/macos/YellowSphere_1.6.0_x64.dmg
```

Older v1.5.0 artifacts may exist under releases/tauri/macos. They are not part of the v1.6.0 reproducibility target.

The shared raw Linux binary path releases/tauri/linux/yellowsphere now contains the current v1.6.4 build and is covered in the v1.6.4 section above.

Current v1.6.2 Native Release Set

The current v1.6.2 native release set adds these artifacts to the archived v1.6.0 baseline:

```
releases/tauri/windows/yellowsphere.exe
releases/tauri/windows/YellowSphere_1.6.2_x64-setup.exe
releases/tauri/windows/YellowSphere_1.6.2_x64_en-US.msi
releases/tauri/macos/YellowSphere_1.6.2_x64.dmg
releases/tauri/macos/YellowSphere_1.6.2_aarch64.dmg
releases/tauri/macos/YellowSphere_1.6.2_universal.dmg
releases/tauri/linux/yellowsphere
releases/tauri/linux/YellowSphere_1.6.2_amd64.deb
releases/tauri/linux/YellowSphere-1.6.2-1.x86_64.rpm
```

The v1.6.2 release hashes are:

61317f534d80d39504f296c48be3ed45b256dc05162ac851fb035d6dfb8aa0cf	releases/tauri/windows/yellowsphere.exe
8f461fe50df109a74cfe7b24873f218394c95b7b6356cd494684876e180a58f6	releases/tauri/windows/YellowSphere_1.6.2_x64-setup.exe
e11f404e2a1db85edcd42d534c6cd5c73cf286275e6b9e99d6d976752963a472	releases/tauri/windows/YellowSphere_1.6.2_x64_en-US.msi
1c1f3c55911a3baaa3f84d1537f33c92703a88d5baea5009e12d5ce5402a975c	releases/tauri/macos/YellowSphere_1.6.2_x64.dmg
eb996da31823d16d47472496d24f19a63709dd7c2166185c6fd28ed51b097718	releases/tauri/macos/YellowSphere_1.6.2_aarch64.dmg
50a575cadd4a6f9e213923041b6a5bb3124f77727f51e9bf78f04f3b401ae1af	releases/tauri/macos/YellowSphere_1.6.2_universal.dmg
5ecca80fbcae77fb209d3f14fdd193009920c1031990fdbcd74246bcebc0a352	releases/tauri/linux/yellowsphere
609d4b66b7b1ac1b11021390b330b2a207601dccc1de41dd8959e1568e45c01a	releases/tauri/linux/YellowSphere_1.6.2_amd64.deb
a334d2aaac79ce8049e42061d0ba471f9c9466cac1fbeddba83d206c74a3e447	releases/tauri/linux/YellowSphere-1.6.2-1.x86_64.rpm

The v1.6.2 macOS app bundles were ad-hoc signed and the DMGs were generated from the signed bundles. They were not Apple-notarized. The v1.6.2 Linux RPM is unsigned. Hash verification is mandatory before installation or recovery use.

Source Version Requirements

The current repository files must agree on v1.6.2:

```
package.json version: 1.6.2
```

```
src-tauri/Cargo.toml package.version: 1.6.2
src-tauri/tauri.conf.json version: 1.6.2
YellowSphere.html visible/browser version: v1.6.2
Python package/app version: 1.6.2
```

The archived `lts/YellowSphere_v1.6.0_LTS.html` file intentionally reports v1.6.0 LTS and is verified by its own SHA-256 entry. It is not a current source version requirement.

Do not mix files from different releases. The HTML, Python launcher, packaged assets, Tauri wrapper, docs, and release artifacts are one build set.

Canonical Hashes

The v1.6.0 release hashes are:

```
See docs/SHA256SUMS for the current archived LTS HTML hash.
a976e8903e13ab4b8d119178a7e66a41492e96d9c47df141afc081ee0601ae00 YellowSphere.py
0d1f05b6658e33417de4692b40aa7c5bb44a9f80a92b6ec7ec5010dfebe9d273 releases/tauri/linux/
YellowSphere-1.6.0-1.x86_64.rpm
992e2e436fff0af98f84598499f43c3b7fe194e7109de8e94747a72b3ac24a8d releases/tauri/linux/
YellowSphere_1.6.0_amd64.deb
d0329d6f92a42b78b8528fe78aab23afbcca7c95d94769b08c37dc5a22c24e releases/tauri/macos/
YellowSphere_1.6.0_aarch64.dmg
948f42808397b13d34450e579869cdd20d23b94d2bb71ee6056c256dbddb6f2b releases/tauri/macos/
YellowSphere_1.6.0_universal.dmg
14b577387ceca7db62c9551f890dcfb87e900d97ddb8fdc9ab6e9ef7ba11eed6 releases/tauri/macos/
YellowSphere_1.6.0_x64.dmg
```

Verify them from the repository root with:

```
shasum -a 256 -c docs/SHA256SUMS
```

For v1.6.6, YellowSphere.html, the checksum manifest, and rebuilt Python/Windows release artifacts also have detached PGP signatures. The public release-signing key is:

```
docs/YellowSphere_Release_Signing_2026_pubkey.asc
```

Release signing key fingerprint:

```
6A88 D329 DCF6 1A44 EF69 101B 019E C328 3B45 1469
```

Inspect the public key:

```
gpg --show-keys docs/YellowSphere_Release_Signing_2026_pubkey.asc
```

Verify the signed checksum manifest:

```
gpg --import docs/YellowSphere_Release_Signing_2026_pubkey.asc
gpg --verify docs/SHA256SUMS.asc docs/SHA256SUMS
```

Verify an artifact signature:

```
gpg --verify YellowSphere.html.asc YellowSphere.html
gpg --verify releases/tauri/windows/YellowSphere_1.6.6_x64-setup.exe.asc releases/tauri/
windows/YellowSphere_1.6.6_x64-setup.exe
```

Recorded macOS Build Host

The v1.6.0 macOS artifacts were produced on:

```
operating system: macOS 15.7.7
build version: 24G720
host architecture: arm64
rustc: 1.96.0 (ac68faa20 2026-05-25)
cargo: 1.96.0 (30a34c682 2026-05-25)
tauri-cli: 2.11.2
```

The build used local Rust/Tauri target directories outside the repository working tree where practical. This avoids copying macOS AppleDouble metadata files named `._*` into release artifacts or checksum inputs.

Recorded Linux Build Host

The v1.6.0 Linux artifacts were produced inside Docker on a macOS arm64 host.

Host Docker version:

Docker version 29.5.3, build d1c06ef

Linux build platform:

linux/amd64

Base distribution:

Ubuntu 22.04

Builder dependency class:

```
ca-certificates
curl
build-essential
pkg-config
libssl-dev
libgtk-3-dev
libwebkit2gtk-4.1-dev
libayatana-appindicator3-dev
librsvg2-dev
patchelf
file
wget
rpm
```

The Linux Applmage retry also installed:

```
libfuse2
desktop-file-utils
appstream
```

The Applmage build was not published because linuxdeploy failed during the Applmage bundling step. The Linux v1.6.0 release artifacts are the raw ELF, the Debian package, and the RPM package only.

Asset Preparation Boundary

The Tauri wrapper reads from:

```
tauri-dist/index.html
tauri-dist/favicon.png
tauri-dist/settings-icon.png
```

The canonical asset-preparation command is:

```
python scripts/prepare_tauri_assets.py
```

On Windows hosts the equivalent command is:

```
powershell -NoProfile -ExecutionPolicy Bypass -File ./scripts/prepare-auri-assets.ps1
```

These preparation scripts copy the packaged HTML asset into tauri-dist and rewrite local asset paths for the Tauri bundle. They are build-preparation steps, not source-of-truth edits to YellowSphere.html.

When reproducing the exact v1.6.0 artifacts in this repository, do not edit any HTML files manually. If tauri-dist is already prepared and known-good, the release build can use that existing prepared directory.

macOS Build Commands

The intended macOS target triples are:

```
x86_64-apple-darwin
aarch64-apple-darwin
universal-apple-darwin
```

Build commands:

```
cargo tauri build --target x86_64-apple-darwin --bundles app,dmg --ci
cargo tauri build --target aarch64-apple-darwin --bundles app,dmg --ci
cargo tauri build --target universal-apple-darwin --bundles app,dmg --ci
```

Expected v1.6.0 DMG outputs:

```
YellowSphere_1.6.0_x64.dmg
YellowSphere_1.6.0_aarch64.dmg
YellowSphere_1.6.0_universal.dmg
```

The v1.6.0 macOS .app bundles were ad-hoc signed. The DMGs were generated from the signed app bundles. They were not Apple-notarized.

Ad-hoc signing command pattern:

```
codesign --force --deep --sign - "<app bundle path>"
```

Architecture verification command pattern:

```
lipo -info "<app bundle path>/Contents/MacOS/yellowsphere"
```

Signature verification command pattern:

```
codesign --verify --deep --strict --verbose=2 "<app bundle path>"
```

Linux Build Commands

The Linux build was performed in a Docker linux/amd64 container. The source tree was copied into /tmp/src without .git metadata, target directories, node_modules, release outputs, or macOS AppleDouble files.

Source-copy exclusion pattern:

```
--exclude=.git
--exclude="._*"
--exclude="*/._*"
--exclude=src-tauri/target
--exclude=target
--exclude=node_modules
--exclude=releases
```

Package build command:

```
CARGO_TARGET_DIR=/target cargo tauri build --bundles deb,rpm --ci
```

Expected v1.6.2 Linux outputs:

```
/target/release/yellowsphere
/target/release/bundle/deb/YellowSphere_1.6.2_amd64.deb
/target/release/bundle/rpm/YellowSphere-1.6.2-1.x86_64.rpm
```

Release-copy command pattern:

```
cp /target/release/yellowsphere releases/tauri/linux/
cp "/target/release/bundle/deb/YellowSphere_1.6.2_amd64.deb" releases/tauri/linux/
cp "/target/release/bundle/rpm/YellowSphere-1.6.2-1.x86_64.rpm" releases/tauri/linux/
```

The intermediate compiler dependency file yellowsphere.d is not a release artifact and must not be copied into the release set.

Automated release harnesses

Run host-platform Tauri configuration, asset, icon, and Rust preflight checks:

```
npm run test:tauri
```

Build and validate fresh native packages on their matching hosts:

```
npm run test:tauri:windows
npm run test:tauri:macos
npm run test:tauri:linux
```

Validate the published artifacts and their docs/SHA256SUMS entries without a new build:

```
npm run test:tauri:windows:validate
npm run test:tauri:macos:validate
npm run test:tauri:linux:validate
```

The macOS validator checks CFBundleShortVersionString, x86_64/arm64/universal architectures, codesign integrity, hdiutil integrity, filenames, sizes, and manifest hashes. Pass --require-notarization directly to the shell harness when notarization is release policy.

The Linux validator checks the raw x86-64 ELF, Debian package name/version/ architecture and payload, RPM name/version/release/architecture and payload, artifact sizes, and manifest hashes. Pass --require-rpm-signature directly to the shell harness when RPM signing is release policy. On macOS, the Linux harness automatically runs in yellowsphere-tauri-linux-builder:22.04 under linux/amd64 emulation.

Linux Artifact Verification

Verify the raw Linux binary type:

```
file releases/tauri/linux/yellowsphere
```

Expected class:

```
ELF 64-bit LSB pie executable, x86-64, dynamically linked
```

Verify Debian package metadata:

```
dpkg-deb --info "releases/tauri/linux/YellowSphere_1.6.2_amd64.deb"
```

Required fields:

```
Package: yellow-sphere
Version: 1.6.6
Architecture: amd64
Depends: libwebkit2gtk-4.1-0, libgtk-3-0
```

Verify RPM package metadata:

```
rpm -qip "releases/tauri/linux/YellowSphere-1.6.2-1.x86_64.rpm"
```

Required fields:

```
Name: yellow-sphere
Version: 1.6.6
Release: 1
Architecture: x86_64
Signature: (none)
```

The RPM is unsigned in v1.6.6. Hash verification is mandatory.

Byte-for-Byte Constraints

Byte-for-byte reproducibility depends on these inputs remaining unchanged:

- YellowSphere.html bytes
- YellowSphere.py bytes
- tauri-dist prepared asset bytes
- src-tauri Rust source bytes
- src-tauri/Cargo.lock dependency resolution
- package.json and Tauri metadata
- Rust compiler version
- Tauri CLI and bundler version
- target triple
- host packaging tools
- code-signing mode
- DMG generation tool behavior
- Linux distribution package tooling

Build outputs may fail to match byte-for-byte if any of these change:

- Rust or Cargo version
- Tauri CLI version
- crate dependency versions
- system linkers or SDKs
- macOS hdiutil behavior

- Linux dpkg/rpm packaging behavior
- file mtimes captured by package formats
- file ownership or permission metadata
- AppleDouble ._* metadata files
- ad-hoc signature timestamp or code directory details

When byte-for-byte equality is not achieved, compare:

- Source file hashes.
- Prepared tauri-dist file hashes.
- Binary architecture and embedded version.
- Package metadata.
- Runtime behavior against docs/TestVectors.txt.

Behavioral equivalence is not the same as release equivalence. A rebuilt file is a v1.6.0 release artifact only if its SHA-256 matches docs/SHA256SUMS or a new signed release manifest explicitly records the new hash.

Sidecar Exclusion Rule

Files named ._* are macOS AppleDouble metadata files. They are not source files, build inputs, test vectors, docs, or release artifacts.

Reproducible build scripts must exclude them from:

- source archives
- Docker copy steps
- checksum manifests
- release directories
- documentation inventory

Verification command:

```
find . -name '._*' -print
```

Expected release result:

```
no output
```

Post-Build Verification Checklist

After building v1.6.0, verify:

- No HTML source file was manually edited during packaging.
- YellowSphere.html hash matches docs/SHA256SUMS.
- YellowSphere.py hash matches docs/SHA256SUMS.
- Linux raw binary hash matches docs/SHA256SUMS.
- Linux .deb hash matches docs/SHA256SUMS.
- Linux .rpm hash matches docs/SHA256SUMS.
- macOS x64 DMG hash matches docs/SHA256SUMS.
- macOS aarch64 DMG hash matches docs/SHA256SUMS.
- macOS universal DMG hash matches docs/SHA256SUMS.
- Linux file command reports x86-64 ELF for yellowsphere.
- Debian metadata reports version 1.6.0 and architecture amd64.

-
- RPM metadata reports version 1.6.0 and architecture x86_64.
 - macOS binaries report the expected architecture for each build.
 - macOS app bundles verify with codesign after ad-hoc signing.
 - docs/TestVectors.txt conformance checks pass against the rebuilt app.
 - No `.*` sidecar files are present in release outputs.

Non-Goals for v1.6.0

The v1.6.0 reproducibility target does not include:

- Linux AppImage output
- Linux arm64/aarch64 output
- Apple notarization
- signed RPM packages
- detached cryptographic signatures
- automatic online update manifests
- balance scanning or transaction signing tests

Future releases may add those targets, but they must define their own artifact hashes and verification rules.

■YellowSphere v1.6.6 - Passphrase and Secret Handling Specification

Release Boundary

This document specifies the promoted production YellowSphere.html v1.6.6. BIP39 passphrase normalization, YellowSphere ARC password handling, keyfile secret construction, and Keyfile + Password combination are unchanged from v1.6.0. Currency-profile and derived-table-search changes do not alter passphrase bytes or credential transcripts except where YellowSphere ARC V3 and encrypted-keyfile v2 are specified below.

Version 1.6.6 uses YellowSphere ARC V3 and encrypted-keyfile v2 for new exports. Password-mode credentials are SHA-512 pre-hashed before PBKDF2. Keyfile mode uses HKDF-SHA512. Keyfile + Password mode concatenates decoded raw keyfile bytes with UTF-8 NFKD password bytes, then applies HKDF-SHA512 with the YellowSphere ARC salt and info string "yellowsphere-arc-v3-combined-key". YellowSphere ARC V2 decryption keeps the legacy SHA-256 combined-secret transcript. The full byte-level construction is specified in Encryption.txt.

Scope

This document specifies the exact role of passphrases and user-entered secrets in YellowSphere.html v1.6.6. It distinguishes the BIP39 wallet passphrase, the protected .arc credential, raw keyfile material, encrypted keyfile passwords, and Keyfile + Password combined secrets.

The most important distinction:

- BIP39 passphrase:
Changes wallet derivation.
- .arc credential:
Opens or creates a protected seed-backup file.
- encrypted keyfile password:
Opens or creates an encrypted keyfile.

These secrets are independent unless the operator deliberately reuses the same string. Reuse is allowed by the UI but is not recommended as an operational default.

Secret Classes

v1.6.6 handles these secret classes:

- mnemonic:
12- or 24-word BIP39 English phrase.
- BIP39 passphrase:
Optional passphrase field on the main screen. Sometimes called a "25th word", but technically an arbitrary Unicode string.
- YellowSphere ARC password:
Password entered in the Encrypt / Export Seed dialog when Password mode is selected.
- raw keyfile bytes:
64 random bytes generated by v1.6.6 keyfile export, or imported key material of at least 32 bytes.
- encrypted keyfile password:
Password used to protect raw keyfile bytes in YellowSphere_Keyfile.enc.key.
- combined YellowSphere ARC secret:
ASCII string derived from combined password plus keyfile secret:
"arc-combined-v1:" + base64(SHA-256(material)).
- BIP39 seed:
64-byte PBKDF2-HMAC-SHA512 output from mnemonic and BIP39 passphrase.
- derived private material:
BIP32 private keys, WIF keys, Ed25519 keys, Monero private spend/view keys, Cardano private keys, and related account secrets.

BIP39 Passphrase Definition

The BIP39 passphrase is entered in the main Passphrase field:

```
<input id="passphrase" type="password">
```

It is consumed by `bip39Seed(mnemonic, passphrase)`:

```
m = NFKD((mnemonic || "").trim().split(/\s+/).filter(Boolean).join(" "))
p = NFKD(passphrase || "")

seed = PBKDF2-HMAC-SHA512(
  password = UTF-8(m),
  salt     = UTF-8("mnemonic" + p),
  iterations = 2048,
  dkLen    = 64
)
```

The passphrase is part of the PBKDF2 salt, prefixed by the literal ASCII string "mnemonic". The mnemonic is the PBKDF2 password. This follows BIP39.

The empty string is a valid passphrase:

```
p = ""
salt = UTF-8("mnemonic")
```

Every distinct passphrase string, including the empty string, creates a different 64-byte seed and therefore a different wallet tree.

What the BIP39 Passphrase Is Not

The BIP39 passphrase is not:

- the .arc password
- the encrypted keyfile password
- a UI login password
- stored in protected .arc plaintext
- stored in unprotected .arc plaintext
- included in derived JSON/CSV/TXT/PDF exports as a field
- included in QR payloads
- validated by the BIP39 checksum
- recoverable from the mnemonic
- recoverable from the .arc file

If the original wallet used a BIP39 passphrase, recovering the same wallet requires the mnemonic and the exact passphrase. Decrypting a protected .arc file recovers the mnemonic only.

Mnemonic Normalization Before BIP39 PBKDF2

The mnemonic passed to `bip39Seed` is normalized as:

```
(mnemonic || "")
  .trim()
  .split(/\s+/)
  .filter(Boolean)
  .join(" ")
  .normalize("NFKD")
```

Consequences:

- Leading and trailing whitespace around the mnemonic is removed.
- Runs of whitespace between words collapse to one U+0020 SPACE.
- Empty tokens are removed.
- Unicode NFKD normalization is applied after whitespace normalization.
- Words are not case-folded by `bip39Seed` itself; the UI normalization and word-entry behavior should produce BIP39 English lowercase words.

The normalized mnemonic string is UTF-8 encoded and used as PBKDF2 password.

Passphrase Normalization Before BIP39 PBKDF2

The passphrase is normalized as:

```
p = (passphrase || "").normalize("NFKD")
```

No trimming is performed on the passphrase.

Consequences:

- "secret" and " secret" are different.
- "secret" and "secret " are different.
- "secret" and "Secret" are different.
- Tab, newline, and ordinary space are significant if entered into a field that permits them.
- Visually similar Unicode strings may normalize to the same NFKD byte string.

Recommendation:

Use ASCII-only passphrases unless there is a documented reason to use non-ASCII text. ASCII is unaffected by NFKD and is easiest to reproduce across keyboards and platforms.

Unicode NFKD Effects

NFKD is Unicode Normalization Form Compatibility Decomposition.

Examples of effects:

- Precomposed accented characters decompose into base character plus combining mark.
- Compatibility ligatures decompose into component letters.
- Full-width characters decompose to ordinary width equivalents.
- Superscript and similar compatibility characters may decompose to ordinary characters.

For ASCII strings:

```
NFKD(s) == s
```

For non-ASCII strings:

The visible characters and the actual PBKDF2 bytes may differ from what a non-BIP39 system would use. BIP39-conformant implementations must apply NFKD.

Operational rule:

Record passphrases in a form that can be reproduced exactly under NFKD. If a non-ASCII passphrase was used historically, test recovery before relying on a new backup.

Cryptographic Effect of Passphrase Errors

A BIP39 passphrase error produces no checksum failure. It creates a different valid wallet tree.

One-byte differences produce unrelated seeds:

```
passphrase = "secret"
passphrase = "Secret"
passphrase = "secret "
passphrase = "secret\n"
```

All are distinct after NFKD unless normalization maps them to the same code point sequence.

Symptoms of a wrong passphrase:

- mnemonic checksum still passes
- root fingerprint differs from known value
- derived addresses do not match the original wallet
- balances appear absent when checked elsewhere

- private keys are valid but control the wrong addresses

There is no local mathematical test that says "wrong passphrase" unless a known root fingerprint or address is available for comparison.

Root Fingerprint Effect

The root fingerprint displayed by v1.6.6 is computed after BIP39 passphrase application.

Process:

```
seed = bip39Seed(mnemonic, passphrase)
root = masterFromSeed(seed)
root_pub = compressed secp256k1 public key of root.k
fingerprint = RIPEMD-160(SHA-256(root_pub))[0:4]
display = lowercase hex of those 4 bytes
```

Display field:

Root Fingerprint: <8 hex chars>

Changing the BIP39 passphrase changes the seed and therefore the fingerprint. Use a known root fingerprint as the fastest check that mnemonic and BIP39 passphrase are both correct.

Limit:

A matching root fingerprint does not verify derivation path, script type, branch, or address index.

Validation and Analysis Fields

analyzeMnemonic returns details including:

```
word_count
wordlist_validity
entropy_bits
checksum_bits
checksum_match
bip39_compliance
bip39_seed_512_bit
master_private_key
master_chain_code
root_fingerprint
keystore_type
seed_format_detection
passphrase_warning
message
```

Supported word counts:

```
12
24
```

For other counts:

```
message = "Only 12-word and 24-word mnemonics are supported."
```

When checksum is valid and passphrase is empty:

```
passphrase_warning = "This seed may require a passphrase"
```

This warning is not evidence that a passphrase was used. It is a reminder that a valid mnemonic can have hidden passphrase-protected wallets.

Mnemonic Checksum Boundary

BIP39 checksum validation covers only the mnemonic entropy/checksum bits.

It detects:

- unsupported word count
- words not in BIP39 English word list
- checksum mismatch for many word errors

It does not detect:

- wrong BIP39 passphrase
- omitted BIP39 passphrase
- wrong derivation path
- wrong script type
- wrong coin selection
- use of another valid mnemonic
- transposition errors that happen to produce a valid checksum

Do not treat "Mnemonic is valid BIP39" as "wallet recovered".

YellowSphere ARC Password Mode

Password mode uses the password entered in the Encrypt / Export Seed dialog as the protected .arc credential.

Before YellowSphere ARC V3 PBKDF2:

```
arc_password_bytes = UTF-8(NFKD(dialog_password))
arc_password_hash = SHA-512(arc_password_bytes)
```

YellowSphere ARC V3 Password KDF:

```
aes_key = PBKDF2-HMAC-SHA512(
    password = arc_password_hash,
    salt      = 32 random bytes from file,
    iterations = 1000000,
    output    = 32-byte AES-256 key
)
```

Export requirements:

- password must be non-empty
- confirmation must match

Import requirements:

- same password string after NFKD normalization

The YellowSphere ARC password opens the protected .arc file. It does not reproduce the wallet tree unless the BIP39 passphrase is also known when one was used.

Raw Keyfile Mode

Raw keyfile mode uses random bytes rather than a typed password as the protected .arc credential source.

Generated keyfile bytes:

```
64 random bytes from crypto.getRandomValues
```

Generated raw keyfile object:

```
magic = "YELLOWSPHERE-KEYFILE"
format = "yellowsphere-keyfile-v1"
key_b64 = base64(64 bytes)
```

Credential string:

```
arc_secret = "arc-keyfile-v1:" + base64(keyfile_bytes)
```

Validation:

```
imported keyfile bytes must be at least 32 bytes
```

The credential string is passed as HKDF-SHA512 input key material with the YellowSphere ARC salt and info string "YellowSphere ARC v3 AES-256-GCM key".

Encrypted Keyfile Password

Encrypted keyfile password protects the raw keyfile bytes inside YellowSphere_Keyfile.enc.key.

It is used by `decryptArcKeyfileObject_v2` and `encryptArcKeyfileBytes_v2`:

```
password_bytes = UTF-8(NFKD(password))
password_hash = SHA-512(password_bytes)

aes_key = PBKDF2-HMAC-SHA512(
    password = password_hash,
    salt      = 16 random bytes from encrypted keyfile,
    iterations = 1000000 for generated v1.6.6 keyfiles,
    output    = 32-byte AES-256 key
)
```

The encrypted keyfile password is not the BIP39 passphrase unless reused. It is not the YellowSphere ARC password unless reused through a workflow. It decrypts the keyfile; the decrypted keyfile bytes then participate in .arc credential construction.

Keyfile + Password Mode

Combined mode has two secrets:

- password
- keyfile bytes

First, keyfile bytes become:

```
keyfile_secret = "arc-keyfile-v1:" + base64(keyfile_bytes)
```

Then `combinedArcSecret` constructs:

```
input = keyfile_bytes || UTF8(NFKD(password))
bits = HKDF-SHA512(
    ikm = input,
    salt = 32-byte YellowSphere ARC salt,
    info = UTF8("yellowsphere-arc-v3-combined-key"),
    len = 64 bytes)
arc_secret = "arc-combined-v1:" + base64(bits)
```

`arc_secret` is passed to the YellowSphere ARC V3 AES-key HKDF using info "YellowSphere ARC v3 AES-256-GCM key".

Recovery requires both original factors. The password alone cannot reconstruct `arc_secret`. The keyfile alone cannot reconstruct `arc_secret`.

Unprotected Export

The advanced "Export without key or password" path creates:

```
format = "yellowsphere-plain-seed-v1"
encrypted = false
mnemonic = normalized words
word_count = 12 or 24
```

It uses the same YELLOWSPHERE-ARC-V2 armor wrapper as protected seed exports, but the inner bundle is plaintext JSON after base64 decoding.

No password, keyfile, combined secret, or encrypted keyfile password protects this file.

The BIP39 passphrase is not stored in unprotected .arc either.

Password Reuse Boundaries

The UI cannot prevent a user from entering the same string for:

- BIP39 wallet passphrase
- YellowSphere ARC password
- encrypted keyfile password
- combined-mode password

However, the implementation treats them as separate inputs:

BIP39 passphrase:

PBKDF2 salt suffix after "mnemonic", 2048 iterations.

YellowSphere ARC password:

PBKDF2 password input, 1000000 iterations for current .arc exports.

encrypted keyfile password:

PBKDF2 password input, 1000000 iterations for current encrypted keyfiles.

combined-mode password:

HKDF-SHA512 input with raw keyfile bytes, then the YellowSphere ARC V3 AES-key HKDF over the resulting ASCII combined secret string.

Recommendation:

Do not reuse the same string across these roles. Separate roles limit blast radius when one backup component is exposed.

Whitespace Rules

Mnemonic:

- Leading/trailing whitespace is stripped.
- Internal whitespace runs collapse to one space.
- Empty tokens are removed.

BIP39 passphrase:

- Not trimmed.
- Whitespace is significant.
- Empty string is valid.

YellowSphere ARC password:

- Not trimmed by the cryptographic function.
- Whitespace is significant.
- Empty password rejected by UI for password mode.

Encrypted keyfile password:

- Not trimmed by the cryptographic function.
- Whitespace is significant.
- Empty password rejected for encrypted keyfile creation/decryption.

Combined-mode password:

- NFKD normalized before SHA-256 material construction.
- Whitespace is significant.
- Empty password rejected by UI.

Visibility and UI Controls

Main passphrase field:

- type="password"
- visibility toggle exists
- value participates in root fingerprint refresh and derivation

YellowSphere ARC credential dialog:

- password input and confirmation input for export

- password meter estimates length * log2(unique character count)
- password confirmation hidden during import
- mode tabs: password, keyfile, both

Generated/imported seed display:

- mnemonic is hidden with bullet masks
- Show Seed reveals while active
- generated/imported seeds remain available internally for validation, copy, export, and derivation

Clipboard:

Copy Seed copies normalized mnemonic words after confirmation and starts a 60-second best-effort clipboard-clear countdown.

Memory Handling

JavaScript strings cannot be reliably zeroized.

High-risk strings:

- mnemonic
- BIP39 passphrase
- YellowSphere ARC password
- encrypted keyfile password
- keyfile secret string
- combined secret string
- JSON plaintext strings

Some Uint8Array buffers are cleared with fill(0), especially around encrypted keyfile generation and decryption. This is best-effort cleanup only. It does not guarantee erasure from browser internals, garbage-collected copies, WebCrypto state, OS swap, hibernation files, crash dumps, or screenshots.

Recovery Requirements by Mode

Mnemonic-only recovery without BIP39 passphrase:

Need:
mnemonic

Mnemonic with BIP39 passphrase:

Need:
mnemonic
exact BIP39 passphrase

Protected .arc password mode:

Need:
protected .arc
exact YellowSphere ARC password
exact BIP39 passphrase if wallet used one

Protected .arc keyfile mode:

Need:
protected .arc
exact keyfile bytes
exact BIP39 passphrase if wallet used one

Protected .arc combined mode:

Need:
protected .arc
exact keyfile bytes
exact combined-mode password
exact BIP39 passphrase if wallet used one

Encrypted keyfile:

Need:
 encrypted keyfile
 exact encrypted-keyfile password

Operational Checklist

Before relying on a passphrase-backed recovery:

- Verify mnemonic checksum.
- Enter the suspected BIP39 passphrase exactly.
- Compare root fingerprint if available.
- Compare known receive addresses.
- Check change branch for UTXO wallets.
- Try empty passphrase only as a separate candidate, not as a fallback after a failed non-empty passphrase.

Before relying on a protected .arc backup:

- Import-test it.
- Confirm root fingerprint after import.
- Confirm the BIP39 passphrase is separately backed up if used.
- Confirm required keyfile and password factors are separately stored.

Failure Modes

Wrong BIP39 passphrase:

No error. Valid wrong wallet.

Missing BIP39 passphrase:

No error. Empty-passphrase wallet.

Wrong YellowSphere ARC password:

MAC failure or decryption failure:
"Unable to decrypt seed file. The password may be incorrect or the file may be corrupted."

Wrong keyfile:

Same protected .arc failure, because reconstructed credential differs.

Wrong combined-mode password:

Same protected .arc failure, because combined secret differs.

Wrong encrypted-keyfile password:

"Unable to decrypt keyfile. The password may be incorrect or the keyfile may be corrupted."
"

Wrong derivation path with correct passphrase:

No error. Valid wrong address set.

Non-Negotiable Rules

- The BIP39 passphrase is never optional if it was used at wallet creation.
- The .arc file does not store the BIP39 passphrase.
- A valid BIP39 checksum does not validate the passphrase.
- A wrong passphrase can look perfectly normal.
- Store mnemonic, BIP39 passphrase, .arc credentials, and keyfiles separately.
- Test backups before relying on them.
- Avoid non-ASCII passphrases unless you have tested exact recovery.

Byte-Level Comparison Table

Mnemonic normalization:

Input field:
mnemonic textarea and word grid

Transform:
trim outer whitespace
split on one or more whitespace characters
remove empty tokens
join with one ASCII space
NFKD normalize

Consumed by:
BIP39 checksum validation
BIP39 seed derivation
protected/unprotected .arc plaintext mnemonic field

Stored in .arc:
yes, as normalized words in protected plaintext or unprotected bundle

BIP39 passphrase:

Input field:
main Passphrase field

Transform:
NFKD normalize only

Consumed by:
BIP39 seed derivation
root fingerprint calculation
address/key derivation

Stored in .arc:
no

YellowSphere ARC password:

Input field:
Encrypt / Export Seed dialog password field

Transform:
NFKD normalize before YellowSphere ARC v2 PBKDF2

Consumed by:
protected .arc encryption/decryption

Stored in .arc:
no

Raw keyfile bytes:

Input/source:
generated keyfile or selected file

Transform:
base64 encode into "arc-keyfile-v1:" credential string

Consumed by:
protected .arc encryption/decryption in Keyfile mode

Stored in .arc:
no

Combined password:

Input field:
Encrypt / Export Seed dialog password field in Keyfile + Password mode

Transform:
NFKD normalize inside combinedArcSecret material
SHA-256 material
base64 digest
prefix with "arc-combined-v1:"

Consumed by:
protected .arc encryption/decryption in combined mode

Stored in .arc:

no

Passphrase Candidate Testing

If the operator is unsure whether a BIP39 passphrase was used, test candidates without exporting private keys until a known verification artifact matches.

Recommended order:

- Empty passphrase.
- Exact passphrase recorded in wallet documentation.
- Exact passphrase variants known to have been used by the operator.
- Stop and reassess before trying guesses not grounded in documentation.

For each candidate:

- enter the candidate in the Passphrase field
- validate mnemonic
- compare root fingerprint if known
- derive the smallest useful address range
- compare known receive address
- check UTXO change branch if applicable

Do not export a private-key file for every candidate. Candidate exports create many valid but wrong private-key artifacts and increase the chance of later operator error.

Known Address Verification

When no root fingerprint exists, known addresses are the practical verification source.

Strong match:

- same coin
- same address encoding family
- same derivation path
- same branch/index
- same known historical address

Weak match:

- same first few characters
- same address prefix only
- plausible address type only

Only a full address match is useful. Prefix similarity is not evidence of a correct passphrase.

For Bitcoin-like wallets:

- Compare receive branch first if you have deposit addresses.
- Compare change branch if you have transaction change outputs.
- If no match, vary path and script type before assuming funds are absent.

For Ethereum-like wallets:

- Compare the full 20-byte address.
- Remember ERC-20 tokens share the same address.

For XRP/Stellar:

- Address match does not validate exchange destination tag or memo.

Human Factors and Transcription

Passphrases fail operationally more often than cryptographic systems fail.

Dangerous ambiguities:

- uppercase vs lowercase
- trailing spaces
- multiple internal spaces
- hyphen vs dash in old notes
- apostrophe vs quote in old notes
- zero vs letter O
- one vs letter l or uppercase I
- non-breaking space copied from rich text
- mobile keyboard smart punctuation
- non-ASCII lookalike characters

Mitigations:

- Prefer generated ASCII passphrases.
- Record passphrase in a plain-text physical representation.
- Avoid smart quotes and typographic punctuation.
- Store a root fingerprint or first receive address alongside non-secret metadata so future recovery can verify correctness.

Backup Separation Examples

Example A: mnemonic plus BIP39 passphrase:

Storage 1:
mnemonic words

Storage 2:
BIP39 passphrase

Storage 3:
non-secret recovery note containing coin/path/root fingerprint

Example B: protected .arc password mode:

Storage 1:
YellowSphere_Encrypted_Seed.arc

Storage 2:
YellowSphere ARC password

Storage 3:
BIP39 passphrase if used

Example C: protected .arc keyfile mode:

Storage 1:
YellowSphere_Encrypted_Seed.arc

Storage 2:
YellowSphere_Keyfile.key

Storage 3:
BIP39 passphrase if used

Example D: protected .arc combined mode:

Storage 1:
YellowSphere_Encrypted_Seed.arc

Storage 2:
YellowSphere_Keyfile.enc.key or raw keyfile

Storage 3:
combined-mode password

Storage 4:
BIP39 passphrase if used

Compatibility Notes

BIP39 passphrase behavior should match any BIP39-conformant wallet:

- NFKD mnemonic
- NFKD passphrase
- salt is "mnemonic" + passphrase
- PBKDF2-HMAC-SHA512
- 2048 iterations
- 64-byte output

If another wallet does not reproduce the same result:

- verify that the wallet is using BIP39, not another mnemonic scheme
- verify passphrase support was enabled
- verify Unicode entry behavior
- verify derivation path
- verify script/address type
- verify account index

The passphrase algorithm is standard. Most mismatches come from path, script type, account index, or transcription errors.

Incident Response

If the BIP39 passphrase was exposed with the mnemonic:

Treat the wallet as compromised. Move funds to a new seed.

If the BIP39 passphrase was exposed without the mnemonic:

The passphrase alone does not recover funds. Still consider rotating if the mnemonic may also be exposed or if the passphrase was reused elsewhere.

If the YellowSphere ARC password was exposed with the protected .arc:

Treat the mnemonic as exposed. Move funds or re-secure depending on whether the BIP39 passphrase remains secret and whether the attacker can derive it.

If a raw keyfile was exposed with its protected .arc:

Treat the mnemonic as exposed for Keyfile mode.

If one factor of combined mode was exposed:

The .arc remains protected against that exposure alone, but re-export with new factors if long-term custody is affected.

Implementation Checklist

A compatible passphrase implementation must:

- Support only 12- and 24-word mnemonics if matching v1.6.6 UI behavior.
- Normalize mnemonic whitespace exactly before BIP39 seed derivation.
- Apply NFKD to mnemonic and BIP39 passphrase.

-
- Use UTF-8 bytes.
 - Use salt UTF-8("mnemonic" + passphrase).
 - Use PBKDF2-HMAC-SHA512 with 2048 iterations and 64-byte output.
 - Compute root fingerprint from BIP32 master public key hash160 first 4 bytes.
 - Keep BIP39 passphrase separate from .arc credential inputs.
 - Never infer passphrase correctness from mnemonic checksum alone.

■YellowSphere v1.6.6 - Byte-Level File Format Specification

Release Boundary

This is the normative file-format specification for the promoted production YellowSphere.html v1.6.6. New protected seed bundles use YellowSphere ARC V3 and new encrypted keyfiles use encrypted-keyfile version 2. YellowSphere ARC V2 and encrypted-keyfile version 1 remain readable compatibility formats. The production derived-output coin identifiers are bitcoin, bitcoincash, litecoin, dogecoin, ethereum, tron, bnbchain, avalanche, polygon, cosmos, solana, stellar, cardano, and xrp. Polkadot and Monero are not emitted by the v1.6.6 browser application.

BNB Chain, Avalanche C-Chain, and Polygon rows use Ethereum-compatible `private_key_hex`, `public_key_hex`, `evm_public_key_hex`, and EIP-55 address fields plus their coin-specific note field. Tron rows add `tron_hex_address` and `trc20_note`. Cosmos rows use a cosmos1 Bech32 address and `cosmos_note`. Network metadata is "mainnet" or "testnet" according to the Advanced Testnet toggle.

The v1.6.6 live derived-table search is presentation-only. Search text, matching-row counts, and expanded-panel state are not serialized to JSON, CSV, TXT, PDF, QR PNG, YellowSphere ARC, or keyfile output. Monero structures retained later are archived v1.6.0 LTS/Python compatibility records, not production v1.6.6 browser output. YellowSphere.html is the v1.6.6 production file-format authority.

Scope

This document specifies every file format produced or consumed by YellowSphere.html v1.6.6. It covers armored seed bundles, protected seed bundles, unprotected seed bundles, raw keyfiles, encrypted keyfiles, derived JSON, CSV, TXT, PDF, and QR PNG exports.

This document specifies structure and serialization. Encryption.txt specifies the cryptographic construction inside protected .arc and encrypted keyfile objects. Derivation.txt specifies the meaning of key and address fields inside derived-output files. QR.txt specifies the QR payload encoder in deeper detail.

All non-PDF formats emitted by v1.6.6 are UTF-8 text unless explicitly stated otherwise. The HTML implementation writes no byte-order mark. Plain text exports use LF line endings. Importers should tolerate CRLF in user-edited text, but v1.6.6 producers write LF.

Format Inventory

v1.6.6 writes these file types:

YellowSphere_Encrypted_Seed.arc
YELLOWSPHERE-ARC-V2 armored seed bundle. The internal bundle may be protected or unprotected depending on credential selection.

YellowSphere_Keyfile.key
JSON raw keyfile containing 64 random key bytes in base64.

YellowSphere_Keyfile.enc.key
JSON encrypted keyfile containing an encrypted 64-byte keyfile payload.

YellowSphere_Derived_Keys_Addresses.json
Pretty-printed derived-output object.

YellowSphere_Derived_Keys_Addresses.csv
Flattened row export.

YellowSphere_Derived_Keys_Addresses.txt
Deterministic human-readable text export.

YellowSphere_Key_Export_<display coin>.pdf
PDF key export generated by embedded jsPDF.

qr_<sanitized-address>.png
QR code PNG generated from the QR canvas.

v1.6.6 reads these file families:

- YELLOWSPHERE-ARC-V2 armored protected seed bundles
- YELLOWSPHERE-ARC-V2 armored unprotected seed bundles

- raw JSON current YellowSphere ARC V3 and legacy protected seed bundles
- raw JSON current unprotected seed bundles
- legacy PBKDF2-SHA256 stream seed bundles
- legacy AES-GCM seed bundles
- current raw keyfile JSON
- current encrypted keyfile JSON
- base64-only raw key material
- legacy KEYFILE and KEYFILE-ENC JSON

Common Encodings

UTF-8:

All text fields are UTF-8 strings. File text is decoded by browser `File.text` during import. `TextEncoder` and `TextDecoder` are used for cryptographic byte conversion.

JSON:

```
Seed bundles:
  JSON.stringify(bundle)

Derived JSON export:
  JSON.stringify(data, null, 2) + "\n"

Keyfiles:
  JSON.stringify(obj, null, 2) + "\n"
```

Base64:

```
Alphabet:
  A-Z a-z 0-9 + /

Padding:
  "=" padding as produced by btoa.

Line wrapping:
  None in v1.6.6-produced fields.
```

Hex:

Lowercase hex, two characters per byte, no separators and no "0x" prefix.

Dates:

```
JavaScript Date.toISOString strings.

Example:
  2026-06-14T18:22:13.456Z
```

Newlines:

Text producers write LF, byte 0x0a.

Binary export:

PDF and PNG exports are Blob objects. In browser mode they are downloaded by object URL. In Tauri mode they are base64-encoded and passed to `save_export`.

Save Path Abstraction

All file saves route through `saveBlob(blob, filename)`.

Browser path:

```
downloadBlobInBrowser(blob, filename):
  a = document.createElement("a")
  a.href = URL.createObjectURL(blob)
  a.download = filename
  a.click()
  URL.revokeObjectURL(a.href)
```

Tauri path:

getTauriSaveExport detects one of:

```
window.yellowsphereTauriSaveExport(filename, contentBase64)
window.__TAURI__.core.invoke("save_export", { filename, contentBase64 })
window.__TAURI__.invoke("save_export", { filename, contentBase64 })
window.__TAURI_INTERNALS__.invoke("save_export", { filename, contentBase64 })
```

When Tauri save is available:

```
bytes = new Uint8Array(await blob.arrayBuffer())
contentBase64 = bytesToBase64(bytes)
savedPath = await save_export(filename, contentBase64)
```

If native save fails, the UI reports the error and does not automatically fall back to browser download in that code path.

.arc Armor

Every v1.6.6 seed export, protected or unprotected, is serialized by `serializeSeedBundle(bundle)`:

```
json = JSON.stringify(bundle)
json_bytes = UTF-8(json)
body = base64(json_bytes)
file_text = "YELLOWSPHERE-ARC-V2" + "\n" + body + "\n"
```

Byte layout:

```
byte 0..13:      ASCII "YELLOWSPHERE-ARC-V2"
byte 14:         LF, 0x0a
byte 15..N-2:    base64(UTF-8(JSON.stringify(bundle)))
byte N-1:        LF, 0x0a
```

The armor does not distinguish protected from unprotected seed bundles. The decoded JSON bundle determines protection type.

Armor parser:

```
trimmed = text.trim()
if trimmed.startsWith("YELLOWSPHERE-ARC-V2"):
    encoded = trimmed.split(/\r?\n/).slice(1).join("").trim()
    bundle = JSON.parse(bytesToText(base64ToBytes(encoded)))
else:
    bundle = JSON.parse(text)
```

Parser consequences:

- Leading and trailing whitespace outside the file body is ignored for armor.
- CRLF and LF are accepted between armor lines.
- Wrapped armor body lines are joined without separators.
- The trailing LF is optional for import.
- Files without the armor header are parsed directly as JSON.
- The filename and extension are not used for dispatch.

Protected YellowSphere ARC V3 .arc Bundle

Current protected seed export is produced by `encrypt_v3`.

Internal JSON object:

```
{
  "magic": "YELLOWSPHERE-ARC",
  "format": "yellowsphere-encrypted-seed-v3",
  "version": 3,
  "created_at": "<Date.toISOString>",
  "credential_mode": "password" | "keyfile" | "both",
  "kdf": {
    "name": "PBKDF2",
    "hash": "SHA-512",
    "iterations": 1000000,
    "salt_b64": "<base64 32 bytes>"
  }
}
```



```

    },
    "cipher": {
      "name": "AES-256-GCM",
      "nonce_b64": "<base64 12 bytes>"
    },
    "padding": {
      "name": "ZERO",
      "length": 512
    },
    "ciphertext_b64": "<base64 528 bytes>"
  }
}

```

Required cryptographic fields:

```

magic:
  Fixed "YELLOWSPHERE-ARC".

format:
  Fixed "yellowsphere-encrypted-seed-v3".

version:
  Integer 3.

created_at:
  Date.toISOString string. This field is authenticated as AES-GCM AAD.

credential_mode:
  Exactly "password", "keyfile", or "both". This field selects the KDF
  family and is authenticated as AES-GCM AAD.

kdf.name:
  "PBKDF2" for Password mode. "HKDF" for Keyfile and both modes.

kdf.hash:
  Fixed "SHA-512".

kdf.iterations:
  Present only for Password mode. Integer 1000000 exactly.

```

For Keyfile and both modes, the exact kdf object is:

```

{"name": "HKDF", "hash": "SHA-512", "salt_b64": "<base64 32 bytes>"}

kdf.salt_b64:
  Base64 of exactly 32 bytes.

cipher.name:
  Fixed "AES-256-GCM".

cipher.nonce_b64:
  Base64 of exactly 12 bytes.

padding.name / padding.length:
  Fixed "ZERO" and integer 512.

ciphertext_b64:
  Base64 of exactly 528 bytes: 512 ciphertext bytes followed by the
  16-byte AES-GCM tag returned by WebCrypto. YellowSphere ARC V3 has no mac_b64 field.

```

The exact compact JSON serialization of all fields before ciphertext_b64 is AES-GCM additional authenticated data. Field order is normative.

Protected .arc Plaintext

The encrypted plaintext JSON is:

```

{
  "mnemonic": "<normalized words joined by U+0020 SPACE>",
  "word_count": 12 or 24,
  "created_at": "<same Date.toISOString string as outer bundle>"
}

```

Serialization:

```

payload_bytes = UTF-8(JSON.stringify(payload))
plaintext = payload_bytes || 0x00 repeated to exactly 512 bytes

```

No indentation, no trailing LF, and no BOM are included. The encrypted payload contains only the mnemonic, word_count, and created_at. It does not contain the BIP39 wallet passphrase, derivation path, coin, addresses, or derived private keys.

Unprotected .arc Bundle

Unprotected seed export is produced by `makePlainSeedBundle` and serialized through the same YELLOWSPHERE-ARC-V2 armor as protected exports.

Internal JSON object:

```
{
  "magic": "YELLOWSPHERE-ARC",
  "format": "yellowsphere-plain-seed-v1",
  "version": 1,
  "created_at": "<Date.toISOString>",
  "mnemonic": "<normalized 12 or 24 words>",
  "word_count": 12 or 24,
  "encrypted": false
}
```

Security:

This is not encrypted and not authenticated. Anyone who base64-decodes the armor body can read the mnemonic.

Import dispatch:

```
bundle.magic == "YELLOWSPHERE-ARC"
bundle.format == "yellowsphere-plain-seed-v1"
```

The password parameter is ignored for this path.

.arc Import Dispatch

Seed import dispatch is implemented by `parseSeedBundle` and decrypt:

- Parse armor or raw JSON into bundle.
- 2. If `bundle.version == 3` or `format == "yellowsphere-encrypted-seed-v3"`:
 `decryptV3(bundle, credential_secret)`
- 3. If:
 `bundle.magic == "YELLOWSPHERE-ARC"`
 and `bundle.format == "yellowsphere-plain-seed-v1"`
 then:
 `return normalizeDecryptedMnemonic(bundle)`
- 4. If:
 `bundle.magic == "YELLOWSPHERE-ARC"`
 or `bundle.version == 2`
 then:
 `decryptV2(bundle, credential_secret)`
- 5. Otherwise:
 `decryptV1(bundle, credential_secret)`

`decryptV1` handles:

- format "yellowsphere-encrypted-seed-v2" in the legacy PBKDF2-SHA256 stream branch when it is not routed to current `decryptV2` by magic/version.
- format "yellowsphere-encrypted-seed-python-v1"
- format "yellowsphere-encrypted-seed-v1" AES-GCM legacy branch.

New v1.6.6 exports always use YELLOWSPHERE-ARC-V2 armor.

Raw Keyfile Format

Raw keyfiles are produced by `makeArcKeyfile(password = "")` when password is empty.

Generated JSON:

```
{
  "magic": "YELLOWSPHERE-KEYFILE",
  "format": "yellowsphere-keyfile-v1",
  "version": 1,
  "created_at": "<Date.toISOString>",
  "key_b64": "<base64 64 bytes>"
}
```

Serialization:

```
JSON.stringify(obj, null, 2) + "\n"
```

Default filename:

```
YellowSphere_Keyfile.key
```

Generated key length:

64 bytes.

Import accepts:

- Current raw keyfile JSON with magic "YELLOWSPHERE-KEYFILE", format "yellowsphere-keyfile-v1", and key_b64.
- Base64-only text. Whitespace is stripped before base64 decode.
- Legacy object with magic "KEYFILE" and field key.

Decoded key material must be at least 32 bytes. v1.6.6-generated raw keyfiles are exactly 64 bytes.

Encrypted-Keyfile Version 2 Format

Encrypted keyfiles are produced by `makeArcKeyfile(password)` when password is non-empty.

Generated JSON:

```
{
  "magic": "YELLOWSPHERE-KEYFILE-ENC",
  "format": "yellowsphere-keyfile-enc-v1",
  "version": 2,
  "created_at": "<Date.toISOString>",
  "kdf": {
    "algo": "PBKDF2-SHA512",
    "iterations": 1000000,
    "salt_b64": "<base64 16 bytes>",
    "prehash": "SHA-512"
  },
  "cipher": {
    "name": "AES-256-GCM",
    "nonce_b64": "<base64 12 bytes>"
  },
  "ciphertext_b64": "<base64 80 bytes>"
}
```

Serialization:

```
JSON.stringify(obj, null, 2) + "\n"
```

Default filename:

```
YellowSphere_Keyfile.enc.key
```

Generated field lengths:

kdf.salt_b64:
base64 of 12 bytes.

cipher.nonce_b64:
base64 of 16 bytes.

ciphertext_b64:
base64 of 64 encrypted keyfile bytes followed by the 16-byte GCM tag.

The exact additionalData bytes are UTF-8 of compact JSON containing only magic and format in that order. New exports use 1000000 iterations. Version 2 import also accepts exactly 200000 for files written by the earlier beta. Version 1 and legacy KEYFILE-ENC objects remain importable through the legacy path.

Keyfile Secret String

Keyfile bytes are not used directly as the .arc password. They are converted to a secret string:

```
"arc-keyfile-v1:" + base64(keyfile_bytes)
```

Combined Keyfile + Password mode computes:

```
combined_ikm = keyfile_bytes || UTF8(NFKD(password))
```

```
combined_bits = HKDF-SHA512(
    ikm = combined_ikm,
    salt = 32-byte YellowSphere ARC V3 salt,
    info = UTF8("yellowsphere-arc-v3-combined-key"),
    len = 64 bytes)
```

and produces:

```
"arc-combined-v1:" + base64(combined_bits)
```

These strings are credential inputs to the YellowSphere ARC V3 HKDF-SHA512 key schedule. They are not file formats by themselves, but implementations must reproduce them exactly to import files protected by keyfile modes.

Derived JSON Export

Function:

```
exportPayload(data, "json")
```

Serialization:

```
JSON.stringify(data, null, 2) + "\n"
```

MIME type:

```
application/json;charset=utf-8
```

Default filename:

```
YellowSphere_Derived_Keys_Addresses.json
```

Top-level object:

```
{
  "coin": "<internal coin id>",
  "network": "mainnet",
  "word_count": 12 or 24,
  "accounts": [ ... ]
}
```

Supported coin ids:

```
bitcoin
bitcoincash
litecoin
dogecoin
ethereum
bnbchain
avalanche
polygon
tron
cosmos
solana
stellar
cardano
xrp
```

Python v1.6.6 producer note:

The Python CLI writes the same top-level JSON object shape for all supported v1.6.6 command-line coin ids. It serializes with `json.dumps(data, indent=2)` followed by one LF byte. Python CSV is produced from the flattened row list and Python TXT is produced from the same object graph. The Python CLI does not write browser `localStorage` state, DOM state, hidden-seed UI state, or PDF modal state into JSON/CSV/TXT exports.

Python `--coin` accepts exactly:

```
bitcoin
avalanche
bitcoincash
bnbchain
cardano
cosmos
dogecoin
ethereum
litecoin
polygon
```

```
solana
stellar
tron
xrp
```

Python --script-type defaults to auto. For Bitcoin Cash this resolves to P2PKH/CashAddr; unsupported script families must fail rather than emit an address. For Solana, Stellar, and Cardano, script type does not select a UTXO script and the coin-specific derivation family controls output fields.

For secp256k1/UTXO families, account objects can include:

```
derivation
account_script_type_used
root_xprv
root_xpub
root_yprv
root_ypub
root_zprv
root_zpub
root_trprv
root_trpub
account_xprv
account_xpub
account_yprv
account_ypub
account_zprv
account_zpub
account_trprv
account_trpub
receiving
change
```

For account-based secp256k1 families, account objects can include:

```
derivation
account_script_type_used
root extended keys
account extended keys
receiving
change
```

Common row fields:

```
branch
path
address
public_key_hex
private_key_hex
```

UTXO row additions:

```
private_key_wif
```

Taproot row additions:

```
taproot_internal_public_key_hex
taproot_internal_private_key_hex
taproot_internal_private_key_wif
taproot_tweak_hex
taproot_output_public_key_hex
taproot_output_private_key_hex
taproot_output_private_key_wif
taproot_output_parity
```

Ethereum row additions:

```
ethereum_public_key_hex
erc20_address
erc20_note
```

XRP row additions:

```
xrp_classic_address
xrp_note
```

Solana/Stellar row additions:

```
private_key_hex
```

```
public_key_hex
coin-specific note fields
```

Archived v1.6.0 LTS Monero row additions:

```
private_spend_key_hex
private_view_key_hex
public_spend_key_hex
public_view_key_hex
monero_note
```

Cardano row additions:

```
private_key_hex
stake_private_key_hex
public_key_hex
stake_public_key_hex
cardano_note
```

The derived JSON schema is intentionally sparse. Fields appear only when the selected coin and script type produce them.

CSV Export

Function:

```
derivedToCsv(data)
```

MIME type:

```
text/csv;charset=utf-8
```

Default filename:

```
YellowSphere_Derived_Keys_Addresses.csv
```

Row source:

```
flattenDerivedRows(data)
```

Flattening algorithm:

```
rows = []
for each account in data.accounts:
    EXCLUDE_FROM_TABLE = Set(
        AK_KEY_ORDER +
        [
            "network",
            "word_count",
            "derivation",
            "account_script_type_used",
            "coin"
        ]
    )

    accountFields = {}
    for each [key, value] in Object.entries(account):
        if key is not "receiving"
        and key is not "change"
        and key is not in EXCLUDE_FROM_TABLE:
            accountFields[key] = value

    for branch in ["receiving", "change"]:
        for each item in account[branch] or []:
            rows.push({
                branch,
                ...accountFields,
                ...item
            })
```

Header order:

The first-seen key order across rows, implemented as:

```
Array.from(rows.reduce((set, row) => {
    Object.keys(row).forEach(key => set.add(key))
    return set
}, new Set()))
```

Cell serialization:

```

text = value === null || value === undefined ? "" : String(value)

if text contains DQUOTE, comma, CR, or LF:
    output = DQUOTE + text.replace(/"/g, '"') + DQUOTE
else:
    output = text

```

Address cells:

For header "address", displayAddress(row.address, data.coin) is applied before CSV escaping. This can strip URI prefixes for display for some coin types.

Line endings:

Rows are joined with LF. The file ends with LF.

Empty output:

If flattenDerivedRows returns no rows, derivedToCsv returns an empty string.

TXT Export

Function:

```
derivedToText(data)
```

MIME type:

```
text/plain;charset=utf-8
```

Default filename:

```
YellowSphere_Derived_Keys_Addresses.txt
```

Serialization:

Header:

```

YellowSphere Derived Keys and Addresses

coin: <data.coin or empty>
network: <data.network or empty>
word count: <data.word_count or empty>

```

For each account:

```

blank line
Account <1-based account index>

```

Account scalar fields:

```
appendTextFields(account, ["receiving", "change"])
```

For each branch receiving/change:

```

blank line
Receiving Addresses
or
Change Addresses

If branch has no items:
    No addresses derived.

Else for each item:
    blank line
    <branch> #<zero-based item index>
    field lines

```

Field label conversion:

```
key.replace(/_/g, " ")
```

Address field display:

displayAddress(value, coin) is applied for key "address".

Line ending:

LF.

Final byte:

LF.

PDF Export

Function:

```
exportDump()
```

Requirement:

window.jspdf.jsPDF must be available inside the HTML file.

MIME type:

application/pdf

Default filename:

```
"YellowSphere_Key_Export_" + (displayCoin || "export") + ".pdf"
```

Document creation:

```
new jsPDF({
  orientation: "landscape",
  unit: "pt",
  format: "a4"
})
```

Page model:

```
page width and height from jsPDF internal page size
margin: 36 pt
usable width: page width - 72 pt
```

Fonts and sizes:

```
title size: 13
header size: 8
cell size: 7.5
row height: 14
header height: 18
column gap: 6
extended-key label width: 90
extended-key line height: 13
extended-key font size: 7.5
extended-key label size: 7
```

Title block:

```
Text:
  YellowSphere Key Export
```

```
Meta fields:
  display coin
  "YellowSphere v" + APP_VERSION
  export timestamp as YYYY-MM-DD HH:MM:SS UTC
  optional "Fingerprint: <root fingerprint>"
```

```
Page label:
  Page <page number>
```

Extended keys:

The first account is inspected. Keys from AK_KEY_ORDER that exist on the account are rendered under "EXTENDED KEYS" with labels from AK_LABELS. Values are split to fit the usable page width and rendered in courier.

Address table columns:

```
Branch:
  fixed width 52 pt
```

```
Path:
  fixed width 110 pt
```

```
Address:
  flexible width
```



```

Private key column:
  Monero:
    key "private_spend_key_hex"
    label "Private Spend Key Hex"

  Ethereum, Solana, Stellar, Cardano, XRP:
    key "private_key_hex"
    label "Private Key Hex"

  Other coins:
    key "private_key_wif"
    label "Private Key WIF"

```

Rows:

Rows come from `flattenDerivedRows(lastDerivedOutput)`. Text is clipped with an ellipsis if it exceeds the column width. Branch text is color-coded. Pages are added when the next row would exceed the bottom margin.

The PDF is not encrypted by jsPDF. It is a plaintext secret-bearing artifact.

QR PNG Export

QR output is generated by the QR modal. The QR encoder renders to a canvas, and Save PNG serializes that canvas.

Save procedure:

```

canvas.toBlob(resolve, "image/png")
if blob exists:
  saveBlob(blob, "qr_" + safeName + ".png")

```

safeName:

```

safeName = address.replace(/^[a-zA-Z0-9]/g, "_").slice(0, 40)
if safeName == "":
  safeName = "address"

```

Filename:

```
qr_<safeName>.png
```

PNG dimensions:

```

Non-XRP renderer requests 256 px.
XRP renderer requests 320 px.

```

The actual canvas dimension is determined by QR.txt:

```

module_px = floor(requested_size / (matrix_size + quiet_zone * 2))
actual_px = module_px * (matrix_size + quiet_zone * 2)

```

QR payloads:

Payload URI construction is specified in QR.txt. FileFormat only specifies the PNG file serialization and filename.

QR Address Copy

The QR modal Copy Address button copies only the trimmed address input, not the rendered QR URI label. For XRP, this means it copies the r-address without the "?dt=" destination-tag component shown in the QR label.

Copy path:

```
copyTextToClipboard(address)
```

Security:

Address copying is not secret in the same sense as a private key, but it can leak wallet association and payment intent.

Display Address Transformation

Some export paths call `displayAddress(value, coin)` before serializing an address for human display. This affects CSV, TXT, and PDF table output for the address column. JSON export preserves the original derived object values.

Consumers that need byte-for-byte derived payloads should prefer JSON. CSV, TXT, and PDF are display exports.

Filename Summary

v1.6.6 default filenames:

```
YellowSphere_Encrypted_Seed.arc
YellowSphere_Keyfile.key
YellowSphere_Keyfile.enc.key
YellowSphere_Derived_Keys_Addresses.json
YellowSphere_Derived_Keys_Addresses.csv
YellowSphere_Derived_Keys_Addresses.txt
YellowSphere_Key_Export_<display coin>.pdf
qr_<sanitized-address>.png
```

Filenames are not authenticated and are not used to identify file type during import. They are operator-facing defaults only.

Security Classification by Format

Protected secret-bearing:

- Protected YELLOWSPHERE-ARC-V2 .arc file
- Encrypted keyfile JSON

Plaintext secret-bearing:

- Unprotected .arc file
- Raw keyfile JSON
- Base64-only keyfile material
- Derived JSON export
- Derived CSV export
- Derived TXT export
- Derived PDF export

Not inherently private-key-bearing but privacy-sensitive:

- QR PNG exports
- Copied address strings

The fact that a format is text, JSON, CSV, PDF, or PNG says nothing about its sensitivity. Classification depends on fields and payloads.

Parser Robustness Requirements

A compatible importer should:

- Accept LF and CRLF in the YellowSphere ARC armor.
- Accept a missing final LF in YellowSphere ARC armor.
- Reject invalid base64 for required binary fields.
- Reject YellowSphere ARC V3 salt lengths other than 32 bytes.
- Reject YellowSphere ARC V3 nonce lengths other than 12 bytes.
- Reject YellowSphere ARC V3 ciphertext/tag lengths other than 528 bytes.
- Reject Password-mode YellowSphere ARC V3 KDF iterations other than 1000000.
- Reject YellowSphere ARC V3 padding metadata other than ZERO/512.
- Reject encrypted-keyfile v2 salt/nonce lengths other than 16/12 bytes.
- Ignore unknown non-security fields in JSON objects where the implementation already ignores them.
- Preserve JSON field values as strings exactly where those fields feed a MAC transcript.
- Treat credential_mode only as an unauthenticated UI hint.

A compatible producer should:

- Write UTF-8 without BOM.
- Write LF line endings.
- Use standard base64 with padding.

- Use JSON.stringify-compatible JSON.
- Use the exact current magic and format strings.
- Use the exact filenames only as defaults, not as security boundaries.

Detailed Derived Object Shapes

The derived JSON object is the only export intended to preserve the full machine-readable result. CSV, TXT, and PDF are projections of the same object.

Common top-level fields:

```
coin:
  Internal lower-case coin id selected by deriveOutput.

network:
  "mainnet" in v1.6.6.

word_count:
  12 or 24, copied from normalized mnemonic word count.

accounts:
  Array. v1.6.6 writes one account object for the selected derivation
  operation.
```

Common account fields for secp256k1 families:

```
derivation:
  Normalized account derivation path.

account_script_type_used:
  Effective script type after auto script resolution.

receiving:
  Array of branch-0 rows for Bitcoin-like branch derivation, or account-like
  rows for account families when the implementation maps output there.

change:
  Array of branch-1 rows. For several non-UTXO families this array is empty
  or unused.
```

Extended-key display order:

The account-key pane and PDF extended-key section use AK_KEY_ORDER, not raw Object.keys order. File consumers should not assume all possible extended key fields are present.

Bitcoin-like row minimum:

```
{
  "path": "<full child path>",
  "address": "<encoded address>",
  "public_key_hex": "<compressed secp256k1 public key>",
  "private_key_hex": "<32-byte private key hex>",
  "private_key_wif": "<WIF string>"
}
```

Ethereum row minimum:

```
{
  "path": "<full child path>",
  "address": "0x...",
  "public_key_hex": "<compressed secp256k1 public key>",
  "ethereum_public_key_hex": "<uncompressed x||y public key hex>",
  "private_key_hex": "<32-byte private key hex>",
  "erc20_address": "0x...",
  "erc20_note": "<note string>"
}
```

XRP row minimum:

```
{
  "path": "<full child path>",
  "address": "<classic r-address>",
  "xrp_classic_address": "<classic r-address>",
  "public_key_hex": "<compressed secp256k1 public key>",
  "private_key_hex": "<32-byte private key hex>",
}
```

```
"xrp_note": "<destination-tag note>"
}
```

Solana/Stellar/Cardano:

These families use Ed25519 or Ed25519-derived schemes. Their exact private key, public key, chain-code, address, and note fields are specified in Derivation.txt. FileFormat requires only that JSON preserve the produced object exactly and that flattened exports treat the fields as strings.

CSV Lossiness and Ordering

CSV is not a canonical backup format. It is a flattened convenience export.

Loss and transformation points:

- Nested account structure is removed.
- Receiving and change rows are combined into one table.
- Extended-key fields in AK_KEY_ORDER are intentionally excluded from row flattening.
- network, word_count, derivation, account_script_type_used, and coin are excluded from repeated account fields.
- Address cells pass through displayAddress.
- Values are converted with String(value), so type information is not preserved.
- Header order depends on first appearance while iterating JavaScript object keys.

CSV is appropriate for spreadsheet review of derived addresses and private keys. It is not appropriate for lossless re-import into YellowSphere.

TXT Lossiness and Ordering

TXT export is deterministic but human-oriented.

Loss and transformation points:

- Underscores in field names are replaced by spaces.
- Object nesting is represented as headings and paragraphs.
- Values are rendered with String(value).
- Address values pass through displayAddress.
- Field order follows Object.entries order of the JavaScript object at export time.

TXT is appropriate for printing or manual review. JSON is preferred for any tooling or automated audit.

PDF Lossiness and Ordering

PDF export is a visual report, not a complete machine-readable file.

Loss and transformation points:

- Address table cells are clipped to fit column width.
- Only Branch, Path, Address, and one private-key column are rendered in the main table.
- The private-key column changes by coin.
- Extended keys are printed only from the first account.
- Some row fields present in JSON do not appear in the PDF table.
- The root fingerprint is read from the UI display, not recomputed inside the PDF exporter.

PDF should be treated as plaintext key material when it contains private keys, but it should not be treated as a complete archival representation of the derived JSON object.

Import File Input Surfaces

Seed import file input:

Element accepts:

```
.arc
.json
application/json
```

The accept attribute is a browser chooser hint. It is not a parser security boundary. parseSeedBundle decides actual support from file contents.

Keyfile inputs:

Raw and encrypted keyfiles are read with File.text and then parsed as JSON or base64-only text. The filename extension is not normative.

QR PNG import:

v1.6.6 does not import QR PNG files.

Derived-output import:

v1.6.6 does not import derived JSON/CSV/TXT/PDF exports back into the app as trusted key material.

Artifact Equivalence

The following artifacts are operationally equivalent to the ability to recover or spend funds:

- mnemonic + BIP39 passphrase if one was used
- unprotected .arc file + BIP39 passphrase if one was used
- protected .arc file + correct credential + BIP39 passphrase if one was used
- protected .arc file + raw keyfile in Keyfile mode + BIP39 passphrase if one was used
- protected .arc file + keyfile + combined password in combined mode + BIP39 passphrase if one was used
- account xprv for all descendants under that account
- single private key for the corresponding address
- Monero private spend key for spend authority

File format readers and operators must classify artifacts by contents, not by extension or MIME type.

Version-Specific Notes

v1.6.6 format facts:

- APP_VERSION is "1.6.6".
- Current protected seed format is yellowsphere-encrypted-seed-v3.
- Current plain seed format is yellowsphere-plain-seed-v1.
- The outer seed armor is YELLOWSPHERE-ARC-V2 for both protected and plain seed bundles.
- credential_mode is included in AES-GCM additional authenticated data.
- New Password-mode exports use SHA-512 prehash plus PBKDF2-HMAC-SHA512 with 1000000 iterations; Keyfile/combined modes use HKDF-SHA512.
- New encrypted keyfiles use SHA-512 prehash, PBKDF2-HMAC-SHA512 with 1000000 iterations, and AES-256-GCM; earlier-beta v2 files at 200000 and legacy version 1 files remain importable.
- Derived-output JSON/CSV/TXT/PDF files are plaintext.
- QR PNG files are address-payload images, not seed backups.

■YellowSphere v1.6.6 - Encryption Subsystem Internals

Release Boundary

This is the normative encryption specification for the promoted production YellowSphere.html v1.6.6. New protected .arc exports use internal YellowSphere ARC V3. New password-protected keyfiles use encrypted-keyfile version 2. YellowSphere ARC V2 and encrypted-keyfile version 1 remain import-only compatibility formats and are specified later in this document.

YellowSphere ARC V3 Protected Seed Format

New protected .arc exports use:

```
outer armor      = "YELLOWSPHERE-ARC-V2"
magic            = "YELLOWSPHERE-ARC"
format           = "yellowsphere-encrypted-seed-v3"
version         = 3
cipher          = "AES-256-GCM"
salt length     = 32 bytes
nonce length    = 12 bytes
authentication tag = 128 bits
padded plaintext length = 512 bytes
ciphertext length = 528 bytes including the GCM tag
```

The unchanged armor name is an outer transport marker, not the internal cryptographic version. Importers must inspect the decoded JSON version and format fields.

YellowSphere ARC V3 bundle insertion order before ciphertext_b64 is:

```
magic
format
version
created_at
credential_mode
kdf
cipher
padding
```

credential_mode is one of "password", "keyfile", or "both". The complete JSON serialization of these metadata fields is supplied to AES-GCM as additional authenticated data. ciphertext_b64 is appended after encryption and is not part of the additional-data serialization. YellowSphere ARC V3 has no mac_b64 field.

The plaintext payload before padding is compact JSON in this insertion order:

```
{"mnemonic":"<single-space words>","word_count":12|24,
 "created_at":"<same ISO timestamp as metadata>"}
```

JSON.stringify emits UTF-8 with no extra whitespace. Those bytes are copied at offset zero into a zero-initialized 512-byte Uint8Array. Bytes from the end of the JSON through offset 511 are 0x00. Payloads longer than 512 bytes are rejected.

AES-GCM returns 512 ciphertext bytes followed by the 16-byte GCM tag, for exactly 528 decoded ciphertext_b64 bytes.

Decryption requires exactly 512 authenticated plaintext bytes, removes trailing 0x00 bytes, decodes fatal UTF-8, parses JSON, normalizes the mnemonic, and verifies word_count when present.

YellowSphere ARC V3 Password mode derives its AES key as follows:

```
password_bytes = UTF8(NFKD(password))
password_hash  = SHA-512(password_bytes)
aes_key = PBKDF2-HMAC-SHA512(
  password      = password_hash,
  salt          = 32-byte YellowSphere ARC salt,
  iterations    = 1000000,
  output        = AES-256-GCM key
)
```

YellowSphere ARC V3 Keyfile mode uses the complete ASCII credential string "arc-keyfile-v1:" || base64(keyfile_bytes) as HKDF input key material:

```
aes_key = HKDF-SHA512(
  ikm  = UTF8(keyfile_secret),
  salt = 32-byte YellowSphere ARC salt,
  info = UTF8("YellowSphere ARC v3 AES-256-GCM key"),
  len  = 32 bytes
)
```

YellowSphere ARC V3 Keyfile + Password mode first computes:

```
combined_ikm = keyfile_bytes || UTF8(NFKD(password))
combined_bits = HKDF-SHA512(
  ikm = combined_ikm,
  salt = 32-byte YellowSphere ARC salt,
  info = UTF8("yellowsphere-arc-v3-combined-key"),
  len = 64 bytes
)
combined_secret = "arc-combined-v1:" || base64(combined_bits)
```

The combined_secret then follows the YellowSphere ARC V3 HKDF AES-key derivation above. YellowSphere ARC V2 combined-mode import explicitly retains the legacy SHA-256 construction; the new combined transcript applies only to newly written YellowSphere ARC V3 bundles.

AES-GCM invocation for every YellowSphere ARC V3 mode is:

```
ciphertext_and_tag = AES-256-GCM-ENCRYPT(
  key = derived 32-byte AES key,
  iv = decoded cipher.nonce_b64, exactly 12 bytes,
  plaintext = exactly 512 padded bytes,
  additionalData = UTF8(JSON.stringify(metadata_object)),
  tagLength = 128 bits
)
```

metadata_object is the bundle immediately before ciphertext_b64 is assigned. Its key order is magic, format, version, created_at, credential_mode, kdf, cipher, padding. Nested key order is also insertion order shown above. Any change to any of these bytes causes AES-GCM authentication failure.

Encrypted-Keyfile Version 2

New password-protected keyfiles use encrypted-keyfile version 2 while retaining:

```
magic = "YELLOWSPHERE-KEYFILE-ENC"
format = "yellowsphere-keyfile-enc-v1"
```

Their cryptographic parameters are:

```
version = 2
salt length = 16 bytes
nonce length = 12 bytes
password pre-hash = SHA-512(UTF8(NFKD(password)))
KDF = PBKDF2-HMAC-SHA512, 1000000 iterations
cipher = AES-256-GCM
authentication tag = 128 bits
plaintext keyfile = 64 bytes for newly generated keyfiles
ciphertext length = 80 bytes for a 64-byte keyfile
```

The stored object insertion order is:

```
{
  "magic": "YELLOWSPHERE-KEYFILE-ENC",
  "format": "yellowsphere-keyfile-enc-v1",
  "version": 2,
  "created_at": "<Date.toISOString string>",
  "kdf": {
    "algo": "PBKDF2-SHA512",
    "iterations": 1000000,
    "salt_b64": "<base64 16 bytes>",
    "prehash": "SHA-512"
  },
  "cipher": {
    "name": "AES-256-GCM",
    "nonce_b64": "<base64 12 bytes>"
  },
  "ciphertext_b64": "<base64 ciphertext and 16-byte tag>"
}
```

Password and key derivation are:

```
password_bytes = UTF8(NFKD(password))
password_hash = SHA-512(password_bytes)
aes_key = PBKDF2-HMAC-SHA512(
  password = password_hash,
  salt = decoded kdf.salt_b64, exactly 16 bytes,
  iterations = kdf.iterations,
```

```
    output      = 32-byte AES-256 key
  )
```

New exports write 1000000 iterations. Import accepts exactly 1000000 for v1.6.6 files and exactly 200000 for encrypted-keyfile v2 files created by the earlier beta. Other values are rejected.

The exact AES-GCM additional-data bytes are:

```
UTF8("{\"magic\":\"YELLOWSPHERE-KEYFILE-ENC\",\"format\":\"yellowsphere-keyfile-enc-v1\"}"))
```

Encryption uses the 12-byte nonce, raw keyfile bytes as plaintext, and a 128-bit tag. A generated 64-byte keyfile therefore produces 80 decoded ciphertext_b64 bytes. Version 2 encrypted keyfiles have no mac_b64 field. `decryptArcKeyfileObject` routes version 2 or cipher.name AES-256-GCM to this path and retains the original version 1 PBKDF2/HMAC stream and MAC importer.

The new paths apply best-effort `fill(0)` cleanup to temporary `Uint8Array` values holding password encodings, password hashes, decoded keyfile bytes, salt, padded plaintext, and decrypted plaintext after use. This cannot erase JavaScript strings, immutable engine copies, `CryptoKey` objects, or all garbage- collected runtime memory.

Scope

This document is the byte-level specification of the seed-file and keyfile encryption subsystem implemented by `YellowSphere.html` v1.6.6. It specifies the protected `.arc` envelope, the unprotected `.arc` envelope, raw keyfiles, encrypted keyfiles, the Keyfile + Password combined-secret mode, legacy import formats, key derivation, stream generation, authentication transcripts, import validation, and failure behavior.

The encryption subsystem protects mnemonic storage at rest. It does not specify address derivation, BIP32 trees, Ed25519 trees, QR payloads, derived-output exports, or wallet passphrase semantics except where those concepts touch seed export/import. Those topics are specified in the other files in this directory.

The current v1.6.6 implementation is the single-file browser build:

```
YellowSphere.html
```

Normative references to function names in this document refer to that file.

Design Constraints

The encryption subsystem is built under these constraints:

1. Browser-native cryptography only.
The canonical v1.6.6 HTML build uses `WebCrypto` primitives exposed through `crypto.subtle` and random bytes from `crypto.getRandomValues`. It does not require an external cryptographic package or network access.
2. File formats must be inspectable and recoverable offline.
Protected files are text files. The outer armor is an ASCII header plus a standard base64 body. Internal binary fields are standard base64 strings. A future offline recovery implementation can parse them using only UTF-8, JSON, base64, PBKDF2, HKDF, SHA-256, SHA-512, AES-GCM, and byte-array operations.
3. New protected seed exports use authenticated encryption.
v1.6.6 protected `.arc` exports derive an AES-256 key through the mode-appropriate PBKDF2 or HKDF path and authenticate ciphertext plus complete compact JSON metadata with AES-256-GCM.
4. The current format must reject downgrade attempts.
`YellowSphere ARC V3` additional data commits to KDF fields, cipher fields, padding, credential mode, magic, format, version, and creation timestamp. Password mode accepts exactly 1000000 iterations.
5. Credential modes are operational wrappers around the same `.arc` envelope.
Password, Keyfile, and Keyfile + Password all ultimately produce a secret string. Explicit credential mode selects the `YellowSphere ARC V3` PBKDF2 or HKDF path.
6. The wallet passphrase is separate.
The BIP39 passphrase field changes wallet derivation. It is not the `.arc` encryption password and is not stored in protected `.arc` plaintext.

Terminology

The following terms are used exactly:

mnemonic:
The BIP39 English recovery phrase, normalized as 12 or 24 lower-case words separated by U+0020 SPACE before encryption.

wallet passphrase:
The optional BIP39 passphrase used by BIP39 seed stretching. This is a derivation parameter, not an .arc encryption password.

.arc password:
The secret passed into YellowSphere ARC V3 seed-file encryption. Depending on UI mode, this may be a human password, a keyfile-derived secret string, or a combined keyfile+password secret string.

raw keyfile:
A JSON or base64 file containing random bytes. v1.6.6-generated raw keyfiles contain 64 bytes.

encrypted keyfile:
A JSON file containing a password-encrypted raw keyfile payload. It is protected independently from the .arc file.

YellowSphere ARC v2:
The current protected seed-file format with magic "YELLOWSPHERE-ARC", format "yellowsphere-encrypted-seed-v2", and armor header "YELLOWSPHERE-ARC-V2".

plain .arc:
The unprotected seed-file format with format "yellowsphere-plain-seed-v1". It uses the same outer armor but has no encryption and no MAC.

Byte Conventions

Unless a section states otherwise:

Text encoding:
UTF-8.

JSON encoding:
ECMAScript JSON as emitted by JSON.stringify in the HTML implementation.

Newline emitted by producers:
LF, byte 0x0a.

Newline accepted by armor parser:
CRLF or LF.

Base64:
RFC 4648 standard base64, alphabet A-Z a-z 0-9 + /, with "=" padding. The implementation uses btoa and atob-compatible standard base64.

Hex:
Lowercase, two hexadecimal characters per byte, no "0x" prefix.

Integer-to-byte conversion for stream counters:
Fixed-width unsigned big-endian using `intToBytes(value, length)`.

Password normalization:
Unicode NFKD, then UTF-8:

`password_bytes = UTF-8(NFKD(password_string))`

Separator byte in YellowSphere ARC v2 MAC transcript:
0x00.

Implementation Constants

The v1.6.6 HTML implementation defines these constants:

ARC_MAGIC	= "YELLOWSPHERE-ARC"
ARC_ARMOR_HEADER	= "YELLOWSPHERE-ARC-V2"
ARC_V2_FORMAT	= "yellowsphere-encrypted-seed-v2"
ARC_PLAIN_FORMAT	= "yellowsphere-plain-seed-v1"
ARC_V2_KDF_ITERATIONS	= 1000000
ARC_V2_MIN_KDF_ITERATIONS	= 600000
ARC_V2_SALT_BYTES	= 32
ARC_V2_NONCE_BYTES	= 24

```

ARC_KEYFILE_MAGIC           = "YELLOWSPHERE-KEYFILE"
ARC_KEYFILE_ENC_MAGIC       = "YELLOWSPHERE-KEYFILE-ENC"
ARC_KEYFILE_FORMAT          = "yellowsphere-keyfile-v1"
ARC_KEYFILE_ENC_FORMAT      = "yellowsphere-keyfile-enc-v1"
ARC_KEYFILE_BYTES           = 64
ARC_KEYFILE_KDF_ITERATIONS  = 1000000
ARC_KEYFILE_LEGACY_KDF_ITERATIONS = 200000

```

YellowSphere ARC V3 fixed values:

```

protected format            = "yellowsphere-encrypted-seed-v3"
protected version           = 3
password KDF iterations     = 1000000
password pre-hash           = "SHA-512"
YellowSphere ARC salt bytes = 32
AES-GCM nonce bytes        = 12
AES-GCM tag bits           = 128
padded plaintext bytes      = 512
decoded ciphertext bytes    = 528
cipher name                 = "AES-256-GCM"
padding name                = "ZERO"
YellowSphere ARC HKDF info  = "YellowSphere ARC v3 AES-256-GCM key"
combined HKDF info          = "yellowsphere-arc-v3-combined-key"

```

Derived string constants:

```

YellowSphere ARC v2 KDF name      = "PBKDF2"
YellowSphere ARC v2 KDF hash     = "SHA-512"
YellowSphere ARC v2 cipher name   = "HMAC-SHA512-CTR"
YellowSphere ARC v2 encryption label = "YellowSphere ARC v2 encryption key"
YellowSphere ARC v2 authentication label = "YellowSphere ARC v2 authentication key"
YellowSphere ARC v2 stream label  = "YellowSphere ARC v2 stream\0"
YellowSphere ARC v2 MAC prefix    = "YellowSphere ARC v2 MAC"

```

Encrypted-keyfile v2 constants:

```

keyfile KDF algo      = "PBKDF2-SHA512"
keyfile KDF prehash   = "SHA-512"
keyfile cipher name   = "AES-256-GCM"
keyfile salt bytes    = 16
keyfile nonce bytes   = 12
keyfile tag bits      = 128

```

The YellowSphere ARC V2 labels and HMAC-SHA512-CTR keyfile cipher documented below are legacy import compatibility constants. They are not used for new v1.6.6 exports.

Combined credential constants:

```

keyfile secret prefix = "arc-keyfile-v1:"
combined secret prefix = "arc-combined-v1:"
combined secret label  = "arc-combined-v1\n"

```

Outer .arc Armor

Every v1.6.6 seed export, encrypted or unprotected, is serialized by `serializeSeedBundle(bundle)`:

```

json_bytes = UTF-8(JSON.stringify(bundle))
body       = base64(json_bytes)
file_text  = "YELLOWSPHERE-ARC-V2" || LF || body || LF

```

Byte layout:

```

bytes 0..13:  ASCII "YELLOWSPHERE-ARC-V2"
byte 14:      0x0a
bytes 15..N-2: standard base64 of UTF-8 JSON bundle
byte N-1:     0x0a

```

No byte-order mark is written. No line wrapping is inserted in the base64 body.

The parser `parseSeedBundle(text)` performs:

```

trimmed = text.trim()
if trimmed.startsWith("YELLOWSPHERE-ARC-V2"):
    encoded = trimmed.split(/\r?\n/).slice(1).join("").trim()
    bundle = JSON.parse(bytesToText(base64ToBytes(encoded)))
else:
    bundle = JSON.parse(text)

```

Important parser consequences:

- Leading and trailing whitespace outside the armor are ignored.
- CRLF and LF are both accepted between armor lines.
- If the base64 body is manually wrapped across multiple lines, those lines are joined without separators before decoding.
- The parser does not require the final LF after trimming.
- Files without the armor header are treated as raw JSON legacy inputs.
- The same outer header is used for encrypted and unprotected .arc bundles.

Legacy YellowSphere ARC V2 Protected Bundle Structure

The legacy protected seed bundle produced by `encrypt_v2(mnemonic, password)` is a JSON object with this insertion order before `credential_mode` is appended:

```
{
  "magic": "YELLOWSPHERE-ARC",
  "format": "yellowsphere-encrypted-seed-v2",
  "version": 2,
  "created_at": "<Date.toISOString string>",
  "kdf": {
    "name": "PBKDF2",
    "hash": "SHA-512",
    "iterations": 1000000,
    "salt_b64": "<base64 32 bytes>"
  },
  "cipher": {
    "name": "HMAC-SHA512-CTR",
    "nonce_b64": "<base64 24 bytes>"
  },
  "ciphertext_b64": "<base64 ciphertext bytes>",
  "mac_b64": "<base64 64 bytes>"
}
```

After `encryptSeedBundle` returns, `handleEncryptExportSeed` appends:

```
"credential_mode": "password" | "keyfile" | "both"
```

`credential_mode` is a UI hint. It is appended after MAC calculation in v1.6.6. Therefore, it is not part of the legacy YellowSphere ARC V2 MAC transcript. Import also accepts the aliases `credentialMode` and `protection` as UI hints:

```
hintedMode = normalizeArcCredentialMode(
  bundle.credential_mode || bundle.credentialMode || bundle.protection
)
```

The credential hint selects or locks the import dialog mode. It is not a cryptographic policy field and must not be used as proof of protection type.

Protected .arc Plaintext Payload

The encrypted plaintext is produced by:

```
words = normalizeMnemonicWords(mnemonic)
createdAt = new Date().toISOString()

payload = {
  mnemonic: words.join(" "),
  word_count: words.length,
  created_at: createdAt
}

plaintext = UTF-8(JSON.stringify(payload))
```

Properties:

- `words.length` must be 12 or 24.
- words are joined by exactly one U+0020 SPACE.
- `JSON.stringify` is called without indentation.
- No trailing LF is included in the plaintext.
- `created_at` inside the plaintext equals `bundle.created_at`.

The plaintext does not contain:

- BIP39 wallet passphrase
- derived private keys
- WIF strings
- xprv/ypmv/zprv/tpmv
- xpub/ypub/zpub/tpub
- addresses
- derivation paths
- coin selection
- output table data
- QR payloads

Mnemonic Normalization on Export and Import

Export uses `normalizeMnemonicWords(mnemonic)` before encryption. Import uses `normalizeDecryptedMnemonic(payload)` after decryption.

`normalizeDecryptedMnemonic` requires:

```
payload is a non-null object
payload.mnemonic normalizes to at least one word
if payload.word_count is present:
    Number(payload.word_count) == normalized word count
```

It returns:

```
normalized_words.join(" ")
```

`handleImportSeedFile` then checks the returned mnemonic with `checkMnemonic` using the current UI wallet passphrase field. A protected file can decrypt correctly and still be rejected by the UI if the recovered phrase is not valid BIP39.

YellowSphere ARC v2 Key Schedule

Function:

```
arcV2Keys(password, saltBytes, iterations)
```

Inputs:

```
password:
  JavaScript string. In Password mode, this is the user-entered password.
  In Keyfile mode, this is a keyfile secret string. In combined mode, this
  is a combined secret string.

saltBytes:
  32 bytes for protected .arc files.

iterations:
  Integer KDF iteration count from bundle.kdf.iterations during import or
  ARC_V2_KDF_ITERATIONS during export.
```

Validation:

```
Number.isInteger(iterations) must be true.
iterations >= 600000.
```

Failure message:

```
"Encrypted seed file uses too few KDF iterations."
```

Step 1: normalize password:

```
password_bytes = UTF-8(NFKD(password))
```

Step 2: derive master key:

```
master_key = PBKDF2-HMAC-SHA512(
  password = password_bytes,
  salt     = saltBytes,
```

```

        iterations = iterations,
        dkLen      = 64
    )

```

Step 3: derive encryption key:

```

enc_key = HMAC-SHA512(
    key = master_key,
    data = UTF-8("YellowSphere ARC v2 encryption key")
)

```

Step 4: derive authentication key:

```

mac_key = HMAC-SHA512(
    key = master_key,
    data = UTF-8("YellowSphere ARC v2 authentication key")
)

```

Outputs:

```

enc_key: 64 bytes
mac_key: 64 bytes

```

The master key is not directly used for encryption or authentication. The domain-separated labels prevent reuse of the same PBKDF2 output as both a stream-generation key and a MAC key.

PBKDF2-HMAC-SHA512 Details

Function:

```

pbkdf2Sha512(passwordBytes, saltBytes, iterations, dkLen)

```

Cryptographic primitive:

```

WebCrypto PBKDF2 with hash "SHA-512"

```

Output length:

```

dkLen bytes. YellowSphere ARC v2 uses 64. Encrypted keyfiles also use 64.

```

The effective PBKDF2 input for ordinary Password mode is:

```

UTF-8(NFKD(user_password_string))

```

The effective PBKDF2 input for Keyfile mode is:

```

UTF-8(NFKD("arc-keyfile-v1:" || base64(keyfile_bytes)))

```

The effective PBKDF2 input for Keyfile + Password mode is:

```

UTF-8(NFKD("arc-combined-v1:" || base64(SHA-256(material))))

```

where material is specified in the combined credential section.

YellowSphere ARC v2 HMAC-SHA512 Counter Stream

Function:

```

arcV2StreamCrypt(data, keyBytes, nonceBytes)

```

This transform is symmetric. The same function encrypts plaintext and decrypts ciphertext.

Inputs:

```

data:
    Bytes to XOR with the generated stream.

keyBytes:
    HMAC key. For YellowSphere ARC v2 seed files this is the 64-byte enc_key. For
    encrypted keyfiles this is the 32-byte encKey slice from keyfile PBKDF2.

nonceBytes:
    Nonce bytes. Protected .arc files use 24 bytes. Encrypted keyfiles use
    16 bytes.

```

Internal constants:

```

label = UTF-8("YellowSphere ARC v2 stream\0")

```

```

counter_initial = 0
counter_width = 8 bytes
counter_endian = big-endian
block_size = 64 bytes

```

For each block i:

```

counter_i = uint64_be(i)

block_i = HMAC-SHA512(
    key = keyBytes,
    data = label || nonceBytes || counter_i
)

```

Keystream:

```

stream = block_0 || block_1 || block_2 || ...

```

Output:

```

out[j] = data[j] XOR stream[j]

```

The final block is truncated to the remaining data length. No padding is applied. A zero-length input produces a zero-length output.

Why Legacy YellowSphere ARC V2 Is Not AES-GCM

Legacy YellowSphere ARC V2 protected .arc files use HMAC-SHA512-CTR plus HMAC-SHA512 authentication, not AES-GCM. New v1.6.6 YellowSphere ARC V3 exports use AES-256-GCM.

The current construction is:

```

PBKDF2-HMAC-SHA512 -> HMAC-derived enc_key and mac_key
HMAC-SHA512-CTR    -> ciphertext
HMAC-SHA512        -> MAC over metadata and ciphertext

```

This is an encrypt-then-MAC construction. Import verifies the MAC before decrypting. It is not AEAD by API, but the MAC transcript authenticates the same material that an AEAD associated-data field would need to cover.

YellowSphere ARC v2 MAC Transcript

Function:

```

arcV2MacData(bundle, saltBytes, nonceBytes, ciphertext)

```

The MAC transcript is not the raw JSON string. It is an explicitly constructed byte sequence. This avoids dependence on JSON key order or whitespace.

The function builds:

```

sep = 0x00

textParts = [
    "YellowSphere ARC v2 MAC",
    String(bundle.magic || ""),
    String(bundle.format || ""),
    String(bundle.version || ""),
    String(bundle.created_at || ""),
    String(bundle.kdf.name || ""),
    String(bundle.kdf.hash || ""),
    String(bundle.kdf.iterations || ""),
    String(bundle.cipher.name || "")
]

```

For each text part:

```

encoded.push(UTF-8(part), sep)

```

Then append:

```

saltBytes || sep || nonceBytes || sep || ciphertext

```

Full transcript:

```

UTF8("YellowSphere ARC v2 MAC")           || 00 ||
UTF8(bundle.magic)                         || 00 ||

```

```

UTF8(bundle.format)           || 00 ||
UTF8(String(bundle.version))  || 00 ||
UTF8(bundle.created_at)       || 00 ||
UTF8(bundle.kdf.name)         || 00 ||
UTF8(bundle.kdf.hash)         || 00 ||
UTF8(String(bundle.kdf.iterations)) || 00 ||
UTF8(bundle.cipher.name)      || 00 ||
saltBytes                     || 00 ||
nonceBytes                     || 00 ||
ciphertext

```

MAC:

```

mac = HMAC-SHA512(
    key = mac_key,
    data = transcript
)

```

Stored value:

```
mac_b64 = base64(mac)
```

Stored length:

```
64 bytes before base64 encoding.
```

Authenticated fields:

- magic
- format
- version
- created_at
- kdf.name
- kdf.hash
- kdf.iterations
- cipher.name
- salt bytes
- nonce bytes
- ciphertext bytes

Not authenticated by v1.6.6 producer:

- credential_mode

The NUL separators prevent transcript collisions caused by moving bytes between adjacent variable-length fields.

Protected .arc Export Procedure

Function path:

```

handleEncryptExportSeed
-> requestArcCredential("export")
-> encryptSeedBundle(mnemonic, credential.secret)
-> encrypt_v2(mnemonic, password)
-> serializeSeedBundle(bundle)

```

Procedure:

1. Read active mnemonic.
2. Validate BIP39 words and checksum with checkMnemonic.
3. Ask for credential mode:
 - password
 - keyfile
 - both
 - or advanced unprotected export
4. If protected, obtain credential.secret.
5. Normalize mnemonic words.

6. Reject word counts other than 12 or 24.
7. Generate salt:
 crypto.getRandomValues(new Uint8Array(32))
8. Generate nonce:
 crypto.getRandomValues(new Uint8Array(24))
9. Generate createdAt:
 new Date().toISOString()
10. Build initial bundle containing magic, format, version, created_at, kdf, and cipher objects.
11. Build plaintext payload JSON.
12. Derive enc_key and mac_key with YellowSphere ARC v2 key schedule and 1000000 iterations.
13. Encrypt plaintext with arcV2StreamCrypt.
14. Store ciphertext_b64.
15. Compute HMAC-SHA512 over YellowSphere ARC v2 MAC transcript.
16. Store mac_b64.
17. Append credential_mode as a UI hint.
18. Armor with YELLOWSPHERE-ARC-V2 header.
19. Save as:
 YellowSphere_Encrypted_Seed.arc

For the same mnemonic and same credential secret, repeated exports should produce different protected files because salt and nonce are freshly sampled.

Protected .arc Import Procedure

Function path:

```
handleImportSeedFile(file)
-> parseSeedBundle(text)
-> requestArcCredential("import", hintedMode, lockMode)
-> decryptSeedBundle(bundle, credential.secret)
-> decrypt(bundle, password)
-> decryptV2(bundle, password)
```

Procedure:

1. Read selected file as text.
2. Parse armor or raw JSON.
3. Read credential hint from credential_mode, credentialMode, or protection.
4. If bundle is plain .arc, skip credential dialog.
5. Otherwise request credential secret.
6. Dispatch:
 - if magic == "YELLOWSPHERE-ARC" and format == "yellowsphere-plain-seed-v1":
 normalize plain mnemonic
 - else if magic == "YELLOWSPHERE-ARC" or version == 2:
 decryptV2
 - else:
 decryptV1 legacy path

decryptV2 validation:

```
bundle.magic must equal "YELLOWSPHERE-ARC"
bundle.version must equal 2
bundle.format must equal "yellowsphere-encrypted-seed-v2"
bundle.kdf must exist
bundle.cipher must exist
bundle.kdf.name must equal "PBKDF2"
bundle.kdf.hash must equal "SHA-512"
bundle.cipher.name must equal "HMAC-SHA512-CTR"
bundle.kdf.iterations must be an integer >= 600000
salt_b64 must decode to exactly 32 bytes
nonce_b64 must decode to exactly 24 bytes
mac_b64 must decode to exactly 64 bytes
ciphertext_b64 must decode successfully; no fixed length is required
```

decryptV2 authentication:

```
expectedMac = decoded mac_b64
{ encKey, macKey } = arcV2Keys(password, salt, iterations)
actualMac = HMAC-SHA512(macKey, arcV2MacData(...))
equalBytes(actualMac, expectedMac) must be true
```

Only after MAC success:

```
decrypted = arcV2StreamCrypt(ciphertext, encKey, nonce)
payload = JSON.parse(TextDecoder().decode(decrypted))
```



```
mnemonic = normalizeDecryptedMnemonic(payload)
```

After `decryptSeedBundle` returns:

```
checkMnemonic(mnemonic, current_wallet_passphrase)
```

If the BIP39 check fails, the UI raises:

```
"Imported file decrypted successfully, but the mnemonic is not valid BIP-39."
```

Constant-Time Comparison

Function:

```
equalBytes(a, b)
```

Behavior:

```
if a.length !== b.length:
    return false

diff = 0
for i in 0..a.length-1:
    diff |= a[i] ^ b[i]

return diff === 0
```

For equal-length arrays, every byte is read before returning. This prevents prefix-length timing leakage during MAC comparison. The length check occurs before the XOR loop. For YellowSphere ARC v2 MACs, the stored MAC length is validated to 64 bytes before `equalBytes` is called.

Base64 Decoding and Length Checks

General base64 conversion:

```
base64ToBytes(text):
    binary = atob(text)
    out = new Uint8Array(binary.length)
    for each byte position:
        out[i] = binary.charCodeAt(i)
```

Required protected .arc fields use:

```
b64DecodeRequired(value, fieldName, expectedLength = null)
```

Validation:

- value must be a non-empty string
- atob-compatible base64 decoding must succeed
- if `expectedLength` is not null, decoded length must equal `expectedLength`

Failure messages are field-specific:

```
"Encrypted seed file is missing <fieldName>."
"Encrypted seed file has invalid <fieldName>."
"Encrypted seed file has invalid <fieldName> length."
```

The ciphertext field is required but not length-constrained:

```
b64DecodeRequired(bundle.ciphertext_b64, "ciphertext_b64")
```

Unprotected .arc Bundle

The unprotected .arc path exists for controlled offline handling and test data. It uses the same YELLOWSPHERE-ARC-V2 outer armor but a plaintext internal bundle.

Function:

```
makePlainSeedBundle(mnemonic)
```

Structure:

```
{
  "magic": "YELLOWSPHERE-ARC",
  "format": "yellowsphere-plain-seed-v1",
```

```

    "version": 1,
    "created_at": "<Date.toISOString string>",
    "mnemonic": "<normalized 12 or 24 words>",
    "word_count": 12 or 24,
    "encrypted": false
}

```

Serialization:

```
serializeSeedBundle(bundle)
```

Import:

```
decrypt(bundle, password) detects:
```

```

bundle.magic == "YELLOWSPHERE-ARC"
bundle.format == "yellowsphere-plain-seed-v1"

```

It then returns `normalizeDecryptedMnemonic(bundle)`.

Security properties:

- No encryption.
- No MAC.
- Anyone with the file can read the mnemonic after base64-decoding the armor.
- The outer armor is only a container, not a protection mechanism.

Credential Modes

The credential dialog supports three protected modes:

password:

User-entered password is explicitly classified as Password mode, then NFKD-normalized, SHA-512 pre-hashed, and passed to YellowSphere ARC V3 PBKDF2.

keyfile:

A raw or encrypted keyfile is converted to a secret string:

```
"arc-keyfile-v1:" || base64(keyfile_bytes)
```

That secret string is passed to YellowSphere ARC V3 HKDF-SHA512.

both:

Raw keyfile bytes and NFKD password bytes are combined with HKDF-SHA512 into a combined secret string:

```
"arc-combined-v1:" || base64(64-byte HKDF output)
```

The combined secret string is passed to YellowSphere ARC V3 HKDF-SHA512.

The credential dialog also has an advanced unprotected export option:

unprotected:

`makePlainSeedBundle` is used instead of `encrypt_v3`.

Password mode export requirements:

- Password must be non-empty.
- Password confirmation must match.

Keyfile mode export requirements:

- A keyfile secret must be available, either by generating a new keyfile or choosing an existing keyfile through the advanced keyfile chooser.

Combined mode export requirements:

- Password must be non-empty.
- Password confirmation must match.
- A keyfile secret must be available.

Import with a credential hint:

- If `credential_mode` is one of `password`, `keyfile`, `both`, the dialog selects and locks that mode.
- If no valid hint exists, the user chooses the mode.

Raw Keyfile Secret

Function:

```
arcKeyfileSecretFromBytes(bytes)
```

Validation:

```
bytes must be a Uint8Array.  
bytes.length must be at least 32.
```

Failure:

```
"Keyfile must contain at least 256 bits of key material."
```

Secret string:

```
keyfile_secret = "arc-keyfile-v1:" || base64(bytes)
```

Generated keyfiles use:

```
key = crypto.getRandomValues(new Uint8Array(64))
```

Generated keyfile entropy:

```
64 bytes = 512 bits.
```

The `keyfile_secret` string is not itself stored inside the `.arc` file. It is reconstructed from the keyfile during export/import and used as the YellowSphere ARC v2 password input.

Raw Keyfile File Format

Function:

```
makeArcKeyfile(password = "")
```

If password is empty, output object:

```
{  
  "magic": "YELLOWSPHERE-KEYFILE",  
  "format": "yellowsphere-keyfile-v1",  
  "version": 1,  
  "created_at": "<Date.toISOString string>",  
  "key_b64": "<base64 64 bytes>"  
}
```

Serialization:

```
JSON.stringify(obj, null, 2) || LF
```

Filename:

```
YellowSphere_Keyfile.key
```

Import accepts:

- JSON object with:
 `magic == "YELLOWSPHERE-KEYFILE"`
 `format == "yellowsphere-keyfile-v1"`
 `key_b64` present
- Base64-only file:
 file text may contain base64 characters and whitespace
 whitespace is removed
 decoded bytes must be at least 32 bytes
- Legacy JSON object:
 `magic == "KEYFILE"`
 key contains base64 raw key bytes

Legacy Encrypted-Keyfile Version 1 Format

Function:

```
encryptArcKeyfileBytes(keyBytes, password)
```

Input keyBytes:

64 random bytes for legacy generated keyfiles.

Password:

Must be non-empty.

Failure:

"Password cannot be empty when using Keyfile + Password."

Random parameters:

```
salt = crypto.getRandomValues(new Uint8Array(16))
nonce = crypto.getRandomValues(new Uint8Array(16))
```

Key derivation:

```
derived = PBKDF2-HMAC-SHA512(
  password = UTF-8(NFKD(password)),
  salt = salt,
  iterations = 200000,
  dkLen = 64
)
```

Split:

```
encKey = derived[0:32]
macKey = derived[32:64]
```

Encryption:

```
ciphertext = arcV2StreamCrypt(keyBytes, encKey, nonce)
```

Although the function name is arcV2StreamCrypt, encrypted keyfiles use:

```
keyBytes = 32-byte encKey slice
nonceBytes = 16 bytes
stream label = "YellowSphere ARC v2 stream\0"
counter = uint64_be starting at 0
HMAC-SHA512 block output = 64 bytes
```

Authentication:

```
mac = HMAC-SHA512(
  key = macKey,
  data = salt || nonce || ciphertext
)
```

Stored object:

```
{
  "magic": "YELLOWSPHERE-KEYFILE-ENC",
  "format": "yellowsphere-keyfile-enc-v1",
  "version": 1,
  "created_at": "<Date.toISOString string>",
  "kdf": {
    "algo": "PBKDF2-SHA512",
    "iterations": 200000,
    "salt_b64": "<base64 16 bytes>"
  },
  "cipher": {
    "name": "HMAC-SHA512-CTR",
    "nonce_b64": "<base64 16 bytes>"
  },
  "ciphertext_b64": "<base64 ciphertext bytes>",
  "mac_b64": "<base64 64 bytes>"
}
```

Serialization:

```
JSON.stringify(obj, null, 2) || LF
```

Filename:

YellowSphere_Keyfile.enc.key

Memory cleanup:

`encryptArcKeyfileBytes` calls `fill(0)` on `derived`, `encKey`, and `macKey` after computing the encrypted keyfile object. This is best-effort JavaScript heap cleanup and does not guarantee erasure of copies held internally by the browser engine or WebCrypto implementation.

Encrypted Keyfile Import

Function:

```
decryptArcKeyfileObject(obj, password)
```

Password:

Must be non-empty.

Failure:

"Enter the same password used with Keyfile + Password before loading this encrypted keyfile."

Accepted field names:

```
salt:
  obj.kdf.salt_b64 or obj.kdf.s

nonce:
  obj.cipher.nonce_b64 or obj.n

ciphertext:
  obj.ciphertext_b64 or obj.ct

MAC:
  obj.mac_b64 or obj.mac

iterations:
  obj.kdf.iterations or obj.kdf.i or 200000 default
```

Derivation:

```
derived = PBKDF2-HMAC-SHA512(
  password = UTF-8(NFKD(password)),
  salt     = decoded salt,
  iterations = Number(iterations),
  dkLen    = 64
)
```

Split:

```
encKey = derived[0:32]
macKey = derived[32:64]
```

Authentication:

```
actualMac = HMAC-SHA512(macKey, salt || nonce || ciphertext)
equalBytes(actualMac, expectedMac) must be true
```

Failure:

"Unable to decrypt keyfile. The password may be incorrect or the keyfile may be corrupted."

Only after MAC success:

```
plain = arcV2StreamCrypt(ciphertext, encKey, nonce)
```

The caller then converts plain bytes into:

```
"arc-keyfile-v1:" || base64(plain)
```

and zeroes the plain Uint8Array with `fill(0)`.

Accepted encrypted keyfile objects:

- magic == "YELLOWSPHERE-KEYFILE-ENC"
format == "yellowsphere-keyfile-enc-v1"
- legacy magic == "KEYFILE-ENC"

Combined Keyfile + Password Secret

Function:

```
combinedArcSecret(password, keyfileSecret, salt)
```

Inputs:

```
password:
    UI password string.

keyfileSecret:
    String produced by arcKeyfileSecretFromBytes:
        "arc-keyfile-v1:" || base64(keyfile_bytes)
```

Material and derivation:

```
keyfile_bytes = base64decode(keyfileSecret after "arc-keyfile-v1:")
password_bytes = UTF8(NFKD(password))
input = keyfile_bytes || password_bytes
bits = HKDF-SHA512(
    ikm = input,
    salt = YellowSphere ARC V3 salt,
    info = UTF8("yellowsphere-arc-v3-combined-key"),
    len = 64 bytes)
```

Combined secret:

```
"arc-combined-v1:" || base64(bits)
```

The combined secret is passed to the YellowSphere ARC V3 HKDF AES-key derivation. Legacy YellowSphere ARC V2 import calls `combinedArcSecret_legacy`, which retains the older SHA-256 newline transcript exactly for compatibility.

Security consequence:

The protected .arc file cannot be opened with only the password or only the keyfile. Both are required to reconstruct the same combined secret.

Operational consequence:

The same password used for combined mode also encrypts the generated encrypted keyfile when the user generates a password-protected keyfile during export. Losing either the .arc file, the keyfile, or the password makes recovery impossible for combined-mode backups.

Credential Mode Normalization

Function:

```
normalizeArcCredentialMode(mode)
```

Accepted values:

```
"password"          -> "password"
"keyfile"           -> "keyfile"
"both"              -> "both"
"keyfile + password" -> "both"
"keyfile-password"  -> "both"
```

Any other value returns:

```
""
```

This function is used for UI hint normalization only.

Legacy Seed Import Family: HMAC-SHA256 Stream

Function:

```
decryptV1(bundle, password)
```

This branch accepts:

```
bundle.format == "yellowsphere-encrypted-seed-v2"
or
bundle.format == "yellowsphere-encrypted-seed-python-v1"
```

This is a legacy PBKDF2-SHA256 compatibility branch and is distinct from the PBKDF2-SHA512/HMAC legacy YellowSphere ARC V2 path as well as current YellowSphere ARC V3.

Legacy inputs:

```
salt      = base64ToBytes(bundle.kdf.salt_b64 || "")
nonce     = base64ToBytes(bundle.cipher.nonce_b64 || "")
ciphertext = base64ToBytes(bundle.ciphertext_b64 || "")
expected  = base64ToBytes(bundle.mac_b64 || "")
iterations = Number(bundle.kdf.iterations || 250000)
```

Password:

```
passwordBytes = UTF-8(NFKD(password))
```

KDF:

```
derived = PBKDF2-HMAC-SHA256(
  password = passwordBytes,
  salt     = salt,
  iterations = iterations,
  dkLen    = 64
)
```

Split:

```
encKey = derived[0:32]
macKey = derived[32:64]
```

MAC:

```
actualMac = HMAC-SHA256(macKey, nonce || ciphertext)
```

Comparison:

```
equalBytes(actualMac, expectedMac)
```

Stream:

```
xorStreamCrypt(ciphertext, encKey, nonce)
```

Legacy stream block:

```
block_i = SHA-256(encKey || nonce || uint32_be(i))
```

where i begins at 0 and is encoded as 4 bytes big-endian. The block size is 32 bytes because SHA-256 output is 32 bytes.

Plaintext:

```
JSON.parse(TextDecoder().decode(decrypted))
normalizeDecryptedMnemonic(payload)
```

New v1.6.6 exports do not produce this format.

Legacy Seed Import Family: AES-GCM v1

Function:

```
decryptV1(bundle, password)
```

This branch accepts:

```
bundle.format == "yellowsphere-encrypted-seed-v1"
```

Legacy inputs:

```
salt      = base64ToBytes(bundle.kdf.salt_b64 || "")
iv        = base64ToBytes(bundle.cipher.iv_b64 || "")
ciphertext = base64ToBytes(bundle.ciphertext_b64 || "")
iterations = Number(bundle.kdf.iterations || 250000)
```

Password:

```
passwordBytes = UTF-8(NFKD(password))
```

KDF:

```
WebCrypto PBKDF2 with:
  hash     = "SHA-256"
```

```
salt      = salt
iterations = iterations
```

Derived key:

```
AES-GCM 256-bit CryptoKey
```

Decrypt:

```
crypto.subtle.decrypt(
  { name: "AES-GCM", iv: iv },
  key,
  ciphertext
)
```

The ciphertext field is the WebCrypto AES-GCM ciphertext including its authentication tag, as returned by the earlier implementation.

Plaintext:

```
JSON.parse(TextDecoder().decode(decrypted))
normalizeDecryptedMnemonic(payload)
```

New v1.6.6 exports do not produce this format.

Dispatch Matrix

`decrypt(bundle, password)` dispatches as follows:

```
if bundle is not an object:
  reject as unsupported encrypted seed file format

if bundle.version == 3
  or bundle.format == "yellowsphere-encrypted-seed-v3":
  return decryptV3(bundle, password)

if bundle.magic == "YELLOWSPHERE-ARC"
  and bundle.format == "yellowsphere-plain-seed-v1":
  return normalizeDecryptedMnemonic(bundle)

if bundle.magic == "YELLOWSPHERE-ARC"
  or bundle.version == 2:
  return decryptV2(bundle, password)

otherwise:
  return decryptV1(bundle, password)
```

Compatibility notes:

- Current protected exports use magic "YELLOWSPHERE-ARC" and internal version 3.
- Legacy protected v2 imports use magic "YELLOWSPHERE-ARC" and version 2.
- Current plain exports use magic "YELLOWSPHERE-ARC" and format "yellowsphere-plain-seed-v1".
- Legacy raw JSON files without the armor header are still parsed as JSON.
- A malformed object with version 2 but without current v2 fields is routed to `decryptV2` and rejected by v2 validation.

Format Compatibility Matrix

Seed file formats:

```
YELLOWSPHERE-ARC-V2 armored protected v3
  Export: yes
  Import: yes
  Protection: AES-256-GCM; Password PBKDF2-SHA512 or Keyfile HKDF-SHA512

YELLOWSPHERE-ARC-V2 armored protected v2
  Export: no
  Import: yes
  Protection: PBKDF2-HMAC-SHA512, HMAC-SHA512-CTR, HMAC-SHA512 MAC

YELLOWSPHERE-ARC-V2 armored plain v1
  Export: yes, advanced option
  Import: yes
  Protection: none

Raw JSON legacy protected v2 object
  Export: no, but JSON parser accepts it
```

Import: yes if fields validate
Protection: same as legacy protected v2

Legacy HMAC-SHA256 stream object

Export: no
Import: yes
Protection: PBKDF2-HMAC-SHA256, SHA256 XOR stream, HMAC-SHA256 MAC

Legacy AES-GCM v1 object

Export: no
Import: yes in browser
Protection: PBKDF2-HMAC-SHA256, AES-GCM-256

Keyfile formats:

YELLOWSPHERE-KEYFILE raw JSON

Export: yes
Import: yes

Base64-only raw key material

Export: no
Import: yes

YELLOWSPHERE-KEYFILE-ENC encrypted JSON version 2

Export: yes
Import: yes
Protection: SHA-512 pre-hash, PBKDF2-SHA512, AES-256-GCM

YELLOWSPHERE-KEYFILE-ENC encrypted JSON version 1

Export: no
Import: yes
Protection: PBKDF2-SHA512, HMAC-SHA512-CTR and HMAC-SHA512

KEYFILE legacy JSON

Export: no
Import: yes

KEYFILE-ENC legacy JSON

Export: no
Import: yes

Protected Fields and Unprotected Fields

Protected by current YellowSphere ARC V3 AES-GCM:

- mnemonic plaintext confidentiality at rest
- mnemonic plaintext integrity after MAC success and JSON parse
- magic string
- protected format identifier
- version integer
- created_at timestamp
- KDF name
- KDF hash
- KDF iteration count
- salt bytes
- cipher name
- nonce bytes
- ciphertext bytes

Not protected by current YellowSphere ARC V3 seed-file encryption:

- outer armor header itself
- filesystem filename
- file modification timestamp

- mnemonic while displayed in the browser
- mnemonic while held in JavaScript memory
- .arc password while typed or held in memory
- keyfile bytes while held in memory
- generated raw keyfile if stored unencrypted
- wallet passphrase field
- derived-output JSON/CSV/TXT/PDF exports
- clipboard contents
- screenshots, screen recording, browser extensions, or compromised OS state

Protected by encrypted-keyfile version 2 AES-GCM:

- keyfile bytes at rest
- exact magic and format AAD bytes
- ciphertext integrity through the 128-bit GCM tag

Not protected by encrypted keyfile format:

- filename
- created_at metadata
- created_at and kdf/cipher metadata are validated but are not included in AAD

Encrypted-keyfile version 1 has the older HMAC coverage specified in its legacy section. Version 2 has no separate MAC field.

Failure Behavior

YellowSphere ARC V3 protected .arc structural failures:

- unsupported magic/version/format
- missing kdf or cipher object
- unsupported KDF name or hash
- unsupported cipher name
- Password-mode KDF iterations other than 1000000
- invalid or missing base64 fields
- invalid decoded salt length
- invalid decoded nonce length
- padding name other than ZERO or length other than 512

Protected .arc authentication failure:

If AES-GCM authentication fails, decryptV3 throws:

```
"Unable to decrypt seed file. The password may be incorrect or the file may be corrupted."
```

No plaintext is accepted before this check succeeds.

Protected .arc plaintext failures:

- decrypted bytes are not valid UTF-8 JSON
- parsed plaintext is not an object
- mnemonic is missing or normalizes to empty
- word_count does not match normalized mnemonic length

- final BIP39 check fails

Encrypted keyfile failures:

- missing password
- invalid JSON and not base64-only material
- unsupported keyfile magic/format
- decoded raw key material shorter than 32 bytes
- MAC mismatch

The user-facing messages deliberately avoid distinguishing wrong password from corruption for protected seed files and encrypted keyfiles.

KDF Iteration Rationale

Current Password-mode YellowSphere ARC V3 exports use SHA-512 password pre-hashing followed by PBKDF2-HMAC-SHA512 at exactly 1000000 iterations. The iteration value is included in authenticated metadata. Keyfile and combined modes start from high-entropy keyfile material and use HKDF-SHA512 rather than PBKDF2.

Current encrypted-keyfile v2 exports use SHA-512 password pre-hashing followed by PBKDF2-HMAC-SHA512 at 1000000 iterations. Import also accepts exactly 200000 for encrypted-keyfile v2 files written by the earlier beta. Legacy YellowSphere ARC V2 and encrypted-keyfile v1 imports retain their stored/legacy iteration rules.

The keyfile KDF protects random 64-byte key material rather than a mnemonic directly. In combined mode, the keyfile password protects the encrypted keyfile, while the final .arc envelope is protected by the combined secret derived from both password and keyfile material.

PBKDF2 is CPU-hard but not memory-hard. It slows offline guessing linearly with the iteration count. It does not rescue weak passwords. A captured .arc file can be attacked offline by testing candidate credentials until MAC verification succeeds.

Password Entropy Boundary

The cryptographic strength of Password mode is bounded by the entropy of the user password and the PBKDF2 cost. A short password, common phrase, reused password, PIN, or personally meaningful phrase should be treated as weak even with 1000000 PBKDF2 iterations.

The cryptographic strength of Keyfile mode is bounded by possession of the keyfile bytes. v1.6.6-generated keyfiles contain 64 random bytes. If the keyfile is copied to cloud storage, email, screenshots, or a compromised machine, the .arc file protected only by that keyfile should be considered compromised by anyone who obtains both files.

The cryptographic strength of Keyfile + Password mode requires both:

- the password
- the keyfile bytes

This mode provides better loss-of-one-factor resistance, but it also increases backup fragility. Recovery requires preserving both factors exactly.

Operational Backup Procedure

For Password mode:

- Load or generate the mnemonic.
- Export protected .arc with a high-entropy password.
- Import the .arc file immediately on the same offline system.
- Confirm BIP39 validation succeeds.
- Store the .arc and password separately.

For Keyfile mode:

1. Generate or select a keyfile.
2. Export protected .arc using Keyfile mode.
3. Import the .arc using the same keyfile.
4. Confirm BIP39 validation succeeds.
5. Store .arc and keyfile separately.
6. If the raw keyfile is not password-encrypted, treat it as a high-value secret equivalent to the ability to open the .arc file.

For Keyfile + Password mode:

- Generate or select a keyfile.
- Use a high-entropy password.
- Export protected .arc using combined mode.
- Import the .arc using the same keyfile and password.
- Confirm BIP39 validation succeeds.
- Store .arc, keyfile, and password in separate controlled locations.

For unprotected .arc:

Use only for test data or tightly controlled offline procedures. The mnemonic is available to anyone who can base64-decode the armored JSON body.

Recovery Requirements

To recover from a protected .arc file:

Password mode:

Need .arc file and exact password string after NFKD normalization.

Keyfile mode:

Need .arc file and exact keyfile bytes.

Keyfile + Password mode:

Need .arc file, exact keyfile bytes, and exact password string after NFKD normalization.

Plain .arc:

Need only the .arc file.

The BIP39 wallet passphrase is not stored in any .arc file. Recovering the same wallet tree also requires knowing whether a wallet passphrase was used during address derivation.

Implementation Function Map

Core byte helpers:

base64ToBytes(text)
Standard base64 decode via atob into Uint8Array.

bytesToBase64(bytes)
Standard base64 encode.

textToBytes(text)
UTF-8 encode.

bytesToText(bytes)
UTF-8 decode.

normalizeNFKD(text)
Unicode NFKD string normalization.

intToBytes(value, length)
Big-endian fixed-width integer encoding.

concatBytes(...arrays)
Byte-array concatenation.

equalBytes(a, b)
Equal-length XOR-accumulation comparison.

YellowSphere ARC v2 protected seed functions:

arcV2Keys(password, saltBytes, iterations)

```

    PBKDF2-SHA512 master key plus HMAC-SHA512 domain-separated enc/mac keys.

arcV2StreamCrypt(data, keyBytes, nonceBytes)
    HMAC-SHA512 counter-mode XOR transform.

arcV2MacData(bundle, saltBytes, nonceBytes, ciphertext)
    NUL-separated metadata transcript plus salt, nonce, and ciphertext.

encrypt_v3(mnemonic, password, requestedMode)
    Current protected seed export using YellowSphere ARC V3 AES-256-GCM.

decryptV3(bundle, password)
    Current protected seed import with authenticated metadata.

deriveV3Key(credential, salt, useHkdf)
    Selects Password PBKDF2 or Keyfile/combined HKDF AES-key derivation.

encrypt_v2(mnemonic, password)
    Legacy YellowSphere ARC V2 compatibility producer retained for tests.

decryptV2(bundle, password)
    Current protected seed import.

encryptSeedBundle(mnemonic, password, credentialMode)
    Wrapper for encrypt_v3.

decryptSeedBundle(bundle, password)
    Wrapper for decrypt.

serializeSeedBundle(bundle)
    YELLOWSPHERE-ARC-V2 armor writer.

parseSeedBundle(text)
    Armor/raw JSON parser.

```

Plain .arc functions:

```

makePlainSeedBundle(mnemonic)
    Creates unprotected yellowsphere-plain-seed-v1 bundle.

```

Legacy seed functions:

```

decryptV1(bundle, password)
    Handles PBKDF2-SHA256 stream family and AES-GCM v1 family.

xorStreamCrypt(data, keyBytes, nonceBytes)
    Legacy SHA-256 stream XOR transform.

```

Keyfile functions:

```

arcKeyfileSecretFromBytes(bytes)
    Validates key material and returns arc-keyfile-v1 secret string.

encryptArcKeyfileBytes_v2(keyBytes, password)
    Current encrypted-keyfile v2 AES-256-GCM producer.

decryptArcKeyfileObject_v2(obj, password)
    Validates and decrypts encrypted-keyfile v2.

encryptArcKeyfileBytes(keyBytes, password)
    Legacy encrypted-keyfile v1 producer retained for compatibility tests.

decryptArcKeyfileObject(obj, password)
    Authenticates and decrypts encrypted keyfile JSON.

makeArcKeyfile(password = "")
    Generates raw or encrypted keyfile text.

parseArcKeyfileText(text, password)
    Parses raw, encrypted, base64-only, or legacy keyfile input.

readArcKeyfile(file, password)
    Reads browser File text and parses it.

```

Credential functions:

```

combinedArcSecret(password, keyfileSecret)
    Creates arc-combined-v1 secret.

normalizeArcCredentialMode(mode)
    Converts credential hint aliases into password, keyfile, both, or empty.

```

```
requestArcCredential(context, preferredMode, lockMode)
    Opens the credential dialog and returns selected secret data.

submitArcCredentialDialog()
    Validates the selected credential mode and constructs the correct secret.
```

UI integration:

```
handleEncryptExportSeed()
    Validates mnemonic, obtains credential, writes .arc file.

handleImportSeedFile(file)
    Parses .arc, obtains credential, decrypts or loads mnemonic.
```

Security Classification

Treat these as highly sensitive secrets:

- BIP39 mnemonic
- .arc password
- raw keyfile bytes
- encrypted keyfile password
- combined-mode password
- combined secret string
- decrypted .arc plaintext JSON
- decrypted keyfile plaintext

Treat these as sensitive encrypted artifacts:

- protected .arc files
- encrypted keyfile files

Treat these as plaintext secret-bearing artifacts:

- unprotected .arc files
- raw keyfile files
- derived-output JSON exports
- derived-output CSV exports
- derived-output TXT exports
- derived-output PDF exports
- screenshots showing mnemonics or keys

Treat these as non-secret but integrity-relevant:

- YellowSphere ARC V3 and legacy YellowSphere ARC V2 constants
- KDF iteration counts
- MAC transcript field order
- stream labels
- credential mode hint names
- legacy dispatch format strings

Compliance Checklist

An implementation is compatible with YellowSphere.html v1.6.6 protected .arc exports if it satisfies all of the following:

- Parses YELLOWSPHERE-ARC-V2 armor exactly enough to recover JSON bundle bytes.
- Uses UTF-8 for all text fields.

-
- Requires YellowSphere ARC magic, v3 format/version, credential_mode, KDF, cipher, and padding.
 - Requires salt length 32 bytes.
 - Requires nonce length 12 bytes and tag length 128 bits.
 - Requires ZERO padding length 512 and decoded ciphertext length 528 bytes.
 - Uses SHA-512 pre-hash plus PBKDF2-HMAC-SHA512 at exactly 1000000 iterations for Password mode.
 - Uses the documented HKDF-SHA512 IKM, salt, and info values for Keyfile and combined modes.
 - Serializes metadata in the documented insertion order and supplies those exact UTF-8 JSON bytes as AES-GCM additionalData.
 - Verifies AES-GCM authentication before accepting plaintext.
 - Removes trailing zero padding and parses fatal UTF-8 JSON.
 - Normalizes mnemonic words and validates word_count if present.

An implementation is compatible with v1.6.6 encrypted keyfiles if it:

- Parses JSON keyfile objects.
- Accepts current encrypted magic/format.
- Writes version 2, SHA-512 prehash, PBKDF2-SHA512 at 1000000 iterations, a 16-byte salt, a 12-byte nonce, and AES-256-GCM with a 128-bit tag.
- Uses the exact magic/format JSON AAD bytes documented above.
- Accepts version 2 files with 200000 iterations for earlier-beta compatibility.
- Retains encrypted-keyfile version 1 import and documented legacy aliases.
- Requires recovered key material to be at least 32 bytes before building the arc-keyfile-v1 secret string.

Non-Goals

The v1.6.6 encryption subsystem does not:

- fetch network state
- use remote key escrow
- store the BIP39 wallet passphrase
- encrypt derived-output exports
- encrypt QR payloads
- protect against malware on the active machine
- protect against screen capture
- guarantee JavaScript memory erasure
- prevent offline guessing if an attacker has a protected .arc file and the credential has low entropy

The encryption subsystem is a local at-rest protection layer for exported seed files and keyfiles. It is not a complete operational-security system by itself.

■YellowSphere v1.6.6 - Derivation Engine Internals

Release Boundary

This is the normative derivation specification for the production root file YellowSphere.html v1.6.6. Production supports Bitcoin, Bitcoin Cash, Litecoin, Dogecoin, Ethereum / ERC-20, Tron / TRC-20, BNB Chain, Avalanche C-Chain, Polygon, Cosmos / ATOM, Solana, Stellar, Cardano, and XRP. Polkadot and Monero are not production v1.6.6 browser currencies.

The production default account paths are:

bitcoin	m/0'
bitcoincash	m/0'
litecoin	m/84'/2'/0'
dogecoin	m/44'/3'/0'
ethereum	m/44'/60'/0'
tron	m/44'/195'/0'
bnbchain	m/44'/60'/0'
avalanche	m/44'/60'/0'
polygon	m/44'/60'/0'
cosmos	m/44'/118'/0'
solana	m/44'/501'/0'
stellar	m/44'/148'/0'
cardano	m/1852'/1815'/0'/0/0
xrp	m/44'/144'/0'

The Advanced Testnet toggle selects a testnet profile for every production currency. Bitcoin and Litecoin testnet defaults follow the selected script purpose; Bitcoin Cash and Dogecoin use m/44'/1'/0'. Account-model currencies retain their mainnet path because network selection changes metadata or address encoding, not the deterministic account path.

Any Monero derivation text or vectors retained later in this document describe the archived `Its/YellowSphere_v1.6.0_LTS.html` or a separate Python compatibility surface. They are not reachable from the v1.6.6 browser selector. YellowSphere.html v1.6.6 is normative for the byte output specified here.

Scope

This document is the authoritative byte-level specification of the deterministic derivation engine implemented by the canonical YellowSphere.html v1.6.6 application. It defines the complete computational pipeline from CSPRNG entropy through BIP39 mnemonic generation, BIP39 validation, Unicode normalization, PBKDF2 seed stretching, secp256k1 BIP32 derivation, SLIP-0010 Ed25519 derivation, Cardano Icarus Ed25519-BIP32 derivation, script-type resolution, per-coin address construction, Taproot key material, extended key serialization, output-object construction, and export flattening.

The root HTML file is the source of truth for v1.6.6 browser behavior. The Python CLI is a compatibility superset: it supports the production browser currencies and retains Monero automation. This document marks surface differences between the canonical HTML workflow and Python automation where those differences affect byte output, export shape, or operator behavior.

This is an offline reference. Every value described here is a deterministic function of local input bytes and local CSPRNG output where generation is requested. The engine never queries a blockchain, wallet server, balance API, token contract, exchange, custodian, or chain-state oracle.

Architectural Invariants

For fixed non-random inputs, derivation is deterministic. Given identical:

- mnemonic
- BIP39 passphrase
- coin selector
- derivation path
- script selector
- address count or range
- Bitcoin Cash legacy-address toggle

the canonical HTML engine produces byte-identical output on every conforming browser implementation.

The following are intentionally outside the derivation engine:

- address discovery

- balance lookup
- UTXO scanning
- wallet gap-limit inference
- Ethereum account-state inspection
- ERC-20 token enumeration
- XRP destination-tag discovery
- Cardano staking-state lookup
- Monero subaddress scanning
- Solana token-account enumeration
- fee estimation
- transaction signing
- transaction broadcast
- any network I/O

The high-level pipeline is:

```

input mnemonic or generated entropy
  |
  | BIP39 word index mapping and checksum verification
  v
normalized mnemonic words
  |
  | optional BIP39 passphrase, NFKD
  v
BIP39 seed or Cardano entropy input
  |
  +--> secp256k1 BIP32 path families
  |
  +--> SLIP-0010 Ed25519 path families
  |
  +--> Cardano Icarus Ed25519-BIP32 path family
  |
  v
per-coin account node and address rows
  |
  v
JSON object, rendered table, CSV, TXT, or PDF export

```

Input Surfaces

The HTML app accepts mnemonic material through four user-facing paths:

- Manual textarea input.
- Numbered 24-cell word grid with 12/24-word selector.
- Generate Random Seed.
- Import Seed from .arc file.

All four paths feed the same downstream validator. A generated or imported seed is held in `importedSeedState` and displayed as masked bullet groups until the user holds Show Seed. Since v1.6.6, a manually entered seed is promoted into the same hidden-seed state after a successful derivation, so subsequent derivations, exports, and reveal behavior use the same state model as generated and imported seeds.

The canonical normalized word sequence is:

```

words = raw_input
        .trim()
        .toLowerCase()
        .split(/\s+/)
        .filter(Boolean)

mnemonic = words.join(" ")

```

The implementation accepts only 12-word and 24-word English BIP39 mnemonics. No 15, 18, or 21 word BIP39 mnemonics are supported in v1.6.6.

CSPRNG-Based Mnemonic Generation

Generate Random Seed accepts `word_count` in {12, 24}. It derives entropy length from BIP39:

```
checksum_bits = floor(word_count / 3)
entropy_bits = word_count * 11 - checksum_bits
entropy_bytes = entropy_bits / 8
```

For 12 words:

```
entropy_bits = 128
checksum_bits = 4
entropy_bytes = 16
```

For 24 words:

```
entropy_bits = 256
checksum_bits = 8
entropy_bytes = 32
```

The browser entropy source is:

```
crypto.getRandomValues(new Uint8Array(entropy_bytes))
```

The checksum is the most significant `checksum_bits` bits of SHA-256(entropy). The generated bit string is:

```
entropy_bits || checksum_bits
```

It is split into `word_count` groups of 11 bits. Each unsigned 11-bit value is an index into the embedded BIP39 English word list:

```
word_i = BIP39_WORDS[index_i]
```

The generated mnemonic is immediately passed through `checkMnemonic`. A generated mnemonic that does not validate is rejected and never used.

Word Grid Behavior

The UI constructs 24 word cells. The seed-length radio selector chooses the active span:

```
12-word mode: cells 0..11 active, cells 12..23 inactive and hidden
24-word mode: cells 0..23 active
```

Pasting a full mnemonic into the textarea or grid is normalized through the same word tokenizer. If more than 12 words are detected, the selector is set to 24. If at least one word and no more than 12 words are detected, the selector is set to 12.

The grid and textarea are synchronized through guarded event handlers so the same canonical mnemonic reaches validation regardless of which visible control the user used. When a hidden-seed state is active and the seed is not being revealed, the controls show bullet placeholders and the raw words are not visible in those input controls.

BIP39 Word Mapping and Checksum

The engine embeds the canonical 2048-entry BIP39 English word list. Each word maps to one 11-bit integer:

```
index in [0, 2047]
binary form is exactly 11 bits, big-endian within the concatenated bitstream
```

Validation procedure:

```
words = normalizeMnemonicWords(input)
wc = words.length
require wc == 12 or wc == 24
require every word exists in BIP39_INDEX

acc = 0
for word in words:
    acc = (acc << 11) | BIP39_INDEX[word]

checksum_bits = floor(wc / 3)
entropy_bits = wc * 11 - checksum_bits

entropy_int = acc >> checksum_bits
checksum_int = acc & ((1 << checksum_bits) - 1)
```

```
entropy = uint_be(entropy_int, entropy_bits / 8)

expected_checksum = int_be(SHA-256(entropy)) >> (256 - checksum_bits)
```

The checksum passes when:

```
checksum_int == expected_checksum
```

Word count table:

word_count	total_bits	entropy_bits	checksum_bits	entropy_bytes
12	132	128	4	16
24	264	256	8	32

If every word is in the BIP39 list but checksum fails, the engine reports the input as BIP39-like with invalid checksum. It does not derive keys from that input.

BIP39 Seed Stretching

For Bitcoin, Bitcoin Cash, Litecoin, Dogecoin, Ethereum, XRP, Solana, Stellar, and Monero, the BIP39 seed is:

```
m = NFKD((mnemonic || "").trim()).split(/\s+/).filter(Boolean).join(" ")
p = NFKD(passphrase || "")

seed = PBKDF2-HMAC-SHA512(
  password = UTF-8(m),
  salt = UTF-8("mnemonic" + p),
  iterations = 2048,
  dkLen = 64
)
```

The output is exactly 64 bytes. An empty passphrase is a valid passphrase and produces a different seed than any non-empty passphrase. The derivation engine cannot know whether the correct passphrase was used. Verification must be done by root fingerprint or known addresses.

Cardano is different in v1.6.6: the canonical HTML uses the BIP39 entropy bytes for the Icarus master-key derivation rather than the 64-byte BIP39 PBKDF2 seed. Cardano behavior is specified in its own section.

Root Fingerprint

The validation panel computes a secp256k1 BIP32 root fingerprint even when the selected coin uses a non-secp256k1 derivation family. This fingerprint is a BIP39 mnemonic/passphrase verification value, not a statement that all coins use the secp256k1 tree.

Procedure:

```
seed = BIP39 seed from mnemonic and passphrase
I = HMAC-SHA512(key = UTF-8("Bitcoin seed"), data = seed)
root_private = int_be(I[0:32])
root_chain_code = I[32:64]
root_pub = compressed_pubkey(root_private * secp256k1_G)
fingerprint = HASH160(root_pub)[0:4]
```

It is displayed as 8 lowercase hex characters.

Path Parser

Path grammar:

```
path = ["m"] [ "/" component ]*
component = decimal_digits [ "'" | "h" | "H" ]
```

The parser behavior is:

```
parts = path.trim().split("/")
if parts[0] == "m":
  parsing starts at parts[1]
else:
  parsing starts at parts[0]
```

Empty components after splitting are skipped. For each non-empty component:

```
if component ends with "'", "h", or "H":
```

```

    hardened = true
    decimal_text = component without final suffix
else:
    hardened = false
    decimal_text = component

require decimal_text matches /^[0-9]+$ /
n = Number(decimal_text)
require 0 <= n < 0x80000000
if hardened:
    n = n | 0x80000000
output n as uint32

```

The canonical normalizer emits:

```

"m" for an empty path
otherwise "m/" + components joined by "/"
hardened components use apostrophe notation

```

Examples:

```

m/84h/0H/0' -> m/84'/0'/0'
44'/60'/0' -> m/44'/60'/0'
m -> m

```

All serialized child numbers use ser32, a 4-byte unsigned big-endian integer.

Address Count and Range

The UI has both Address Count and Range inputs. Derivation computes:

```

countRaw = max(1, Number(count_field || 5))
rangeRaw = trim(range_field)
startIdx = 0
endIdx = countRaw - 1

```

If rangeRaw matches:

```

/^(\\d+)\\s*-\\s*(\\d+)$/

```

then:

```

startIdx = max(0, parseInt(first, 10))
endIdx = max(startIdx, parseInt(second, 10))
count = endIdx - startIdx + 1

```

If rangeRaw is non-empty but does not match this pattern, v1.6.6 silently falls back to the count field. Address indexes are always non-negative.

secp256k1 Domain Parameters

The secp256k1 curve is:

$$y^2 = x^3 + 7 \bmod P$$

Field prime:

```

P = 0xfffffffffffffffffffffffffffffffffffffffffffffffffffffffefffffc2f

```

Group order:

```

N = 0xfffffffffffffffffffffffffffffffebaaedce6af48a03bbfd25e8cd0364141

```

Generator:

```

Gx = 0x79be667ef9dcbbac55a06295ce870b07029bfcdb2dce28d959f2815b16f81798
Gy = 0x483ada7726a3c465da4fbfc0e1108a8fd17b448a68554199c47d08ffb10d4b8

```

The valid private scalar domain is:

$$1 \leq k < N$$

Point addition is affine-coordinate addition. If p1 is null, p2 is returned. If p2 is null, p1 is returned. If x coordinates are equal and $y_1 + y_2 = 0 \bmod P$, the result is the point at infinity represented by null.

Doubling slope:

$$\lambda = (3 * x_1^2) * \text{inverse_mod}(2 * y_1, P) \bmod P$$

Addition slope:

```
lambda = (y2 - y1) * inverse_mod(x2 - x1, P) mod P
```

Result:

```
x3 = lambda^2 - x1 - x2 mod P
y3 = lambda * (x1 - x3) - y1 mod P
```

Scalar multiplication uses double-and-add over native BigInt arithmetic.

Compressed public key serialization:

```
prefix = 0x03 if y is odd else 0x02
serP(P) = prefix || uint256_be(x)
```

Ethereum uncompressed input to Keccak omits the usual 0x04 prefix:

```
uint256_be(x) || uint256_be(y)
```

BIP32 secp256k1 Master Node

The secp256k1 master node is derived from the 64-byte BIP39 seed:

```
I = HMAC-SHA512(key = UTF-8("Bitcoin seed"), data = seed)
IL = I[0:32]
IR = I[32:64]

k = int_be(IL)
c = IR
```

Reject if:

```
k == 0
k >= N
```

The node object contains:

```
k      private scalar
c      32-byte chain code
depth  0 for root
parentFp 00000000 for root
childNum 00000000 for root
```

BIP32 CKDpriv

For a parent node:

```
parent.k = private scalar
parent.c = chain code
parentPub = parent.k * G
```

For child index idx:

```
if idx has bit 31 set:
    data = 0x00 || ser256(parent.k) || ser32(idx)
else:
    data = serP(parentPub) || ser32(idx)

I = HMAC-SHA512(parent.c, data)
IL = I[0:32]
IR = I[32:64]
il = int_be(IL)
childK = (il + parent.k) mod N
```

Reject if:

```
il >= N
childK == 0
```

The child node is:

```
k      childK
c      IR
depth  parent.depth + 1
parentFp HASH160(serP(parentPub))[0:4]
childNum idx
```

The engine raises an error for invalid edge cases rather than skipping to the next index.

secp256k1 Account and Branch Model

For Bitcoin, Bitcoin Cash, Litecoin, Dogecoin, Ethereum, and XRP:

```
root = masterFromSeed(BIP39 seed)
account = derive(root, account_derivation_path)
```

For Bitcoin, Bitcoin Cash, Litecoin, and Dogecoin, rows are derived under both:

```
receiving branch: account / 0 / address_index
change branch:    account / 1 / address_index
```

For Ethereum and XRP, v1.6.6 still uses the same branch/index layout:

```
receiving branch: account / 0 / address_index
change branch:    account / 1 / address_index
```

This means Ethereum and XRP exports contain both receiving and change arrays. Although many account-wallet conventions use only branch 0, the HTML engine emits both branches for consistency with the secp256k1 row model.

Example:

```
account derivation: m/44'/60'/0'
receiving index 0: m/44'/60'/0'/0/0
change index 0:    m/44'/60'/0'/1/0
```

Coin Selector and Defaults

The UI coin selector maps display names to internal IDs:

Bitcoin	-> bitcoin
Bitcoin Cash	-> bitcoincash
Litecoin	-> litecoin
Dogecoin	-> dogecoin
Ethereum / ERC-20	-> ethereum
Tron / TRC-20	-> tron
BNB Chain	-> bnbchain
Avalanche C-Chain	-> avalanche
Polygon	-> polygon
Cosmos / ATOM	-> cosmos
Solana	-> solana
Stellar	-> stellar
Cardano	-> cardano
XRP	-> xrp

Default account derivation paths:

bitcoin	m/0'
bitcoincash	m/0'
litecoin	m/84'/2'/0'
dogecoin	m/44'/3'/0'
ethereum	m/44'/60'/0'
tron	m/44'/195'/0'
bnbchain	m/44'/60'/0'
avalanche	m/44'/60'/0'
polygon	m/44'/60'/0'
cosmos	m/44'/118'/0'
solana	m/44'/501'/0'
stellar	m/44'/148'/0'
cardano	m/1852'/1815'/0'/0/0
xrp	m/44'/144'/0'

When the coin selector changes, the HTML sets:

bitcoincash	-> script selector P2PKH
dogecoin	-> script selector P2PKH
ethereum	-> Auto
tron	-> Auto
bnbchain	-> Auto
avalanche	-> Auto
polygon	-> Auto
cosmos	-> Auto
solana	-> Auto
stellar	-> Auto
cardano	-> Auto

```
xrp          -> Auto
otherwise    -> P2WPKH
```

The initial page default is Bitcoin with P2WPKH selected.

Network Parameters

Bitcoin mainnet:

```
p2pkh xprv/xpub: 0488ade4 / 0488b21e
p2wpkh-p2sh yprv/ypub: 049d7878 / 049d7cb2
p2wpkh zprv/zpub: 04b2430c / 04b24746
p2tr trprv/trpub: 0488ade4 / 0488b21e
WIF prefix: 80
P2PKH prefix: 00
P2SH prefix: 05
HRP: bc
networkName: mainnet
```

Bitcoin Cash mainnet:

```
p2pkh xprv/xpub: 0488ade4 / 0488b21e
p2wpkh-p2sh: null
p2wpkh: null
p2tr: null
WIF prefix: 80
P2PKH prefix: 00
P2SH prefix: 05
CashAddr prefix: bitcoincash
networkName: mainnet
```

Litecoin mainnet:

```
p2pkh xprv/xpub: 019d9cfe / 019da462
p2wpkh-p2sh yprv/ypub: 01b26792 / 01b26ef6
p2wpkh zprv/zpub: 04b2430c / 04b24746
p2tr trprv/trpub: 019d9cfe / 019da462
WIF prefix: b0
P2PKH prefix: 30
P2SH prefix: 32
HRP: ltc
networkName: mainnet
```

Dogecoin mainnet:

```
p2pkh dgpv/dgub: 02fac398 / 02facafd
p2wpkh-p2sh: 02fac398 / 02facafd
p2wpkh: 02fac398 / 02facafd
p2tr: null
WIF prefix: 9e
P2PKH prefix: 1e
P2SH prefix: 16
HRP: doge
networkName: mainnet
```

Ethereum mainnet:

```
addressFamily: ethereum
xprv/xpub versions: 0488ade4 / 0488b21e for all script slots
WIF: undefined
networkName: mainnet
```

XRP mainnet:

```
addressFamily: xrp
xprv/xpub versions: 0488ade4 / 0488b21e for all script slots
WIF: undefined
networkName: mainnet
```

Solana, Stellar, Monero, and Cardano:

```
addressFamily only
no BIP32 extended-key version bytes
networkName: mainnet
```

Script Type Resolution

Script selector values:

```
Auto      -> auto
P2PKH     -> p2pkh
P2WPKH-P2SH -> p2wpkh-p2sh
P2WPKH    -> p2wpkh
P2TR      -> p2tr
```

For Ethereum and XRP:

```
script type is forced to addressFamily: ethereum or xrp
```

For Solana, Stellar, Monero, and Cardano:

```
script selector is ignored because these functions dispatch before
secp256k1 script handling.
```

For Bitcoin, Bitcoin Cash, Litecoin, and Dogecoin:

```
if requested == auto:
    first path component with hardening bit masked:
        86 -> p2tr
        84 -> p2wpkh
        49 -> p2wpkh-p2sh
        otherwise -> p2pkh
else:
    script type = requested
```

If the selected network object does not have parameters for the resolved script type, the engine throws "Unsupported script type". This prevents constructing addresses for unsupported combinations such as Bitcoin Cash P2WPKH in v1.6.6.

Hash and Encoding Primitives

SHA-256:

```
Browser WebCrypto SHA-256 digest, 32 bytes.
```

RIPEMD-160:

```
Pure JavaScript RIPEMD-160 implementation, 20 bytes.
```

HASH160:

```
RIPEMD-160(SHA-256(bytes))
```

Keccak-256:

```
Pre-standard Ethereum Keccak, not NIST SHA3-256.
Rate = 136 bytes.
Padding = 0x01 ... 0x80.
Output = 32 bytes.
```

Base58 alphabet:

```
123456789ABCDEFGHJKLMNPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz
```

XRPL Base58 alphabet:

```
rpshnaf39wBUDNEGHJKLM4PQRST7VWXYZ2bcdeCg65jkm8oFqi1tuvAxyz
```

Bech32 alphabet:

```
qpzry9x8gf2tvdw0s3jn54khce6mua7l
```

Base32 alphabet for Stellar StrKey:

```
ABCDEFGHIJKLMNOPQRSTUVWXYZ234567
```

Base58 and Base58Check

Base58 encoding interprets the byte string as one big-endian unsigned integer:

```
x = int_be(bytes)
while x > 0:
    mod = x mod 58
    x = floor(x / 58)
```



```
prepend alphabet[mod]
```

For each leading 0x00 byte in the input, prepend alphabet[0].

Base58Check:

```
checksum = SHA-256(SHA-256(payload))[0:4]
output = Base58(payload || checksum)
```

Used for:

- P2PKH addresses
- P2WPKH-P2SH addresses
- WIF private keys
- extended keys
- XRP classic addresses, with XRPL alphabet

WIF Private Keys

For UTXO-style secp256k1 coins with WIF defined:

```
payload = WIF_prefix || ser256(private_key) || 0x01
wif = Base58Check(payload)
```

The trailing 0x01 is the compressed-public-key flag. Every public key emitted by this engine is compressed for UTXO address construction, so the WIF compression flag is mandatory.

Ethereum and XRP do not use WIF in v1.6.6. Solana, Stellar, Monero, and Cardano also do not use WIF.

Bech32 and Bech32m

The bech32Polymod generator constants are:

```
0x3b6a57b2
0x26508e6d
0x1ea119fa
0x3d4233dd
0x2a1462b3
```

HRP expansion:

```
high bits of each HRP char
zero separator
low five bits of each HRP char
```

Checksum construction:

```
values = hrp_expand(hrp) || data || [0,0,0,0,0,0]
polymod = bech32Polymod(values) XOR constant
checksum[i] = (polymod >> (5 * (5 - i))) & 31 for i=0..5
```

Constants:

```
Bech32 = 1
Bech32m = 0x2bc830a3
```

segwitAddress(hrp, version, witnessProgram):

```
data = [version] || convertBits(witnessProgram, 8, 5, pad=true)
if version == 0:
    use Bech32
else:
    use Bech32m
```

v1.6.6 therefore uses:

```
P2WPKH version 0 -> Bech32
P2TR version 1 -> Bech32m
```

CashAddr

Bitcoin Cash default address rendering uses CashAddr unless the legacy toggle is enabled. The CashAddr alphabet is the same 32-character string as Bech32:

```
qpzry9x8gf2tvdw0s3jn54khce6mua7l
```

cashaddrPolymod uses five 40-bit generator constants:

```
0x98f2bc8e61
0x79b76d99e2
0xf33e5fb3c4
0xae2eabe2a8
0x1e4f43e470
```

Prefix expansion:

```
for each char in lowercase(prefix):
    charCode & 31
append 0
```

For a 20-byte HASH160:

```
version = (type << 3) | size_code
size_code = 0 for 20-byte hashes
```

P2PKH CashAddr:

```
type = 0
version = 0
payload = convertBits([version] || pkh, 8, 5, true)
checksumValue = cashaddrPolymod(prefix_expand || payload || eight zeros)
checksum = eight 5-bit values, most significant first
address = "bitcoincash:" || payload_chars || checksum_chars
```

P2SH CashAddr:

```
type = 1
version = 8
payload = convertBits([version] || script_hash, 8, 5, true)
```

In v1.6.6, Bitcoin Cash network configuration exposes only p2pkh as supported, so the default UI path emits P2PKH CashAddr. The generic pubToAddress function also contains the P2SH CashAddr branch for p2wpkh-p2sh if a network ever enables that script slot.

If the legacy toggle is enabled, Bitcoin Cash P2PKH uses:

```
Base58Check(0x00 || HASH160(pubkey))
```

UTXO Address Construction

For Bitcoin, Bitcoin Cash, Litecoin, and Dogecoin:

```
child_pub = serP(child.k * G)
pkh = HASH160(child_pub)
```

P2PKH:

```
if Bitcoin Cash and legacy toggle is off:
    address = CashAddr("bitcoincash", type=0, pkh)
else:
    address = Base58Check(p2pkh_prefix || pkh)
```

P2WPKH-P2SH:

```
redeem = 0x00 || 0x14 || pkh
script_hash = HASH160(redeem)
if CashAddr prefix exists and legacy toggle is off:
    address = CashAddr(prefix, type=1, script_hash)
else:
    address = Base58Check(p2sh_prefix || script_hash)
```

P2WPKH:

```
address = Bech32(hrp, [0] || convertBits(pkh, 8, 5, true))
```

P2TR:

handled through Taproot key material below.

Every UTXO address row contains:

```
path
address
public_key_hex
private_key_hex
private_key_wif
```

Taproot Key Material

Taproot is applied when script type is p2tr and the selected network has p2tr extended-key version parameters.

Input:

```
child private scalar d
```

Step 1, internal key parity normalization:

```
P = d * G
if y(P) is odd:
    internalPrivateKey = N - d mod N
    internalPublicKeyPoint = -P
else:
    internalPrivateKey = d
    internalPublicKeyPoint = P

internalPublicKey = uint256_be(x(internalPublicKeyPoint))
```

Step 2, BIP340/BIP341 tagged hash:

```
tagHash = SHA-256(UTF-8("TapTweak"))
tweakBytes = SHA-256(tagHash || tagHash || internalPublicKey)
tweak = int_be(tweakBytes)
```

Reject if:

```
tweak >= N
```

Step 3, output key:

```
outputPubPoint = internalPublicKeyPoint + tweak * G
outputPrivateKey = (internalPrivateKey + tweak) mod N
```

Reject if:

```
outputPubPoint is null
outputPrivateKey == 0
```

Step 4, address:

```
outputPublicKey = uint256_be(x(outputPubPoint))
outputParity = y(outputPubPoint) & 1
address = segwitAddress(hrp, 1, outputPublicKey)
```

Taproot row additions:

```
taproot_internal_public_key_hex
taproot_internal_private_key_hex
taproot_internal_private_key_wif
taproot_tweak_hex
taproot_output_public_key_hex
taproot_output_private_key_hex
taproot_output_private_key_wif
taproot_output_key_parity
```

Both internal and output private keys are funds-controlling secrets.

Extended Key Serialization

Extended private key payload:

offset	length	field
-----	-----	-----
0	4	uint32_be(version)
4	1	depth
5	4	parent fingerprint

9	4	child number, ser32
13	32	chain code
45	1	0x00
46	32	private scalar ser256

Extended public key payload:

offset	length	field
-----	-----	-----
0	4	uint32_be(version)
4	1	depth
5	4	parent fingerprint
9	4	child number, ser32
13	32	chain code
45	33	compressed public key

Both payloads are 78 bytes before Base58Check checksum.

The HTML emits account/root key fields by script family:

```

always:
    root_xprv, root_xpub, account_xprv, account_xpub

p2wpkh-p2sh:
    root_yprv, root_ypub, account_yprv, account_ypub

p2wpkh:
    root_zprv, root_zpub, account_zprv, account_zpub

p2tr:
    root_trprv, root_trpub, account_trprv, account_trpub

```

Ethereum and XRP use standard xprv/xpub version bytes in the HTML network object for every script slot, but their script type is forced to their address family.

Ethereum

Ethereum uses secp256k1 BIP32 root/account/branch/index derivation.

For each child:

```

pub = child.k * G
uncompressed_no_prefix = uint256_be(pub.x) || uint256_be(pub.y)
hash = Keccak-256(uncompressed_no_prefix)
address_bytes = hash[12:32]
address_hex = lowercase hex(address_bytes)

```

EIP-55 checksum:

```

hash_hex = hex(Keccak-256(UTF-8(address_hex)))
checked = ""
for i in 0..39:
    if int(hash_hex[i], 16) >= 8:
        checked += uppercase(address_hex[i])
    else:
        checked += address_hex[i]

address = "0x" || checked

```

Ethereum row additions:

```

ethereum_public_key_hex = uint256_be(x) || uint256_be(y)
erc20_address = address
erc20_note = "ERC-20 tokens on Ethereum use this same account address."

```

private_key_hex is the 32-byte secp256k1 private scalar. No WIF is emitted.

XRP

XRP uses secp256k1 BIP32 root/account/branch/index derivation.

For each child:

```

pub = compressed public key, 33 bytes
accountId = HASH160(pub)
payload = 0x00 || accountId
address = Base58Check(payload, XRP_B58)

```

XRP row additions:

```
xrp_classic_address = address
xrp_note = "XRP Ledger classic address. Destination tags, when required by an exchange or
custodian, are not derived from the seed."
```

Destination tags are never derived. They are off-chain or custodian-assigned routing metadata.

Ed25519 Curve and Encoding

Solana, Stellar, and Monero use Ed25519 public-key arithmetic. The HTML engine implements the twisted Edwards curve:

```
p = 2^255 - 19
d = -121665 / 121666 mod p
```

Base point:

```
x = 15112221349535400772501151409588531511454012693041857206046113283949847762202
y = 46316835694926478169428394003475163141307993866256225615783033603165251855960
```

Note: the implementation stores these as decimal BigInt constants.

The group order used for scalar reduction is:

```
L = 2^252 + 2774231777372353535851937790883648493
```

Point addition uses the Edwards formulas:

```
xy = d * x1 * x2 * y1 * y2 mod p
x3 = (x1*y2 + y1*x2) * inverse_mod(1 + xy, p) mod p
y3 = (y1*y2 + x1*x2) * inverse_mod(1 - xy, p) mod p
```

Ed25519 public key from a 32-byte seed:

```
h = SHA-512(seed)
scalarBytes = h[0:32]
scalarBytes[0] &= 248
scalarBytes[31] &= 127
scalarBytes[31] |= 64
point = scalarBytes_le * G
encoded = little_endian_y(point), with x parity in top bit of byte 31
```

Ed25519 public key from scalar bytes:

```
point = little_endian_scalar(scalarBytes) * G
encoded = little_endian_y(point), with x parity in top bit of byte 31
```

The distinction matters:

- Solana and Stellar public keys use `ed25519PublicKeyFromSeed` on SLIP-0010 k.
- Monero spend/view public keys use `ed25519PublicKeyFromScalarBytes` after scalar reduction.
- Cardano public keys use `ed25519PublicKeyFromScalarBytes(k[0:32])`.

SLIP-0010 Ed25519 Master and Child Derivation

Solana, Stellar, and Monero use the SLIP-0010 Ed25519 tree.

Master:

```
I = HMAC-SHA512(key = UTF-8("ed25519 seed"), data = BIP39 seed)
k = I[0:32]
c = I[32:64]
```

Child:

```
require index has HARDENED bit set
data = 0x00 || parent.k || ser32(index)
I = HMAC-SHA512(parent.c, data)
child.k = I[0:32]
child.c = I[32:64]
```

Unhardened Ed25519 derivation throws:

"Ed25519 derivation requires hardened path indexes."

Solana

Default path:

```
m/44'/501'/0'
```

Path-per-index rule:

```
ints = parsePath(basePath)
if ints.length >= 4
  and purpose == 44
  and coin type == 501
  and last component masked == 0:
    replace component 2 with index'
    path = pathFromIndexes(next)
else if index == 0:
  path = normalizePath(basePath)
else:
  path = normalizePath(basePath) + "/" + index + ""
```

This rule is intentionally implementation-specific. For default m/44'/501'/0', index 0 resolves to m/44'/501'/0'. Index 1 resolves to m/44'/501'/1'.

Account object fields:

```
derivation
account_script_type_used = solana
root_private_key_hex
root_chain_code_hex
root_public_key_hex
account_private_key_hex
account_chain_code_hex
account_public_key_hex
receiving
change = []
```

Row fields:

```
branch = account
path
address = Base58(public_key)
public_key_hex
private_key_hex
solana_note
```

Stellar

Default path:

```
m/44'/148'/0'
```

Path-per-index rule:

```
if base path has purpose 44' and coin type 148':
  replace component 2 with index'
else if index == 0:
  use normalized base path
else:
  append "/" + index + ""
```

StrKey construction:

```
body = versionByte || payload
checksum = CRC16-XModem(body), emitted little-endian
strkey = Base32(body || checksum), no padding
```

Version bytes:

```
public address: 6 << 3 = 0x30
secret seed:    18 << 3 = 0x90
```

CRC16-XModem:

```
initial crc = 0
polynomial = 0x1021
for each byte:
  crc ^= byte << 8
  repeat 8:
```

```

if crc & 0x8000:
    crc = (crc << 1) ^ 0x1021
else:
    crc = crc << 1
crc &= 0xffff

```

Row fields:

```

branch = account
path
address = stellarPublicAddress(public_key)
public_key_hex
private_key_hex
stellar_secret_seed
stellar_note

```

Archived v1.6.0 LTS Monero Compatibility

Default path:

```
m/44'/128'/0'
```

Path-per-index rule matches Stellar, with coin type 128.

Private spend key:

```
privateSpendKey = reduceEd25519Scalar(SLIP-0010 child.k)
```

Scalar reduction:

```

scalar = little_endian_int(bytes) mod L
if scalar == 0:
    scalar = 1
output = uint256_le(scalar)

```

Private view key:

```
privateViewKey = reduceEd25519Scalar(Keccak-256(privateSpendKey))
```

Public keys:

```

publicSpendKey = ed25519PublicKeyFromScalarBytes(privateSpendKey)
publicViewKey  = ed25519PublicKeyFromScalarBytes(privateViewKey)

```

Standard mainnet address payload:

```

body = 0x12 || publicSpendKey || publicViewKey
checksum = Keccak-256(body)[0:4]
address = MoneroBase58(body || checksum)

```

Monero Base58 chunk encoding:

```

process bytes in chunks of up to 8 bytes
interpret each chunk as a big-endian integer
encode with Bitcoin Base58 alphabet
left-pad each encoded chunk to fixed size:

```

raw bytes	encoded chars
1	2
2	3
3	5
4	6
5	7
6	9
7	10
8	11

Account object includes both root and first-account Monero material:

```

root_private_spend_key_hex
root_private_view_key_hex
root_public_spend_key_hex
root_public_view_key_hex
account_private_spend_key_hex
account_private_view_key_hex
account_public_spend_key_hex
account_public_view_key_hex

```

Row fields:

```
branch = account
path
address
public_spend_key_hex
public_view_key_hex
private_spend_key_hex
private_view_key_hex
monero_note
```

Cardano Icarus Ed25519-BIP32

Cardano in v1.6.6 does not use the 64-byte BIP39 seed. It reconstructs the BIP39 entropy bytes from the mnemonic word indexes:

```
entropy = mnemonicEntropyBytes(mnemonic)
```

Icarus master:

```
keyBytes = PBKDF2-HMAC-SHA512(
    password = empty byte string,
    salt      = entropy,
    iterations = 4096,
    dkLen     = 96
)
```

Clamp:

```
keyBytes[0]  &= 0xf8
keyBytes[31] &= 0x1f
keyBytes[31] |= 0x40
```

Root node:

```
k = keyBytes[0:64]
c = keyBytes[64:96]
```

Cardano private key k is 64 bytes:

```
left_half = k[0:32]
right_half = k[32:64]
```

Cardano public key:

```
ed25519PublicKeyFromScalarBytes(k[0:32])
```

Cardano child derivation uses little-endian child indexes:

```
idxBytes = uint32_le(index)
pub = cardanoPublicKeyFromPrivate(parent.k)
```

If index hardened:

```
z      = HMAC-SHA512(parent.c, 0x00 || parent.k || idxBytes)
cDigest = HMAC-SHA512(parent.c, 0x01 || parent.k || idxBytes)
```

If index unhardened:

```
z      = HMAC-SHA512(parent.c, 0x02 || pub || idxBytes)
cDigest = HMAC-SHA512(parent.c, 0x03 || pub || idxBytes)
```

Then:

```
kl = little_endian_int(parent.k[0:32])
kr = little_endian_int(parent.k[32:64])
zl = little_endian_int(z[0:28])
zr = little_endian_int(z[32:64])

childLeft = kl + 8 * zl
reject if childLeft mod ED25519_L == 0

childRight = (kr + zr) mod 2^256

child.k = uint256_le(childLeft) || uint256_le(childRight)
child.c = cDigest[32:64]
```

Default path:

```
m/1852'/1815'/0'/0/0
```


Path selection per address index:

```
ints = parsePath(basePath)
account = HARDENED
if ints.length >= 3 and purpose == 1852 and coin type == 1815:
    account = ints[2]

paymentPath = m/1852'/1815'/account/0/index
stakingPath = m/1852'/1815'/account/2/0
```

If the default base path is used, account is 0'. The final /0/0 in the base path is not used directly as an index template; v1.6.6 reconstructs payment and staking paths from purpose, coin type, and account.

BLAKE2b-224:

```
output length = 28 bytes
IV = standard BLAKE2b IV
parameter block sets digest length 28
compression rounds = 12
little-endian 64-bit words
```

Shelley base address:

```
paymentHash = blake2b224(paymentPub)
stakeHash = blake2b224(stakePub)
payload = 0x01 || paymentHash || stakeHash
address = Bech32("addr", convertBits(payload, 8, 5, true))
```

Cardano row fields:

```
branch = receiving
path = paymentPath
staking_path
address
public_key_hex
stake_public_key_hex
private_key_hex
stake_private_key_hex
cardano_note
```

The 0x01 header indicates Shelley base address, mainnet network id 1, payment credential by key hash, and stake credential by key hash.

Output Object: secp256k1 Families

Top-level result:

```
{
  coin: internal coin id,
  network: "mainnet",
  word_count: 12 or 24,
  accounts: [ account ]
}
```

secp256k1 account object:

```
{
  derivation,
  account_script_type_used,
  root_xprv,
  root_xpub,
  optional root_yprv/root_ypub,
  optional root_zprv/root_zpub,
  optional root_trprv/root_trpub,
  account_xprv,
  account_xpub,
  optional account_yprv/account_ypub,
  optional account_zprv/account_zpub,
  optional account_trprv/account_trpub,
  receiving: [],
  change: []
}
```

Common secp256k1 row:

```
{
  path,
```

```
    address,  
    public_key_hex,  
    private_key_hex  
}
```

UTXO rows add:

```
private_key_wif
```

Ethereum rows add:

```
ethereum_public_key_hex  
erc20_address  
erc20_note
```

XRP rows add:

```
xrp_classic_address  
xrp_note
```

Taproot rows add the Taproot fields listed earlier.

Output Object: Ed25519 and Cardano Families

Solana and Stellar account objects:

```
derivation  
account_script_type_used  
root_private_key_hex  
root_chain_code_hex  
root_public_key_hex  
account_private_key_hex  
account_chain_code_hex  
account_public_key_hex  
receiving  
change = []
```

Archived v1.6.0 LTS Monero account object:

```
derivation  
account_script_type_used  
root_private_key_hex  
root_chain_code_hex  
account_private_key_hex  
account_chain_code_hex  
account_private_spend_key_hex  
account_private_view_key_hex  
account_public_spend_key_hex  
account_public_view_key_hex  
root_private_spend_key_hex  
root_private_view_key_hex  
root_public_spend_key_hex  
root_public_view_key_hex  
receiving  
change = []
```

Cardano account object:

```
derivation  
account_script_type_used  
root_private_key_hex  
root_chain_code_hex  
root_public_key_hex  
account_private_key_hex  
account_chain_code_hex  
account_public_key_hex  
receiving  
change = []
```

These families do not emit BIP32 xprv/xpub strings in v1.6.6.

Flattened Table and CSV Row Model

`flattenDerivedRows(data)` iterates every account, extracts account-level fields, then overlays each row from `account.receiving` and `account.change`.

Before copying account-level fields, the table flattener excludes:

```
all keys in AK_KEY_ORDER
network
word_count
derivation
account_script_type_used
coin
receiving
change
```

For each branch:

```
for branchName in ["receiving", "change"]:
    for item in account[branchName]:
        row = { branch: branchName, ...accountFields, ...item }
```

Important consequence: if an item has its own branch field, as Solana, Stellar, Monero, and Cardano rows do, the item branch overwrites the loop branch. Thus Solana/Stellar/Monero rows show branch "account", and Cardano rows show branch "receiving".

CSV header order is insertion order of first appearance across rows. CSV fields are escaped by:

```
text = value == null ? "" : String(value)
if text contains comma, quote, CR, or LF:
    output quote + text.replace(/"/g, '"') + quote
else:
    output text
```

CSV rows are joined with LF and the file ends with LF.

TXT Export Field Model

TXT export emits:

```
YellowSphere Derived Keys and Addresses

coin: <coin>
network: <network>
word count: <word_count>
```

Then for each account:

```
Account N
account scalar fields, excluding receiving and change
```

Then for each branch:

```
Receiving Addresses
Change Addresses
```

Row labels are lower-case field keys with underscores replaced by spaces. Null and undefined values are skipped.

PDF Export Field Model

PDF export first flattens derived rows. It uses four visible address-table columns:

```
Branch
Path
Address
Private key column
```

The private key column is selected by coin:

```
Monero:
    private_spend_key_hex, label "Private Spend Key Hex"

Ethereum, Solana, Stellar, Cardano, XRP:
    private_key_hex, label "Private Key Hex"

All other coins:
    private_key_wif, label "Private Key WIF"
```

Extended keys are printed above the table when present in the account object. Ed25519/Cardano families do not have xprv/xpub fields, so their PDF exports skip that extended-key section unless future fields are added.

Failure Modes

The derivation engine produces no partial successful result when a hard failure is encountered.

Input failures:

- word count not 12 or 24
- unknown BIP39 word
- invalid BIP39 checksum
- unsupported coin id
- malformed derivation path component
- derivation index $\geq 0x80000000$ before hardening

secp256k1 failures:

- invalid BIP32 master key
- invalid BIP32 child key
- unsupported script type for selected network
- WIF requested for a coin without WIF
- Taproot tweak $\geq N$
- Taproot output public key at infinity
- Taproot output private key $== 0$

SLIP-0010 failures:

- unhardened Ed25519 derivation component

Cardano failures:

- $\text{childLeft} \bmod \text{ED25519_L} == 0$

QR, export, and .arc errors are specified in their own documents.

Practical Recovery Procedure

When searching for a wallet:

- Validate the mnemonic checksum.
- Enter the exact BIP39 passphrase if one was used.
- Confirm the root fingerprint where available.
- Select the original coin.
- Match the original wallet's account path.
- Match the original wallet's script type.
- Derive index 0 and compare the first known receive address.
- If no match, check common purpose paths and both receiving/change branches.
- Increase count or use Range for large address gaps.
- Export only after path and passphrase have been confirmed.

For Bitcoin/Bitcoin Cash/Litecoin/Dogecoin:

check `m/44'`, `m/49'`, `m/84'`, and `m/86'` where supported

For Ethereum:

start with `m/44'/60'/0'/0/0` and branch 0

For XRP:

destination tags are not derivation data; obtain them from the custodian

For Solana/Stellar/Monero:

account index changes are hardened account path changes in v1.6.6

For Cardano:

payment and staking paths are reconstructed from the account component

Compatibility Reference

Canonical HTML v1.6.6:

Full behavior described by this document.

Python CLI in the current repository:

Reports APP_VERSION "1.6.2".

Supports the documented v1.6.2 Python compatibility subset:

```
bitcoin
bitcoincash
litecoin
dogecoin
ethereum
solana
stellar
monero
cardano
xrp
```

Supports JSON/CSV/TXT scripted output through --output-format.

Uses --script-type auto by default so Bitcoin Cash selects P2PKH/CashAddr instead of an unsupported SegWit script family.

Emits Bitcoin Cash CashAddr strings by default.

Emits Solana raw Ed25519 public keys encoded with Bitcoin Base58.

Emits Stellar StrKey public addresses and stellar_secret_seed values.

Emits Monero standard mainnet addresses plus private/public spend and view key fields.

Emits Cardano Shelley base addresses from payment and staking keys.

Provides Python helper code for derived PDF and QR PNG generation, but the browser UI remains the canonical interactive export workflow.

PySide6 GUI:

Renders packaged HTML. Its behavior follows the packaged asset that was copied into src/yellowsphere/assets.

Tauri wrapper:

Renders packaged HTML and provides native save bridge. Derivation behavior is still the HTML behavior.

Implementation Function Map

Canonical HTML functions:

```
generateRandomMnemonic(wordCount)
analyzeMnemonic(mnemonic, passphrase)
checkMnemonic(mnemonic, passphrase)
bip39Seed(mnemonic, passphrase)
mnemonicEntropyBytes(mnemonic)
masterFromSeed(seed)
ckdPriv(node, index)
derive(node, path)
masterFromSeedEd25519(seed)
ckdPrivEd25519(node, index)
deriveEd25519(node, path)
cardanoIcarusMasterFromEntropy(entropyBytes)
ckdPrivCardano(node, index)
deriveCardano(node, path)
deriveSolanaOutput(seed, derivation, count, startIdx, wordCount, networkName)
deriveStellarOutput(seed, derivation, count, startIdx, wordCount, networkName)
deriveMoneroOutput(seed, derivation, count, startIdx, wordCount, networkName)
deriveCardanoOutput(mnemonic, derivation, count, startIdx, wordCount, networkName)
```

```
deriveOutput()  
pubToAddress(pub, scriptType, net, useLegacy)  
taprootKeyData(privKey)  
xprv(node, version)  
xpub(node, version)  
toWif(k, net)  
flattenDerivedRows(data)  
derivedToCsv(data)  
derivedToText(data)
```

Python compatibility functions are now useful for cross-checking both the secp256k1 subset and the expanded v1.6.6 Ed25519-family coin set. Conformance for either implementation must still be measured against the byte-level rules in this document and the vectors in TestVectors.txt; if Python and HTML disagree, the canonical HTML behavior and documented test vectors control until the Python code is corrected.

Security Classification of Derived Fields

Critical secret fields:

```
root_xprv  
account_xprv  
root_yprv  
account_yprv  
root_zprv  
account_zprv  
root_trprv  
account_trprv  
private_key_hex  
private_key_wif  
taproot_internal_private_key_hex  
taproot_internal_private_key_wif  
taproot_output_private_key_hex  
taproot_output_private_key_wif  
stellar_secret_seed  
private_spend_key_hex  
private_view_key_hex  
account_private_spend_key_hex  
account_private_view_key_hex  
root_private_spend_key_hex  
root_private_view_key_hex  
stake_private_key_hex
```

Public but linkable fields:

```
addresses  
xpub/ypub/zpub/trpub  
public keys  
root fingerprint  
derivation paths
```

Operationally, any export containing critical secret fields must be handled as funds-controlling key material.

■YellowSphere v1.6.6 - QR Payload and Encoder Specification

Release Boundary

This is the normative QR specification for YellowSphere.html v1.6.6. The production context routes are solana:, web+stellar:pay, raw Cardano, tron:, bnb:, avalanche:, polygon:, and cosmos:, followed by syntax-based Bitcoin, Bitcoin Cash, Litecoin, Dogecoin, Ethereum, XRP, and raw fallback rules. Monero is not a production v1.6.6 context route. Any Monero rule retained later is an archived v1.6.0 LTS compatibility note.

The QR encoder, capacity table, error-correction behavior, mask scoring, canvas rendering, and PNG serialization remain byte-compatible with the retained v1.6.0 encoder. YellowSphere.html does not change QR payload bytes.

Scope

This document specifies the QR Export subsystem implemented inside YellowSphere.html v1.6.6. It covers the modal workflow, address normalization, URI payload construction, XRP destination-tag handling, QR byte encoding, version/capacity selection, Reed-Solomon generation, matrix construction, masking, rendering, PNG export, clipboard behavior, and security boundary.

The QR subsystem is self-contained. It does not call a CDN, external QR library, wallet service, blockchain node, or network API.

Public Entry Points

The embedded QR module is:

```
const QRGen = (() => { ... return { generate, render }; })();
```

Public methods:

```
QRGen.generate(text)
  Converts a JavaScript string into a QR matrix.

QRGen.render(matrix, canvas, opts)
  Draws a QR matrix onto an HTML canvas.
```

UI functions:

```
openQrModal()
bindQrUI()
isXrpAddress(a)
toBip21Uri(address, memo, coinContext)
renderXrpQr(address, memo)
renderQrFromAddress(address, memo, coinContext)
resetQrOutput()
```

File export:

```
Save PNG uses canvas.toBlob(..., "image/png") and saveBlob.
```

QR Modal Workflow

Open:

```
QR Export button calls openQrModal().
```

openQrModal behavior:

- resetQrOutput()
- qrAddressInput.value = ""
- qrAddressInput.dataset.coin = ""
- qrMemoInput.value = ""
- show modal with showModal() if available
- otherwise set open attribute
- focus address input after 50 ms

Close:

- Close button closes the dialog.
- Clicking the backdrop closes the dialog when event target is the dialog.

Generate:

- Trim address input.
- If empty, do nothing.
- `resetQrOutput()`.
- If address matches XRP classic syntax, show destination-tag prompt.
- Otherwise render immediately.

XRP prompt:

- Confirm reads trimmed memo/tag and renders.
- Skip renders with empty memo/tag.
- Enter in memo field triggers Confirm.

After rendering:

- canvas is shown
- label is shown
- Save PNG, Copy Address, and Edit controls are shown

Edit:

- `resetQrOutput()`
- if XRP address, show memo prompt again
- otherwise focus address input

Input Normalization

Address input:

```
a = address.trim()
```

Memo/tag input:

```
m = (memo || "").trim()
```

Empty address:

```
Generate returns without rendering.
```

No chain validation:

The QR subsystem does not validate balances, accounts, destination-tag requirements, network, token contract, or exchange deposit policy.

XRP Address Detection

Function:

```
isXrpAddress(a)
```

Regex:

```
/^[1-9A-HJ-NP-Za-km-z]{24,}/
```

Input:

```
a.trim()
```

Consequences:

- Address must begin with "r".
- The following characters must be from the XRP Base58-like alphabet subset in the regex.
- Minimum regex length is "r" plus at least 24 following characters.
- The regex is syntactic and does not validate checksum.

When true, the UI uses the XRP-specific memo prompt and renderXrpQr path.

URI Payload Construction

Function:

```
toBip21Uri(address, memo, coinContext)
```

Inputs:

```
address:
    User-entered address string.

memo:
    Optional memo/destination tag string.

coinContext:
    Optional internal coin id.
```

Processing:

```
a = address.trim()
m = (memo || "").trim()
```

Rule order is normative. First match wins:

- Existing scheme:


```
if /^[a-z]+:/.test(a):
    return a
```
- Explicit Solana context:


```
if coinContext == "solana":
    return "solana:" + a
```
- Explicit Stellar context:


```
if coinContext == "stellar":
    return "web+stellar:pay?destination=" + encodeURIComponent(a)
```
- Explicit Cardano context:


```
if coinContext == "cardano":
    return a
```
- Explicit Tron context:


```
if coinContext == "tron":
    return "tron:" + a
```
- Explicit BNB Chain context:


```
if coinContext == "bnbchain":
    return "bnb:" + a
```
- Explicit Avalanche context:


```
if coinContext == "avalanche":
    return "avalanche:" + a
```
- Explicit Polygon context:


```
if coinContext == "polygon":
    return "polygon:" + a
```
- Explicit Cosmos context:


```
if coinContext == "cosmos":
    return "cosmos:" + a
```
- Bitcoin syntax:


```
if /^(bc1|[13])[a-zA-HJ-NP-Z0-9]{25,}/.test(a):
    return "bitcoin:" + a
```

- Bitcoin Cash prefixed CashAddr:

```
if /^bitcoincash:[qp][a-z0-9]{20,}/i.test(a):
    return a
```
- Bitcoin Cash prefixless CashAddr:

```
if /^[qp][a-z0-9]{20,}/i.test(a):
    return "bitcoincash:" + a
```
- Litecoin syntax:

```
if /^(ltc1|[LM])[a-zA-HJ-NP-Z0-9]{25,}/.test(a):
    return "litecoin:" + a
```
- Dogecoin syntax:

```
if /^[DA9][a-zA-HJ-NP-Z0-9]{25,}/.test(a):
    return "dogecoin:" + a
```
- Ethereum syntax:

```
if /^0x[0-9a-fA-F]{40}$/i.test(a):
    return "ethereum:" + a
```
- XRP syntax:

```
if isXrpAddress(a):
    return a + "?dt=" + (m ? encodeURIComponent(m) : "000000")
```
- Fallback:

```
return a
```

Cardano note:

Cardano is returned raw only when coinContext is "cardano". Without explicit context, a Cardano address falls through to raw payload.

XRP Payload Rule

XRP uses renderXrpQr rather than the generic non-XRP render path.

Payload:

```
uri = address.trim() + "?dt=" + tag_component
```

tag_component:

```
if trimmed memo/tag is non-empty:
    encodeURIComponent(m)
else:
    "000000"
```

XRP payload intentionally does not include an "xrp:" URI scheme in v1.6.6.

Label shown under QR:

The full XRP payload including "?dt=...".

Copy Address button:

Copies only qrAddressInput.value.trim(), not the label payload. For XRP this means the destination-tag component is not copied by Copy Address.

Text Encoding and QR Mode

QRGen.generate(text):

```
enc = new TextEncoder().encode(text)
byteLen = enc.length
```

Mode:

Byte mode only.

Mode indicator:

0100

Character count length:

```
8 bits for versions 1 through 9
16 bits for version 10
```

Bitstream before padding:

```
mode_4_bits ||
byte_length_count_indicator ||
UTF-8 payload bytes as 8-bit values
```

Terminator:

Four zero bits are pushed by buildCodewords.

Byte alignment:

Zero bits are appended until bit length is divisible by 8.

Pad bytes:

0xEC, 0x11 alternating until data capacity is filled.

Capacity Selection

Supported versions:

1 through 10

Supported error-correction levels:

```
ecLevel 0 = M
ecLevel 1 = Q
```

Important v1.6.6 behavior:

The implementation tests level M first, then level Q, for each version.

Algorithm:

```
ver = 1
ecLevel = 0

for v in 1..10:
    lenBitsV = v < 10 ? 8 : 16
    totalBits = 4 + lenBitsV + byteLen * 8 + 4
    reqBytes = ceil(totalBits / 8)

    if CAP[v][0].db >= reqBytes:
        ver = v
        ecLevel = 0
        break

    if CAP[v][1].db >= reqBytes:
        ver = v
        ecLevel = 1
        break
```

Consequence:

The selected QR is the first version where M fits; if M does not fit but Q does fit at that same version, Q is selected. The code does not continue searching later versions for a different level after finding Q.

Capacity table:

Version	M data bytes	Q data bytes
-----	-----	-----
1	16	13
2	28	22
3	44	32
4	64	48
5	86	64
6	108	84
7	124	93
8	154	122
9	182	154
10	216	180

Overflow behavior:

The code initializes `ver=1/ecLevel=0` before the loop. In normal UI use, address payloads fit in versions 1-10. Very large payloads should be treated as unsupported; downstream rendering is not intended as an arbitrary large text QR generator.

Reed-Solomon Parameters

Capacity entries include:

```
db:
    data bytes

ec:
    ECC bytes per block

b:
    number of blocks
```

Table:

Version	M ec/block blocks		Q ec/block blocks	
1	10	1	13	1
2	16	1	22	1
3	26	2	18	2
4	18	2	26	2
5	24	2	18	4
6	16	4	24	4
7	18	4	18	6
8	22	4	22	6
9	22	5	20	7
10	26	5	24	8

GF(256) Arithmetic

The encoder builds EXP and LOG tables:

```
EXP: Uint8Array(512)
LOG: Uint8Array(256)
```

Primitive polynomial:

```
0x11d
```

Generator element:

```
2
```

Table construction:

```
x = 1
for i in 0..254:
    EXP[i] = x
    LOG[x] = i
    x = x << 1
    if x > 255:
        x ^= 0x11d

for i in 255..511:
    EXP[i] = EXP[i - 255]
```

Multiplication:

```
gfMul(a, b):
    if a != 0 and b != 0:
        return EXP[LOG[a] + LOG[b]]
    else:
        return 0
```

Generator Polynomial and ECC

Generator polynomial:

```
gfPoly(ec):
    p = [1]
    for i in 0..ec-1:
```

```

    q = [1, EXP[i]]
    r = zero array length p.length + 1
    for each p coefficient a:
        for each q coefficient b:
            r[a+b] ^= gfMul(p[a], q[b])
    p = Array.from(r)
    return p

```

ECC encode:

```

rsEncode(data, ec):
    gen = gfPoly(ec)
    out = data || zero(ec)

    for i in 0..data.length-1:
        c = out[i]
        if c != 0:
            for j in 0..gen.length-1:
                out[i+j] ^= gfMul(gen[j], c)

    return out.slice(data.length)

```

Block Interleaving

buildCodewords(bits, totalData, ecPerBlock, numBlocks):

- Append terminator and padding bits.
- Convert data bits into totalData bytes.
- Split data into numBlocks blocks.
- Some final blocks may be one byte longer:


```

            blockSize = floor(totalData / numBlocks)
            longBlocks = totalData % numBlocks

            for block index b:
                len = b < numBlocks - longBlocks ? blockSize : blockSize + 1
            
```
- Generate ECC for each block.
- Interleave data bytes by position across blocks.
- Interleave ECC bytes by position across blocks.

The returned codeword stream is placed into the QR matrix.

Matrix Construction

Matrix size:

```
size = version * 4 + 17
```

Cell representation:

```

null:
    unfilled module

1:
    dark function module

0:
    light function module

true/false:
    data or ECC module before/after masking

```

The distinction between numeric function modules and boolean data modules is important. applyMask only flips cells whose type is boolean.

Function patterns:

- three finder patterns
- one-module light separator around finders

- timing patterns on row 6 and column 6
- alignment patterns for versions 2-10
- dark module at (size - 8, 8)
- format-information reservation cells

Finder locations:

```
top-left
top-right
bottom-left
```

Alignment coordinates:

```
v1  []
v2  [6,18]
v3  [6,22]
v4  [6,26]
v5  [6,30]
v6  [6,34]
v7  [6,22,38]
v8  [6,24,42]
v9  [6,26,46]
v10 [6,28,50]
```

Data Placement

placeData(m, codewords):

- Start at the lower-right module.
- Move in two-column vertical stripes.
- Skip column 6.
- Alternate upward and downward direction per stripe.
- Fill only null cells.
- Write codeword bits most-significant-bit first.
- If codeword bits run out, write false for remaining data slots.

Mask Functions

All eight masks are evaluated:

```
0: (r + c) % 2 == 0
1: r % 2 == 0
2: c % 3 == 0
3: (r + c) % 3 == 0
4: (floor(r/2) + floor(c/3)) % 2 == 0
5: (r*c) % 2 + (r*c) % 3 == 0
6: ((r*c) % 2 + (r*c) % 3) % 2 == 0
7: ((r+c) % 2 + (r*c) % 3) % 2 == 0
```

applyMask:

```
out = copy of matrix
for each cell:
    if typeof out[r][c] == "boolean":
        out[r][c] = out[r][c] != maskFunction(r,c)
```

Function modules are not masked.

Format Bits

Precomputed format tables:

```
FMT_M:
101010000010010
101000100100101
101111001111100
101101101001011
```

```

100010111111001
100000011001110
100111110010111
100101010100000

```

```

FMT_Q:
011010101011111
011000001101000
011111100110001
011101000000110
010010010110100
010000110000011
010111011011010
010101111101101

```

writeFormat(m, ecLevel, mask):

- Chooses FMT_Q when ecLevel == 1, otherwise FMT_M.
- Writes bits to top-left format track.
- Writes bits to top-right and bottom-left copy tracks.

Penalty Scoring

v1.6.6 penaltyScore implements two penalty families:

- Runs of five or more equal modules in rows and columns:


```

      if run >= 5:
          score += run - 2
      
```
- 2x2 blocks of equal modules:


```

      score += 3
      
```

It does not implement finder-like pattern penalty or dark-ratio penalty in the current HTML build. Any compatibility implementation that wants byte-identical mask choice must use the same two-family scorer.

Mask choice:

```

bestScore = Infinity
for mask in 0..7:
    candidate = applyMask(base, mask)
    writeFormat(candidate, ecLevel, mask)
    s = penaltyScore(candidate)
    if s < bestScore:
        bestScore = s
        bestMask = mask

```

The first mask with the lowest score wins because the update condition is strictly less-than.

Rendering

Function:

```

QRGen.render(matrix, canvas, opts = {})

```

Defaults:

```

quiet = opts.quiet ?? 3
dim = opts.size ?? 256
dark = opts.dark ?? "#000000"
light = opts.light ?? "#ffffff"

```

v1.6.6 modal rendering:

```

Non-XRP:
  size: 256
  quiet: 4
  dark: "#000000"
  light: "#ffffff"

XRP:
  size: 320
  quiet: 4
  dark: "#000000"

```

```
light: "#ffffff"
```

Actual canvas dimensions:

```
totalModules = matrix_size + quiet * 2
module_px = floor(dim / totalModules)
actual = module_px * totalModules
canvas.width = actual
canvas.height = actual
```

Draw:

- Fill entire canvas with light color.
- For each truthy matrix cell, draw a dark rectangle at:

```
x = (column + quiet) * module_px
y = (row + quiet) * module_px
width = module_px
height = module_px
```

All modal QR codes are black on white, independent of UI theme.

PNG Export

Save button:

```
canvas.toBlob(resolve, "image/png")
```

Filename:

```
safeName = address.replace(/^[a-zA-Z0-9]/g, "_").slice(0, 40) || "address"
filename = "qr_" + safeName + ".png"
```

Save route:

```
saveBlob(blob, filename)
```

Browser:

Downloads the PNG through an object URL.

Tauri:

Converts PNG bytes to base64 and passes them to `save_export`.

Copy Address

Copy Address button:

```
address = qrAddressInput.value.trim()
copyTextToClipboard(address)
```

It does not copy:

- QR label text
- URI scheme generated by `toBip21Uri`
- XRP `"?dt="` destination-tag component

The button text changes to "Copied!" for 1500 ms.

Security Boundary

QR export is intended for public address payloads.

It must not be used to encode:

- mnemonic words
- BIP39 passphrases
- .arc passwords
- keyfile bytes

- private keys
- extended private keys
- encrypted seed file contents

Address QR codes can still be privacy-sensitive. Scanning a QR into an online wallet, exchange, camera app, or cloud-synced photo library can link the address to that service or device.

Operational Checks

Before using a QR code:

- Confirm the displayed label matches the intended address or URI.
- For XRP, confirm the destination tag with the receiving service.
- For Stellar, confirm memo requirements separately; v1.6.6 encodes only the destination in the Stellar URI rule.
- For Ethereum, confirm the chain/network in the receiving wallet.
- For Bitcoin Cash, confirm whether the receiving wallet expects CashAddr.
- For Cardano, confirm the raw address form is accepted by the scanner.

Do not assume a wallet scanner validates chain, exchange memo, or custodial requirements just because it accepts the QR code.

Compatibility Checklist

A compatible v1.6.6 QR implementation should:

- Trim address and memo/tag inputs.
- Detect XRP with `/^r[1-9A-HJ-NP-Za-km-z]{24,}/`.
- Use the exact `toBip21Uri` rule order.
- Use raw Cardano payload when `coinContext` is "cardano".
- Use XRP payload address + `"?dt=" + tag-or-00000`.
- Encode QR data in byte mode using UTF-8.
- Support versions 1 through 10.
- Test M before Q for each version.
- Use the v1.6.6 CAP table.
- Use GF(256) polynomial 0x11d.
- Interleave data and ECC blocks as implemented.
- Mask only boolean data/ECC modules.
- Score masks with run and 2x2 penalties only.
- Render black-on-white with quiet zone 4 in the modal.
- Save PNG through `canvas.toBlob`.

Capacity Worked Examples

Example: Ethereum address

```
Address:  
    0x1111111111111111111111111111111111111111  
  
URI:  
    ethereum:0x1111111111111111111111111111111111111111  
  
Byte length:  
    9 bytes for "ethereum:"  
    42 bytes for address  
    total 51 bytes  
  
Version selection:  
    v1 M req > 16, no
```

```
v2 M req > 28, no
v3 M req > 44, no
v4 M data bytes 64, yes
```

Result:
version 4, level M

Example: prefixless Bitcoin Cash address

Input:
q...

URI:
bitcoincash:q...

The prefix is part of the encoded payload unless the input already begins with "bitcoincash:".

Example: XRP address without tag

Input:
r...

User skips destination-tag prompt.

Payload:
r...?dt=000000

Copy Address:
copies only r...

Example: Stellar address

Explicit coin context:
stellar

URI:
web+stellar:pay?destination=<encoded-address>

Memo:
v1.6.6 does not include memo in the Stellar URI rule.

Known Limitations

The QR subsystem intentionally does not:

- implement numeric mode
- implement alphanumeric mode selection
- implement Kanji mode
- support versions above 10
- expose custom ECC level selection in the UI
- validate address checksums
- validate XRP destination tag range
- validate Stellar memo format
- validate Ethereum chain ID
- validate Cardano network ID
- decode QR images
- import QR payloads

The generated QR code is a transport representation of the payload string. It does not prove the payload is a correct payment request for a receiving service.

Scanner Compatibility Guidance

Most wallet scanners are strict about:

- quiet zone
- black-on-white contrast
- absence of blur
- correct URI scheme
- expected memo/tag syntax

v1.6.6 uses black modules on a white background and a four-module quiet zone in the modal render paths. Do not crop the PNG to the QR edges; cropping can remove the quiet zone and break scanning.

If a scanner rejects a code:

- compare the label under the QR with the intended payload
- try copying the address manually
- verify whether the scanner expects a bare address or URI scheme
- for Bitcoin Cash, verify CashAddr prefix expectations
- for XRP/Stellar custodial deposits, verify tag/memo requirements

File Handling

QR PNG export writes address payload images, not private key files. They are less sensitive than derived private-key exports, but they can still reveal:

- wallet address ownership
- coin family
- exchange/custodian destination tag in XRP payload label if shared visually
- operational recovery activity

Do not allow QR PNGs to be automatically uploaded to:

- cloud photo libraries
- chat applications
- issue trackers
- email drafts
- shared desktop folders

Byte-Level Implementation Map

QRGen.generate:

- TextEncoder input string.
- Select version and ECC level from CAP.
- Push byte-mode indicator.
- Push byte-length count.
- Push payload bytes.
- Pad to data capacity.
- Generate Reed-Solomon ECC.
- Build matrix.
- Place data.
- Apply all masks.

- Write format bits.
- Choose lowest two-family penalty score.
- Return final matrix.

QRGen.render:

- Compute actual canvas size.
- Set canvas width and height.
- Fill background.
- Draw dark modules.

renderQrFromAddress:

- Detect XRP and delegate to renderXrpQr.
- Otherwise build URI with toBip21Uri.
- Generate matrix.
- Render 256 px requested QR.
- Show label and save controls.

renderXrpQr:

- Build raw r-address plus ?dt payload.
- Generate matrix.
- Render 320 px requested QR.
- Add xrp-mode class.
- Show label and save controls.

Regression Checks

After changing QR code:

- Verify a Bitcoin bc1 address encodes with bitcoin: prefix.
- Verify a prefixless Bitcoin Cash q address encodes with bitcoincash: prefix.
- Verify an already-prefixed bitcoincash: address is not double-prefixed.
- Verify Ethereum 0x address encodes with ethereum: prefix.
- Verify explicit Cardano context encodes raw address.
- Verify XRP without tag encodes ?dt=00000.
- Verify XRP with tag encodes the URL-encoded tag.
- Verify Copy Address copies the address input, not the generated URI.
- Verify PNG save filename sanitizes non-alphanumeric characters.
- Verify generated modules are nonblank on light and dark UI themes.

■YellowSphere v1.6.6 - Canonical Test Vector Specification

Release Boundary

This document is the conformance suite for YellowSphere.html v1.6.6. Retained BIP39, BIP32, Ed25519, Cardano, XRP, YellowSphere ARC V3/legacy YellowSphere ARC V2, UTXO, Ethereum, Solana, and Stellar vectors remain byte-identical where their algorithms did not change. Production adds deterministic profiles for Tron, BNB Chain, Avalanche C-Chain, Polygon, and Cosmos and mainnet/testnet metadata profiles for all supported currencies.

BNB Chain, Avalanche C-Chain, and Polygon use the same secp256k1 private key, uncompressed public key, Keccak-derived 20-byte account identifier, and EIP-55 address as Ethereum for the same mnemonic, passphrase, and path. Their coin/network metadata and note-field names differ. Testnet selection for these account-model currencies does not change the key or address bytes. UTXO and Cardano testnet profiles do change address/version encoding as specified in Derivation.txt.

Monero vectors retained later are archived v1.6.0 LTS/Python compatibility vectors. They are not production v1.6.6 browser conformance requirements. YellowSphere.html is the v1.6.6 production vector target.

Scope

This document is the byte-level conformance suite for YellowSphere.html v1.6.6. It records deterministic input/output pairs for mnemonic validation, PBKDF2 seed stretching, BIP32 and SLIP-0010 root construction, account derivation, address encoding, YellowSphere ARC V3 and legacy YellowSphere ARC V2 encryption, and negative rejection paths.

An implementation is specification-equivalent to v1.6.6 only when it produces the exact bytes and exact encoded strings in this document for the stated inputs. Matching only an address while producing a different private key, public key, chain code, extended key, or encryption transcript is not compliant.

Randomized operations are not byte-stable unless their random inputs are fixed. For YellowSphere ARC V2 encryption this document fixes salt, nonce, created_at, and plaintext so the whole armored file can be compared byte-for-byte. For generated mnemonics and normal YellowSphere ARC exports, implementations must validate structure and round-trip behavior instead of comparing random bytes.

Global Encoding Rules

All hexadecimal strings are lowercase, contain no "0x" prefix, and encode raw bytes in big-endian display order. Spaces and line breaks shown in this document are for readability only unless a field explicitly says ASCII line bytes are part of the encoded value.

Base64 strings use RFC 4648 standard base64 with "+" and "/" and "=" padding. Base58Check strings use the alphabet appropriate to the target protocol: Bitcoin-family Base58 for Bitcoin, Bitcoin Cash legacy, Litecoin, and Dogecoin; XRPL Base58 for XRP. Bech32 strings are lowercase. Bech32m strings are lowercase. Ethereum addresses are EIP-55 checksum addresses.

Mnemonic text is normalized exactly as v1.6.6 does before seed derivation:

- Trim leading and trailing JavaScript whitespace.
- Split on one or more whitespace code points.
- Drop empty tokens.
- Join tokens with a single ASCII space, 0x20.
- Apply Unicode NFKD normalization.
- UTF-8 encode the normalized mnemonic.

The BIP39 passphrase is normalized with Unicode NFKD and UTF-8 encoded. The PBKDF2 salt is ASCII("mnemonic") || UTF8(NFKD(passphrase)).

All derivation paths are absolute and start with "m". Hardened components may be written with "'", "h", or "H" at input, but vectors in this document use apostrophe notation. A hardened index is encoded as uint32(index + 0x80000000). Non-hardened index i is encoded as uint32(i). Child-number bytes in BIP32 HMAC messages are 4-byte big-endian unsigned integers.

Canonical Inputs

TV1 mnemonic:

```
abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon about
```

TV1 passphrase:

```
empty string
```

TV1 normalized mnemonic bytes, hex:

```
6162616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e20
6162616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e20
6162616e646f6e206162616e646f6e206162616e646f6e2061626f7574
```

TV1 normalized mnemonic byte length:

```
93
```

TV1 entropy bytes:

```
00000000000000000000000000000000
```

TV1 entropy byte length:

```
16
```

TV1 entropy bits:

```
128
```

TV1 checksum bit length:

```
4
```

TV1 checksum bits:

```
0011
```

TV1 final word index:

```
3
```

TV1 final word:

```
about
```

TV1 BIP39 seed, 64 bytes:

```
5eb00bbddcf069084889a8ab9155568165f5c453ccb85e70811aaed6f6da5fc1
9a5ac40b389cd370d086206dec8aa6c43daea6690f20ad3d8d48b2d2ce9e38e4
```

Seed derivation parameters:

```
algorithm: PBKDF2-HMAC-SHA512
password bytes: UTF8(NFKD(TV1 mnemonic))
salt bytes: ASCII("mnemonic")
iterations: 2048
dklen: 64
```

BIP32 secp256k1 Root Node, TV1

Master node derivation:

```
algorithm: HMAC-SHA512
key bytes: ASCII("Bitcoin seed")
data bytes: TV1 BIP39 seed
output length: 64 bytes
IL: bytes 0..31
IR: bytes 32..63
```

Master private key, IL, 32 bytes:

```
1837c1be8e2995ec11cda2b066151be2cfb48adf9e47b151d46adab3a21cdf67
```

Master chain code, IR, 32 bytes:

```
7923408dadd3c7b56eed15567707ae5e5dca089de972e07f3b860450e2a3b70e
```

Root fingerprint:

73c5da0a

Root xprv:

xprv9s21ZrQH143K3GJpoapnV8SFfukcVBSfeCficPSGfubmSFDxo1kuHnLisriDvSnRRuL2Qrg5ggqHKNVpxR86QEC8w35uxmGoggxtQTPvfUu

Root xpub:

xpub661MyMwAQRbcFkPHucMnrGNzDwb6teAX1RbKQmqtEF8kK3Z7LZ59qafCjB9eCRLiTVG3uxBgKvRgububRhqSKXnGGb1aoaqLrpMBDrVxga8

BIP32 serialized private extended key payload before checksum is 78 bytes:

```
version: 0488ade4
depth: 00
parent_fingerprint: 00000000
child_number: 00000000
chain_code: 7923408dadd3c7b56eed15567707ae5e5dca089de972e07f3b860450e2a3b70e
key_data: 00 || 1837c1be8e2995ec11cda2b066151be2cfeb48adf9e47b151d46adab3a21cdf67
```

BIP32 serialized public extended key payload before checksum is 78 bytes:

```
version: 0488b21e
depth: 00
parent_fingerprint: 00000000
child_number: 00000000
chain_code: 7923408dadd3c7b56eed15567707ae5e5dca089de972e07f3b860450e2a3b70e
key_data: 0339a36013301597daef41fdf21a57419e8c75857fbbfddf8b76b3a8dc9cd0d4d8
```

Default v1.6.6 Account Paths

The v1.6.6 UI preselects these account-level derivation paths for the supported coin selector values:

```
Bitcoin: m/0'
Bitcoin Cash: m/0'
Litecoin: m/84'/2'/0'
Dogecoin: m/44'/3'/0'
Ethereum / ERC-20: m/44'/60'/0'
Solana: m/44'/501'/0'
Stellar: m/44'/148'/0'
Archived v1.6.0 LTS Monero: m/44'/128'/0'
Cardano: m/1852'/1815'/0'/0/0
XRP: m/44'/144'/0'
```

For secp256k1 coins, the displayed receiving rows append /0/i and displayed change rows append /1/i to the account path. For Solana and Stellar, v1.6.6 uses hardened account-style rows under the selected account path. For Monero, the account path itself is the displayed account address. For Cardano, the selected path is the payment key path and the staking key path is fixed at m/1852'/1815'/0'/2/0 for the displayed Shelley base address.

Bitcoin Mainnet, TV1, Auto Script, m/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Bitcoin
internal coin id: bitcoin
network: mainnet
derivation: m/0'
script selector: Auto
count: 2
range: empty
```

Account output:

```
account_script_type_used: p2pkh
account_xprv:
xprv9ukw2Usuz4v7Yd2EC4vNXaMckdsEdgBA9n7MQbqMJbW9FuHDWwjDwzEM2h6XmFnrzX7JVmfCNWMEVoRauU6hQpbo
kqPPNTbdycw9fHSPYyF
account_xpub:
xpub68jrrRzQopSUQm76hJ6TntiJMfjh38u1X12xCzExrw388hcN443UVnYpswdUkV7vPJ3KayiCdp3Q5E23s4wvkuco
```

hVTh7eSstJdBfyn2DMx

Receiving row 0:

```
path: m/0'/0/0
address: 17871ErDqdevLTLWBH6WzjUc1EKGDQzCMA
public_key_hex: 026666422d00f1b308fc7527198749f06fedb028b979c09f60d0348ef79c985e41
private_key_hex: e81fa7bb95cc6bee975bf675bf6bbab4044c1390e6a00ae246e55c07e3cf835e
private_key_wif: L4zvqB8Cme7xRmTWxQ6TVmQs7smCNKD1rfAKmYZx6DAqyLjm4sp4
```

Receiving row 1:

```
path: m/0'/0/1
address: 1B4ynFJzDPqvuttzgF16jccwGxvdJwHSWr
public_key_hex: 0384257cf895f1ca492bbe5d7485ae0ef479036fdf59e15b92e37970a98d6fe75
private_key_hex: 660e9c5602379d842bb74883f34e888e4ffcb45ea38a8b57f20dc6099eef5a13
private_key_wif: Kze6YryiB5bfUTddt8fQi2ZPY2f944w1PWuJPFf5CSTy1owCpQGZ
```

Change row 0:

```
path: m/0'/1/0
address: 1MseVFBWLkbPeGMpkAsahBujinBq3QjGo4
public_key_hex: 030247a355c3263a69dce173ac12fcc49408260b76b089ab02dc68f3389fc57cb8
private_key_hex: 2c8de4729a7e4dc1ab55e4638bb8540d70cd01a3e31e776631a02b7b72c53b30
private_key_wif: KxiKRSSXMTSzAeBMyriBwDbu482pdWHAe5cGYNiFQNMAYwRJkKtB
```

Change row 1:

```
path: m/0'/1/1
address: 1AopQaJaiEt9sw2cDyf3CqSHZfiNtrWzxd
public_key_hex: 0394e33c4c819a55235cde10baed2df62f2787be0607d920dc3947069b23633022
private_key_hex: e4e54ad17c56f88f18e12d83dba09956be07dbdc15467d4f22a085aadea4d4ed
private_key_wif: L4tetqr49fjQreYr6nMJyPsBERh9XvWoWwYnZ9NHeEUs9CsFV6xK
```

Bitcoin Mainnet, TV1, P2WPKH Script, m/0'

Inputs are the same as the Bitcoin Auto vector except script selector is P2WPKH.

Account output:

```
account_script_type_used: p2wpkh
account_zprv:
zprvAZR2dpDkHS15FDQTrnVcwkyd6aA8WvA9z19nyPd84cFuN6ug1q4MC7Yd571hm56hooLuzirjHq4LGNeiLrvj1Hy1
VWnEYHEcX4dSSTGpeBe
account_zpub:
zpub6nQP3Kke7oZnThUvxp2dJtVmebzcvt1ME5Pmn2jcwntEuEpZNNbjus6vMYekJRmCaGw5vuKZ8kVqoFBjTmxMNz1
SARYHU5rRkku38oTcty
```

Receiving row 0:

```
path: m/0'/0/0
address: bc1qgv52mt89gpev6p56huggl970sppqkgftxakv7f
public_key_hex: 026666422d00f1b308fc7527198749f06fedb028b979c09f60d0348ef79c985e41
private_key_hex: e81fa7bb95cc6bee975bf675bf6bbab4044c1390e6a00ae246e55c07e3cf835e
private_key_wif: L4zvqB8Cme7xRmTWxQ6TVmQs7smCNKD1rfAKmYZx6DAqyLjm4sp4
```

Receiving row 1:

```
path: m/0'/0/1
address: bc1qdec7wsahwjs4tgg7a66gk9g7vul0ufjhempqz
public_key_hex: 0384257cf895f1ca492bbe5d7485ae0ef479036fdf59e15b92e37970a98d6fe75
private_key_hex: 660e9c5602379d842bb74883f34e888e4ffcb45ea38a8b57f20dc6099eef5a13
private_key_wif: Kze6YryiB5bfUTddt8fQi2ZPY2f944w1PWuJPFf5CSTy1owCpQGZ
```

Change row 0:

```
path: m/0'/1/0
address: bc1qunmfkdmckn76c8nmf3g22du699gne5q8c3xqh1
public_key_hex: 030247a355c3263a69dce173ac12fcc49408260b76b089ab02dc68f3389fc57cb8
private_key_hex: 2c8de4729a7e4dc1ab55e4638bb8540d70cd01a3e31e776631a02b7b72c53b30
private_key_wif: KxiKRSSXMTSzAeBMyriBwDbu482pdWHAe5cGYNiFQNMAYwRJkKtB
```

Change row 1:

```
path: m/0'/1/1
address: bc1qdwfad4n29p6kwh7dh6eczc0c8uv4z0u0f0njxhf
public_key_hex: 0394e33c4c819a55235cde10baed2df62f2787be0607d920dc3947069b23633022
private_key_hex: e4e54ad17c56f88f18e12d83dba09956be07dbdc15467d4f22a085aadea4d4ed
private_key_wif: L4tetqr49fjQreYr6nMJyPsBERh9XvWoWwYnZ9NHeEUs9CsFV6xK
```


P2WPKH address construction for row 0:

```
witness_version: 0
witness_program: HASH160(compressed_public_key), 20 bytes
witness_program_hex: 4328adb4e54072cd068abd108f97cf80420b212b
human_readable_part: bc
address: bc1qgv52mt89gpev6p56huggl970sppqkgftxakv7f
```

Bitcoin Cash Mainnet, TV1, Auto Script, m/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Bitcoin Cash
internal coin id: bitcoincash
network: mainnet
derivation: m/0'
script selector: Auto
count: 2
```

Account script type:

p2pkh

Receiving row 0:

```
path: m/0'/0/0
address: bitcoincash:qppj3tdvu4q89ngxn2l3pruhe7qyyzep9v3l5ke649
legacy_payload_hash160: 4328adb4e54072cd068abd108f97cf80420b212b
public_key_hex: 026666422d00f1b308fc7527198749f06fedb028b979c09f60d0348ef79c985e41
private_key_hex: e81fa7bb95cc6bee975bf675bf6bbab4044c1390e6a00ae246e55c07e3cf835e
private_key_wif: L4zvqB8Cme7xRmTWxQ6TVmQs7smCNKD1rfAKmYZx6DAqyLjm4sp4
```

Receiving row 1:

```
path: m/0'/0/1
address: bitcoincash:qph8re6rka62z4dprmhftzc4rennal3x2uuu3nua4w
public_key_hex: 0384257cf895f1ca492bbee5d7485ae0ef479036fdf59e15b92e37970a98d6fe75
private_key_hex: 660e9c5602379d842bb74883f34e888e4ffcb45ea38a8b57f20dc6099eef5a13
private_key_wif: KzeYryiB5bfUTddt8fQi2ZPY2f944W1PWuJPFf5CSTy1owCpQGZ
```

Change row 0:

```
path: m/0'/1/0
address: bitcoincash:qrj0dxeh0z60mtq70dx9pffhng54z0xsquelhdnpxz
public_key_hex: 030247a355c3263a69dce173ac12fcc49408260b76b089ab02dc68f3389fc57cb8
private_key_hex: 2c8de4729a7e4dc1ab55e4638bb8540d70cd01a3e31e776631a02b7b72c53b30
private_key_wif: KxiKRSSXMTSzAeBMyriBwDbu482pdWHAe5cGYNiFQNMAYwRJkktB
```

Change row 1:

```
path: m/0'/1/1
address: bitcoincash:qp4e84kkdg582e6lekl8qflql3j5fl3ayy20l89y3
public_key_hex: 0394e33c4c819a55235cde10baed2df62f2787be0607d920dc3947069b23633022
private_key_hex: e4e54ad17c56f88f18e12d83dba09956be07dbdc15467d4f22a085aadea4d4ed
private_key_wif: L4tetqr49fjQreYr6nMJyPsBERh9XvwWwYnZ9NHeEUS9CsFV6xK
```

Litecoin Mainnet, TV1, Auto Script, m/84'/2'/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Litecoin
internal coin id: litecoin
network: mainnet
derivation: m/84'/2'/0'
script selector: Auto
count: 2
```

Account output:

```
account_script_type_used: p2wpkh
account_xprv:
Ltpv77z3LHgiTumhjPwxy5THUn1RJVrPQU6yK8iFN9TUCUnfv0x2ixQQGHmuNx5Bo1yGQWrSbo87JgF1CKVQ28zddVZ1
5xgNeL4QnHXSKrXfbih
account_xpub:
```

```
Ltub2ZANw57Fi4JfMGennqwfZMqDrscCTf2m3qEjvLuk8faGXB973sSqGttAdKBvGSGCLG9DXh2yxaUB9qpWQue2zCCtr
ZPhjxGuMAwQL6F7Xrpd
  account_zprv:
zprvAdQSGFiAHcXKb1gcktyukXyGZykTBemMPZ9brfYnxqxM2CocMdxY9aPXTbTLv7dvJgWn2Efi4vFSyPbT4QqgarYr
s583WCeMXM2q3TUU8FS
  account_zpub:
zpub6rPo5mF47z5coVm5rvWv7fv181awb7Vckn5Cf3xQXBVKu18kuBHDhNi1Jrb4br6vVD3ZbrnXemEsWJoR18mZwkUd
zwD8TQnHDUCGxqZ6swa
```

Receiving row 0:

```
path: m/84'/2'/0'/0/0
address: ltc1qjmxnz78nmc8nq77wuxh25n2es7rzm5c2rkk4wh
public_key_hex: 02e49c9b9b5d0f127235dc26a0c252814c52fb333d651a946773f59d72c2da9904
private_key_hex: 4ab54480cbbaa53d5d3ba43a3e85d221df085490e88346ad11579e17000db7bb
private_key_wif: T5ZCYhLqXu6EJKk2nhjvwsaLH357CisixhLGWpKXEiqWTutzte6o
```

Receiving row 1:

```
path: m/84'/2'/0'/0/1
address: ltc1qwleazpr3890hcvva9twqh27mr6edadreqvhnn
public_key_hex: 021c1750d4a5ad543967b30e9447e50da7a5873e8be133eb25f2ce0ea5638b9d17
private_key_hex: 61fa14b9b3d872aaa327855cc94b5a220094395d55d01319cfee32e236a26d1e
private_key_wif: T6LRyVtoN2JxywNyYXwk9KoMpwa34Fjino4uppy9RKs5QQmC8RSr
```

Change row 0:

```
path: m/84'/2'/0'/1/0
address: ltc1qyeljcy9v88jg8sqvnqh0m5q390xruc5r98q9yy
public_key_hex: 029857513f0fe1dc125f219ffef22098e14c653c4bcb0a2aaeff47b3a252569f1a
private_key_hex: dbf6dd9d691b00d0a7f6f93605a67ddb42ba4baafcf9b0d98979b66f8a21184e
private_key_wif: TARZNteayzJqRiXnqKJX3h5zr6H4tx4sXvoZ21pHjAEgNc1g2Mwm
```

Change row 1:

```
path: m/84'/2'/0'/1/1
address: ltc1qzenvkhkqazfanrjs6htluwlm2sdwt0sgc3jh8
public_key_hex: 02df3af22530218813eab494b0bec331ee13e4662a566e24bed32a35a4cc2a248f
private_key_hex: acfa7e72eeb4254be5f87a09685089039f6e4736cb7cb998e48ff51202c5fdc8
private_key_wif: T8rDzH8bF1cgAG2oZKctJX9qmxvFK7HmgQqww4wom15ndzPzF2uu
```

Dogecoin Mainnet, TV1, Auto Script, m/44'/3'/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Dogecoin
internal coin id: dogecoin
network: mainnet
derivation: m/44'/3'/0'
script selector: Auto
count: 2
```

Account output:

```
  account_script_type_used: p2pkh
  account_xprv:
dgpv57bftCH9z6CEAdAY9SCDV9NfVsyaQWdi5LuCXdumz5qUPWnw1S3YBM7PdHXMvA8oSGS6Pbes1xEHmd5Zi2qHVK4
5y5FKKxzBXsZcTtYmX5
  account_xpub:
dgub8rUhdDtD3YFGZTUpHbfpBbvFvSMKQXYLzg87Me2ta78r2SdVLmypoBUkkxrnr9RTnchsyiJSkHZyLwxD13ibBiXtu
FWktBoDaGaZjQUBLNLS
```

Receiving row 0:

```
path: m/44'/3'/0'/0/0
address: DBus3bamQjgJULBJtYXpEzDWQRwF5iwxgC
public_key_hex: 02cc6b0dc33aabc3a23643e5e2919a80c50fb3dd2129ce409bbbc5f0d4643d05e0
private_key_hex: 21f5e16d57b9b70a1625020b59a85fa9342de9c103af3dd9f7b94393a4ac2f46
private_key_wif: QPkeC1ZFhX3c9g7WTj9cQ8gnvk2iSAfAcbbq1aVAWjNTwDAKfZUzx
```

Receiving row 1:

```
path: m/44'/3'/0'/0/1
address: DAcDAtJRztXBHya6D6h8du1HGuyTR43Mas
public_key_hex: 025a8ad8881f6facdc949c4a4d03257414153faea67e96acf57344660080610788
private_key_hex: 0ce96fd14dd5bd468a0927b5016d138e06d5dfb1db64c69a1b22e79c65120b63
```

```
private_key_wif: QP3j5SpiwZk9k8z9kaV2S6gbrVkoPaWyfW1Wy4x1WUQoyTab9VfH
```

Change row 0:

```
path: m/44'/3'/0'/1/0
address: D7ReBLrRv12mi9pYh5HtfFLTt1PSoeAa7e
public_key_hex: 020745c065a8b7cb03a843a57339cf9164d675a2e5010c6fbd61c09239bbb5f4df
private_key_hex: da27a8fcc03519980a5db5dfdceaeab7b61985e9463f3fb750a1d86b2cefd65c
private_key_wif: QVvh62CvvLSWYTTJXS62RdyuXnBn9adqgzJ6xrZRjpwYRvuHLCtw
```

Change row 1:

```
path: m/44'/3'/0'/1/1
address: D92vUBQJjMhmczzGf7ReUswODEZuqaNout
public_key_hex: 02475f40b385bb486ef27171fe119a89ce9b46fa1ab0f5bc542ee0e1efcd78623
private_key_hex: 6799f60741b5023781d69ef9b865714d12d99ffa2ee1c66d1edd091cab07182d
private_key_wif: QS61pQ4VhzRFbfLyxTDBSeztbuk2pu15bRw1Z6LAgpFzp8fHdF25
```

Ethereum Mainnet, TV1, m/44'/60'/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Ethereum / ERC-20
internal coin id: ethereum
network: mainnet
derivation: m/44'/60'/0'
script selector: Auto
count: 2
```

Account output:

```
account_script_type_used: ethereum
account_xprv:
xprv9zDS0Jv1aBcjX6sNgEpE2J9K6MV2MUnXuqXsFgzVn3zY2aHyupaFQdYctdCbNMkvctdx9FeN49sgXw6mjrrhrFLRS
zJVnRYPFsCCgjjeg4GxY
account_xpub:
xpub6DCoCpSuQZB2jawqnGMEPS63ePKWkwPH4TU45Q7LPXWuNd8TMTVxRrgjtEshuqpK3mdhawHPFsBngh5GFZaM6si
3yZdUsT8ddYM3PwnATt
```

Receiving row 0:

```
path: m/44'/60'/0'/0/0
address: 0x9858EfFD232B4033E47d90003D41EC34EcaEda94
public_key_hex: 0237b0bb7a8288d38ed49a524b5dc98cfff3eb5ca824c9f9dc0dfdb3d9cd600f299
ethereum_public_key_hex:
37b0bb7a8288d38ed49a524b5dc98cfff3eb5ca824c9f9dc0dfdb3d9cd600f299a6179912b7451c09896c4098eca7
ce6be258330672795e847c4d6af44e024230
private_key_hex: 1ab42cc412b618bdea3a599e3c9bae199ebf030895b039e9db1e30dafb12b727
erc20_address: 0x9858EfFD232B4033E47d90003D41EC34EcaEda94
```

Receiving row 1:

```
path: m/44'/60'/0'/0/1
address: 0x6Fac4D18c912343BF86fa7049364Dd4E424Ab9C0
public_key_hex: 039fd0991d0222b4e1339c1a1a5b5f6d9f6a96672a3247b638ee6156d9ea877a2f
ethereum_public_key_hex:
9fd0991d0222b4e1339c1a1a5b5f6d9f6a96672a3247b638ee6156d9ea877a2f1735e3a9260940e4c2225c344a8c
ea6c7b6a6057d0eb90a9a875f446c131031d
private_key_hex: 9a983cb3d832fbde5ab49d692b7a8bf5b5d232479c99333d0fc8e1d21f1b55b6
erc20_address: 0x6Fac4D18c912343BF86fa7049364Dd4E424Ab9C0
```

Change row 0:

```
path: m/44'/60'/0'/1/0
address: 0x399Db6Ed32539fbdF44c3e7678b5b428e378F666
public_key_hex: 03abdc0424e5a951abb5e12df771738e269566fc170dfe8a5f0dae27052a168559
ethereum_public_key_hex:
abdc0424e5a951abb5e12df771738e269566fc170dfe8a5f0dae27052a1685590ed3baf090b916db5f923ae4c5d3
4aba23466c172027e17749f0c8f579f0935b
private_key_hex: dcea9371bd9641a066ad61b6542ffa3eb2835cababbf202ce2250c726ce736b3
erc20_address: 0x399Db6Ed32539fbdF44c3e7678b5b428e378F666
```

Change row 1:

```
path: m/44'/60'/0'/1/1
address: 0x26db4d065800Bd118928848E69A1cBF956Cff1D0
```

```
public_key_hex: 02dd53226bc6d4d2efafabfe7600a10d4d069de1371dd3207a293fb96766b3073
ethereum_public_key_hex:
dd53226bc6d4d2efafabfe7600a10d4d069de1371dd3207a293fb96766b307376605b0580017eb8e3ee5202d613
fca46d7befcbb303ccc1da9d32f8fd4e96
private_key_hex: 011fe87587edf9d5bad64e253778ed929ecf319302bd41f4ce051e2678052cc1
erc20_address: 0x26db4d065800Bd118928848E69A1cBF956Cff1D0
```

Ethereum address construction for receiving row 0:

```
private_key: 32 bytes, secp256k1 scalar
public_key: uncompressed secp256k1 point, 65 bytes, prefix 0x04 removed
hash: Keccak-256(64-byte x||y)
address_body: last 20 bytes of hash
display: EIP-55 checksum over lowercase hex address_body
```

Solana Mainnet, TV1, SLIP-0010 Ed25519, m/44'/501'/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Solana
internal coin id: solana
network: mainnet
derivation: m/44'/501'/0'
script selector: Auto
count: 2
```

Root Ed25519 node:

```
root_private_key_hex: 560f9f3c94558b6551928bb781cf6092c6b8800b4fc544af2c9444ed126d51aa
root_chain_code_hex: ddfa71109701bbf7c126c8c7ab5880b0dec3d167a8fe6afa7a9597df0bbe72b
root_public_key_hex: e96b1c6b8769fdb0b34fbecfd85c33b053cecad9517e1ab88cba614335775c1
```

Account Ed25519 node:

```
account_private_key_hex: ec252c5d95bcf80a4b22df119cedd4ae1aed07364578e8d43bdfa0435625dbd1
account_chain_code_hex: 30f34004e6e8a90ec46c36ec8fef945a52b269adb55816a98ec9c063434a6b3d
account_public_key_hex: e9b6062841bb977ad21de71ec961900633c26f21384e015b014a637a61499547
```

Receiving row 0:

```
branch: account
path: m/44'/501'/0'
address: GjJyeC1r2RgkuoCWMyPYkCWSGSLcz266EaAkLA27Ahl
public_key_hex: e9b6062841bb977ad21de71ec961900633c26f21384e015b014a637a61499547
private_key_hex: ec252c5d95bcf80a4b22df119cedd4ae1aed07364578e8d43bdfa0435625dbd1
```

Receiving row 1:

```
branch: account
path: m/44'/501'/0'/1'
address: GKreMshvt8A79VApjboYDq3J4ZCXSJRYQk9BscMbi1H
public_key_hex: e3b3e4299dc3a9380b9ac55acd5c18e87666bbfdf010c3e79928d784670919c4
private_key_hex: 22b1890a6c748d580a6fe6fb99334d76bd2496126be46ecf9e6fc412b53368e1
```

Solana address construction:

```
address bytes: 32-byte Ed25519 public key
address encoding: raw public key bytes encoded with Bitcoin Base58 alphabet
checksum: none
```

Stellar Mainnet, TV1, SLIP-0010 Ed25519, m/44'/148'/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Stellar
internal coin id: stellar
network: mainnet
derivation: m/44'/148'/0'
script selector: Auto
count: 2
```

Root Ed25519 node:

```
root_private_key_hex: 560f9f3c94558b6551928bb781cf6092c6b8800b4fc544af2c9444ed126d51aa
```

```
root_chain_code_hex: ddfa71109701bbf7c126c8c7ab5880b0dec3d167a8fe6afa7a9597df0bbec72b
root_public_key_hex: e96b1c6b8769fdb0b34fbecfd85c33b053cecad9517e1ab88cba614335775c1
```

Account Ed25519 node:

```
account_private_key_hex: 695db2365365e06159f13cc752a5d3b0c7376c45012b2f695e3a4da2434948bc
account_chain_code_hex: fe47279273939c24fc0b8bdda584b5b0ad01f0c51208661d2aa5ffa687ce6f8
account_public_key_hex: 7691d85048acc4ed085d9061ce0948bbdf7de6a92b790aaf241d31b7dcaa4238
```

Receiving row 0:

```
branch: account
path: m/44'/148'/0'
address: GB3JWCQJJCWMJ3IILWIGDTQJJJC5567PGVEVXSCVPEQOTDN64VJBDQBYX
public_key_hex: 7691d85048acc4ed085d9061ce0948bbdf7de6a92b790aaf241d31b7dcaa4238
private_key_hex: 695db2365365e06159f13cc752a5d3b0c7376c45012b2f695e3a4da2434948bc
stellar_secret_seed: SBUV3MRWKN6AYKZ6E6MOUVF2OYMON3MIUASWL3JLY5E3ISDJFELYBRZ
```

Receiving row 1:

```
branch: account
path: m/44'/148'/1'
address: GDVSYTUAJ3ACHTPQNSTQBQ4LDHQCMMY4FCEQH5TJUMSSLWQSTG42MV
public_key_hex: eb2c62740276011e6f8365380470e2c678098dc70a2240fd9a68c9497684a66e
private_key_hex: 8e315456301464326e8d7cae8f18aec38e58db8838cf304132567a0ad4d305e1
stellar_secret_seed: SCHDCVCWGAKGIMTORV6K5DYV3BY4WG3RA4M6MCBGJLHUCWU2MC6DL66
```

Stellar address construction:

```
public raw payload: version_byte 0x30 || 32-byte Ed25519 public key
secret raw payload: version_byte 0x90 || 32-byte Ed25519 seed
checksum: CRC16-XModem, little-endian in encoded payload
encoding: RFC 4648 base32 without padding in display form
```

Archived v1.6.0 LTS Monero Mainnet, TV1, m/44'/128'/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Monero
internal coin id: monero
network: mainnet
derivation: m/44'/128'/0'
script selector: Auto
count: 1
```

Root Ed25519 node:

```
root_private_key_hex: 560f9f3c94558b6551928bb781cf6092c6b8800b4fc544af2c9444ed126d51aa
root_chain_code_hex: ddfa71109701bbf7c126c8c7ab5880b0dec3d167a8fe6afa7a9597df0bbec72b
root_private_spend_key_hex:
14c8049b8c76d3f4f171df59cf0cabcc1c5b8800b4fc544af2c9444ed126d510a
root_private_view_key_hex:
e11a19cef93c1c40022ca506220c0f3cd0430bee4c9598d3a3b668bde1611b07
root_public_spend_key_hex:
1652f408a68b70b1f451a3fe6ee02492ca40cb5723b6f55b9b518e0d262a2fca
root_public_view_key_hex: 76d07541ef20a993c4ed574decafafcd45966a48efdb2b668c6f664d14c9c4a1
```

Account Monero keys:

```
account_private_key_hex: 98f0cdd5993ce34eb46b57c1fa6399f6643516416fae089d74ecfd0c389a6bd8
account_chain_code_hex: aded23c191b516375a114a093db93f2690cdb5d6cdb7257e653243ab432eaece
account_private_spend_key_hex:
8f2d521d4334f4d5d174c47aacb346e7633516416fae089d74ecfd0c389a6b08
account_private_view_key_hex:
84b0087a63854856686f80596a5a1a6090795b4d1311139173262170d7e7180f
account_public_spend_key_hex:
51fd81faa5e2641bca8a5c43d764ab276033c12b459fd9f5c9c23b7733af67e6
account_public_view_key_hex:
eb8855fd7d21670f9bdfc0cdcfa54172e80322c4eae5ce30d85cb9ec90d21d1
```

Receiving row 0:

```
branch: account
path: m/44'/128'/0'
address:
44jKQv6ZKMD5ecLLmkNJGi7azgSptEq8ki7TFiat1TfLfddQ1tQ7ZYa3cRh7X2uRwvLDjddWh97ajeyhR2seKSECQeDx
```

1wR

```
public_spend_key_hex: 51fd81faa5e2641bca8a5c43d764ab276033c12b459fd9f5c9c23b7733af67e6
public_view_key_hex: eb8855fd7d21670f9bdfc0cdcfa54172e80322c4eae5ce30d85cb9ec90d21d1
private_spend_key_hex: 8f2d521d4334f4d5d174c47aacb346e7633516416fae089d74ecfd0c389a6b08
private_view_key_hex: 84b0087a63854856686f80596a5a1a6090795b4d1311139173262170d7e7180f
```

Monero address construction:

```
network byte: 0x12 for standard mainnet address
spend key: 32-byte public spend key
view key: 32-byte public view key
checksum: first 4 bytes of Keccak-256(network || spend || view)
encoding: Monero base58 in 8-byte blocks
```

Cardano Mainnet, TV1, Shelley Base Address, m/1852'/1815'/0'/0/0

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: Cardano
internal coin id: cardano
network: mainnet
derivation: m/1852'/1815'/0'/0/0
staking path: m/1852'/1815'/0'/2/0
script selector: Auto
count: 1
```

Root Icarus Ed25519-BIP32 node:

```
root_private_key_hex:
60ce7dbec3616e9fc17e0c32578b3f380337b1b61a1f3cb9651aee30670e6f53970419a23a2e4e4082d12bf78faa
8645dfc882cee2ae7179e2b07fe88098abb2
root_chain_code_hex: 072310084784c7308182dbbdb1449b2706586f1ff5cbf13d15e9b6e78c15f067
root_public_key_hex: 37fdfdbe9ac856469f8d83c66c57880246cd8bf7f852bf5b94336fe535c0efc8
```

Payment key node:

```
account_private_key_hex:
105d2ef2192150655a926bca9cccf5e2f6e496efa9580508192e1f4a790e6f53de06529129511d1cacb0664bcf04
853fdc0055a47cc6d2c6d205127020760652
account_chain_code_hex: 88848e8af62a27a57e982215741c9eac17e6e45cbfd6ea65a0e0dcc03bb777b2
account_public_key_hex: 7ea09a34aebb13c9841c71397b1cabfec5ddf950405293dee496cac2f437480a
```

Receiving row 0:

```
branch: receiving
path: m/1852'/1815'/0'/0/0
staking_path: m/1852'/1815'/0'/2/0
address:
addr1qx3mdledzm0zs4d05yc7Lntytr7Lzhqacrdcewlezgdnwf7ye0j3j44kfknjyy7hz4fkscee0m6e3ng202hvn3k
2rk8q2p4dcs
public_key_hex: 4620d26d9e17f37419b35a09049ee7cadf1c9a8bc1aa3ca8676267993f1c88cf
stake_public_key_hex: 2a7187031abe7b41d5689cb67c7ca2c4cce4dcf22d7ed06f79a347e827846e23
private_key_hex:
10347ac4094ecb654516c434630a83bc56a8f4cef4880e68d1e61730c2e71c4dbea10c3047f6f0b8e80004090c23
c2ae14d09a6aa8be6c1cdac1713160f2aa87
stake_private_key_hex:
400e8581450b9f2ece5364ba68e890bf1cfd127530766a1d3cc4bf1ec4e71c4d7db7965530e68a9b7bf60b1131ae
1ac7a7378b839778b0de0206c669b5e318c2
```

Cardano address construction:

```
address type: Shelley base address, payment key hash plus stake key hash
network id: 1 for mainnet
payment key hash: Blake2b-224(payment_public_key)
stake key hash: Blake2b-224(stake_public_key)
raw address bytes: 1-byte header || 28-byte payment hash || 28-byte stake hash
display encoding: Bech32 HRP "addr"
```

XRP Mainnet, TV1, m/44'/144'/0'

Inputs:

```
mnemonic: TV1
passphrase: empty string
coin selector: XRP
```

```
internal coin id: xrp
network: mainnet
derivation: m/44'/144'/0'
script selector: Auto
count: 2
```

Account output:

```
account_script_type_used: xrp
account_xprv:
xprv9yFya3vnAMVKmALsNBnw3G98Trzy4AmqciPkhNSZUNUuhTvTA3gWQRg2ecJFS3PDLSfYFgDW1UukaapjTDUENfi
wg22ryd4mWiph8Faw3p
account_xpub:
xpub6CFKyZTfzj3cyeRLUDKwQQ5s1tqTTdVgywKMVkrB2i1taGFBhazkxDzWVsFBHZpv7rg6qpDBGyR5oA8iazEfa44C
dQkknPFHJ7YCzncCS9
```

Receiving row 0:

```
path: m/44'/144'/0'/0/0
address: rHsMGQEkVNJmpGws8XUBoTBiAAbwxZN5v3
xrp_classic_address: rHsMGQEkVNJmpGws8XUBoTBiAAbwxZN5v3
public_key_hex: 031d68bc1a142e6766b2bdfb006ccfe135ef2e0e2e94abb5cf5c9ab6104776fbae
private_key_hex: 90802a50aa84efb6cdb225f17c27616ea94048c179142fecf03f4712a07ea7a4
```

Receiving row 1:

```
path: m/44'/144'/0'/0/1
address: r3AgF9mMBFtaLhKcg96weMhbbEFLZ3mx17
xrp_classic_address: r3AgF9mMBFtaLhKcg96weMhbbEFLZ3mx17
public_key_hex: 038bf420b5271ada2d7479358ff98a29954cf18dc25155184aeadd05796da737e89
private_key_hex: 0974b4cfe004a2e6c4364cbf3510a36a352796728d0861f6b555ed7e54a70389
```

Change row 0:

```
path: m/44'/144'/0'/1/0
address: rE8wWANXkzNgRx6noykbeXQRcfVRNoZQv4
xrp_classic_address: rE8wWANXkzNgRx6noykbeXQRcfVRNoZQv4
public_key_hex: 02852f3ccc7e31159e3e8afdf84fa919b6313197b7fd8f454139aec2a6d9306721
private_key_hex: ec5756c9d1abc5626e434e047f4c6afb791ffec66d5396bdbe5c119d7326240b
```

Change row 1:

```
path: m/44'/144'/0'/1/1
address: rwEck2kRntGkzULqYndeHW1Qq32zeK5fwG
xrp_classic_address: rwEck2kRntGkzULqYndeHW1Qq32zeK5fwG
public_key_hex: 0229fbc91aa74c94fa0b0078385de4ea96bda59c5a76b8ce50a7aef86860e39321
private_key_hex: 291b4b8ad8e50a6e9da60c64007e1d6ad346f450eda289daaf8448560535d79b
```

XRP address construction:

```
account id: HASH160(compressed_public_key), 20 bytes
version byte: 0x00
checksum: first 4 bytes of double-SHA256(version || account_id)
encoding alphabet: XRPL Base58 alphabet
destination tag: not derived and not encoded in the key vector
```

YellowSphere ARC V3 Fixed Encryption Vectors

These vectors fix every random and time-dependent YellowSphere ARC V3 input. Standard base64 includes padding. Hex is lowercase. JSON is compact JSON.stringify output with insertion order exactly as shown in Encryption.txt.

Common inputs:

```
mnemonic:
  abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon
about
created_at:
  2026-06-19T00:00:00.000Z
password:
  correct horse battery staple
salt hex:
  000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f
salt base64:
  AAECaWQFBgcICQoLDA00DXAREhMUFYXGBKaGxwdHh8=
```



```
nonce hex:
a0a1a2a3a4a5a6a7a8a9aaab

nonce base64:
oKGio6Slpqeoqaqr
```

Password-mode AAD UTF-8 text (one line, no LF):

```
{"magic":"YELLOWSPHERE-ARC","format":"yellowsphere-encrypted-seed-v3","version":3,
"created_at":"2026-06-19T00:00:00.000Z","credential_mode":"password","kdf":{"name":"PBKDF2",
"hash":"SHA-512","iterations":1000000,"salt_b64":
"AAECAwQFBgcICQoLDA00DxAREhMUFRYXGBKaGxwdHh8="},"cipher":{"name":"AES-256-GCM","nonce_b64":
"oKGio6Slpqeoqaqr"},"padding":{"name":"ZERO","length":512}}
```

Password-mode ciphertext_b64, including the 16-byte GCM tag:

```
g2Fuhcu0JKvU1HvZimhCDVs9cp1JJDGFAiAt07Fhhf1toJW35TtA8am1GqM6+QJrDQ003Vu6SXNSr8HyiJ7LNpAKiFE
F64unQSZtZtjdbb7c6YW+mTRWwAN3yCgnFKiofbTu6IiehNxUJq8rXWH9yA4ej0wht94uuGLKr3gBD56k4CsjXDb8iByp
9WrTJGwSzIEAkGKpngwXBQM1raDwKeXuTISub7+YKF0r3jJeoMpYo1CMpcRkf6uKgEX4FHvfNNTfTMyDqyfZcmoL9v8
pB7zMTClLJq8hgt7Svt272oGx2ZFgZXR+iNbLdSR0hk4RcNUauw0Y4VIZsQGR/
GpkKV2nNIBAI5rGYurrF2EZg8gSqSPHssLHxl6/
QjHaamfz02C6+zzG7TELE3niu6LJNH84JXPsh87VJw4DJ9hFcqT9T/
chUaCa8tpMesxpmRDDzmm77Z9I5LCFRTvv5jC0CaPWTAshXxdp276pqfhjnbrKGrejLDS7PJL6wd7EmSYht1R0KrYP2u
ke+0WKySwuPpjGHHFXzPI+g0g2FHA214AiutkoQ63TVRhCElw4tXuTPg4giPoYLSjrusDQD3S8tc81mj7CBKntmxFL5
5AgxQvtSdHtC5mohPr06G8P51XJQtpI6N0B/VuxYuhQQYkwaAF4g0536zo9U7XqSMQKdqZ/80dWwyUuyDp08/qcww
```

Decoded ciphertext/tag length:

528 bytes

SHA-256(decoded ciphertext_b64):

852e52d9a35f2d6539a6f1b58f5b1eaccdec430bb54e24aeceb7b531b97f8438

The complete armored password-mode file is:

```
"YELLOWSPHERE-ARC-V2" || LF ||
base64(UTF8(JSON.stringify(bundle_with_ciphertext_b64))) || LF
```

Complete armored length:

1468 bytes

SHA-256(complete armored password-mode file):

296ba4ddb9af622ace1394db2827590d3db1d5704b198a7be6fdbb19c43a81d5

Keyfile/combined common raw keyfile hex:

0b1c2d3e4f60718293a4b5c6d7e8f90a1b2c3d4e5f708192a3b4c5d6e7f8091a2b3c4d5e6f8091a2b3c4d5e6f708
192a3b4c5d6e7f90a1b2c3d4e5f60718293a

Keyfile-mode SHA-256(decoded ciphertext_b64):

db62af9586b0feb57f8be6a715716bdcd862e855ee1e43dcbf278b55c3a67cb4

Keyfile-mode complete armored length and SHA-256:

1436 bytes
29ba07d21521cda5b38d274d880812b2cf6a8b0e769ef3885dc83e869a453e1f

Combined-mode HKDF output hex:

90d2b3028780d80f0983033f6b37f7bea75eda57c0cb741434086c27391011ae024c55a9bd190b253a4f0b3d58cde
d5729aaf26d7a0711cbe440e1beed9e32269

Combined secret:

```
arc-combined-v1:kNKzAoeA2A8JgwM/
azf76nXtpXwMt0FDQIbCc5EBGuAkxVqb0ZCyU6Tws9WM3tVymq8m16BxHL5EDhvu2eMiaQ==
```

Combined-mode SHA-256(decoded ciphertext_b64):

280c53ba4778dad02e843b1bc64de219e3cb92d805547589b7cbc889c8aadfffd

Combined-mode complete armored length and SHA-256:

1432 bytes


```
d11a9de89a7a20957d523af2dcb5f31f94cb4d5bbba5b1e82459763f6922b05d
```

Encrypted-Keyfile v2 Fixed Vector

Inputs:

```
raw keyfile hex: same 64-byte keyfile above
password: keyfile password
salt hex: 101112131415161718191a1b1c1d1e1f
nonce hex: 202122232425262728292a2b
iterations: 1000000
```

AAD UTF-8 text (one line, no LF):

```
{"magic":"YELLOWSPHERE-KEYFILE-ENC", "format":"yellowsphere-keyfile-enc-v1"}
```

ciphertext_b64, including the 16-byte GCM tag:

```
deiM8E9tYdfIjSaJwM83eVCBECfhT383u/YLt6DNU0/
cwYVBE2UzHkx83oQiP40KfY0Pq1+TZAddZIPkYxR4QhY3o1nHplJyK37+XRxuUA=
```

Decoded ciphertext/tag length and SHA-256:

```
80 bytes
bfb5423ea8d89d8f09390fa3082c89e502312a7f00569772e6315bb7ecc0bb89
```

Any change to password, salt, nonce, AAD, raw keyfile bytes, iteration count, or tag must fail authentication or produce a different vector.

Legacy YellowSphere ARC V2 Fixed Encryption Vector

This vector fixes every random or time-dependent value used by YellowSphere ARC V2 so the KDF, stream cipher, HMAC transcript, and final armored file can be tested byte-for-byte.

Inputs:

```
mnemonic: TV1
password: correct horse battery staple
created_at: 2026-06-14T00:00:00.000Z
salt bytes: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f
nonce bytes: 000102030405060708090a0b0c0d0e0f1011121314151617
iterations: 1000000
```

Salt byte length:

```
32
```

Nonce byte length:

```
24
```

Plaintext object before UTF-8 encoding:

```
{"mnemonic":"abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon about", "word_count":12, "created_at":"2026-06-14T00:00:00.000Z"}
```

Plaintext JSON hex:

```
7b226d6e656d6f6e6963223a226162616e646f6e206162616e646f6e206162616e646f6e206162616e
646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162616e64
6f6e206162616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162616e646f
6e2061626f7574222c22776f72645f636f756e74223a31322c2263726561746564
5f6174223a223032362d30362d31345430303a30303a30302e3030305a227d
```

Plaintext byte length:

```
149
```

PBKDF2 master key:

```
dfffaca375f881b8241d0cbf17b5f395db942d419ae134d9dd7b08fe26e9a246
a79d872f4e4a1caa05ec9fc5f19315e1cc28b32543a3a04da85df5257c8f5333
```

Expanded encryption key:

```
3c8d5f9435d4d935f8dbcb48285ca8d578079eded9ba046a58fb4a6c6b73e6cf
ca43a93488c5bc8757310108f3eb7b05089fd84f5bc393300afffeaf79d3e5f8f
```

Expanded MAC key:

```
d5d4d1a6f5f036d040e502ab0c9759ca517463f9dbd971bc0cf3a27b5a728a93
20079532475422c1b118e53f55d33b9858342fed7f666f570ffe5dba717b9a3
```

ciphertext_b64:

```
rmQ+bXDPoMHcZXsulTBBKND+Q0IoX0XT3njFsJx2CyFbs70nqu/
B1yC+aUaq21aDwuKnL00lFbwgq8Brzw7ExUcrdwYoepMc0hw7vroSALS05J/
+8on3euhQsSNa0YppkTAlNpcZz+BnTyFQUEkfZzuBjmejd01lV4n1wS9gi4Mg3Q4Vi1KYcaGbZaCEbMJ61kqZNdtx7YT
OI64N5eiYrD6lNi8=
```

Ciphertext decoded byte length:

149

mac_b64:

```
UUYZ/YB3NvCD83u9MIEjv5Nvx39p024PsHESwbTjNWSyt+7xgGsD8nHY4IwAgpT4Cn5f4Amp5r5SUaPHL7Cr3Q==
```

MAC decoded byte length:

64

Armored line 1:

```
YELLOWSPHERE-ARC-V2
```

Armored line 2:

```
eyJtYwppYyI6iKfSQ1VMVMTQVJDIIwiZm9ybWFOIjoIYXJjdWx1cy1lbmNyeXB0ZWQtc2VLZC12MiIsInZlcnNpb24i
OjIsImNyZWf0ZWRfYXQiOiIyMDI2LTA2LTE0VDAwOjAwOjAwLjAwMf0iLCJrZGYiOnsibmFtZSI6IlBCS0RGMiIsImhh
c2giOiJlSEETNTeyIiwiaXRlcmF0aW9ucyI6MTAwMDAwMwI2FsdF9iNjQiOiJBQUVUDQXDRRkNjY0LDUW9MREEWt0R4
QVJFaE1VRLJZWEdCa2FHeHdkSGg4PSJ9LCljaXB0ZXIiOnsibmFtZSI6IkhNQUMtU0hBNTEyLUNUUiIsIm5vbmNlX2I2
NCI6IkFBRUNBd1FGQmdjSUNRb0xEQTBPpRHHBUKVoTVVGULLYIn0sImNpcGhlcmlRleHRfYyY0Ijoicm1RK2JYRFBvTUhj
WlhzdWxUQkJLTkQrUTBjB1gWwFQzbmpGc0p4MkN5RmJzNzBucVUvQjF5QythVWFxMjFhRHd1S25MME9sRmJ3Z3E4QnJ6
VzdFeFVjcmR3Ww9lcE1jT2h3N3Zyb1NBTFMwNUovKzhvbjNldWhRc1N0YTBZcHBrVEFsTnBjWnorQm5UeUZRVUVRZlp6
dUJKbWVqZDAxbFY0bjF3UzlnaTRNZzNRNFZpMUTZY2FHYlphQ0ViTUo2MwtXWk5kdHg3WVRPSTY0TjVlaVlyREdsbmk4
PSIsIm1hY19iNjQiOiJVVVpZL1lCM052Q0Q4M3U5TUlFanY1Tnh2MzlwTzI0UHNIRVN3YlRqTldTeXQRn3hnR3NEOG5I
WTRJd0FncF0Q0241ZjRBbXA1c1jVTVVWFQSEw3Q3IzUT09In0=
```

Armored file bytes:

```
ASCII("YELLOWSPHERE-ARC-V2") || 0a || ASCII(line2) || 0a
```

YellowSphere ARC V2 importer rejection rules:

```
line 1 must be exactly YELLOWSPHERE-ARC-V2
version must be exactly integer 2
kdf.name must be exactly PBKDF2
kdf.hash must be exactly SHA-512
kdf.iterations must be >= 600000
kdf.salt_b64 must decode to exactly 32 bytes
cipher.name must be exactly HMAC-SHA512-CTR
cipher.nonce_b64 must decode to exactly 24 bytes
mac_b64 must decode to exactly 64 bytes
HMAC must verify before plaintext is decrypted or trusted
```

Common secp256k1 Path Matrix, TV1, Receiving Row 0

This matrix fixes the first receiving row for the common account paths that v1.6.6 can derive for secp256k1-based coins. Each row uses TV1, empty passphrase, mainnet, script selector Auto, count 1, and range empty.

Bitcoin m/44'/0'/0':

```
account_script_type_used: p2pkh
row_path: m/44'/0'/0'/0/0
address: 1LqBGSKuX5yYUonjxT5qGfpUsXKYYWeabA
public_key_hex: 03aaeb52dd7494c361049de67cc680e83ebcbbdbbeb13637d92cd845f70308af5e
private_key_hex: e284129cc0922579a535bbf4d1a3b25773090d28c909bc0fed73b5e0222cc372
```

Bitcoin m/49'/0'/0':

```
account_script_type_used: p2wpkh-p2sh
row_path: m/49'/0'/0'/0/0
address: 37VucYsAXLCAsxYyAPfbSi9eh4iEcbShgf
public_key_hex: 039b3b694b8fc5b5e07fb069c783cac754f5d38c3e08bed1960e31fdb1dda35c24
private_key_hex: 508c73a06f6b6c817238ba61be232f5080ea4616c54f94771156934666d38ee3
```

Bitcoin m/84'/0'/0':

```
account_script_type_used: p2wpkh
row_path: m/84'/0'/0'/0/0
address: bc1qcr8te4kr609gcawutmrza0j4xv80jy8z306fyu
public_key_hex: 0330d54fd0dd420a6e5f8d3624f5f3482cae350f79d5f0753bf5beef9c2d91af3c
private_key_hex: 4604b4b710fe91f584fff084e1a9159fe4f8408fff380596a604948474ce4fa3
```

Bitcoin m/86'/0'/0':

```
account_script_type_used: p2tr
row_path: m/86'/0'/0'/0/0
address: bc1p5cyxnuxmeuwkvfem96lqzszd02n6xdcjrs20cac6yqjjwudpxqkedrcr
public_key_hex: 03cc8a4bc64d897bddc5fbc2f670f7a8ba0b386779106cf1223c6fc5d7cd6fc115
private_key_hex: 41f41d69260df4cf277826a9b65a3717e4eeddbeedf637f212ca096576479361
```

Bitcoin Cash m/44'/0'/0':

```
account_script_type_used: p2pkh
row_path: m/44'/0'/0'/0/0
address: bitcoincash:qrvcdmgpk73zyfd8pmdl9wnuld36zh9n4gms8s0u59
public_key_hex: 03aaeb52dd7494c361049de67cc680e83ebcbbdbbeb13637d92cd845f70308af5e
private_key_hex: e284129cc0922579a535bbf4d1a3b25773090d28c909bc0fed73b5e0222cc372
```

Litecoin m/44'/2'/0':

```
account_script_type_used: p2pkh
row_path: m/44'/2'/0'/0/0
address: LUWPbpM43E2p7ZSh8cyTBEkvpHmr3cB8Ez
public_key_hex: 030fe9d8d0e15d432d1ae9b3c52f4cb6e37e3c7a41af0139783da09eab85a182dc
private_key_hex: 4baa38b7623a40da63836cd9ee8c51d0b6273e766c88adde156fd5fec6e19008
```

Litecoin m/49'/2'/0':

```
account_script_type_used: p2wpkh-p2sh
row_path: m/49'/2'/0'/0/0
address: M7wtsL7wSHDBJVMWWhTQfTMSYkYooAAXM
public_key_hex: 03f7a0a5d44504ea8a2494c7e32c895ba4968d3dab66a4d790380be8b0539f36bc
private_key_hex: b02c7ab9f8827bc028780d5df6bab2a1f35d2b89f9b246829802ba5b83ba1c2
```

Litecoin m/84'/2'/0':

```
account_script_type_used: p2wpkh
row_path: m/84'/2'/0'/0/0
address: ltc1qjmxnz78nmc8nq77wuxh25n2es7rzm5c2rkk4wh
public_key_hex: 02e49c9b9b5d0f127235dc26a0c252814c52fb333d651a946773f59d72c2da9904
private_key_hex: 4ab54480cbbaa53d5d3ba43a3e85d221df085490e88346ad11579e17000db7bb
```

Litecoin m/86'/2'/0':

```
account_script_type_used: p2tr
row_path: m/86'/2'/0'/0/0
address: ltc1puht8rk95c53q3u9w3pf9h3jfcutcr19lxc7rqsdtthjrse4k6sn7q9tuqm9
public_key_hex: 037af20364ca7c95e5f11fc4fc11df425271c85f829a1edd7f987973ea46726b73
private_key_hex: 7f7a21d0f032c83217e11cec6d6417b1c45c42fa0fbd88c8e06f183f001db0b6
```

Dogecoin m/44'/3'/0':

```
account_script_type_used: p2pkh
row_path: m/44'/3'/0'/0/0
address: DBus3bamQjgJULBJtYXpEzDWQRwF5iwxgC
public_key_hex: 02cc6b0dc33aabc3a23643e5e2919a80c50fb3dd2129ce409bbc5f0d4643d05e0
private_key_hex: 21f5e16d57b9b70a1625020b59a85fa9342de9c103af3dd9f7b94393a4ac2f46
```

Dogecoin m/49'/3'/0':

```
account_script_type_used: p2wpkh-p2sh
row_path: m/49'/3'/0'/0/0
address: 9xzLEawbi3eVzRzv6YdGcXbXQMHydntSq7
public_key_hex: 03f3b10f13fa36775245758f05d1cf650095091c0ef5f2a60c5903c9bee9be91bd
private_key_hex: 3473b63348122b1ab2036d80c8b3d2c3a31e971affba9647bf5033051e26cc36
```

Dogecoin m/84'/3'/0':

```
account_script_type_used: p2wpkh
row_path: m/84'/3'/0'/0/0
address: doge1q78ehfacf2d0s7nylpxd5a5wl0lf26nm635g6wa
public_key_hex: 0208412125242e1fc6922b15f4790d562426475a901b8f9e33b44cd25e3e423d4a
private_key_hex: 29b9404df265785f088b4315207595990c828064181a012bfe281e0564f1ee7c
```

Dogecoin m/86'/3'/0':

```
expected result: reject
reason: p2tr is not supported for this coin/network
```

Ethereum m/44'/60'/0':

```
account_script_type_used: ethereum
row_path: m/44'/60'/0'/0/0
address: 0x9858EfFD232B4033E47d90003D41EC34EcaEda94
public_key_hex: 0237b0bb7a8288d38ed49a524b5dc98cff3eb5ca824c9f9dc0dfdb3d9cd600f299
private_key_hex: 1ab42cc412b618bdea3a599e3c9bae199ebf030895b039e9db1e30dafb12b727
```

XRP m/44'/144'/0':

```
account_script_type_used: xrp
row_path: m/44'/144'/0'/0/0
address: rHsMGQEkVNJmpGws8XUBoTBiAAbwxZN5v3
public_key_hex: 031d68bc1a142e6766b2bdfb006ccfe135ef2e0e2e94abb5cf5c9ab6104776fbae
private_key_hex: 90802a50aa84efb6cddb225f17c27616ea94048c179142fecf03f4712a07ea7a4
```

Export Format Digest Matrix, TV1, count 2

This matrix fixes byte lengths and SHA-256 digests for Python CLI export formats. Each row is generated from TV1, empty passphrase, mainnet, default coin derivation, script selector Auto, count 2, and no explicit range. The byte stream is exactly `format_derived_output(data, format).encode("utf-8")`. JSON uses two-space indentation and a trailing newline. CSV uses `csv.DictWriter` header order as emitted by `flatten_derived_rows` and `writerows`. TXT uses the human-readable label format emitted by `derived_to_text` and ends with a newline.

coin	format	byte_length	sha256
bitcoin	json	2324	a1b55503fe016130c1a19e02bca9eda0199764c80085903c7e9da28074d2ddc8
bitcoin	csv	3040	db0e9937c1461bbbb6c73a7394cda3977d51feefa1127ba8ba0d4b6cd8f33f4
bitcoin	txt	1905	786bb5180ac791de6e07d746b9579fe91c1e125b38289bdd2e93af0a3089d677
bitcoincash	json	2408	2f498287d421d904a3c1b2aebb65ecace583b4b7a80862246c91b7a73966a260
bitcoincash	csv	3136	b91b46ab353b90ee3a6ca9b2b9727c2391905a7d44c2c81c9623f8fd8cb1db99
bitcoincash	txt	1989	0f6212a755095b387580471c941faf9e4786e42b84b7650f7680c1a9ba6d870c
litecoin	json	2939	a38194d9d1e862b7ce85428aee41788f5f9f46196e6d5f8183ec383014fd0bd0
litecoin	csv	4978	68ecb69800e802ee44d781f6835e0e15c04ba6451896abcf057cbe454bef0e5f
litecoin	txt	2476	3b0f0367aaf2b978761b153ddfbb4741d08a5995a86aac569a71c900bbb2561b3
dogecoin	json	2360	1a6383909d39b8268329d3b160566cc4bd0c09a7fbd10553457de61dbf7d3e44
dogecoin	csv	3100	c81543884a81784a2c43aed8165004202e7bc32195990079c5ea7fccb88dbff1
dogecoin	txt	1941	4e5b1393779b7c668dd5b0e7a296bd32a44d0f07755b084078e5fbc1cb1b6f7e
ethereum	json	3364	2ce532f5b7ff25f18eac16d66fdabba971f51cdb958df9d1675c91188454bcbf
ethereum	csv	3889	3793620425b00f4cb4ea0d7066e78c63d9e9a9931354d6e98d14f741bf90fd88
ethereum	txt	2825	ba43bb4f6b4fdbaaca5f3d482cf9b86944e42135448dcd270bd0271b289b5556
solana	json	1459	9b02b3f9677bf9127c4c6e7e5599a8ecde13576023c9e8b2e8406f43cc1c7c4e
solana	csv	1504	ad8a39ab1de5f432c763acb2f447a99f1ef3357272d23091c4811ceed43cae12
solana	txt	1244	38133e01791c339ede4beec31f34c941667773ed37ec43e024660455c2fbdf99
stellar	json	1668	893c3b3ee2a0ad6ff18bc3caa994512a89ef56c7cfe33c00c0808de521be446e
stellar	csv	1663	7d6dcfa96eb90d20897148297fd775207058c9c6c756c9f7f1a73ae74bcbdb1
stellar	txt	1423	7096602add8c832dfc09f888148651ccb257901f935e3ee884a737a43f055fc9
monero	json	2044	e9d0d57cb1ef2f9e19a2943408ff7af4f7d95c9045790843eddbde662efb92152
monero	csv	1673	b67ffc7f7992a97967402ad50c3a7bf8d2463f589d732cbb62d916a8c5088c0ba

```

monero      txt      1799
e0c02a629efd2c9eb707c2c41b4dad70377829d3373b74a01882ed17d77fc0d7
cardano     json     2491
588fb0ec0879917265d7fc23ae03fffd2cbb807af55b0273849bc613449f0e30
cardano     csv      2521
1a21194294a458372269ce916ce477f6460f0f89c00ca91126e33586f9e638de
cardano     txt      2186
8752ae06ed29fe9ee63400eb8a53cfb355962ffca6bf52a789d2a4a66f0abe91
xrp         json     2935
ea6118e1a9f96bcd4f1acc6dd17f6f0d3bf9b9c13523fb8dab9e5dcae6d6da9c
xrp         csv      3565
ba0d3e1320d0d306160e298cd99e36362257af983d7acc67b29722ee24f20442
xrp         txt      2456
b6e42e68e68a30de4ac35a4e512cca913c333fff4a222d3297cfb111a4bcf2952

```

Expanded Solana Rows, TV1, count 4

Inputs are TV1, empty passphrase, Solana mainnet, m/44'/501'/0', Auto script, count 4.

Row 0:

```

path: m/44'/501'/0'
address: GjJyeC1r2RgkuoCWMyPYkCWSGSLcz266EaAkLA27Ahl
public_key_hex: e9b6062841bb977ad21de71ec961900633c26f21384e015b014a637a61499547
private_key_hex: ec252c5d95bcf80a4b22df119cedd4ae1aed07364578e8d43bdfa0435625dbd1

```

Row 1:

```

path: m/44'/501'/0'/1'
address: GKreMsHvt8A79VApjboYDq3J4ZCXSJRYQk9BscMbi1H
public_key_hex: e3b3e4299dc3a9380b9ac55acd5c18e87666bbfdf010c3e79928d784670919c4
private_key_hex: 22b1890a6c748d580a6fe6fb99334d76bd2496126be46ecf9e6fc412b53368e1

```

Row 2:

```

path: m/44'/501'/0'/2'
address: 9RYreF1nBs8Gvq94ACMBtVSAVUBKSB9p6xdJBfYGApo
public_key_hex: 7d2774540df0f8f323bf44bec922e58a1cdded6632de3d312541dd89b5562ab0
private_key_hex: 6e1af78e682d7eff0224491db31e4cc932e3dc767b5cc07bab9a90f6ff61dd9b

```

Row 3:

```

path: m/44'/501'/0'/3'
address: EbRros2uDEJC6pnrykj6woipb4PSejP7Q4sWuPyFopZN
public_key_hex: c9f9c91281f7da549be25291b13decc35445c25eea0d60710863c3e99de83681
private_key_hex: 75c314d9bfca136f5185ecc990d2f087d5e2283207db7398c80bb7d46924445c

```

Expanded Stellar Rows, TV1, count 4

Inputs are TV1, empty passphrase, Stellar mainnet, m/44'/148'/0', Auto script, count 4.

Row 0:

```

path: m/44'/148'/0'
address: GB3JDWCQJQW3IILWIGDTQJJ5567PGVEVXSCVPEQ0TDN64VJBDQBYX
public_key_hex: 7691d85048acc4ed085d9061ce0948bbdf7de6a92b790aaf241d31b7dcaa4238
private_key_hex: 695db2365365e06159f13cc752a5d3b0c7376c45012b2f695e3a4da2434948bc
stellar_secret_seed: SBUV3MRWKN56AYKZ6E6MOUVF20YMON3MIUASWL3JLY5E3ISDJFELYBRZ

```

Row 1:

```

path: m/44'/148'/1'
address: GDVSYTTUUAJ3ACHTPQNSTQBQ4LDHQCMMY4FCEQH5TJUMSSLWQSTG42MV
public_key_hex: eb2c62740276011e6f8365380470e2c678098dc70a2240fd9a68c9497684a66e
private_key_hex: 8e315456301464326e8d7cae8f18aec38e58db8838cf304132567a0ad4d305e1
stellar_secret_seed: SCHDCVCWGAKGIMTORV6K5DYVY3BY4WG3RA4M6MCBGJLHUCWU2MC6DL66

```

Row 2:

```

path: m/44'/148'/2'
address: GBFPWBNT4AXHPWPTQVQB4KRZ2YVYVOGRMV2PEYL20BPPJDP7LECEVHR
public_key_hex: 4afb066de02e77d9f3856017f151ceb15c61c68b2ba7930bd382f7a46ffac822
private_key_hex: 1ebacd74bc86b2c466108ab78f2c9889563f79bcd9fe1029155595337c59a0f2
stellar_secret_seed: SAPLVTLUXSDLFRDCCFLPDZMTCEVMP3ZXTM74EBJCVKZKM34LGQPF7K3

```

Row 3:

```

path: m/44'/148'/3'

```

```
address: GCCCOWAKYVFY5M6SYHOW33TSNC7Z5IBRUEU2XQVVT34CIZU7CXZ40Q40
public_key_hex: 8427580ac54b8eb3d2c1dd6dee7268bf9ea031a129abc2b59ef824669f15f3c7
private_key_hex: e18bb9fa202997f30e243a1a2510dc4727f6f5e64a8f0bb8dc043ee3db5d9f79
stellar_secret_seed: SDQYXOP2EAUZP4Y0EQ5BUJIQ3RDSF5XV4ZFI6C5Y3QCD5Y63LWPXT7PW
```

Expanded Cardano Rows, TV1, count 3

Inputs are TV1, empty passphrase, Cardano mainnet, m/1852'/1815'/0'/0/0, staking path m/1852'/1815'/0'/2/0, Auto script, count 3.

Row 0:

```
path: m/1852'/1815'/0'/0/0
staking_path: m/1852'/1815'/0'/2/0
address:
addr1qy8ac7qqy0vtulyl7wntmsxc6wex80gvcy3jy33qffrh7msh927ysx5sftuw0dlft05dz3c7revpf7jx0xnlcjz3
g69mq4afdhv
public_key_hex: 7ea09a34aebb13c9841c71397b1cabfec5dddf950405293dee496cac2f437480a
stake_public_key_hex: 012f5dc3115b8a07981e6e50f5a671e2c6fbb26c3ffde1cd1dcaf40a7fe8f160
private_key_hex:
105d2ef2192150655a926bca9cccf5e2f6e496efa9580508192e1f4a790e6f53de06529129511d1cacb0664bcf04
853fdc0055a47cc6d2c6d205127020760652
stake_private_key_hex:
2047891e88934a422e3ff6eea4caaaecda795724cd2bfac91569896750e6f534a704748705e28a7bd69d009638a
dd767f79c63eb9c839c8ffe0eff0b6e16772
```

Row 1:

```
path: m/1852'/1815'/0'/0/1
staking_path: m/1852'/1815'/0'/2/0
address:
addr1qyz85693g4fr8c55mfyxhae8j2u04pydxrgqr73vmwp3a8927ysx5sftuw0dlft05dz3c7revpf7jx0xnlcjz3
g69mq2c0f9
public_key_hex: 86e24e36b7f0d1ad2afa266179207eb04f02642898bb58a2b6f80e491b658060
stake_public_key_hex: 012f5dc3115b8a07981e6e50f5a671e2c6fbb26c3ffde1cd1dcaf40a7fe8f160
private_key_hex:
30b8a1fd8fed35fbc91a0ded3e49c41ce883625bca29f877765e34c7c0e6f53520bd4fb56a4546f0c82f99747b9
e09c65971c64c75a1386f016ccf840af283a
stake_private_key_hex:
2047891e88934a422e3ff6eea4caaaecda795724cd2bfac91569896750e6f534a704748705e28a7bd69d009638a
dd767f79c63eb9c839c8ffe0eff0b6e16772
```

Row 2:

```
path: m/1852'/1815'/0'/0/2
staking_path: m/1852'/1815'/0'/2/0
address:
addr1qxfysvklcds0u35d8esyksfqapfdahfknur6dzx7sgqsvh927ysx5sftuw0dlft05dz3c7revpf7jx0xnlcjz3
g69mqhmg9q
public_key_hex: 5e8b424dc521d6a0b8223ec1b7598de4a64c28561ac04de3add316679d1e672c
stake_public_key_hex: 012f5dc3115b8a07981e6e50f5a671e2c6fbb26c3ffde1cd1dcaf40a7fe8f160
private_key_hex:
68874b7c010174a4df9d2dfa09c92d1089f1882c19caa3900a439dac780e6f53ad413c48153e07ca4991262c64c9
420f7211e49e71c817d3e115f9bee2e36716
stake_private_key_hex:
2047891e88934a422e3ff6eea4caaaecda795724cd2bfac91569896750e6f534a704748705e28a7bd69d009638a
dd767f79c63eb9c839c8ffe0eff0b6e16772
```

Archived v1.6.0 LTS Additional Monero Deterministic Vectors

Alternate account path, TV1, empty passphrase:

```
derivation: m/44'/128'/1'
account_private_key_hex: 6c0a5b7fc21b7e744c1ea1c5ea37c2777d033beaedb23513ba5aaedc08a45742
account_chain_code_hex: 1d0e31119601c81334643ebbe3cb55ac6121ca40b7a3b2b98658deb785c4bfa7
account_private_spend_key_hex:
b8ba830b598f3414f3aac239705046247d033beaedb23513ba5aaedc08a45702
account_private_view_key_hex:
f2613790022490c2ff04c7ca08829991eda631acb2c515c4b6d40c6caf741607
account_public_spend_key_hex:
36507367314bb97234a10f1fab20308c757a55fda8f42e968103882782f208ad
account_public_view_key_hex:
d7b4d7f1b37b79ac1bd747e4511a6f21f8c0b9f7765fc112b04200f1ace101cf
receiving[0].address:
43gVG8hoX8UL6mMn3Eai9dQVdP6BfQXiuSB5TqNBfHvPW5VUm9WXV2Vnfta9b2S4v6gZwbsGF3MJ48JWh3pgnXSQQ3N
hiL
```

Passphrase-sensitive path, TV1, BIP39 passphrase "TREZOR":

```
derivation: m/44'/128'/0'
root_private_key_hex: 5c74be5597f0750c4afeb185c0f08df35dfffc55cb858fae6bf64a45427bccb86
root_chain_code_hex: d18ce4a4baf4ebeab76944e2029c2a63a3c65a56c51f6d51ce949b1bf9f7da6b
root_private_spend_key_hex:
f4d40f6ec4d7e24b9717f56dcdb21964c5dfffc55cb858fae6bf64a45427bccb06
root_private_view_key_hex:
7df73082ae34b33859326c4066ee6e0b68aece20c2a8f5ad8e228d9b09f25f09
account_private_key_hex: 4fe8191bb6b1442bbb8d415e2e92b924c4ccd5513bd2ee222c17e3262c5c1856
account_chain_code_hex: 402b9d42f9bcfaae325cd92c3a52b348c22926e3e9565e2accf1184538de7e68
account_private_spend_key_hex:
aec44c4a32c2e8728b7d6b2fd5b05ebcc3ccd5513bd2ee222c17e3262c5c1806
account_private_view_key_hex:
f78186af31a862828ef78eb8419bb5fa9a536ed4da820b2977733da859e28a02
account_public_spend_key_hex:
50cdf692ba50a43c6ef27a1358b84cf710ffa04be6177e26cecea19a38646f05
account_public_view_key_hex:
63f32e372c220ec9ae1a2665a85d7f46824f4a23eeab2a5b82ab29656305527b
receiving[0].address:
44giFrE94GbB7HDSTmk9rTiKrWRPANSgD7VV7QxD6tWA1uJ3jpEKcf7ajYsRxqpK6WCo2VviZeISMGJmQy9UdcxZEVtT
RbE
```

TV1 Passphrase "TREZOR" First-Row Matrix

This matrix verifies that non-empty BIP39 passphrases change every supported coin family deterministically. Inputs are TV1, passphrase "TREZOR", mainnet, default derivation for each coin, Auto script, count 1.

Bitcoin:

```
account_script_type_used: p2pkh
path: m/0'/0/0
address: 1KSQwLw4ZdFVnopsAjEs3yG2zVtjuNTEXM
public_key_hex: 03cf0e698f3fb44d8316bd7aade649585d26633e4d2eb87e4585752552207c1a2d
private_key_hex: 5c2d5dfb7f3d86d16a19b1c5364224a266e3bfb2809f91a30c7462db3a3f5099
```

Bitcoin Cash:

```
account_script_type_used: p2pkh
path: m/0'/0/0
address: bitcoincash:qr9ypfgvv300fwp4vqtqqa43hyxcvw7n8y0s4ypylx
public_key_hex: 03cf0e698f3fb44d8316bd7aade649585d26633e4d2eb87e4585752552207c1a2d
private_key_hex: 5c2d5dfb7f3d86d16a19b1c5364224a266e3bfb2809f91a30c7462db3a3f5099
```

Litecoin:

```
account_script_type_used: p2wpkh
path: m/84'/2'/0'/0/0
address: ltc1qmnmdtk82gfvv4khc3w9lrugre34cj65kamf9tz
public_key_hex: 03c5c065cbca75c74991ecf2d4b03a730ae7f87e83ba8cfff5ac7d1c356fe39276
private_key_hex: bcf1eb0501e08cc121a9d44ab76f70de210d89a394c9014ba933404888178308
```

Dogecoin:

```
account_script_type_used: p2pkh
path: m/44'/3'/0'/0/0
address: DMn7J63QSZUR9XNsUJtvsttZVzV9Am4qM
public_key_hex: 029c8654f657a5a926900a33b75afc53af2cc6829fb2cc8c5c265b1878771937db
private_key_hex: 3fe5539c1326ef28b41e940799065e1bb38eb426302a74aee7ae8c98c4f0fd17
```

Ethereum:

```
account_script_type_used: ethereum
path: m/44'/60'/0'/0/0
address: 0x9c32F71D4DB8Fb9e1A58B0a80dF79935e7256FA6
public_key_hex: 03986dee3b8afe24cb8ccb2ac23dac3f8c43d22850d14b809b26d6b8aa5a1f4778
private_key_hex: 62f1d86b246c81bdd8f6c166d56896a4a5e1eddbcaeb06480e5c0bc74c28224
```

Solana:

```
account_script_type_used: solana
path: m/44'/501'/0'
address: 9md2ZNCYw622wTzgHn71kh9T6mFS0B4USnA4QdvY8oM4
public_key_hex: 824bc9660d39a7c64bcd02cdcc4fcce746051db378254d8e6185a8826c3bf2ab
private_key_hex: d3072f7e41ab7d8605246f465706270d39269da22f922c169bc00ec4bc597daa
```

Stellar:


```
account_script_type_used: stellar
path: m/44'/148'/0'
address: GBXISQLLM60GWWZU7SCNF2G0JSQLHJU3I76P23J6IDSJGKEEGM2AJYG5
public_key_hex: 6e89416b679c6b5b34fc84d2e8ce4ca0b3a69b47fcfd6d3e40e4932884333404
private_key_hex: 4cf62724451fcff35352d944522c931ed74b30c5c126911ae246de3e6d148f2c
stellar_secret_seed: SBGPMJZEIUP4742TKLMUIURMSMPN0SZQYXASNEI24JDN4PTNCSHSZXCXK
```

Monero:

```
account_script_type_used: monero
path: m/44'/128'/0'
address:
44giFrE94GbB7HDSmK9rTiKrWRPANSGD7VV7QxD6tWA1uJ3jpEKcf7ajYsRxqpK6WCo2VviZeISMGJmQy9UdcxZEVTT
RbE
private_spend_key_hex: aec44c4a32c2e8728b7d6b2fd5b05ebcc3ccd5513bd2ee222c17e3262c5c1806
private_view_key_hex: f78186af31a862828ef78eb8419bb5fa9a536ed4da820b2977733da859e28a02
```

Cardano:

```
account_script_type_used: cardano
path: m/1852'/1815'/0'/0/0
staking_path: m/1852'/1815'/0'/2/0
address:
addr1qy8ac7qqy0vtulyl7wntmsxc6wex80gvcyjy33qffrhmf7sh927ysx5sftuw0dlft05dz3c7revpf7jx0xnlcjz3
g69mq4afdhv
public_key_hex: 7ea09a34aebb13c9841c71397b1cabfec5ddf950405293dee496cac2f437480a
stake_public_key_hex: 012f5dc3115b8a07981e6e50f5a671e2c6fbb26c3ffde1cd1dcafa40a7fe8f160
private_key_hex:
105d2ef2192150655a926bca9cccf5e2f6e496efa9580508192e1f4a790e6f53de06529129511d1cacb0664bcf04
853fdc0055a47cc6d2c6d20512702760652
stake_private_key_hex:
2047891e88934a422e3ff6eea4caaaecda795724cd2bfac9f1569896750e6f534a704748705e28a7bd69d009638a
dd767f79c63eb9c839c8ffe0eff0b6e16772
```

XRP:

```
account_script_type_used: xrp
path: m/44'/144'/0'/0/0
address: rfBUajJsZotvNwZz5yUk7GNqcWehxc2YAs
public_key_hex: 02be56cc0b66d75d45eec7683b5090ed127315bc33ac4a7091acff472b33a08cbe
private_key_hex: c269a68e88e67c566a24789fb4de96b03eb27424dbe02390dd225a82f4655db0
```

YellowSphere ARC V2 Fixed 24-Word Encryption Vector

This vector verifies YellowSphere ARC V2 behavior for a 24-word mnemonic and an alternate salt/nonce ordering. It uses the same password and created_at value as the TV1 YellowSphere ARC V2 vector.

Inputs:

```
mnemonic:
abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon abandon abandon abandon art
password: correct horse battery staple
created_at: 2026-06-14T00:00:00.000Z
salt bytes: 1f1e1d1c1b1a191817161514131211100f0e0d0c0b0a09080706050403020100
nonce bytes: 17161514131211100f0e0d0c0b0a09080706050403020100
iterations: 1000000
```

Plaintext JSON hex:

```
7b22637265617465645f6174223a22323032362d30362d31345430303a30303a
30302e3030305a222c226d6e656d6f6e6963223a226162616e646f6e206162
616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162
616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162
616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162
616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162
616e646f6e206162616e646f6e206162616e646f6e206162616e646f6e206162
616e646f6e206162616e646f6e20617274222c22776f72645f636f756e74223a
32347d
```

Plaintext byte length:

258

ciphertext_b64:

```
HuspzKt0g9ztAgnrq82GXND37EiY91WnyyKU/KyHKc30y4TJe2V0vp0Fkni/
```


mgIpbTbB8JCUDeeYwS+yuuw4Cn5yDFa8xuUyKzhjt27+89Ir0B9s/
X1PwcVAZ4vPeBZII565jS0q1onufqJewPoP3gsQUh3D0llFajHNmAelivfIEiQwYumhj9uK4dft82leiUmpxmuFd3mQw
JE5pkI0CjhbBwiQtcXu0HgZMt7OMN5LDczZuQGiacAHCKdvTisHPLB9574257NAmlWuMpKJ4BrLV8S+NMS7laoC5gtyY
tBs6HcePY9dkUzd4CUCo5yXhfM0WvSiyhQT/EcnyLLIaSRU

mac_b64:

RMemT5YzoGcexZZ51vsGc1fJbKv3E0Wkpnq+BMF0WVaCeJibE5ITP4fKT9cK6MI4I7+/vfCTWmr8wSGVnZgd8A==

Serialized armored file byte length:

1056

Serialized armored file SHA-256:

ce58c271f72c82decdf97f3dc09480f2ffa66046b476dec831bb3fa94664711

Armored line 2:

eyJjaXB0ZXIiOonsibmFtZSI6IkhNQUMTU0hBNTeyLUNUUiIsIm5vbmNLX2I2NCI6IkZ4WVZGQk1TRVJBUErNME1Dd29K
Q0FjR0JRURBZ0VBIn0sImNpcGhlcRleHRfYjY0IjoISHVzcHpLdDBnOXp0QWducnE4MkdYTkQzN0VJWTKxV255eUtV
L0t5SEtjMzB5NFRKZTJWt3ZwMEZrbmkvbwDjcGJUYki4SkNVRGVlWxdTK3l1dVc0Q241eURGYTh4dVV5S3poanQyNys4
OUlyMEI5cy9YMBXY1ZBwjR2UGVcWklpNTY1a1NpCTFvbnVmcUpLV1BvUDNnc1FVaDNET2xsRmFqSE5tQWUxaXZmSUVP
UXdZdW1oaajl1SzRkZlQ4MmxlaVvtcHhtdUZkM21Rd0pFNXBrSU9DamhCYndpUXRjWHVPSGdaTXRmT010NUxEY3padVFH
awFjQUhDa2R2VGZcSFbMQjk1NzQyNTd0QW1Md3VNcEtKNEJyTFY4Uyt0TXM3bGFvQzVndHlZdEJzNkhjZVBZOWRrVXpk
NENVQ281eVhoZk1PV3ZTaXloUVQvRWNUeUxMSWFTUluILCjJcmVhdGVkX2F0IjoImjAyNi0wNi0xNFQwMDowMDowMCA4w
MDBaIiwizm9ybWFOIjoIYXJjdWx1cy1lbmNyeXB0ZWQtc2VLZC12MiIsImtkZiI6eyJoYXNoIjoIU0hBLTUxMiIsImlo
ZXJhdGlvbnMiOjEwMDAwMDAsIm5hbWUiOiJkQkterjiILCjZyYX0X2I2NCI6IkZ4WVZGQk1TRVJBUErNME1Dd29K
T0RRd0x0Z2t3QndZrKjBTUNBUUE9In0sIm1hY19iNjQ0IjoIjStWVtVdVZem9HY2V4Wlo1MXZzR2MxZkp1S3YzRTBxa3Bu
cStCTUZPV1ZhQ2VKawJFNUlUUDRms1Q5Y0s2TUK0STcrL3ZmQ1RXbXI4d1NHVm5aZ2Q4QT09IiwibWFnawMiOiJBuKNV
TFVTLUFsQyIsInZlcnpb24iojJ9

Negative Test Vectors

Conforming v1.6.6 implementations must reject every input in this section before producing account rows, downloadable bundles, QR payloads, or partial derived output.

Invalid word count:

mnemonic: abandon
expected result: reject
reason: 1 word is neither 12 nor 24

Invalid word count:

mnemonic: abandon abandon abandon
expected result: reject
reason: 3 words is neither 12 nor 24

Invalid word count:

mnemonic: abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon
expected result: reject
reason: 11 words is neither 12 nor 24

Invalid word count:

mnemonic: abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon abandon
expected result: reject
reason: 13 words is neither 12 nor 24

Unknown BIP39 word:

mnemonic: notaword abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon about
expected result: reject
reason: token "notaword" is absent from the embedded English BIP39 word list

Checksum failure:

mnemonic: abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon
expected result: reject
reason: all words are valid, but checksum bits encoded by the final word do not match
SHA256(entropy)

Invalid 24-word checksum:

```
mnemonic: abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon
abandon abandon abandon
expected result: reject
reason: 24 zero-index words do not encode the 8 checksum bits required for 256-bit zero
entropy
```

Invalid path component:

```
path: m/44'/abc'/0'
expected result: reject
reason: component "abc" is not a base-10 unsigned integer with optional hardened suffix
```

Invalid path component:

```
path: m//0'
expected result: reject
reason: empty component between slashes
```

Invalid path root:

```
path: n/44'/0'/0'
expected result: reject
reason: path root must be exactly "m"
```

Index overflow:

```
path: m/2147483648'/0'/0'
expected result: reject
reason: component index 2147483648 is outside the accepted pre-hardened range 0..
2147483647
```

Unsupported script:

```
coin selector: Dogecoin
script selector: P2TR
expected result: reject
reason: Dogecoin Taproot output is not supported by v1.6.6
```

Malformed YellowSphere ARC V3 salt:

```
salt length: 31 bytes
expected result: reject
reason: YellowSphere ARC V3 salt must be exactly 32 bytes
```

Malformed YellowSphere ARC V3 nonce:

```
nonce length: 11 bytes
expected result: reject
reason: YellowSphere ARC V3 AES-GCM nonce must be exactly 12 bytes
```

Malformed YellowSphere ARC V3 padding:

```
padding: {"name":"ZERO","length":511}
expected result: reject
reason: YellowSphere ARC V3 plaintext padding length must be exactly 512
```

YellowSphere ARC V3 metadata mutation:

```
mutation: change credential_mode without recomputing ciphertext/tag
expected result: reject
reason: complete metadata JSON is AES-GCM additional authenticated data
```

YellowSphere ARC V3 ciphertext/tag mutation:

```
mutation: flip any bit of decoded ciphertext_b64
expected result: reject
reason: AES-GCM authentication fails
```

Encrypted-keyfile v2 iteration mismatch:

```
iterations: 999999
expected result: reject
reason: importer accepts only 1000000 and earlier-beta 200000
```

Encrypted-keyfile v2 AAD mutation:

```
mutation: change magic or format without recomputing ciphertext/tag
```

expected result: reject
reason: exact magic/format JSON is AES-GCM additional authenticated data

Malformed YellowSphere ARC V2 salt:

salt length: 31 bytes
expected result: reject
reason: YellowSphere ARC V2 salt must be exactly 32 bytes

Malformed YellowSphere ARC V2 nonce:

nonce length: 23 bytes
expected result: reject
reason: YellowSphere ARC V2 nonce must be exactly 24 bytes

Malformed YellowSphere ARC V2 MAC:

mac length: 63 bytes
expected result: reject
reason: YellowSphere ARC V2 HMAC-SHA512 tag must be exactly 64 bytes

Weak YellowSphere ARC V2 iteration count:

iterations: 599999
expected result: reject
reason: import floor is 600000 iterations

YellowSphere ARC V2 MAC mismatch:

mutation: flip bit 0 of decoded mac_b64 byte 0
expected result: reject
reason: constant-time HMAC comparison fails

YellowSphere ARC V2 ciphertext mutation:

mutation: flip bit 0 of decoded ciphertext_b64 byte 0 without recomputing MAC
expected result: reject
reason: ciphertext bytes are included in the MAC transcript

YellowSphere ARC V2 plaintext mismatch:

mutation: decrypts to mnemonic with 12 words but word_count field is 24
expected result: reject
reason: decrypted word_count must match normalized mnemonic word count

Compliance Checklist

A test harness for v1.6.6 should verify all of the following conditions:

1. TV1 mnemonic normalization produces the exact 93 bytes listed above.
2. TV1 BIP39 PBKDF2 produces the exact 64-byte seed.
3. TV1 secp256k1 BIP32 root IL, IR, xprv, and xpub match exactly.
4. Bitcoin Auto m/0' produces P2PKH addresses and the listed key material.
5. Bitcoin P2WPKH m/0' changes only address encoding and SLIP132 display keys, not child scalar bytes.
6. Bitcoin Cash uses CashAddr output for the same m/0' child key bytes.
7. Litecoin Auto at m/84'/2'/0' uses P2WPKH and the ltc Bech32 HRP.
8. Dogecoin Auto at m/44'/3'/0' uses P2PKH and Dogecoin WIF versioning.
9. Ethereum and ERC-20 rows use the same EIP-55 account address.
10. XRP rows use XRPL classic addresses and never derive destination tags.
11. Solana and Stellar use SLIP-0010 Ed25519 hardened derivation only.
12. Monero emits spend/view key pairs and a standard mainnet address.
13. Cardano emits the Shelley base address from payment and staking keys.
14. YellowSphere ARC V3 fixed Password, Keyfile, and combined vectors match exact ciphertext/tag and armored-file SHA-256 values.
15. Common secp256k1 path matrix rows match exact path, script type, address, public key, and private key bytes.
16. JSON, CSV, and TXT export byte lengths and SHA-256 digests match for every supported coin.
17. Expanded Solana and Stellar rows 0..3 match exact hardened paths, addresses, public keys, private keys, and Stellar secret seeds.
18. Expanded Cardano rows 0..2 match exact payment paths, staking path, Shelley base addresses, and payment/stake key bytes.
19. Additional Monero vectors match exact alternate-account and passphrase-sensitive spend/view key material.
20. TV1 passphrase "TREZOR" first-row vectors match for every supported coin family.
21. Legacy YellowSphere ARC V2 fixed 12/24-word vectors remain import-compatible.
22. Encrypted-keyfile v2 matches its exact AAD and ciphertext/tag vector.

23. Every negative test rejects without returning partial key material.

No address-only comparison is sufficient. Private key bytes, public key bytes, chain codes, paths, script types, and encoded display forms are all normative.

Python CLI v1.6.2 Compatibility Parity Checks

The current Python CLI remains a v1.6.2 scripted derivation surface until promotion synchronization. A Python parity harness must run with APP_VERSION equal to 1.6.2 and must verify at least the first receiving row for every upgraded coin. The canonical mnemonic for the commands below is TV1:

```
abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon abandon
about
```

Version check:

```
python YellowSphere.py --version
```

Expected stdout:

```
YellowSphere 1.6.2
```

Bitcoin Cash command:

```
python YellowSphere.py --mnemonic "<TV1>" --coin bitcoincash --output-format json
```

Required JSON fields:

```
coin: bitcoincash
accounts[0].account_script_type_used: p2pkh
accounts[0].receiving[0].address:
  bitcoincash:qppj3tdvu4q89ngxn2l3pruhe7qyyzep9v3l5ke649
```

Solana command:

```
python YellowSphere.py --mnemonic "<TV1>" --coin solana --output-format json
```

Required JSON fields:

```
coin: solana
accounts[0].account_script_type_used: solana
accounts[0].receiving[0].address:
  GJJyeC1r2RgkuoCWMyPYkCWSGSGSLcz266EaAkLA27AhL
```

Stellar command:

```
python YellowSphere.py --mnemonic "<TV1>" --coin stellar --output-format json
```

Required JSON fields:

```
coin: stellar
accounts[0].account_script_type_used: stellar
accounts[0].receiving[0].address:
  GB3JDWCQJCWMJ3IILWIGDTQJJC5567PGVEVXSCVPEQOTDN64VJBDQBYX
accounts[0].receiving[0].stellar_secret_seed:
  SBUV3MRWKNS6AYKZ6E6MOUVF20YMON3MIUASWL3JLY5E3ISDJFELYBRZ
```

Archived v1.6.0 LTS Monero command:

```
Use lts/YellowSphere_v1.6.0_LTS.html or an archived v1.6.0-compatible
implementation for this vector. The v1.6.6 Python CLI does not accept
--coin monero.
```

Required JSON fields:

```
coin: monero
accounts[0].account_script_type_used: monero
accounts[0].receiving[0].address:
```

```
44jKQv6ZKMD5ecLLmkNJGi7azgSptEq8ki7TFiat1TfLfDDQ1tQ7ZYa3cRh7X2uRwvLDjddWh97ajeyhR2seKSECQeDx
1wR
```

```
accounts[0].receiving[0].private_spend_key_hex:
  8f2d521d4334f4d5d174c47aacb346e7633516416fae089d74ecfd0c389a6b08
```

Cardano command:

```
python YellowSphere.py --mnemonic "<TV1>" --coin cardano --output-format json
```

Required JSON fields:

```
coin: cardano
accounts[0].account_script_type_used: cardano
accounts[0].receiving[0].address:
```

```
addr1qy8ac7qqy0vtulyl7wntmsxc6wex80gvcyjy33qffrhm7sh927ysx5sftuw0dlft05dz3c7revpf7jx0xnlcjz3
g69mq4afdvh
```

Bitcoin regression command:

```
python YellowSphere.py --mnemonic "<TV1>" --coin bitcoin --derivation "m/0'" --script-
type p2wpkh --count 1 --output-format json
```

Required JSON field:

```
accounts[0].receiving[0].address:
bc1qqv52mt89gpev6p56huggl970sppqkgftxakv7f
```

The Python harness must parse JSON and compare exact strings. It must not compare terminal formatting, object key order, or address-only output. For secret fields, compare exact lowercase hexadecimal byte encodings.