


Project Report

Group 18: Chengzhen Wu, Huiqi Mao, Ruofan Zhou

May 8, 2014

1 ER model

After reading the feedback of diverable1, we modified our ER model as below:

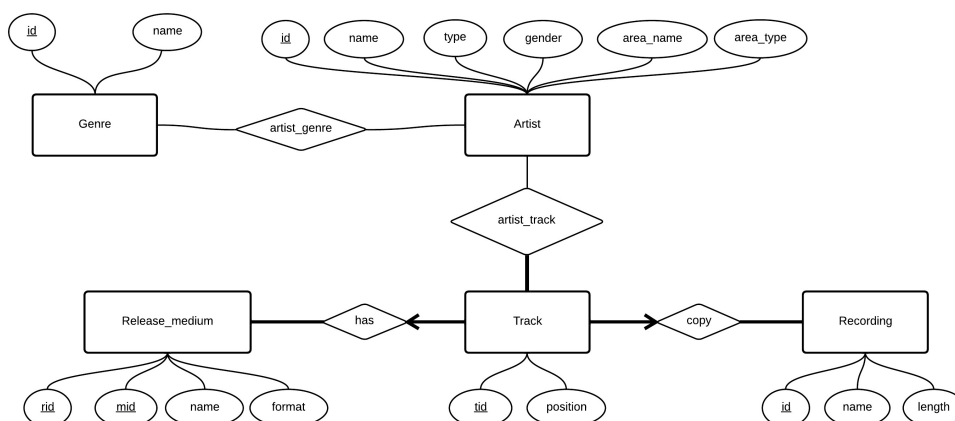

In the given project data, we firstly recognize 'area', 'artist' and 'genre' each as three individual entities. Each artist is from at most one area, so it's a many-to-one relation. Several artists can belong to different genres and one genre can contain several artists. So the relation between 'artist' and 'genre' is many-to-many.

Secondly, we think about the relationship among 'release', 'recording', 'track' and 'medium'. We imagine a scene to describe these relations. The csv file of 'release' contains the names of releases. They could be stored in the mediums, such as CD, 12" Vinyl and so on. What's more, one release could have several CDs to contain many tracks, or in different medium (I'm not sure about this, but possible). So the relation between 'release' and 'medium' is one-to-many. Next, each track in different mediums must correspond to one recording. So the relation between 'track' and 'recording' is many-to-one. Each 'track' must be in one of 'medium's. So the relation is many-to-one.

Finally, we merge one-to-many relations. 'release' and 'medium' are merged into 'Release_medium'. 'area' can be merged into 'artist' as attributes. The 'has' relation between 'Release_medium' and 'track' is merged into 'track' using 'mid' as foreign key. So is the 'copy' relation between 'recording' and 'track' using 'id' of recording as foreign key.

Additionally, we ignore the 'count' in 'genre', which could be created as view in the database.

2 SQL based on ER model

```
--ENTITY Genre
--we don't need gcount in genre
CREATE TABLE Genre (
  GID INTEGER,
  Gname VARCHAR(100),
  PRIMARY KEY (GID)
);

--ENTITY Artist
CREATE TABLE Artist (
  AID INTEGER,
  Aname VARCHAR(100),
  Atype CHAR(6),
  gender CHAR(6),
  area_name VARCHAR(60),
  area_type CHAR(15)
  PRIMARY KEY (AID)
);

--ENTITY Recording
CREATE TABLE recording (
  RID INTEGER,
  Rname VARCHAR(100),
  Rlength INTEGER,
  PRIMARY KEY (RID)
);

--ENTITY ReleaseMedium
CREATE TABLE ReleaseMedium (
  MID INTEGER,
  RID INTEGER,
  name VARCHAR(400),
  format CHAR(45),
  PRIMARY KEY (RID,MID)
);

--ENTITY Track
CREATE TABLE Track (
  TID INTEGER,
  position INTEGER,
  MID INTEGER NOT NULL,
  RID INTEGER NOT NULL,
  REID INTEGER NOT NULL,
  PRIMARY KEY (TID),
  FOREIGN KEY (RID,MID) REFERENCES ReleaseMediuma ON DELETE NO ACTION,
  FOREIGN KEY (REID) REFERENCES Recording ON DELETE NO ACTION
);

--RELATIONSHIP artist_genre
CREATE TABLE artist_genre (
  AID INTEGER NOT NULL,
  GID INTEGER NOT NULL,
  PRIMARY KEY (AID, GID),
  FOREIGN KEY (AID) REFERENCES Artist ON DELETE NO ACTION ,
  FOREIGN KEY (GID) REFERENCES Genre ON DELETE NO ACTION
);

--RELATIONSHIP artist-track
CREATE TABLE artist_track(
  AID INTEGER NOT NULL,
  TID INTEGER NOT NULL,
```

```
PRIMARY KEY (AID, TID),
FOREIGN KEY (AID) REFERENCES Artist ON DELETE NO ACTION ,
FOREIGN KEY (TID) REFERENCES Track ON DELETE NO ACTION
);
```

3 Alternative based on Real Data

When importing the real data, we find several problems. So we decide to change the schema in order to import as much data as possible.

In our ER model, we merged the 'area' and 'artist'. However, since the data is not incomplete, a few AreaIDs in 'artist' don't appear in 'area', such as 'AreaID=241'. So we use an 'area' entity instead. And the foreign key in 'artist' is disabled. Other foreign key constraints, except in 'medium', are also disabled to make it easy to import data. Additionally, in the original file of 'artist.csv', we change 'N' to '0', which is null in the 'area' table.

Another problem with the data is duplicate, since the data in artist_track has duplicate, we set the foreign-key disabled in the table artist_track.

We separate the release_medium table into 'release' and 'medium', considering the limited space. Because the name of release could be very long. Duplication could cause a waste of memory. But the foreign key in 'medium' is still retained, because it works.

In the 'genre' entity, 'count' is remained for further possible queries(We find that 'count' from real data is not really the count we calculate).

4 Alternative SQL

```
CREATE TABLE Init_Genre (
  GID VARCHAR(20),
  Gname VARCHAR(300),
  count Integer,
  PRIMARY KEY (GID)
);

create table Init_Area(
  AreaID VARCHAR(20),
  AreaName VARCHAR(150),
  Area_type VARCHAR(15),
  PRIMARY KEY (AreaID)
);

CREATE TABLE Init_Artist (
  AID VARCHAR(20),
  Aname VARCHAR(200),
  Atype CHAR(10),
  gender CHAR(6),
  --area_name VARCHAR(100),
  --area_type CHAR(15),
  AreaID VARCHAR(20),
  PRIMARY KEY (AID),
  foreign key (AreaID) references Init_area(AreaID)
);
```

```

CREATE TABLE Init_Recording (
  RID VARCHAR(20),
  Rname VARCHAR(2000),
  Rlength VARCHAR(20),
  PRIMARY KEY (RID)
);

CREATE TABLE Init_Release (
  RID VARCHAR(20),
  name VARCHAR(1000),
  PRIMARY KEY (RID)
);

CREATE TABLE Init_Medium (
  MID VARCHAR(20),
  RID VARCHAR(20),
  format CHAR(45),
  PRIMARY KEY (MID),
  FOREIGN KEY (RID) REFERENCES Init_Release (RID)
);

CREATE TABLE Init_Track (
  TID VARCHAR(20),
  REID VARCHAR(20) NOT NULL,
  MID VARCHAR(20) NOT NULL,
  position INTEGER,
  PRIMARY KEY (TID),
  FOREIGN KEY (MID) REFERENCES Init_Medium (MID),
  FOREIGN KEY (REID) REFERENCES Init_Recording (RID)
);

CREATE TABLE Init_artist_genre (
  AID VARCHAR(20) NOT NULL,
  GID VARCHAR(20) NOT NULL,
  PRIMARY KEY (AID, GID),
  FOREIGN KEY (AID) REFERENCES Init_Artist (AID) ON DELETE CASCADE,
  FOREIGN KEY (GID) REFERENCES Init_Genre (GID) ON DELETE CASCADE
);

CREATE TABLE Init_artist_track (
  AID VARCHAR(20) NOT NULL,
  TID VARCHAR(20) NOT NULL,
  PRIMARY KEY (AID, TID),
  FOREIGN KEY (AID) REFERENCES Init_Artist (AID), --these foreign keys are disabled for data duplicate
  FOREIGN KEY (TID) REFERENCES Init_Track (TID)
);

```

5 Queries

We finished the queries based on our model:

A

```

select artist.ANAME from init_area area, init_artist artist
      where area.areaname='Switzerland';

```

B

```

select area.areaname
from INIT_AREA area
where area.AREAID in (select art.areaid
                      from INIT_ARTIST art
                      where art.GENDER = 'Male' and art.ATYPE = 'Person' and
                      GROUP BY art.AREAID

```

```

having count(*)>= all (select count(*)
                        from INIT_ARTIST art1
                        where art1.GENDER = 'Male'
                        and art1.ATYPE = 'Person'
                        and art.AREAID <> 0
                        group by art1.AREAID));

select count(*)
  from INIT_ARTIST art
 where art.ATYPE='Person'
 and art.GENDER = 'Female'
 and art.areaid = '222' —United States

```

C

```

select artist.aname
from (
select artist.ANAME, count(*)
  from init_artist artist, init_artist_track A-T
 where artist.atype='Group' and A-T.aid=artist.aid
 group by artist.aname order by count(*) desc) artist
 where Rownum<11;

```

D

```

select art.ANAME
from (select art.aid
      from INIT_ARTIST art
      join INIT_ARTIST_TRACK art_track
        on art.AID = art_track.AID
      join INIT_TRACK track on art_track.TID = track.TID
      join INIT_MEDIUM medium on track.MID = medium.MID
      join INIT_RELEASE release on medium.RID = release.RID
 where art.atype = 'Group'
 group by art.aid
 order by count(*) desc) info, init_ARTIST art
WHERE art.AID = info.AID and rownum <= 10
ORDER BY rownum;

```

E

```

select art1.aname
  from (select art.aid
        from init_artist art, init_artist_genre
        art_genre, init_genre genre
        where art.aid = art_genre.aid

```

```

        and art_genre.GID = genre.GID
        and art.gender = 'Female'
    group by art.aid
    order by count(*))
genreRank, init_artist art1
where genreRank.aid = art1.aid and rownum = 1;

```

F

```

select area.areaname
from INIT_AREA area
where area.area_type='City' and (select count(*)
    from INIT_ARTIST artist
    where artist.AREAID = area.areaID
    and artist.GENDER='Male') < (select count(*)
    from INIT_ARTIST artist, INIT_AREA area
    where artist.AREAID = area.areaID and artist.GENDER='Female')

```

G

```


create view med_track as
    select medium.MID, count(*) as tracks
    from INIT_Medium medium, INIT_TRACK track
    where track.MID = medium.MID
    group by medium.MID order by count(*) desc;

select med_track.mid, med_track.tracks
from med_track
where med_track.tracks = (
    select MAX(med_track.tracks)
    from med_track);

```

6 Interface

Since we've already upload the data to the server, it's convient for us to use PHP + Apache + Oracle to build the website as interface, like below:

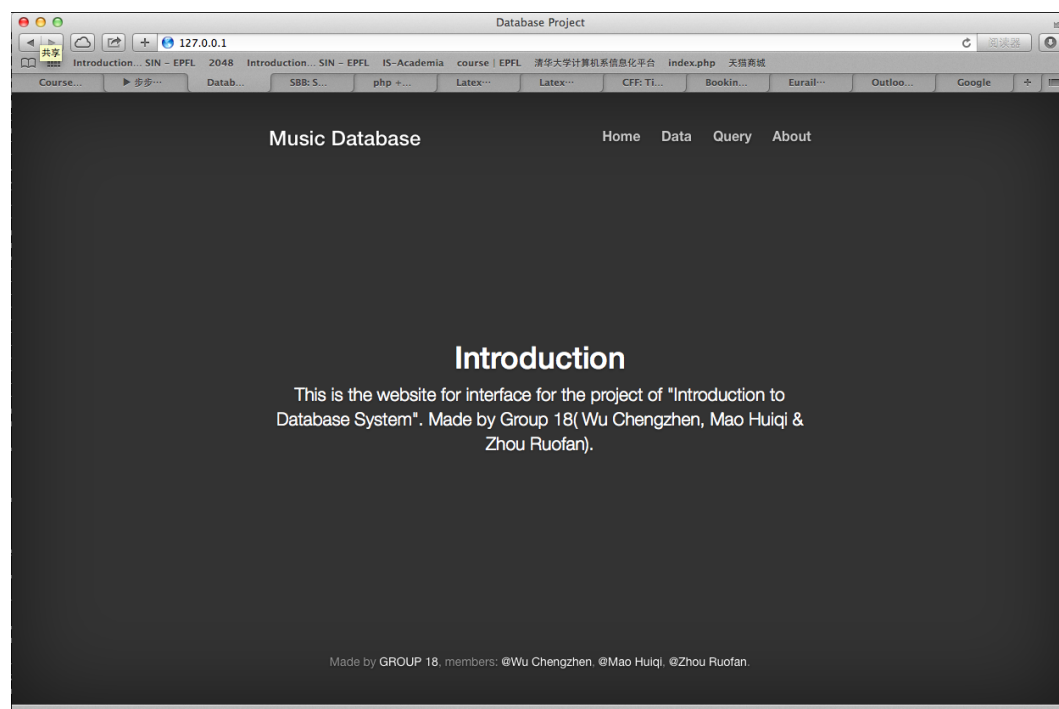

It's the index of our website. The website contains 4 parts: Home, Data, Query and About, and the functionally page is Data and Query.

The screen shot of Data page is as below, the page shows the data of tables(you can select the table you want to see by clicking the link of table names, which are the yellow words on the upper part of the page). Each page would show 20 data and you can blowse more data by click the link of pages on the bottom part of the page. As the screen shot, it shows the 'artist' table. By moving your mouse onto those foreign keys, a prompt box showing the message of the table linked by the foreign key(as the screen shot, we move the mouse onto the 'areaid' and a box showing message of the name and type of the 'areaid').

Music Database

Home Data Query About

area	artist	art_genre	art_track	genre	medium	recording	release	track
AID	ANAME					ATYPE	GENDER	AREAD
68440	Combo Audio					Group	Other	222
300542	Matthieu Lagarde					Other	Other	0
318750	The Happies					Other	Other	0
610232	Lounge Jam					Other	Other	0
68244	Bazooka Joe					Person	Male	0
475188	Martina Tichová					Person	Female	58
147590	The Ulf Sandberg Quartet					Group	Other	0
163464	Frank Proffitt Jr.					Other	Other	0
835812	The Other Thing Brass Band					Other	Other	0
740587	As a People					Other	Other	0
67048	The Aluminium Group					Other	Other	0
507863	Patrick HAF					Person	Other	0
883351	Steffen Horn					Person	Male	160
68378	Otis Reem					Other	Other	0
504812	Ben Pollack and His Californians					Group	Other	0
68380	Magadog					Other	Other	0
68512	Abfahrt Hinwil					Group	Other	0
551815	Maxine McClain					Person	Other	0
68396	Slapdash					Other	Other	0
162331	Chris Barron					Person	Other	0

keyword search

[1] 2 3 4 > >>

Made by GROUP 18, members: @Wu Chengzhen, @Mao Huiqi, @Zhou Ruofan.

Under each row there's a input box, and you can use it to search for keyword. Just by clicking the "Keyword Search" you can filter the data of the table. For example, next screen shot shows the result as we input 'Person' under keyword 'atype' and 'male' under keyword 'gender'.

Music Database

Home Data Query About

area	artist	art_genre	art_track	genre	medium	recording	release	track
AID	ANAME					ATYPE	GENDER	AREAD
68244	Bazooka Joe					Person	Male	0
883351	Steffen Horn					Person	Male	160
1011628	Elijah Josam					Person	Male	238
423163	Richard Wyands					Person	Male	222
591287	Charles-Émile Beullac					Person	Male	38
665348	El Seis					Person	Male	5187
891262	Παναγιώτης Τσίρος					Person	Male	84
842193	Slimy Adenoid					Person	Male	0
839173	Osvaldo Berlinger					Person	Male	10
978462	Udo Hüppe					Person	Male	81
978465	Daniel Schweiker					Person	Male	81
978463	Sebastian Bosum					Person	Male	81
978464	Florian Bosum					Person	Male	81
978466	Sebó					Person	Male	81
978491	Martin Stadelmann					Person	Male	203
978469	Piotr Wojtasik					Person	Male	170
978486	José Juan Cadenas					Person	Male	194
978470	Michael Felberbaum					Person	Male	222
978471	Karl Jannuska					Person	Male	38
978500	Christian Käufeler					Person	Male	203

keyword search

[1] 2 3 4 > >>

Made by GROUP 18, members: @Wu Chengzhen, @Mao Huiqi, @Zhou Ruofan.

And we satisfied all the queries in the Query page, and you can see the results by clicking the query number.

