USA_Housing using LINEAR REGRESSION

import pandas as pd
import numpy as np
import seaborn as sns
import matplotlib.pyplot as plt

df=pd.read_csv(r"/content/USA_Housing.csv")

df

	Avg. Area Income	Avg. Area House Age	Avg. Area Number of Rooms	Avg. Area Number of Bedrooms	Area Population	Price	Address
0	79545.458574	5.682861	7.009188	4.09	23086.800503	1.059034e+06	208 Michael Ferry Apt. 674\nLaurabury, NE 3701
1	79248.642455	6.002900	6.730821	3.09	40173.072174	1.505891e+06	188 Johnson Views Suite 079\nLake Kathleen, CA
2	61287.067179	5.865890	8.512727	5.13	36882.159400	1.058988e+06	9127 Elizabeth Stravenue\nDanieltown, WI 06482
3	63345.240046	7.188236	5.586729	3.26	34310.242831	1.260617e+06	USS Barnett\nFPO AP 44820
4	59982.197226	5.040555	7.839388	4.23	26354.109472	6.309435e+05	USNS Raymond\nFPO AE 09386
4995	60567.944140	7.830362	6.137356	3.46	22837.361035	1.060194e+06	USNS Williams\nFPO AP 30153-7653
4996	78491.275435	6.999135	6.576763	4.02	25616.115489	1.482618e+06	PSC 9258, Box 8489\nAPO AA 42991- 3352
4997	63390.686886	7.250591	4.805081	2.13	33266.145490	1.030730e+06	4215 Tracy Garden Suite 076\nJoshualand, VA 01

df.head()

	Avg. Area Income	Avg. Area House Age	Avg. Area Number of Rooms	Avg. Area Number of Bedrooms	Area Population	Price	Address
(79545.458574	5.682861	7.009188	4.09	23086.800503	1.059034e+06	208 Michael Ferry Apt. 674\nLaurabury, NE 3701
1	79248.642455	6.002900	6.730821	3.09	40173.072174	1.505891e+06	188 Johnson Views Suite 079\nLake Kathleen, CA
2	2 61287.067179	5.865890	8.512727	5.13	36882.159400	1.058988e+06	9127 Elizabeth Stravenue\nDanieltown, WI 06482
3	63345.240046	7.188236	5.586729	3.26	34310.242831	1.260617e+06	USS Barnett\nFPO AP 44820

df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 5000 entries, 0 to 4999
Data columns (total 7 columns):

Ducu	corumns (cocar / corumns).		
#	Column	Non-Null Count	Dtype
0	Avg. Area Income	5000 non-null	float64
1	Avg. Area House Age	5000 non-null	float64
2	Avg. Area Number of Rooms	5000 non-null	float64
3	Avg. Area Number of Bedrooms	5000 non-null	float64
4	Area Population	5000 non-null	float64
5	Price	5000 non-null	float64
6	Address	5000 non-null	object

dtypes: float64(6), object(1) memory usage: 273.6+ KB


df.describe()

	Avg. Area Income	Avg. Area House Age	Avg. Area Number of Rooms	Avg. Area Number of Bedrooms	Area Population	Price
count	5000.000000	5000.000000	5000.000000	5000.000000	5000.000000	5.000000e+03
mean	68583.108984	5.977222	6.987792	3.981330	36163.516039	1.232073e+06
std	10657.991214	0.991456	1.005833	1.234137	9925.650114	3.531176e+05
min	17796.631190	2.644304	3.236194	2.000000	172.610686	1.593866e+04
25%	61480.562388	5.322283	6.299250	3.140000	29403.928702	9.975771e+05
50%	68804.286404	5.970429	7.002902	4.050000	36199.406689	1.232669e+06
75%	75783.338666	6.650808	7.665871	4.490000	42861.290769	1.471210e+06
	407704 740070	0.540000	40 750500	6 500000	60604 740070	0.460066~+06

df.columns

EXPLORATORY DATA ANALYSIS

```
sns.pairplot(df)
sns.displot(df['Price'])
sns.displot(df['Area Population'])
```

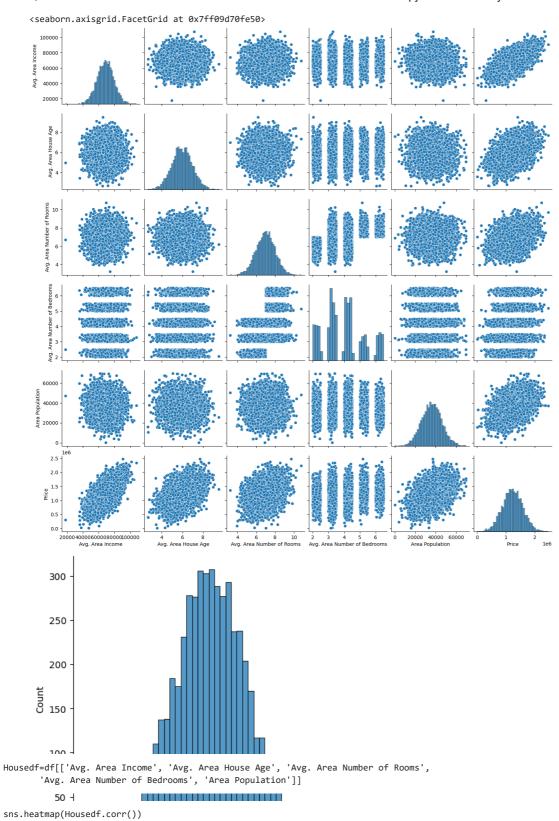

<Axes: > - 1.0 Avg. Area Income -- 0.8 Avg. Area House Age -- 0.6 Avg. Area Number of Rooms -0.4 Avg. Area Number of Bedrooms -TO TRAIN THE MODEL ALCO FORGIOGIOTI T x=Housedf[['Avg. Area Income', 'Avg. Area House Age', 'Avg. Area Number of Rooms', 'Avg. Area Number of Bedrooms', 'Area Population']] y=df['Price'] from sklearn.model_selection import train_test_split $x_train, x_test, y_train, y_test=train_test_split(x, y, test_size=0.3, random_state=101)$ Ø ÷ from sklearn.linear_model import LinearRegression lm=LinearRegression() lm.fit(x_train,y_train) ▼ LinearRegression

LinearRegression()

print(lm.intercept_)

-2641372.6673014294

coeff_df=pd.DataFrame(lm.coef_,x.columns,columns=['coefficient']) coeff_df

	coefficient	1
Avg. Area Income	21.617635	
Avg. Area House Age	165221.119872	
Avg. Area Number of Rooms	121405.376596	
Avg. Area Number of Bedrooms	1318.718783	
Area Population	15.225196	

predictions=lm.predict(x_test) plt.scatter(y_test,predictions)