


CNN autoencoder with 16-dimensional bottleneck

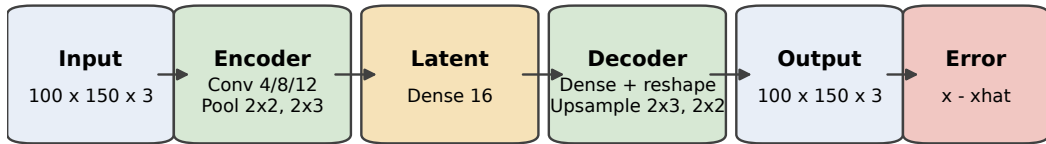

Training uses nominal spectrograms only; anomaly scores are derived from reconstruction error.