

CSCM79: Hardware & Devices Coursework Report - The Every Dice

Jamie Bragg
2137481

Sean Coaker
986529

Dylan Parry
961883

Ryan Lucas
951998

ABSTRACT TO-DO

INTRODUCTION

Anxiety has been studied as a problem occurring within classrooms where certain teaching practices put pressure on students and can cause excess stress. This anxiety, caused primarily by the tactic of calling on a specific student to answer questions, has also been seen as a link to general social anxiety and lower grades.

Active learning is a method of teaching where the students are actively involved in the learning process through discussion, debate, and tasks that help the student develop their understanding of a topic as they work through it.

However, the problems become apparent when you see that active learning also uses techniques which increase anxiety in the classroom. These techniques, whilst beneficial to those without anxiety, can be seen as stress inducing to students suffering with anxiety, rendering it less useful. For active learning to be effective, there must be ways to adapt it to students who suffer from anxiety.

To address the problem of anxiety in the classroom, this report will investigate the viability of using technology in an active learning environment, with the goal of reducing anxiety whilst retaining the effectiveness of active learning. By doing so, this report should be able to develop a prototype of a product that could achieve this task.

LITERATURE REVIEW

Active learning is defined as “a method of learning in which students are actively or experientially involved in the learning process.” [1]. It is seen as a beneficial teaching method in which students are actively involved in the learning process. This can be accomplished through tools such as class discussions and debates where the students are encouraged to talk to one another or the teacher to generate a greater understanding of the topic. The benefits of active learning are apparent, with active learning reducing the failure rates of students in classes where it is used [3].

Benjamin England et al. studied anxiety in the classroom. They conducted surveys and interviews with students about which active learning practices caused them to feel anxious. The classroom practices that lead to the most anxiety were different ways of questioning. Cold calling, a practice where the teacher selects a specific student to answer, was the most anxiety inducing while volunteer questioning was the second most anxiety inducing. The reasons that the students gave for feeling anxiety were a mixture of communication apprehension, social anxiety and test anxiety. This demonstrates a problem in the classroom as the authors found that anxiety could have potential impacts on student grades as those who felt stronger anxiety tended to have lower grades [2].

Active learning techniques have been shown to be beneficial to students despite the concerns about anxiety. Shams Huda et al conducted a study into the benefits of active learning strategies. They found that active learning strategies increased student engagement and participation. Students were also found to have learnt more through active learning strategies. They also found that two thirds of the students also felt that active learning techniques were beneficial to them, this is backed up with an increase in student grades. This paper demonstrates that active learning is an overall positive learning environment. The issue of anxiety shown by Benjamin is the only hurdle found that could lead to students having a bad experience and lower grades. We have designed The Every Dice with the goal of combatting the problem of anxiety when answering questions in the classroom [4].

REQUIREMENTS AND SPECIFICATIONS

This section includes a brief description for the requirements and specifications of the project. The following table, table 1, lists the requirements of the Every Dice project along with accompanying specifications that needed to be met to allow each requirement to be attained successfully.

Table 1: A table of requirements with relative specifications that need to be met to reach the requirement.

Code	User Requirement	Specification
REQ1	The Every Dice should allow the user to answer questions in an attempt to reduce anxiety in classrooms that practise active learning.	The Android application should allow a user to list options for answers and select the correct answer. This has been implemented with a recycler view that allows the user to add and remove items to and from the list.
		When a user sets down the Every Dice, the side facing up, determined by the contained spacial phidget, will become the chosen answer. At this point, the user can tap the 'check answer' button in the application and communication between the Every Dice, and the Android application should ensure that the user is notified whether their answer is incorrect or correct with a display on the screen facing upwards and an audio tone.
REQ2	The Every Dice should permit the size of the dice to be greater than 6 sides. Allowing for the Every Dice to be used in games that require dices with varying shapes of dice.	The Android application should include a state machine feature that ensures that the Every Dice is notified when the number of items listed in the application are greater than 6 sides, with the Every Dice having virtually more than 6 sides.
		In this instance, instead of displaying each item on each side as the application does when 6 items are selected, the application should animate each screen, with a shuffle through each of the items listed in the application.
		The application should make a pseudo-random choice of one of the listed items. Once an external spatial phidget has been shaken, the selected pseudo-random item is displayed to the side facing upwards as the chosen side. The side facing upwards will again be determined by the internal spatial phidget.
REQ3	The Every Dice should facilitate an auto-roll feature, for entertainment purposes and for the purpose of a user being able to auto-roll a random answer when they are unsure of a question within a classroom setting.	With a shake of the mobile phone device the application will send a prompt to the Every Dice to auto-roll. The Every Dice should use the servo motors contained within the dice housing to open each side to roll the dice over a random number of times.
REQ4	The Every Dice should be able to stand out in the foreground and be able to blend into the background.	With the use of contexts in the Android application lifecycle, we can identify when the user is no longer using the Every Dice. When this occurs, the dice will play a sleep audio tone before turning off all screens and disabling the phidget hardware. When the application becomes the main focus of the mobile device again, the Every Dice plays a start audio tone and the screens are displayed once again after all phidgets have been restarted.

IMPLEMENTATION

The completed first prototype is a package that involves a wooden housing containing all the necessary phidget hardware to implement the Every Dice system. As well as the hardware included in the dice housing, an external spatial phidget is utilised to identify when the dice has been rolled. This decision was made to avoid the prototype itself needing to be rolled, which would have increased the likelihood of causing damage to the dice. An overview of the cutouts to each side of the dice can be seen in figure 1.

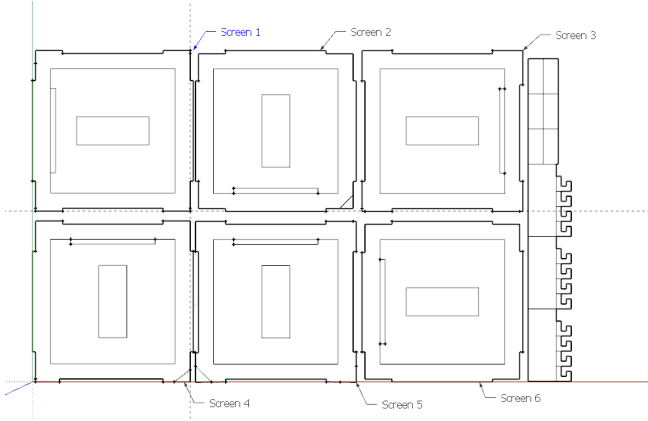


Figure 1. A model of the cutouts of each side that needed to be created to form the Every Dice.

As stated previously, the necessary hardware to implement the features required for the project were housed within the dice's wooden casing. Each side acts as a door which has two uses, provide access to the hardware of the device to allow for easy adjustments during prototyping, and to allow for the auto-roll feature of the device to be implemented. Due to resource constraints, we could only implement 3 doors for the auto-roll feature, but they provide a proof-of-concept of how we envisioned this feature working. Each of the 3 working doors are connected to servo-motors which allow them to be opened. The theory behind this is that the opening motion would press the door against the surface it is sat on, causing the dice to flip over to another side. An example of the built prototype containing its hardware contents can be viewed in figure 2.

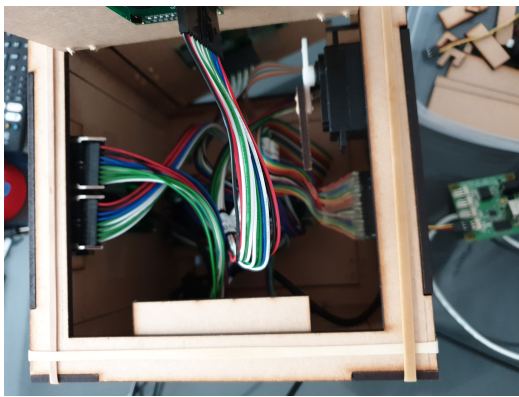


Figure 2. An image of the built Every Dice prototype displaying its contents.

Another important piece of hardware that is included within the casing of the prototype is the internal spatial phidget. This phidget is in constant communication with the application, so it understands which side of the device is currently facing upwards. This is important in allowing us to develop the check answer feature for classroom settings, as well as the feature that allows the dice to be more than 6 sides virtually. A final list of hardware included within this project can be viewed below.

- **2x Spatial Phidget** - One internally to identify which side of the dice is facing upwards, and one externally to help simulate the rolling of the dice.

- **6x LCD Screens** - A screen for each side of the dice.
- **3x LCD Screen Controllers** - Each one used to handle the transferring of data from the application to 2 LCD screens.
- **3x Servo Motors** - Each one used to open the doors of the dice to facilitate the auto-roll feature.
- **1x Buzzer** - Used to play tones when the incorrect/correct answer is detected, or when the dice is being transferred between sleep and awake states.

On the Android application side, we began by developing a MainActivity file that would handle the context change detection of the application, handle the events of each phidget device we have detected, as well as handling the creation of the MainFragment which displays the user interface. The MainActivity class begins by initialising the dice to be in inactive mode using the enum state 'INACTIVE'. Each side of the dice is then set with a generic name. A sensor manager is then created to allow us to handle the detection of the phone shaking and call the auto-roll feature. The communication between each phidget device is then opened ready for communication throughout the application's lifecycle.

Once the main features of our system are initialised, we include code to handle the context change events. This code ultimately allows the device to turn on and off depending on if the application is in focus on the connected mobile device or not. Alongside this, the options menu for the application is configured to include two buttons. The first of those buttons is the check answer button, one that allows the user of the application to check if the side of the dice that is facing upwards is the same item that they have selected to be the correct answer. The other button is a list reset function which allows the user to quickly clear all items they have selected to be displayed on the dice.

The most important development of code is included within the latter stages of the MainActivity class, which handles the detection of which side of the dice is facing upwards. This is achieved by taking measurements for the x angle and y angle of the accelerometer, before comparing those values to pre-determined threshold values to interpret which side of the dice is facing upwards. Determining the side of the dice that is facing upwards was imperative to being able to implement the check answer feature and determine which side of the dice the user had chosen as their answer, as well as being able to implement the roll feature which floats the pseudo-random item from the user's list to the side facing upwards whenever the dice has more than 6 items chosen and the external spatial phidget is shaken. Other code is also included here to detect changes in acceleration from the external spatial phidget, before comparing those values to a threshold value to determine when the external spatial phidget is being shaken. At this stage, we can perform the roll feature for the dice when more than 6 items have been entered by the user.

Finally, the work within the MainActivity class is completed with the inclusion of code to handle the background-foreground feature of the Every Dice. Effectively, we have included code that allows audio tones to be played when the dice is going from a sleep state to an awake state, or from an awake state to a sleep state. As well as this, we have included code that allows the LCD screens of the dice to also be switched on and off depending on if the dice is supposed to be sleeping or not.

Aside from the MainActivity class, we have developed two other classes to handle the controlling of the user interface fragment as well as the recycler view within the main fragment, which is used to display the user's selected items through the mobile device. The MainFragment class allows the user to tap on the 'Add Choices...' button and list comma-separated strings that act as their list of options. This list of strings is the data source for both the recycler view and the options to be listed on the dice. Each item in the list is displayed as a card view that includes a delete button for each item to allow the item to be removed from the list. An item in the list can also be selected as the 'correct answer', which is then used as comparison against the item on the side facing upwards on the dice when the check answer button is tapped. The clear button in the options menu also allows the user quickly delete all items from their list, as stated earlier in this section. Within all this code, communication is regularly occurring between the MainActivity and MainFragment to update the state of the dice depending on the number of items selected by the user. An example of the Android application's user interface can be seen in figure 3.

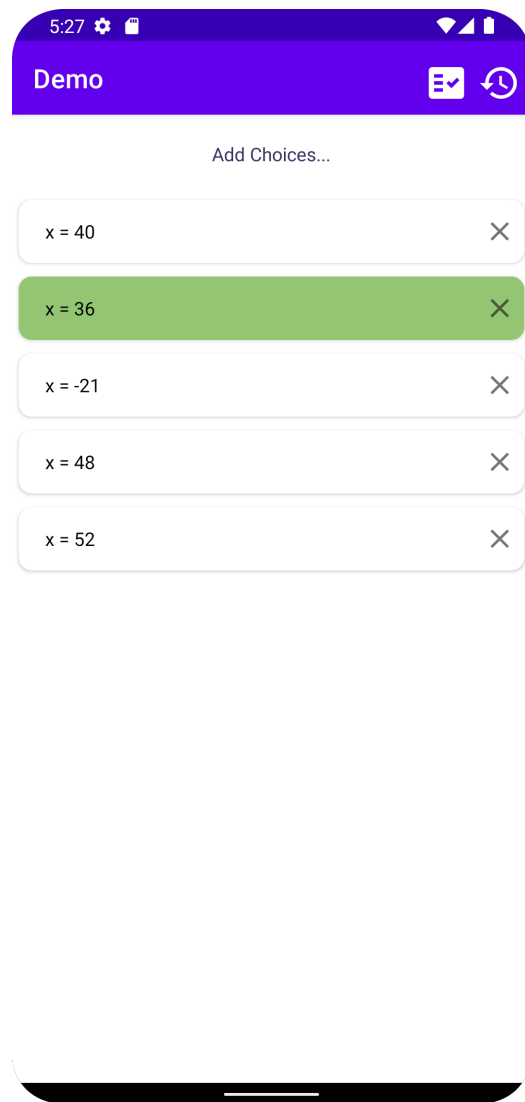


Figure 3. An image of the finalised user interface of the Android application.

EVALUATION

DISCUSSION

CONCLUSION

REFERENCES

1. Charles C. Bonwell and James A. Eison. 1991. *Active learning: Creating excitement in the classroom*. 1991 *Ashe-Eric Higher Education Reports*. ERIC Clearinghouse on Higher Education, Washington, DC.
2. Benjamin J. England, Jennifer R. Brigati, and Elisabeth E. Schussler. 2017. Student anxiety in introductory biology classrooms: Perceptions about active learning and persistence in the major. *PLOS ONE* 12, 8 (Aug 2017). DOI : <http://dx.doi.org/10.1371/journal.pone.0182506>
3. Scott Freeman, Sarah L. Eddy, Miles McDonough, Michelle K. Smith, Nnadozie Okoroafor, Hannah Jordt, and Mary Pat Wenderoth. 2014. Active learning increases student performance in science, engineering, and Mathematics. *Proceedings of the National Academy of Sciences* 111, 23 (May 2014), 8410–8415. DOI : <http://dx.doi.org/10.1073/pnas.1319030111>

4. Shams Ul Huda, Tazeen Saeed Ali, Kashmira Nanji, and Shanaz Cassum. 2016. Perceptions of undergraduate nursing students regarding active learning strategies, and benefits of active learning. *International Journal of Nursing Education* 8, 4 (Jan 2016), 193. DOI : <http://dx.doi.org/10.5958/0974-9357.2016.00151.3>