Early Depression Detection from User Post Sequences (eRisk 2025 Task 2): System Design, Experiments and Findings

> **Scope.** The offline pipeline in `4Z03/jupyter` (data processing → feature engineering → sequence model → evaluation → ablations). The online client (`Test/`) has not been aligned with the new pipeline and is out of scope (Section 11). **Reporting convention.** Every result is the mean ± standard deviation over 3 random seeds (42, 43, 44) unless stated otherwise. Complete result tables are in Appendix A and are generated directly from the saved experiment results. Figures are generated by `docs/make_figures.py` from the same files. **Honesty note.** All numbers were produced by local runs. Anything that was not measured (for example computing cost) is explicitly marked as such.

Contents

1. Summary and main findings
2. Task and data
3. System design and pipeline
4. Feature engineering
5. Sequence model and training
6. Evaluation protocol
7. Why the performance is lower than in the old README
8. Experiments and ablations
9. Feature selection and recommended configuration
10. Repeated cross-validation: MentalRoBERTa and bag-of-words baselines, significance tests, error analysis and feature groups
11. Limitations, risks and open work
12. Reproduction and code layout
13. Paper plan and outline

- Appendix A. All experiment results
- Appendix B. Audit of the old pipeline

---

1. Summary and main findings

System. For each user, the posts (submissions and comments) are read in time order and a depression probability is produced after every post. A causal Transformer operates on a sequence of hand-designed, interpretable features. An alarm is raised once the probability stays at or above a threshold `th` for `k` consecutive posts.

Main findings

1. **PHQ-9 similarity features carry most of the signal and cannot be replaced.** Removing them lowers ROC-AUC from ≈0.95 to ≈0.89 and PR-AUC from ≈0.81 to ≈0.67. This holds in the full feature set, in the `lean` and `lean2` configurations, and on the parent-only subset.
2. **Most other feature groups are redundant.** Own-text LIWC categories (`liwc_HEALTH/ANX/SAD`) add a little; relative entropy (RE), cosine similarity (`sim`) and `post_index` can be removed without a measurable change; running means help when the feature set is small but can hurt with 150 features.
3. **LSM finding.** The original LSM was computed on raw LIWC *counts* instead of word *rates*, which mixes in a length effect. Recomputing it on rates and adding signed differences (LSMX) makes it much stronger when used alone, but most of that gain comes from the *parent text's own category rates* (topic/community selection), not from style matching. Without the parent rates, the remaining style-alignment features still give a small, fairly consistent gain on top of PHQ.
4. **(Superseded by item 8.) Recommended configuration on the single split: `lean2` (76 features)** = PHQ + RE + 3 own-LIWC categories + style-alignment LSM (rate-based LSM and signed difference) + running means; no `sim`, no parent rates. Full-data test PR-AUC 0.831 (second only to `lean_PHQ_plus_LSMX_no_par` at 0.834), ROC-AUC 0.950, OOF PR-AUC 0.744 (tied for best with `no_cummean`, 0.745), and no topic-shortcut

features.

5. **The old README's F1 ≈ 0.93 is not comparable.** The old test set had control users truncated (longest 516 posts, while 57 % of depressed users had more than 600), which creates a length shortcut; the old features also had defects (unsorted history features, `-1` sentinels, in-sample RE). With the full data and an honest protocol, F1 is about 0.70.
6. **Comparison with MentalRoBERTa (same sequence model for all).** Against frozen embeddings, `lean2` ranks users better (ROC 0.950 vs 0.909, PR 0.831 vs 0.737) while the embeddings detect earlier (AUC@10 0.894 vs 0.860). Against an **adapter fine-tuned** MentalRoBERTa (cross-fitted logit), `lean2` is on par in PR (0.831 vs 0.814) and F1 (0.697 vs 0.688) but the fine-tuned model has the higher ROC (0.960) and the faster alarms (median 3.7 posts); combining both gives the highest test F1 (0.731) and PR (0.835) but not a higher OOF PR. **The system therefore does not clearly beat a fine-tuned MentalRoBERTa.**
7. **The largest uncertainty is sample size.** The test set has only 21 depressed users; the 95 % interval of the test F1 is about ±0.14–0.17 and seed noise is about ±0.03–0.05. Most F1 differences between configurations (0.66–0.72) cannot be resolved; conclusions should rest on PR/ROC/OOF metrics and consistent trends.
8. **Repeated cross-validation over all 891 users (Section 10.5) is the evidence to rely on, and it changes two conclusions.** (a) The single test split was optimistic (`lean2` PR 0.831 on the test set with RE, 0.820 without RE, against 0.753 pooled for `lean2_without_RE`; intervals about ±0.07). (b) There is no demonstrable gain from features beyond PHQ: `lean2`, `lean`, `only_PHQ` and `lean_PHQ_plus_LIWC` are indistinguishable (or `lean` is slightly better), so `lean2` is **not** supported as the recommended configuration (item 4 and Section 9 are superseded). The adapter fine-tuned MentalRoBERTa logit is the strongest method (ROC 0.963, PR 0.792, F1 0.788), significantly better than frozen embeddings and than a TF-IDF logistic-regression baseline, but not significantly better than the hand-crafted features after Holm correction. The bag-of-words baseline has the highest AUC@10 and the shortest delay.
9. **Error analysis (Section 10.6).** Most missed depressed users do disclose their depression, but in a few posts buried in long histories of unrelated comments; the sequence model does not keep such isolated evidence. About a third of the false alarms are control users who describe their own depression. A rule without training that alarms at the first self-reported diagnosis reaches F1 0.783 (best model 0.788) but alarms much later (median 55 posts), so the learned models' advantage is mainly earliness. For the hand-crafted `lean2` (Section 10.7) the errors differ: it misses depressed users with an explicit disclosure but a short history, and flags control users who write about health topics, because its PHQ and LIWC features measure vocabulary rather than the statement.
10. **Feature groups (Section 10.8).** Run alone in the cross-validation, the groups rank PHQ > LIWC > LSM (counts) > LSM alignment > behaviour > cosine similarity; PHQ is significantly better than LIWC and the LSM groups. Post position and volume alone already give ROC 0.662. After one post PHQ and LIWC rank users with AUC about 0.75, the LSM groups need several posts (AUC 0.53–0.56 after one post); LIWC and PHQ have the same median delay but LIWC is less precise. The groups miss and flag different users (misses of PHQ are long-history users with diluted evidence; false alarms of the behaviour features are heavy posters), and every configuration loses recall on depressed users without an explicit self-report phrase (indicative, 19 users). RE was not part of the cross-validation.

Key numbers (full data, test set with 21 depressed users)

Configuration	# features	F1	ROC	PR	AUC@10	OOF PR
`lean2` (recommended)	76	0.697±0.041	0.950	0.831	0.860	0.744
`lean`	44	0.708±0.023	0.947	0.820	0.868	0.716
`only_PHQ`	28	0.696±0.036	0.939	0.802	0.832	0.664
`all` (all V2 features)	150	0.664±0.045	0.948	0.806	0.857	0.726
`post_level_only` (no history)	43	0.614±0.049	0.915	0.698	0.871	0.613
`mental_emb` (frozen MentalRoBERTa)	771	0.666±0.034	0.909	0.737	0.894	0.629
`ft_logit` (adapter fine-tuned MentalRoBERTa)	4	0.688±0.019	0.960	0.814	0.888	0.735
`ft_logit_plus_lean2`	77	0.731±0.031	0.953	0.835	0.868	0.697

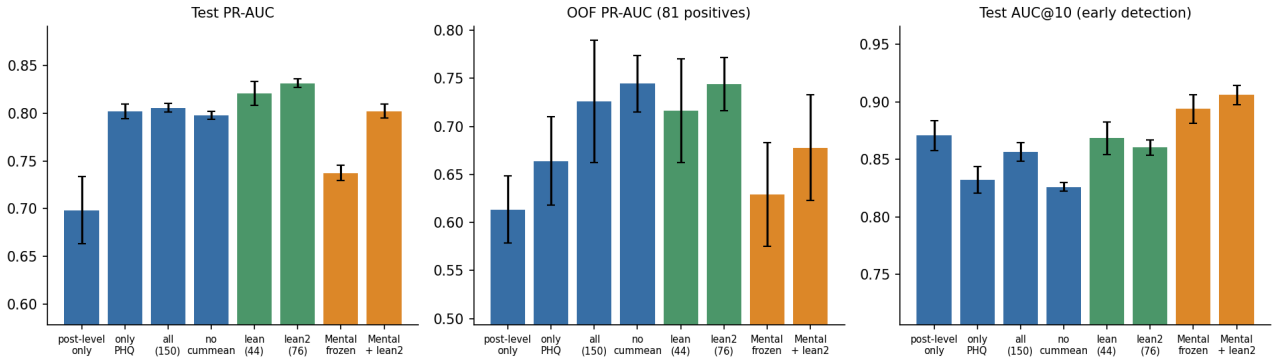


Figure 1. Test PR-AUC, out-of-fold (OOF) PR-AUC and test AUC@10 of the main configurations (mean ± std over 3 seeds; y-axes are truncated). Blue: our feature sets, green: `lean`/`lean2`, orange: MentalRoBERTa-based.

2. Task and data

2.1 Task

eRisk 2025 Task 2: early detection of depression risk for Reddit users. Each user has a time-ordered sequence of posts; the system must decide as early and as accurately as possible whether the user is depressed.

2.2 Data and cleaning

- Raw data: Reddit discussion threads (JSON) plus user-level labels. Only submissions and comments written by the target (labelled) users are kept, together with the text they reply to (the *parent text*).
- Cleaning rules: drop empty bodies, `[removed]` / `[deleted]`, posts without a label, with an invalid timestamp, and duplicates.
- After cleaning: **343,153 posts** (33,172 submissions, 309,981 comments). Dropped: 73,052 empty-body submissions and 2,987 `[removed]`/`[deleted]` posts.
- **Users:** 891 (18 control users disappeared because all of their posts were removed).
    - Train: 712 users (81 depressed), 278,540 posts.
    - Test: 179 users (21 depressed), 64,613 posts.
- **No truncation.** All posts are used and control users are not down-sampled (an important difference from the old pipeline, Section 7).
- **Parent text availability.** Only about 60 % of rows have parent text (`has_parent` ≈ 0.608 train / 0.578 test). `sim` and LSM have real values only on those rows.

2.3 User split

- A user-level 80/20 split (stratified by label, seed 42), frozen in `splits/user_split.csv` as an exact reproduction of the old assignment. The old and new test sets therefore contain **the same users** (183 before, 179 now; the difference is 4 control users whose posts were all removed).
- Inside the training users: 3 folds for cross-fitting the RE language models and 5 folds for classifier cross-validation (both user-level and stratified by label).

2.4 The "parent-only" subset

To study features that depend on parent text (LSM, `sim`), a subset was built that keeps only comments with a known parent text, and **all history features are recomputed on this subsequence**:

- Train: 169,421 rows, 689 users (81 depressed).
- Test: 37,345 rows, 171 users (21 depressed).
- Experiment names carry the prefix `parent_`.

3. System design and pipeline

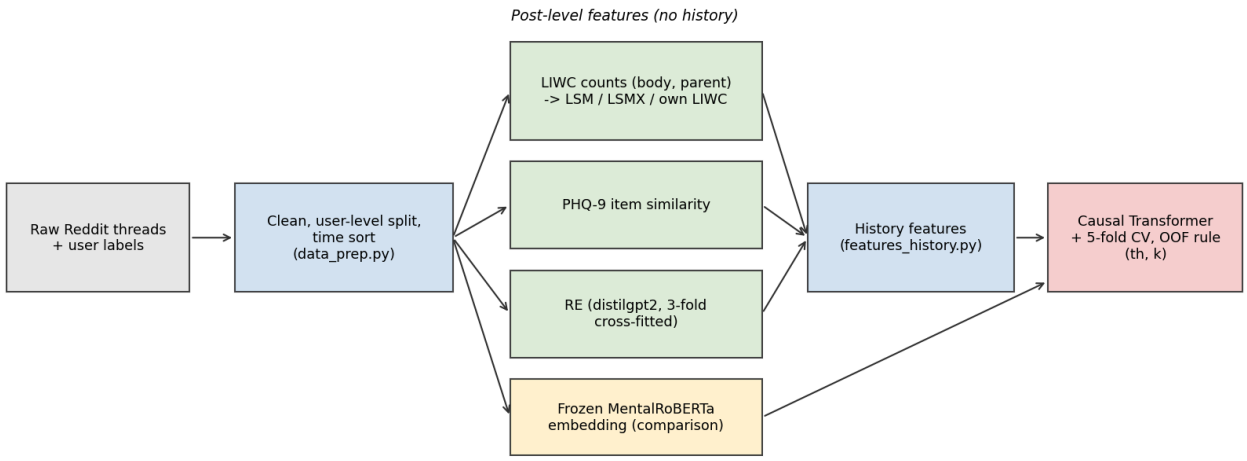


Figure 2. Offline pipeline. Green boxes are post-level feature extractors, yellow is the optional frozen-embedding baseline.

Design principles

1. **History features are computed in exactly one place** (`features_history.build_features`), so train, validation and test cannot disagree. Rows are sorted by (user, time) first and only past information is used. "Prefix invariance" is covered by tests: removing later posts does not change earlier features.
2. **Paths are managed in one place** (`paths.Paths`) and can be overridden with environment variables (`ERISK_THREADS_DIR`, `ERISK_LABELS_FILE`, `NLTK_DATA`); the notebooks contain no machine-specific paths.
3. **Thin notebooks.** `data-processing.ipynb` and `Develop/Train_and_evaluate.ipynb` only call module functions; training also runs from the command line (`run_experiments.py`) in the background.
4. **Cached experiments.** Each result is cached in `models/v2/classifier/<name>/`; a change of configuration or columns triggers retraining, otherwise the cache is reused.
5. **No sentinel values.** Rows without parent text get `sim`/LSM = 0, history values are carried forward from the user's last row that had a parent, and `is_comment` / `has_parent` tell the model which rows carry real values (the old pipeline used `-1`, which overlaps the valid range).

---

4. Feature engineering

4.1 Post-level features

Group	Content	Source and notes
PHQ	9 PHQ-9 item similarities, `phq_score` (mean of the 9)	Item scoring of the `extremism` repository (our fork), PHQ-9 archetype scale, applied to the post body; the sentence encoder is `mixedbread-ai/mxbai-embed-large-v1` (335 M parameters)
RE (relative entropy)	`loss_dep0`, `loss_dep1`, `re`	distilgpt2 fine-tuned separately on depressed and control posts; per-post mean token cross-entropy under both models; `re` is their difference. **3-fold cross-fitting:** training posts are scored by the fold model that never saw the user, test posts by the average of the 3 fold models
SIM	`sim`	MiniLM cosine similarity between a comment and its parent (rows with a parent only)
LSM (original)	10 features: `LSM_mean`, `social_mean`, `positive_mean`, `negative_mean`, `first_person_singular`, `second_person`, `third_person_singular`, `third_person_plural`, `cognitive_process`, `perceptual_process`	Group mean of 1 -
OWN_LIWC	15 category rates in the post's own text: `I`, `NEGEMO`, `POSEMO`, `SAD`, `ANX`, `ANGER`, `DEATH`, `FEEL`, `COGPROC`, `SOCIAL`, `HEALTH`, `BIO`, `FOCUSPAST`, `FOCUSFUTURE`, `NEGATE`	LIWC count ÷ word count
BEHAVIOR	`log_tokens` (log word count), `night` (posted 00:00–05:59 UTC), `log_gap` (log1p of seconds since the user's previous post, 0 for the first)	Behavioural signals

CONTEXT	`post_index` (log1p of the post number), `is_comment`, `has_parent`	Tell the model the row type and position
LSMX (new, 31)	`lsmr_*` (LSM on word rates, 10), `dlsm_*` (comment group rate – parent group rate, signed, 10), `par_*` (parent group rate, 10), `par_log_tokens`	Rows with a parent only; each feature has a raw value and a running mean

4.2 History features

- **PHQ / RE / SIM / LSM:** current value, running maximum and minimum, their difference (`max_gap`), difference to the previous value (`delta`), rolling standard deviation over a window of 5. PHQ also has the running maximum of each item.
- **Running mean `*_cummean`:** mean up to the current position (for sim/LSM/LSMX computed over rows with a parent and carried forward).
- Feature counts: V2 has 150 (base 101 + OWN_LIWC 15 + BEHAVIOR 3 + running means 31); V3 has 212 (V2 + LSMX 31 + their running means 31).

4.3 Standardisation

`Standardizer`: z-score with statistics from the training rows only; `post_index` is log1p-transformed first; values are clipped to ±10 (without clipping the largest |z| reached 123, e.g. a one-word post with a LIWC rate of 1.0 would dominate a batch).

4.4 Signal strength of single features

User-level AUC = how well the per-user mean (or last running mean) of a feature separates depressed from control users (training users). AUC far below 0.5 means the signal is in the opposite direction.

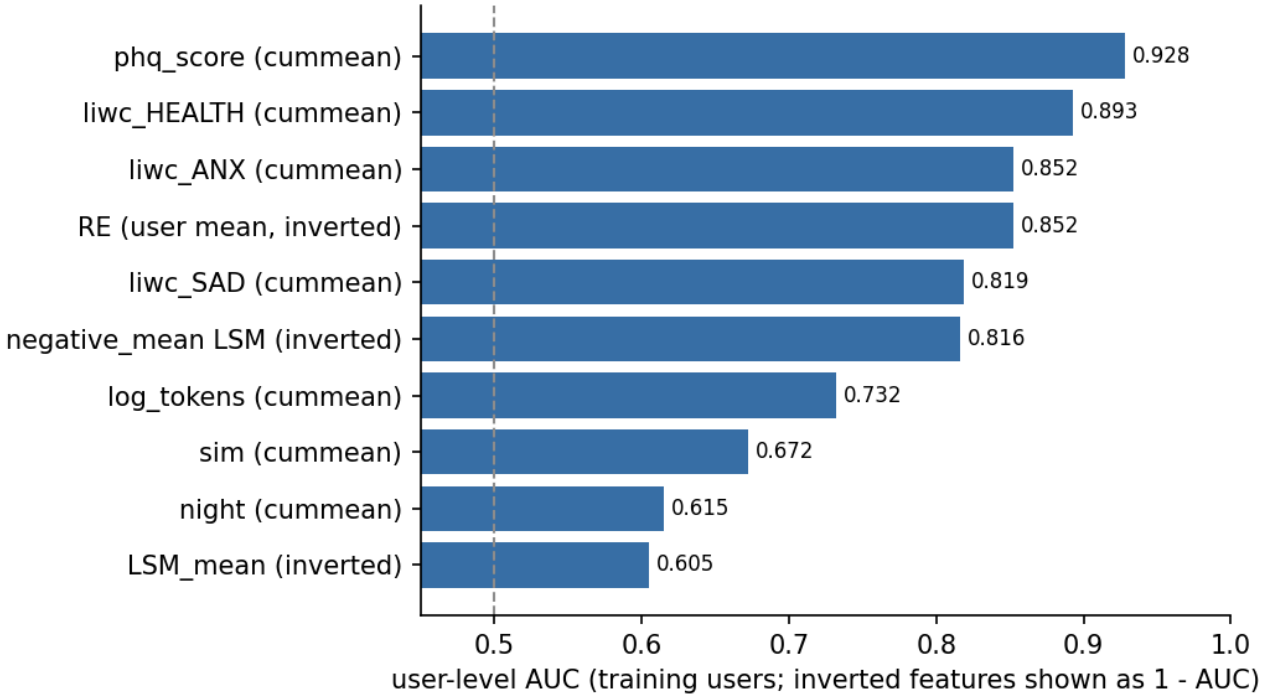


Figure 3. User-level AUC of selected features on the training users (features with an inverted direction are shown as 1 – AUC).

Feature	User-level AUC
`phq_score_cummean`	0.928
`liwc_HEALTH_cummean`	0.893
`liwc_ANX_cummean`	0.852
RE (user mean, inverted)	0.148 (inverted 0.852)
`liwc_SAD_cummean`	0.819
`negative_mean_cummean` (inverted)	0.184 (inverted 0.816)
`log_tokens_cummean`	0.732

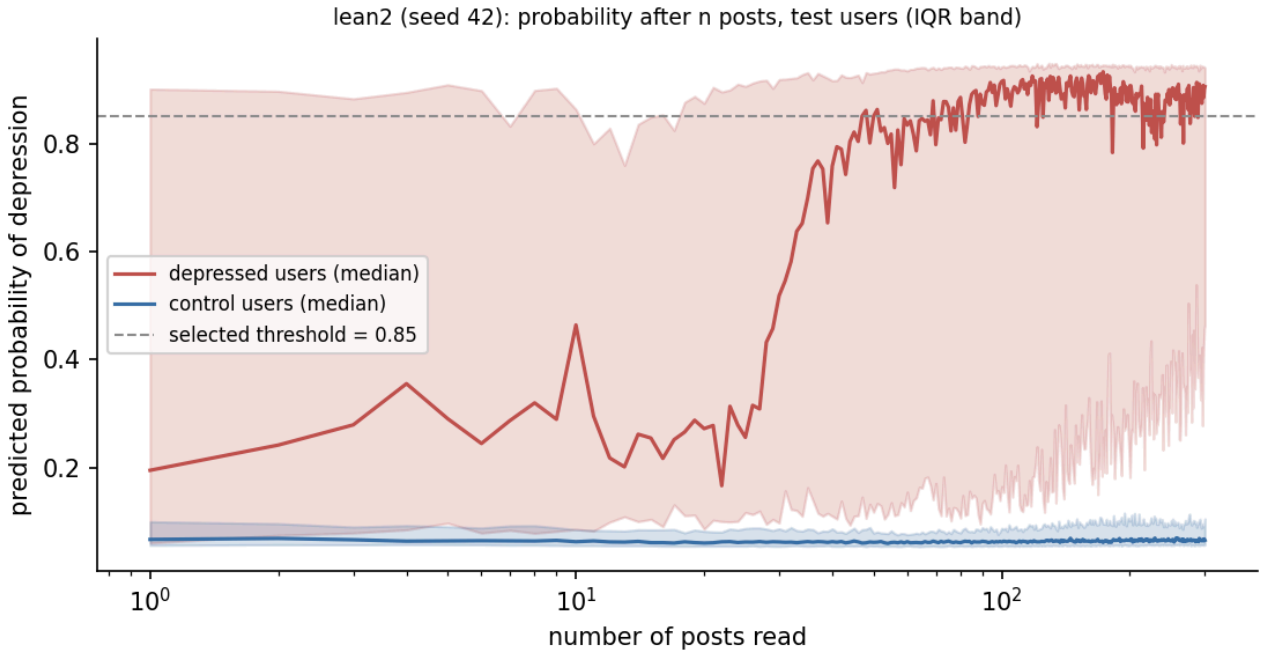


Figure 4. `lean2` (seed 42): predicted probability after n posts for the test users (median and inter-quartile band, shown where at least 5 users have that many posts). The dashed line is the threshold selected on the OOF predictions.

Control users stay at a low probability (median ≈ 0.07) whatever the number of posts, whereas for depressed users the median rises steeply after a few dozen posts and approaches the threshold. The wide inter-quartile band for depressed users shows that some of them are already above the threshold within the first posts while others need long histories.

---

6. Evaluation protocol

1. **User-level split.** The posts of a user are in exactly one of train or test; the RE cross-fitting and the CV folds are also user-level.
2. **Past information only.** History features are time-sorted and prefix-invariant (covered by tests).
3. **Cross-fitted RE.** The RE of a training user comes from fold models that never saw that user; test users use the mean of the 3 fold models, which avoids the "training RE is easier to separate than test RE" bias.
4. **Standardisation statistics come from training rows only.**
5. **5-fold CV.** One model per fold; the pooled OOF probabilities are used to choose the decision rule; the test set is **evaluated once**, with the average probabilities of the 5 fold models.
6. **Decision rule.** A user is flagged when the probability is ≥ `th` for `k` consecutive posts; (th, k) is chosen on the OOF predictions from th ∈ {0.05,…,0.95} and k ∈ {1, 3, 5, 10} to maximise the **latency-weighted F1 (F_latency)**.
    - F_latency = F1 × speed, where speed uses the eRisk latency penalty (constant 0.0078) computed from the median delay of correctly flagged users.
7. **Metrics**
    - User-level precision / recall / F1, median alarm delay (posts read before the alarm), F_latency.
    - **ROC / PR:** the highest probability a user ever reaches is used as the score.
    - **AUC@n:** user-level ROC-AUC of the probability after the first *n* posts (it does not reward simply having more posts). AUC@10 measures early detection, AUC@100 mid-term detection.
    - OOF PR-AUC (81 training positives) is more stable than the test metrics (21 positives) and is the more reliable basis for comparing configurations.
    - The test F1 comes with a 95 % bootstrap interval (1000 resamples of users).
8. **Known limitation.** Dozens of configurations were evaluated on the same test set (multiple-comparison problem). Conclusions therefore rely mainly on OOF metrics and on consistency across settings (full data / parent-only).

---

7. Why the performance is lower than in the old README

The old README reports F1 ≈ 0.93 for the final model (precision 0.91, recall 0.95, mean delay 6). On the same test users, the new pipeline gives F1 ≈ 0.70. The reasons:

7.1 The split did not change

The old and new test sets contain the same users (Section 2.3), so the new result is not caused by "an unlucky split". A single split with 21 positives has an F1 interval of ±0.14–0.17, but the gap between 0.93 and 0.70 (0.23) is far larger.

7.2 Control users were truncated in the old test set, creating a length shortcut (measured)

The old pipeline randomly removed posts of control users. Share of users with at least *n* posts in the old test table (`MERGED_test_full_fixed.pkl`, 183 users) and in the new one (179 users):

Posts	Old test set (depressed / control)	New test set (depressed / control)
≥ 100	86 % / 59 %	86 % / 65 %
≥ 300	62 % / 41 %	71 % / 40 %
≥ 600	**57 %** / **0 %**	52 % / **26 %**
Longest control user	**516**	**1033**

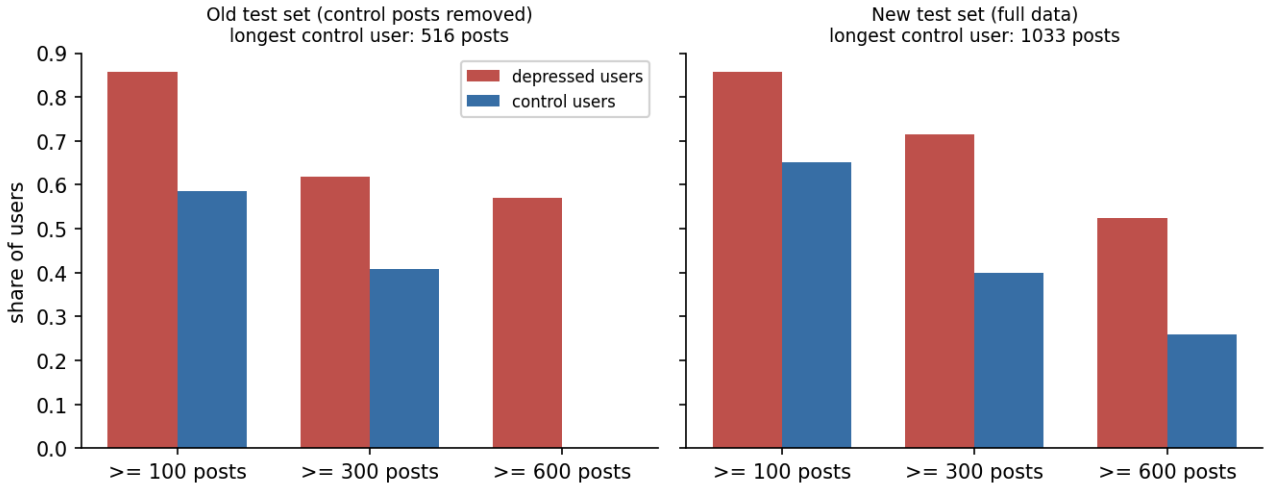


Figure 5. Share of users with at least 100 / 300 / 600 posts in the old and the new test set.

In the old test set no control user exceeded 516 posts, while more than half of the depressed users exceeded 600: a large `post_index` meant "depressed". With the full data, 26 % of control users also exceed 600 posts, the shortcut is gone and false alarms increase. This is the largest verified factor. The AUC of the *total* post count alone is similar in both sets (0.733 new vs 0.768 old), so the shortcut sits in the tail rather than in the overall volume.

7.3 Defects in the old features (details in Appendix B)

- History features were computed on data that was not time-sorted.
- About 92 % of rows had `min_sim_so_far == -1` (a sentinel that overlaps the valid cosine range).
- RE was computed in-sample (the language models were fine-tuned on the training posts and then scored the same posts).
- The baseline notebooks tuned thresholds on the test set (hard-coded 0.5701).
- No feature scaling (`post_index` can be in the thousands).

7.4 Stricter evaluation

The old version used a fixed threshold of 0.5, k = 5 and a single run; the new one chooses (th, k) on the OOF predictions (favouring early alarms) and reports the mean and std of 3 seeds.

7.5 Mislabelled old ablation

In the old ablation table, `cosine = 0.889` is actually the F1 of the PHQ-9 logistic regression with mean pooling; the cosine feature alone reached a Transformer F1 of only 0.588. Single features had F1 between 0.36 and 0.74 in the old README, yet the combination reached 0.93, which looks like a shortcut rather than a genuine synergy.

Conclusion. The old results are not a valid baseline. The new numbers (F1 ≈ 0.70, ROC ≈ 0.95) were obtained on the full data under a leak-free protocol and are more trustworthy.

---

8. Experiments and ablations

> Notation: F1, P, R are test-set user-level metrics; "OOF PR" is the out-of-fold PR-AUC of the training users; ROC/PR are AUCs of the highest probability a user reaches; AUC@10 is the AUC after the first 10 posts. Unless stated otherwise the data is "full data".

8.1 One group kept (`only_X`, plus the 3 context features)

Experiment	# features	F1	ROC	PR	AUC@10	OOF PR
`only_PHQ`	28	0.696±0.036	0.939	0.802	0.832	0.664
`only_OWN_LIWC`	33	0.687±0.033	0.904	0.725	0.815	0.631
`only_LSM` (original)	73	0.567±0.025	0.878	0.638	0.747	0.475
`only_RE`	12	0.561±0.019	0.876	0.531	0.838	0.478
`only_BEHAVIOR`	9	0.532±0.020	0.875	0.445	0.784	0.301
`only_SIM`	10	0.296±0.015	0.801	0.467	0.682	0.245
`post_level_only` (no history)	43	0.614±0.049	0.915	0.698	0.871	0.613

Observations:

- PHQ alone is almost as good as the full set (F1 0.696 vs 0.664–0.708).
- History features raise PR from 0.698 (no history) to about 0.81 but do not improve the early AUC (AUC@10 is even slightly lower): history helps mid- and long-term decisions.
- After fixing RE (removing a spurious 1/length factor and cross-fitting), `only_RE` improved from F1 0.368 to 0.561.
- `only_SIM` is essentially noise.

8.2 Leave one group out of the full set (`without_X`)

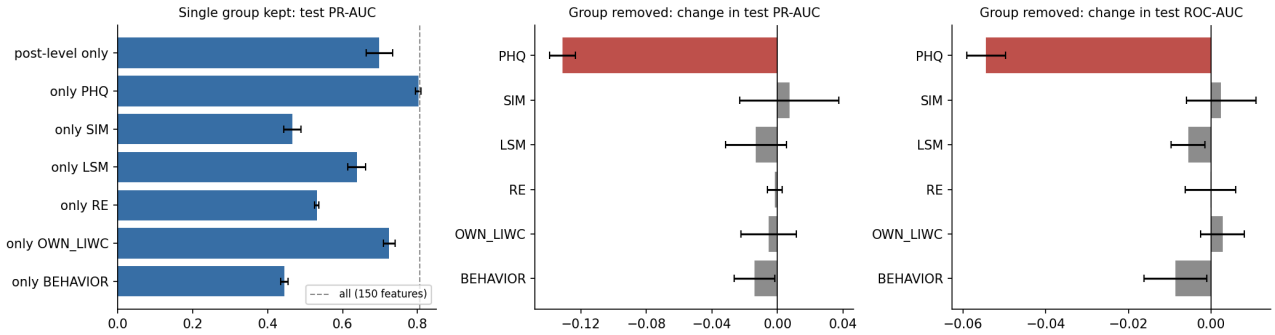


Figure 6. Left: test PR-AUC when only one group is kept (dashed: all 150 features). Middle and right: change in test PR-AUC and ROC-AUC when one group is removed from the full set (paired by seed, mean ± std; red = clearly harmful to remove).

Experiment	F1	ROC	PR	AUC@10	OOF PR
`all` (150)	0.664±0.045	0.948	0.806	0.857	0.726
`without_PHQ`	**0.618±0.029**	**0.894**	**0.674**	0.820	0.670
`without_SIM`	0.707±0.035	0.951	0.813	0.853	0.725
`without_LSM`	0.681±0.039	0.943	0.792	0.871	0.736
`without_RE`	0.686±0.007	0.948	0.804	0.848	0.723
`without_OWN_LIWC`	0.689±0.048	0.951	0.800	0.831	0.699
`without_BEHAVIOR`	0.692±0.024	0.940	0.792	0.837	0.705

Only removing PHQ causes a clear drop; removing any other group leaves F1 slightly higher (+0.02 to +0.04, within noise) and ROC/PR essentially unchanged.

8.3 Other controls (full data)

Experiment	Description	F1	ROC	PR	AUC@10	OOF PR
`base_features` (101)	Old feature set, RE fixed	0.685±0.042	0.951	0.800	0.824	0.737
`no_cummean` (119)	Full set without running means	0.702±0.031	0.949	0.798	0.826	0.745
`all` (150)		0.664±0.045	0.948	0.806	0.857	0.726

Adding the new features (own LIWC, behaviour, running means, `log_gap`) did not improve the overall metrics; the F1 differences between the three rows are below seed noise. Running means show signs of over-fitting in the large set (`all` has a lower and noisier OOF PR than `no_cummean`) because the Transformer can already aggregate history.

`log_gap` (time since the previous post). Adding it raised the F1 of `only_BEHAVIOR` from 0.483 to 0.532 (precision 0.34 → 0.43), so the time gap carries some information; in the full model it is covered by PHQ and the other features and shows no visible improvement.

8.4 The `lean` configuration (44 features) and its ablations

`lean` = all PHQ features + 3 context features + RE (`re`, `re_cummean`) + 3 LIWC categories (`liwc_HEALTH/ANX/SAD`, each with a running mean) + 4 original LSM sub-scores (`negative_mean`, `perceptual_process`, `social_mean`, `first_person_singular`, each with a running mean). No `sim`.

Leave-one-part-out:

Removed	# features	F1	ROC	PR	AUC@10	OOF PR
none (`lean`)	44	0.708±0.023	0.947	0.820	0.868	0.716
PHQ	19	**0.576±0.013**	**0.900**	**0.703**	0.827	0.611
all running means	35	0.644±0.011	0.945	0.807	0.835	0.658
LIWC (3)	38	0.656±0.023	0.947	0.809	0.858	0.714
LSM (4)	36	0.723±0.012	0.945	0.815	0.860	0.675
RE	42	0.694±0.051	0.945	0.820	0.863	0.710
`post_index`	43	0.718±0.020	0.949	0.825	0.868	0.703

Adding one part to PHQ + context:

Configuration	# features	F1	ROC	PR	AUC@10	OOF PR
`only_PHQ`	28	0.696±0.036	0.939	0.802	0.832	0.664
+ RE (`lean_PHQ_plus_RE`)	30	0.671±0.031	0.943	0.805	0.845	0.683
+ LIWC (`lean_PHQ_plus_LIWC`)	34	0.708±0.028	0.947	0.820	0.864	0.707
+ LSM (`lean_PHQ_plus_LSM`)	36	0.667±0.027	0.947	0.818	0.839	0.707

PHQ is the core; LIWC and running means contribute something real but small; RE and `post_index` contribute nothing; PHQ + 3 LIWC categories (34 features) matches the full `lean`.

8.5 LSM in detail

Question 1: can LSM be made useful by projecting it to a higher dimension? No. The model's first layer already projects the inputs linearly to 256 dimensions, so a manual up-projection is just another linear map and adds no information; the bottleneck is the signal and the sample size (81 training positives), not the dimensionality.

Question 2: is LSM useful on rows that have a parent text only? (`parent_*` experiments)

Comparison	F1	ROC	PR	AUC@10	OOF PR
`parent_all` (with original LSM)	0.655±0.043	0.950	0.788	0.868	0.703
`parent_without_LSM`	0.621±0.009	0.945	0.765	0.845	0.716

`parent_lean` (with original LSM)	0.623±0.020	0.950	0.791	0.874	0.678
`parent_lean_without_LSM`	0.622±0.008	0.941	0.768	0.858	0.682
`parent_only_PHQ`	0.636±0.040	0.934	0.760	0.835	0.712
`parent_only_LSM` (alone)	0.517±0.028	0.858	0.592	0.753	0.468

On data with a parent text the original LSM gives a small, fairly stable ranking gain (PR +0.02, AUC@10 +0.016 to +0.023); on the full data it does not.

Question 3: the original LSM has a flaw. The original formula is evaluated on raw LIWC **counts**, so a long post replying to a short one looks like a style mismatch: a length effect is mixed in. The new LSMX features use word rates and add signed differences and the parent's rates.

LSMX results

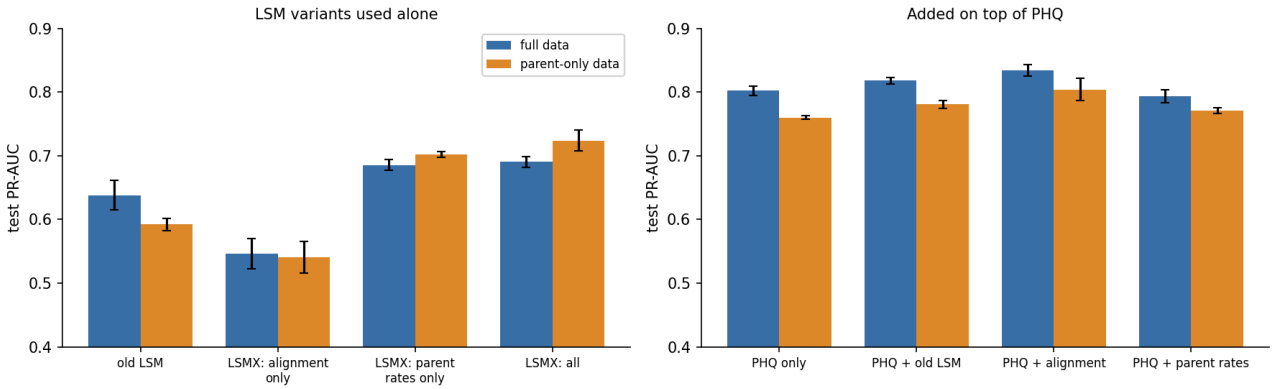


Figure 7. Test PR-AUC of LSM variants used alone (left) and added on top of PHQ (right), on full data (blue) and on the parent-only data (orange).

Experiment	Data	F1	ROC	PR	AUC@10	OOF PR
`only_LSM` (original)	full	0.567	0.878	0.638	0.747	0.475
`only_LSMX` (all)	full	0.584	0.910	0.690	0.825	0.558
`only_LSMX_no_par` (lsmr + dlsm only)	full	0.521	0.880	0.546	0.718	0.370
`only_LSMX_par` (par_* only)	full	0.620	0.889	0.685	0.832	0.586
`parent_only_LSM` (original)	parent-only	0.517	0.858	0.592	0.753	0.468
`parent_only_LSMX`	parent-only	0.607	0.917	0.724	0.790	0.572
`parent_only_LSMX_no_par`	parent-only	0.546	0.871	0.541	0.758	0.470
`parent_only_LSMX_par`	parent-only	0.597	0.892	0.702	0.817	0.578

Used alone, almost all of the LSMX gain comes from the parent rates (`par_*`), i.e. the content/topic of the posts the user replies to; the pure style-alignment part (`lsmr + dlsm`) is on its own even weaker than the original LSM (PR 0.546 vs 0.638).

Added on top of PHQ the picture reverses:

Configuration	Data	F1	ROC	PR	AUC@10
`only_PHQ`	full	0.696	0.939	0.802	0.832
`lean_PHQ_plus_LSM` (original)	full	0.667	0.947	0.818	0.839
`lean_PHQ_plus_LSMX_no_par` (style alignment)	full	0.687	0.949	**0.834**	0.857
`lean_PHQ_plus_LSMX_par` (parent rates)	full	0.684	0.944	0.793	0.856
`parent_only_PHQ`	parent-only	0.636	0.934	0.760	0.835
`parent_lean_PHQ_plus_LSM` (original)	parent-only	0.607	0.949	0.781	0.860
`parent_lean_PHQ_plus_LSMX_no_par`	parent-only	0.645	**0.956**	**0.804**	**0.878**
`parent_lean_PHQ_plus_LSMX_par`	parent-only	0.617	0.951	0.771	0.853

On top of PHQ the parent rates add nothing (their information is covered by PHQ: the topic of the parent text is

correlated with the topic of the user's own text), whereas the style-alignment features give a small, consistent gain (PR +0.03 to +0.044) and are also better than the original LSM.

LSM summary (suggested wording for a paper). The count-based LSM mixes in a length effect. Recomputed on word rates with a signed difference added, it gives a small ranking gain on top of PHQ. The parent text's own rates are very strong alone but represent a topic/community effect covered by PHQ and should not be presented as "LSM is useful". The gains are small, the test set has 21 positives, so they should be described as trends.

8.6 `lean2` (recommended, 76 features)

`lean2` = all PHQ features + 3 context features + RE (2) + 3 LIWC categories with running means (6) + style-alignment LSM (`lsmr_*` and `dlsm_*`, 10 each, with running means: 40). No `sim`, no `par_*`, no behaviour features.

Data	Configuration	F1	ROC	PR	AUC@10	OOF PR
full	`lean2`	0.697±0.041	0.950	**0.831**	0.860	**0.744**
full	`lean`	0.708±0.023	0.947	0.820	0.868	0.716
full	`lean_plus_LSMX` (106)	0.715±0.017	0.951	0.822	0.870	0.718
full	`lean_PHQ_plus_LSMX_no_par` (68)	0.687±0.023	0.949	0.834	0.857	0.693
parent-only	`parent_lean2`	0.655±0.025	0.949	0.798	0.882	0.664
parent-only	`parent_lean_plus_LSMX` (with par_*)	0.665±0.031	0.961	0.815	0.873	0.684

Leave-one-part-out inside `lean2` (full data; parent-only in brackets):

Removed	# features	ROC	PR	AUC@10	OOF PR
none	76	0.950 (0.949)	0.831 (0.798)	0.860 (0.882)	0.744 (0.664)
PHQ	51	**0.887 (0.871)**	**0.632 (0.696)**	0.823 (0.813)	0.570 (0.553)
all running means	51	0.942 (0.944)	0.808 (0.755)	0.837 (0.859)	0.674 (0.671)
LIWC	70	0.946 (0.956)	0.810 (0.803)	0.839 (0.870)	0.693 (0.665)
LSM style alignment (all)	36	0.945 (0.941)	0.815 (0.768)	0.860 (0.858)	0.675 (0.682)
... only `lsmr_*`	56	0.950 (0.939)	0.841 (0.789)	0.865 (0.834)	0.743 (0.672)
... only `dlsm_*`	56	0.952 (0.952)	0.834 (0.791)	0.861 (0.869)	0.728 (0.709)
RE	74	0.945 (0.949)	0.820 (0.796)	0.860 (0.876)	0.748 (0.688)
`post_index`	75	0.952 (0.955)	0.835 (0.805)	0.860 (0.872)	0.730 (0.674)

F1 on the full data when the part is removed: none 0.697; PHQ 0.527; RE 0.713; LIWC 0.686; LSM alignment 0.723; `lsmr` 0.714; `dlsm` 0.733; running means 0.707; `post_index` 0.715.

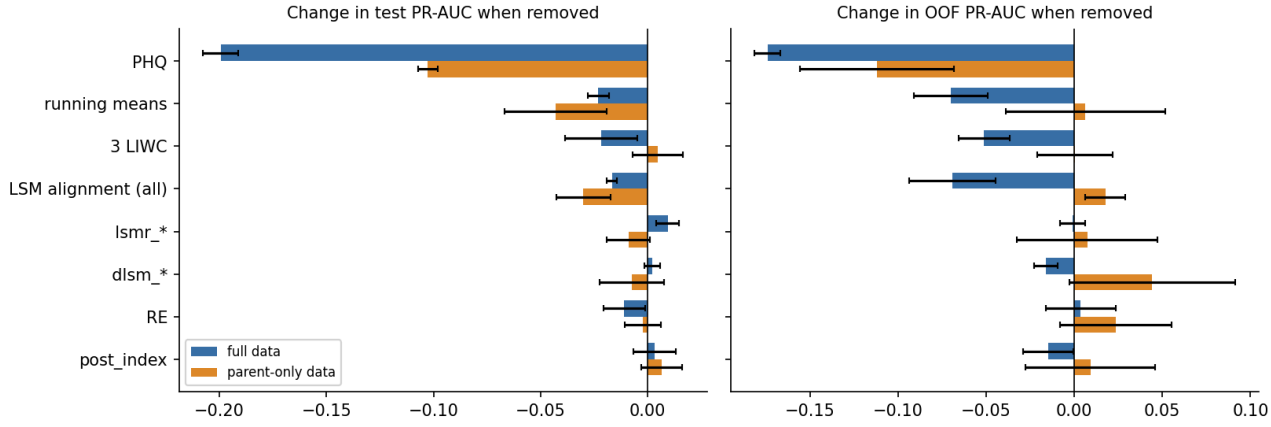


Figure 8. Change in test PR-AUC (left) and OOF PR-AUC (right) when one part of `lean2` is removed (paired by seed, mean ± std; blue: full data, orange: parent-only data).

Conclusions:

- **PHQ.** Removing it lowers every metric and is the only large drop, in both settings.
- **Running means** are second in importance (PR −0.02 to −0.04; OOF PR −0.07 on full data).
- **LSM style alignment** gives a small gain in test PR in both settings (−0.016 on full data and −0.030 on parent-

only data when removed) and in OOF PR on the full data (–0.069), but not in OOF PR on the parent-only data (+0.018 when removed). `lsmr` matters more on parent-only data (AUC@10 –0.048, ROC –0.01); `dlsm` has little independent contribution.

- **LIWC** helps a little on the full data and hardly on the parent-only data.
- **RE and `post_index`** are redundant in `lean2` (their removal does not hurt any OOF PR); the fact that `post_index` is unnecessary also shows that the length shortcut has little influence on the current model.
- Only PHQ exceeds the noise by a wide margin (seed std of PR is about 0.01); everything else is a trend.

8.6.1 Correlation of the `lean2` features with the label

Pearson r between each of the 76 `lean2` features and the depression label, computed on the 712 training users only (81 positives; the test set is not used), in three views: **post-level** (every post is a sample carrying its user's label; `lsmr_*` and `dlsm_*` only over rows with a parent), **user-level, all posts** (per-user mean of the feature; for running means and "so far" features the last value), and **user-level, first 10 posts** (the same on the first 10 posts, the setting that matters for early detection). Features are grouped by type. The values are also in `docs/figures/lean2_label_correlation.csv`.

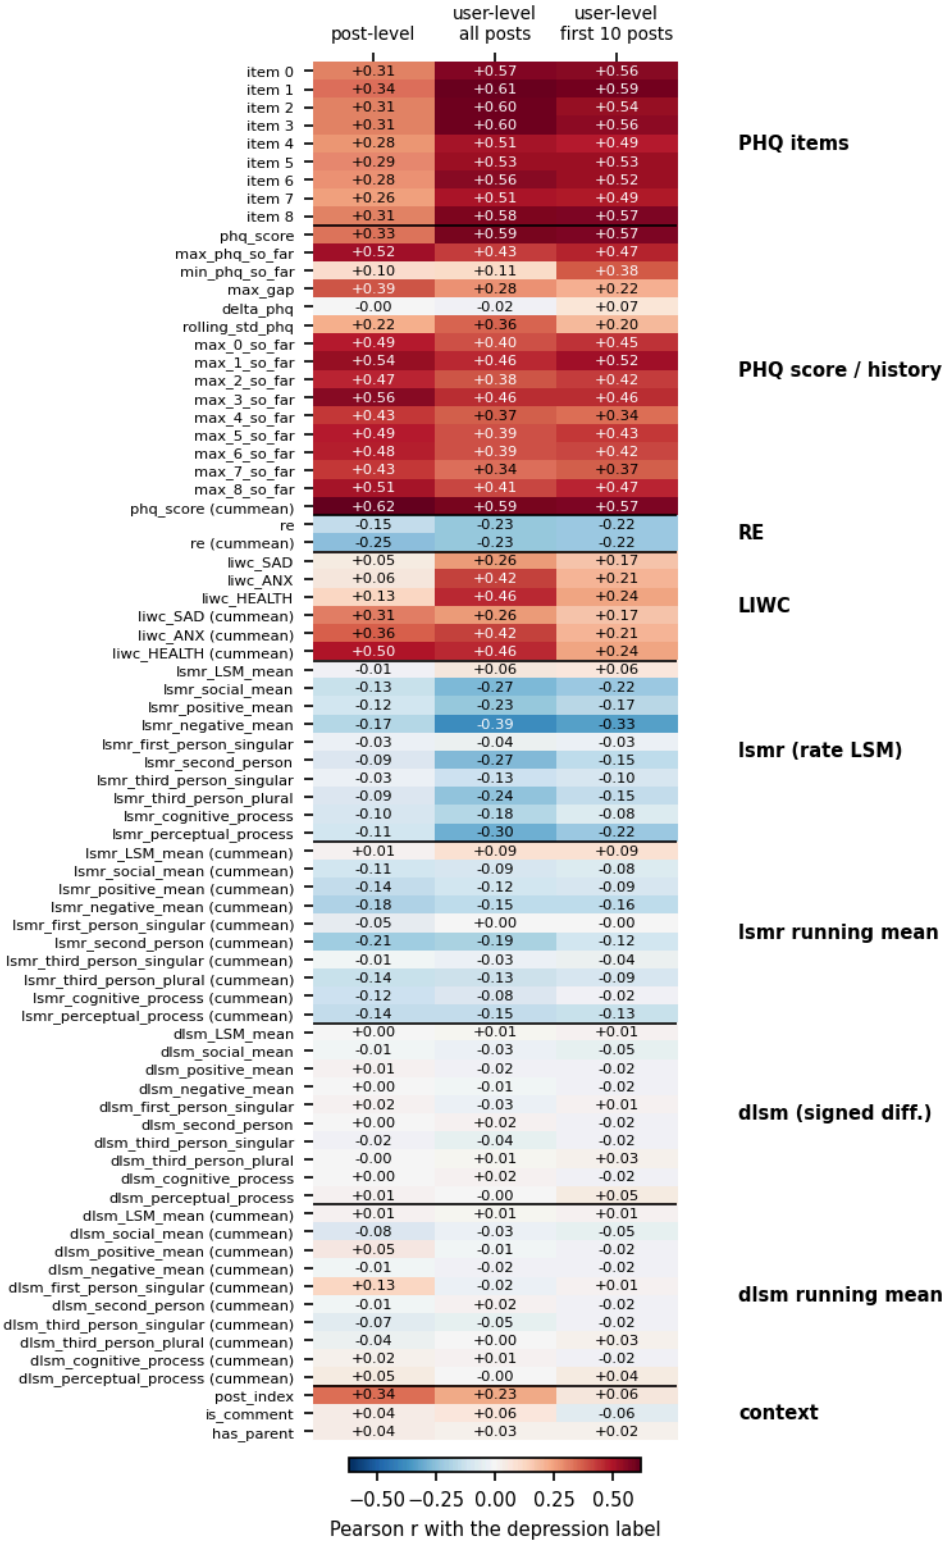


Figure 8a. Pearson r between each `lean2` feature and the user label (training users).

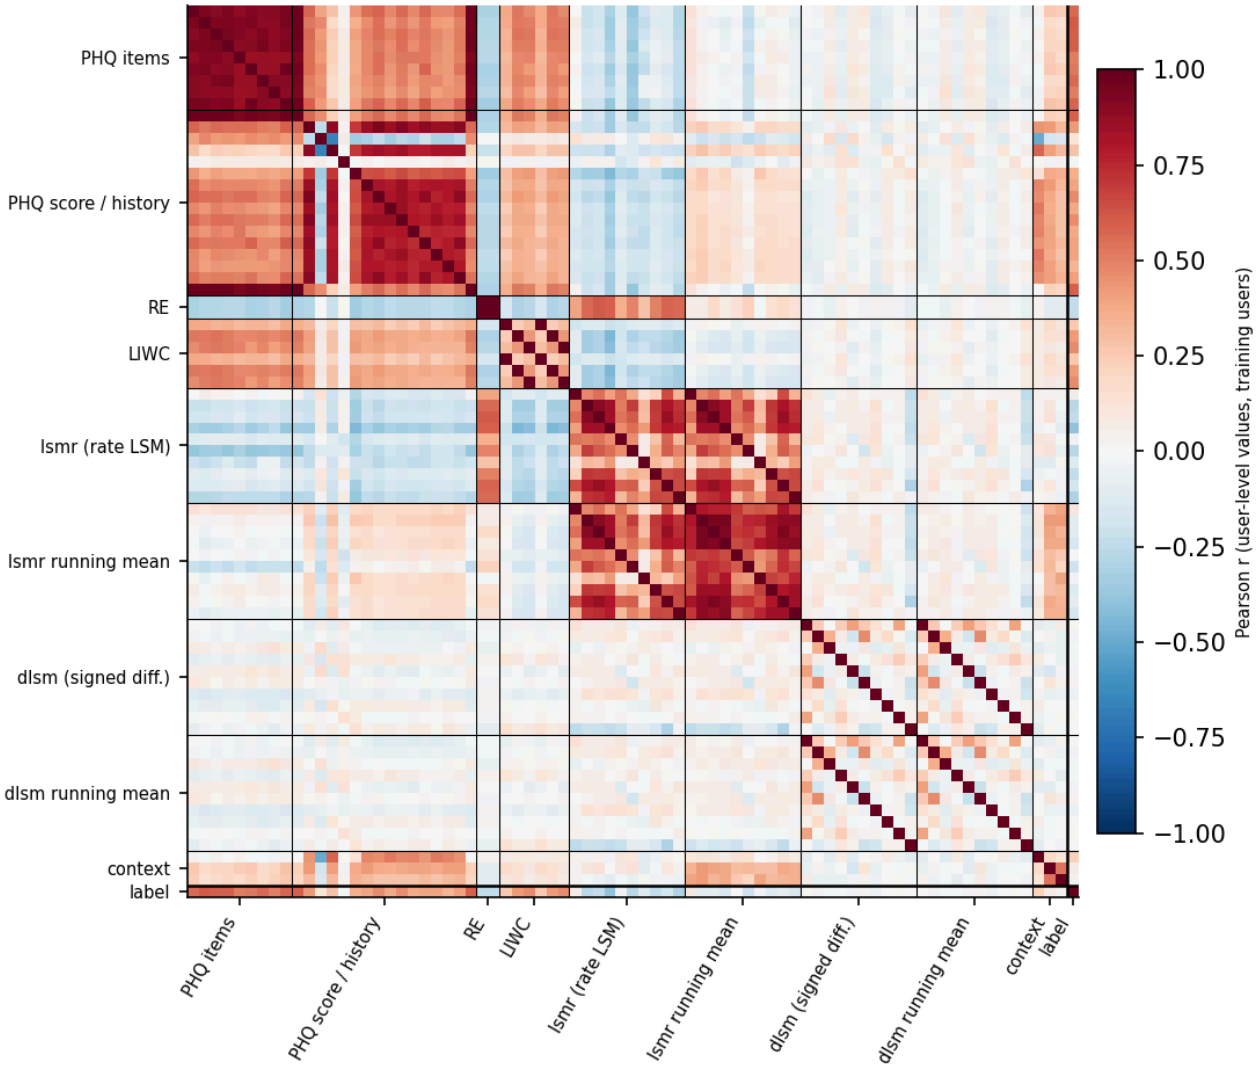


Figure 8b. Correlation between the user-level feature values (all posts), ordered by type, with the label as the last row and column.

- **PHQ** is the strongest type: the nine item similarities and `phq_score` reach user-level r = 0.51–0.61 (0.49–0.59 on the first 10 posts). The "so far" maxima and `phq_score_cummean` carry the signal at post level (r up to 0.62), because the history accumulates it; `delta_phq` is uncorrelated (–0.02).
- **LIWC** is the second type: `liwc_HEALTH` 0.46, `liwc_ANX` 0.42, `liwc_SAD` 0.26 over all posts, but only 0.24, 0.21 and 0.17 on the first 10 posts, so it needs more history than PHQ.
- **RE** is weakly negative (–0.23, equal in the first 10 posts); the sign is the direction of the inverted AUC in Section 4.4.
- **`lsmr_*`** is negative for the emotional and pronoun sub-scores: `negative_mean` –0.39 (–0.33 on the first 10 posts), `perceptual_process` –0.30, `social_mean` and `second_person` –0.27. Their running means are weaker (|r| ≤ 0.21 at post level, ≤ 0.19 at user level). `LSM_mean` and `first_person_singular` are close to 0.
- **`dlsm_*`** is uncorrelated with the label (|r| ≤ 0.05 at user level, ≤ 0.13 at post level), which agrees with its small independent contribution in the ablation above.
- **Context:** `post_index` has r = 0.34 at post level and 0.23 at user level, i.e. depressed users have longer histories (the length shortcut of Section 7); it is nearly 0 within the first 10 posts (0.06), and removing it did not hurt `lean2` (Section 8.6).
- **Redundancy (Figure 8b).** The nine PHQ items and `phq_score` correlate strongly with each other, and the PHQ items are positively correlated with LIWC (r 0.30–0.54, median 0.47) and mostly negatively with `lsmr_*` (–0.38 to 0.05, median –0.15). RE correlates positively with `lsmr_*` (0.28–0.60, median 0.53). The label's correlation with `lsmr_*` therefore partly reflects what PHQ and RE already measure, which fits the ablation result that these parts add little beyond PHQ.

Caveat: these are marginal linear correlations on 81 positive users and say nothing about interactions or about what the sequence model uses; the ablations remain the evidence for importance.

8.7 All features plus LSMX (`all_v3`, 212 features)

`all_v3` reaches F1 0.696±0.038, ROC 0.944, PR 0.798, no different from `all` (0.664, 0.948, 0.806); on the parent-only data it is worse (F1 0.655 → 0.621, PR 0.788 → 0.770). Too many features over-fit, which supports using a compact configuration.

---

9. Feature selection and the recommended configuration

Selection evidence: (1) single-group and leave-one-group-out experiments (8.1, 8.2); (2) ablations inside `lean` and `lean2` (8.4, 8.6); (3) user-level single-feature AUC (4.4, computed on the training users and therefore independent of the test labels); (4) consistency across the full data and the parent-only data; (5) only 81 training positives, which favours fewer and interpretable features.

Kept: all PHQ features (core), 3 own-LIWC categories (`liwc_HEALTH`, `liwc_ANX`, `liwc_SAD`), style-alignment LSM (`lsmr_*`, `dlsm_*`), running means, context features, RE (can be dropped when cost matters).

Dropped: `sim` (noise), parent rates `par_*` (topic shortcut, covered by PHQ), the other LIWC categories, behaviour features (`log_tokens`, `night`, `log_gap`; possible posting-volume bias), and most history features of the count-based LSM.

Role	Configuration	# features	Rationale
Main	`lean2`	76	Full-data PR 0.831, OOF PR 0.744 (tied for best with `no_cummean`), no topic shortcut, interpretable features
Reference (compact)	`lean`	44	Close to `lean2`, simpler
Reference (minimal)	PHQ + 3 LIWC (`lean_PHQ_plus_LIWC`)	34	Matches `lean`
Baselines	`only_PHQ`, `post_level_only`, `all`	28 / 43 / 150	Show the value of each part

A further simplification that has **not been run**: `lean3` = PHQ + 3 LIWC + `lsmr_*` + running means, without RE, `dlsm_*` and `post_index` (about 55 features).

Update after the repeated cross-validation (Section 10.5). `lean2` has no demonstrable advantage over `lean`, `only_PHQ` and `lean_PHQ_plus_LIWC`; the table above reflects the single-split choice and should be read together with Section 10.5, which recommends `only_PHQ` or `lean_PHQ_plus_LIWC` as the simplest hand-crafted configuration.

Caveat. F1 differences between configurations in the 0.66–0.72 range cannot be resolved; the choice of a configuration should not be based on test F1 alone.

---

10. Repeated cross-validation: MentalRoBERTa and bag-of-words baselines, significance tests, error analysis and feature groups

Two ways of using MentalRoBERTa are compared with our feature sets, **always with exactly the same sequence model, 5-fold CV, OOF decision rule and single test evaluation as every other experiment**, so that only the input features differ.

10.1 Setup

Frozen embeddings. `embed_posts.py` encodes every post body with `mental/mental-roberta-base` (at most 256 tokens, masked mean pooling of the last layer → 768 dimensions, float16, `Features/v2/{train,test}_mental_emb.npy`, aligned by `row_id`).

- `mental_emb`: 768-dimensional embedding + the 3 context features (771 inputs).
- `mental_plus_lean2`: embedding + the 76 `lean2` features (844 inputs).

Adapter fine-tuned. `finetune_mental.py` trains a bottleneck adapter (`seq_bn`, AdapterHub `adapters`) and a classification head on top of the frozen encoder.

- Post-level training: every post receives the label of its user; at most 200 random posts per user and epoch; positive class weighted by the class ratio; AdamW, learning rate 3e-4, batch 32, 3 epochs, maximum length 256, bf16 autocast; the best epoch is chosen on 10 % of the training users (48 users).
- **Cross-fitting to avoid leakage** (the same design as the RE feature): the 3 user-level folds of the RE feature are reused; each fold model is trained on the users of the other two folds and scores the users of its own fold;

test posts get the mean logit of the 3 fold models. The result is one post-level feature `ft_logit` (logit of "depressed" minus logit of "control").

- Trainable parameters: 2.13 M (1.7 % of the 126.8 M of the model). Training took about 2–3 minutes per fold on one RTX 4090 (about 39 s per epoch when the GPU was not shared, 59 s when two folds shared it), peak GPU memory 3.4 GB.
- Two experiments: `ft_logit` (the logit + the 3 context features, 4 inputs) and `ft_logit_plus_lean2` (the logit + the 76 `lean2` features, 77 inputs).
- The user-level AUC of the simple mean of `ft_logit` over a user's posts is 0.932 on the training users (out-of-fold) and 0.897 on the test users.

10.2 Results (full data, test set, 3 seeds of the sequence model)

Configuration	F1	P	R	ROC	PR	AUC@10	AUC@100	Median delay	F_latency	OOF PR
`ft_logit` (adapter fine-tuned)	0.688±0.019	0.740	0.651	**0.960**	0.814	0.888	**0.930**	**3.7**	**0.681**	0.735
`ft_logit_plus_lean2`	**0.731±0.031**	0.750	0.714	0.953	**0.835**	0.868	0.901	18.5	**0.681**	0.697
`mental_emb` (frozen embedding)	0.666±0.034	0.748	0.603	0.909	0.737	**0.894**	0.883	8.3	0.647	0.629
`mental_plus_lean2`	0.690±0.029	0.729	0.667	0.948	0.802	**0.906**	0.898	6.8	0.675	0.678
`lean2`	0.697±0.041	0.698	0.698	0.950	0.831	0.860	0.893	18.7	0.649	**0.744**
`lean`	0.708±0.023	0.687	0.730	0.947	0.820	0.868	0.893	17.7	0.661	0.716
`only_PHQ`	0.696±0.036	0.782	0.635	0.939	0.802	0.832	0.889	21.3	0.641	0.664

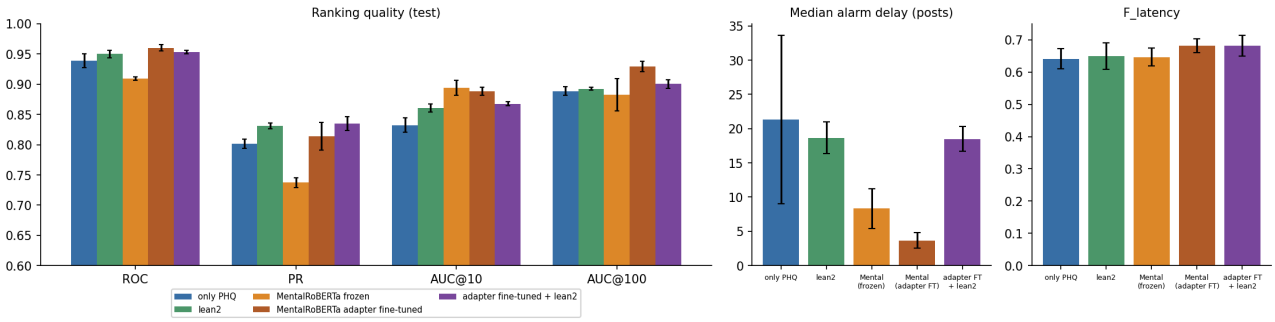


Figure 9. Ranking quality (left), median alarm delay (middle) and F_latency (right) for `only_PHQ`, `lean2`, frozen MentalRoBERTa embeddings, the adapter fine-tuned logit and the fine-tuned logit combined with `lean2` (test set, mean ± std over 3 seeds of the sequence model; the adapter itself was trained once).

10.3 Interpretation

- **Frozen embeddings vs our features.** `lean2` ranks users better overall (ROC 0.950 vs 0.909, PR 0.831 vs 0.737, OOF PR 0.744 vs 0.629). The frozen embedding detects earlier (AUC@10 0.894 vs 0.860, median delay 8 vs 19 posts).
- **Fine-tuning closes most of the gap to our features and goes beyond it in some respects.** One fine-tuned logit plus three context features reaches the highest ROC (0.960) and AUC@100 (0.930) of all configurations, alarms after a median of 3.7 posts, and is on par with `lean2` in PR (0.814 vs 0.831), F1 (0.688 vs 0.697) and OOF PR (0.735 vs 0.744); these last three differences are within noise.
- **Combining.** `ft_logit_plus_lean2` has the highest F1 (0.731) and PR (0.835) on the test set, but its OOF PR (0.697) is lower than that of `lean2` (0.744) and of `ft_logit` (0.735); with only 21 test positives the gain on the test set should not be trusted.
- On long histories the hand-crafted features are not inferior to a frozen 768-dimensional embedding (AUC@100 0.893 vs 0.883), but they are inferior to the fine-tuned logit (0.930).
- F1 values of all configurations lie between 0.67 and 0.73, with differences mostly below the noise.

What can be claimed. Our interpretable feature system does **not** clearly outperform a parameter-efficiently fine-tuned MentalRoBERTa: the two are on par in PR and F1, the fine-tuned model is better in ROC and in early detection, and combining them gives at most a small, unconfirmed gain. The defensible statements are that (i) interpretable features without any labelled fine-tuning reach a similar level, (ii) they clearly beat frozen embeddings in overall ranking, and (iii) the evaluation protocol is stricter than in earlier work.

Limitations of this baseline. The adapter was trained **once** (one seed), so the variance of the fine-tuning is not included in the ± values (they come from the sequence model only); its hyper-parameters were chosen once and not tuned; the best epoch was chosen on only 48 validation users; each fold model sees about two thirds of the training users, and the test logit is the mean of three models whereas the training logits come from a single model (the same design as RE); the design is post-level fine-tuning followed by a sequence model, and an end-to-end user-level fine-

tuning was not tried.

10.4 Computing cost (measured)

Measured with `benchmark.py` (results in `docs/benchmark_results.json`) on one RTX 4090 and an Intel Xeon w5-2455X (24 cores visible), PyTorch 2.5.1 / CUDA 12.1. A fixed random sample of real test posts was used (mean 35 words, median 17). Times are per post at batch size 1 (the online setting), mean ± std over posts, after discarded warm-up calls and with GPU synchronisation; model loading is excluded. GPU memory is the peak above the memory allocated before the component was loaded.

Component	Parameters	GPU fp32 (ms)	GPU fp16 (ms)	CPU 8 threads (ms)	CPU 1 thread (ms)	GPU memory fp32 (fp16)
LIWC (body + parent), CPU only	–	–	–	–	1.14±1.33 (body only 0.68)	–
PHQ-9 encoder (`mxbai-embed-large-v1`)	**335 M**	6.62±1.67	6.26±2.33	58.6±48.7	313.8±292.6	1.37 GB (0.68 GB)
Frozen MentalRoBERTa embedding	125 M	2.59±0.32	2.55±0.24	15.6±9.5	82.0±53.7	0.51 GB (0.26 GB)
RE: one pair of distilgpt2 models	164 M	3.61±0.45	3.65±1.91	28.9±17.5	148.3±106.6	0.79 GB (0.48 GB)
History features (full rebuild of a user, per post)	–	–	–	2.38±6.61 (CPU, upper bound)	–	–
Sequence model, 10 posts of history	4.0 M	0.55±0.11	–	0.59±0.02	1.57±0.02	0.02 GB
Sequence model, 100 posts	4.0 M	0.51±0.01	–	1.70±0.06	5.87±0.10	0.02 GB
Sequence model, 1000 posts	4.0 M	1.04±0.00	–	19.99±0.25	113.89±1.05	0.08 GB

The sequence model re-encodes the whole history for every new post (no KV cache), so its cost grows with the history length. At batch size 1 the GPU timings are dominated by kernel-launch overhead, which is why fp16 brings no gain there. The standard deviation on CPU is large because post lengths vary.

Estimated total per post (sum of the separately measured parts, history length 100, comment with parent text; *not* measured end to end):

System	GPU fp32	CPU 8 threads	CPU 1 thread
`lean2` without RE	≈ 10.7 ms	≈ 64 ms	≈ 323 ms
`lean2` with RE (one model pair)	≈ 14.3 ms	≈ 93 ms	–
Frozen MentalRoBERTa + sequence model	≈ 3.1 ms	≈ 17 ms	≈ 88 ms
MentalRoBERTa + `lean2` without RE	≈ 13.2 ms	≈ 79 ms	–

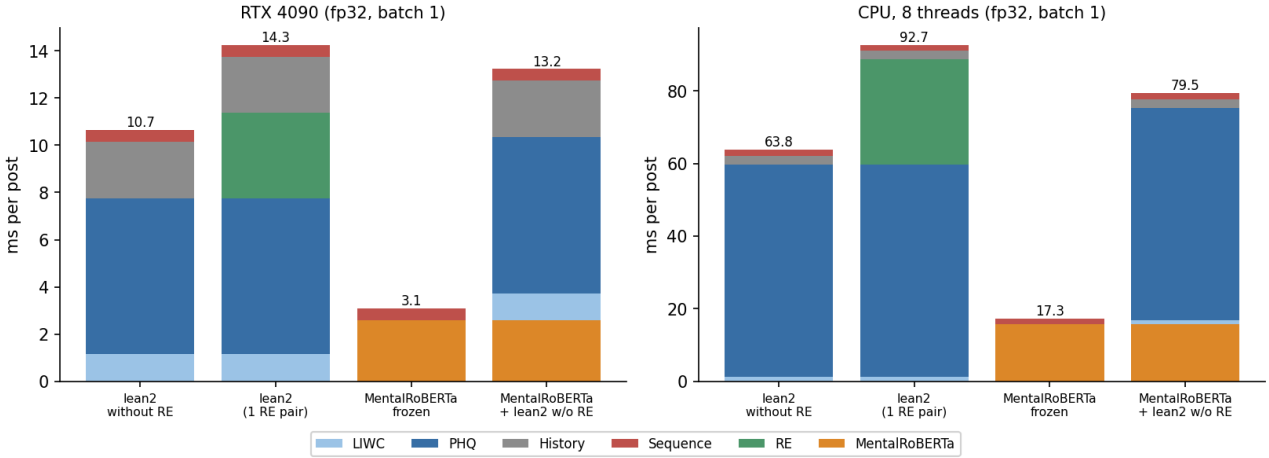


Figure 10. Estimated per-post inference cost (ms) by component, GPU fp32 and 8 CPU threads, batch size 1.

Training cost (GPU fp32, one fold of about 500 users). `lean2` without RE: 0.49 s per epoch including validation, peak GPU memory 1.96 GB; the saved 5-fold run used 47 epochs in total, i.e. about 0.4 minutes of pure training. `mental_emb` (771 inputs): 0.70 s per epoch, 87 epochs in total, about 1.0 minute, peak 2.0 GB. The wall time of a whole experiment including loading, the OOF sweep and the bootstrap was observed to be 1–4 minutes (not timed

rigorously).

What the measurements show

- The classifier is tiny (4 M parameters, under a minute of training, about 0.5–1 ms per forward pass on GPU), and no large model is fine-tuned for the recommended `lean2` without RE: PHQ similarities are zero-shot and LIWC is a dictionary.
- **At inference, however, the recommended system is not cheaper than frozen MentalRoBERTa.** Its dominant cost is the PHQ-9 encoder `mxbai-embed-large-v1` (335 M parameters), which is 2.7 times larger than MentalRoBERTa-base (125 M) and 2.6 times slower per post on GPU (6.6 vs 2.6 ms) and 3.7 times slower on 8 CPU threads (58.6 vs 15.6 ms). In total the frozen MentalRoBERTa pipeline costs about 3 ms per post on GPU against about 11 ms for `lean2` without RE.
- **The adapter fine-tuned MentalRoBERTa baseline is cheaper than our system at inference:** it needs the 125 M-parameter encoder plus a small adapter (2.13 M parameters), so its per-post cost should be close to the frozen MentalRoBERTa (about 2.6 ms on GPU); the adapter overhead was not measured separately. Fine-tuning took about 2–3 minutes per fold (Section 10.1).
- RE adds about 3.6 ms per post per model pair on GPU (the offline pipeline averages 3 pairs); removing it does not change the metrics (Section 8.6), so it should be dropped.
- A smaller sentence encoder for the PHQ similarities would lower the cost, but it would change the PHQ features and has **not been evaluated**.
- **A claim of "computationally efficient" is supported only in this limited sense:** no task-specific training of a large model and a very small classifier. It is not supported as "cheaper than MentalRoBERTa" at inference.

Caveats. Single machine and single run of the benchmark; post lengths are short (median 17 words), so long posts cost more; batched throughput numbers with random, unsorted batches are dominated by padding and are not used here (they are kept in the JSON file); the offline feature extraction of the whole dataset and the fine-tuning of the RE models were not re-timed.

10.5 Repeated cross-validation over all users (the results to rely on)

Protocol. All 891 labelled users (102 depressed; train and test pooled) are split by 5-fold stratified cross-validation repeated 3 times (`cv_splits.py`, seed 2025). In every outer fold the sequence model is trained on about 80 % of the users exactly as in Section 5 (inner 5-fold CV, early stopping on 12 % of the inner training users); the decision rule `(th, k)` is chosen on the pooled inner out-of-fold probabilities of the training users only, and the 5 inner models are averaged on the held-out users (`cv_all.py`). Every user is therefore predicted once per repeat by a model that never saw it, and all configurations use identical splits and seeds.

- **RE is not part of the cross-validation** (`*_without_RE` names). Its two language models are fitted on the labels, so reusing them across the pooled folds would leak, and a nested version (refitting them inside every outer fold) was not run. RE was tested only on the single split, where removing it changes neither the test nor the out-of-fold metrics (Section 8.6): the finding is "RE is redundant on the single split", not "RE is redundant in the cross-validation".
- **`ft_logit` is re-fitted inside every outer fold** (`cv_ft.py`): 3 inner adapter models are trained on the outer training users only (one adapter run per outer fold).
- **`tfidf_lr`** (new bag-of-words baseline, `cv_tfidf.py`): TF-IDF (word 1–2-grams, minimum document frequency 5, at most 200 000 terms, sublinear tf; fitted on the outer training text without labels) and a logistic regression (`C = 1`) that scores every post with the label of its user (each user weighted equally, classes balanced). The user's score after *n* posts is the sigmoid of the running mean of the post logits, so it is causal and uses the same `(th, k)` rule, selected on the same inner out-of-fold scheme. `C` was compared among 0.1, 0.3, 1 and 3 on the inner out-of-fold F_latency of one outer fold only (0.710, 0.715, 0.732, 0.723); n-grams and vocabulary size were not tuned.
- **Metrics.** ROC and PR use the user's maximum probability; AUC@10 uses the probability after 10 posts; F1, median delay and F_latency use, for every user, the rule chosen in the user's own outer fold. Values are means over the 3 repeats; intervals are 95 % percentile intervals of a stratified bootstrap over users (2 000 draws, the same draws for every configuration, repeats averaged inside each draw). They reflect the finite number of users, not the training randomness.
- **Paired tests** (`cv_significance.py`) on the difference A – B: bootstrap p-value of the mean difference over repeats, adjusted by Holm's method within a pre-specified family of comparisons (family 1: 9 comparisons fixed before the analysis; family 2: 4 comparisons with the bag-of-words baseline, fixed before it was run, corrected separately so that family 1 is unaffected). The Nadeau–Bengio corrected resampled t-test on the folds, DeLong's test of ROC-AUC and McNemar's test of the alarm decisions are in `models/v2/cv_all/pairs.csv`. They agree with the bootstrap test for the main findings (PHQ against LSM and against the control; adapter against TF-IDF) but not for borderline comparisons: PHQ against LIWC in PR-AUC (Nadeau–Bengio p

= 0.209) and F1 (McNemar p = 0.060); the adapter against the frozen encoder in PR-AUC (Nadeau–Bengio p = 0.057); the four-score variant against the alignment variant in ROC-AUC (Nadeau–Bengio p = 0.215). These are described as suggestive, not established.

Configuration	ROC	PR	AUC@10	F1	F_latency	Median delay
ft_logit	0.963 [0.947, 0.977]	0.792 [0.732, 0.852]	0.878	0.788 [0.735, 0.837]	0.762	9.5
lean_without_RE	0.958 [0.942, 0.974]	0.777 [0.710, 0.846]	0.892	0.751 [0.695, 0.805]	0.713	13.8
ft_logit_plus_lean2_without_RE	0.958 [0.940, 0.974]	0.771 [0.709, 0.840]	0.884	0.738 [0.685, 0.793]	0.698	14.8
lean2_without_RE	0.953 [0.934, 0.970]	0.753 [0.689, 0.822]	0.883	0.723 [0.666, 0.782]	0.680	16.3
lean_PHQ_plus_LIWC	0.952 [0.934, 0.968]	0.749 [0.679, 0.820]	0.891	0.732 [0.674, 0.790]	0.706	10.3
only_PHQ	0.952 [0.935, 0.968]	0.742 [0.677, 0.815]	0.875	0.718 [0.657, 0.778]	0.681	14.0
mental_plus_lean2_without_RE	0.957 [0.940, 0.971]	0.741 [0.676, 0.812]	0.879	0.719 [0.663, 0.774]	0.702	7.2
mental_emb	0.938 [0.914, 0.960]	0.726 [0.659, 0.798]	0.889	0.729 [0.669, 0.786]	0.708	8.3
tfidf_lr	0.914 [0.884, 0.940]	0.680 [0.601, 0.759]	0.902	0.715 [0.646, 0.775]	0.702	5.7

Table 10.5a. Pooled 5×3 cross-validation, 891 users (102 depressed), sorted by PR. Mean over repeats with 95 % bootstrap interval; AUC@10 intervals are about ±0.04.

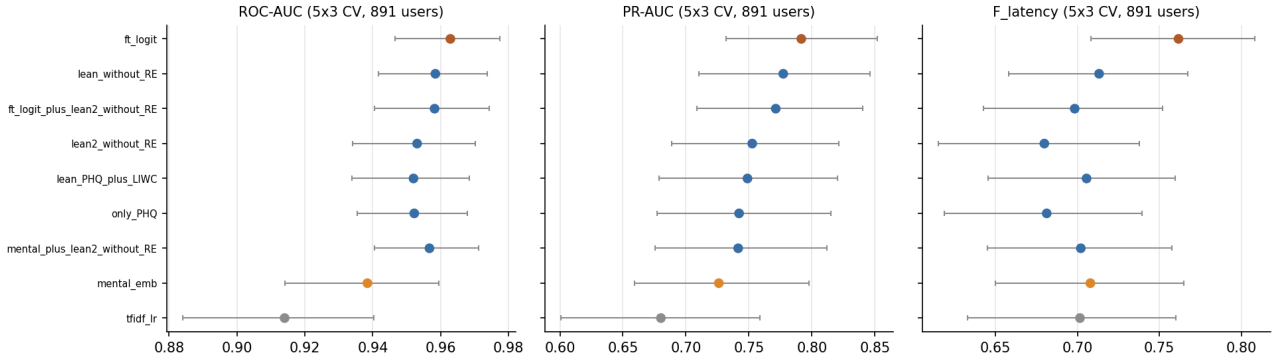


Figure 11. Pooled 5×3 cross-validation: mean and 95 % bootstrap interval over users for ROC-AUC, PR-AUC and F_latency.

Family	A – B	ΔROC (Holm p)	ΔPR (Holm p)	ΔF1 (Holm p)	ΔAUC@10 (Holm p)
1	lean2_without_RE – only_PHQ	+0.001 [-0.006, +0.007] (1.000)	+0.010 [-0.025, +0.044] (1.000)	+0.005 [-0.027, +0.039] (1.000)	+0.008 [-0.010, +0.028] (1.000)
1	lean2_without_RE – lean_PHQ_plus_LIWC	+0.001 [-0.004, +0.007] (1.000)	+0.004 [-0.032, +0.040] (1.000)	-0.009 [-0.040, +0.022] (1.000)	-0.007 [-0.022, +0.007] (1.000)
1	lean2_without_RE – lean_without_RE	-0.005 [-0.009, -0.001] (0.042)	-0.025 [-0.048, -0.001] (0.322)	-0.028 [-0.051, -0.004] (0.182)	-0.009 [-0.021, +0.002] (1.000)
1	lean2_without_RE – mental_emb	+0.015 [+0.001, +0.031] (0.192)	+0.027 [-0.027, +0.083] (1.000)	-0.006 [-0.057, +0.047] (1.000)	-0.006 [-0.032, +0.022] (1.000)
1	lean2_without_RE – ft_logit	-0.010 [-0.019, -0.001] (0.192)	-0.039 [-0.086, +0.010] (0.810)	-0.065 [-0.113, -0.014] (0.088)	+0.005 [-0.025, +0.037] (1.000)
1	ft_logit – mental_emb	+0.024 [+0.011, +0.041] (0.004)	+0.065 [+0.019, +0.109] (0.045)	+0.059 [+0.023, +0.096] (0.018)	-0.011 [-0.034, +0.012] (1.000)
1	ft_logit_plus_lean2_without_RE – ft_logit	-0.005 [-0.013, +0.004] (1.000)	-0.020 [-0.064, +0.027] (1.000)	-0.050 [-0.095, -0.002] (0.270)	+0.006 [-0.022, +0.037] (1.000)

1	ft_logit_plus_lean2_without_RE – lean2_without_RE	+0.005 [+0.003, +0.008] (0.004)	+0.019 [+0.003, +0.036] (0.192)	+0.015 [-0.003, +0.036] (0.570)	+0.001 [-0.005, +0.007] (1.000)
1	mental_plus_lean2_without_RE – lean2_without_RE	+0.004 [-0.003, +0.010] (1.000)	-0.011 [-0.049, +0.028] (1.000)	-0.004 [-0.042, +0.032] (1.000)	-0.005 [-0.027, +0.016] (1.000)
2	ft_logit – tfidf_lr	+0.049 [+0.030, +0.071] (0.002)	+0.111 [+0.042, +0.180] (0.002)	+0.073 [+0.024, +0.125] (0.004)	-0.024 [-0.047, -0.003] (0.112)
2	mental_emb – tfidf_lr	+0.024 [+0.011, +0.039] (0.002)	+0.046 [-0.012, +0.109] (0.204)	+0.014 [-0.022, +0.054] (1.000)	-0.014 [-0.034, +0.005] (0.238)
2	only_PHQ – tfidf_lr	+0.038 [+0.018, +0.059] (0.002)	+0.062 [-0.014, +0.139] (0.204)	+0.003 [-0.061, +0.070] (1.000)	-0.028 [-0.058, -0.001] (0.144)
2	lean2_without_RE – tfidf_lr	+0.039 [+0.020, +0.060] (0.002)	+0.072 [+0.002, +0.144] (0.138)	+0.008 [-0.048, +0.075] (1.000)	-0.019 [-0.044, +0.005] (0.238)

Table 10.5b. Paired differences A – B (mean over repeats, 95 % bootstrap interval, Holm-adjusted p in parentheses).

What the cross-validation shows

1. **The single test split was optimistic.** `lean2` reached test PR 0.831 and ROC 0.950 on the 21 test positives (with RE; 0.820 and 0.946 without RE), against 0.753 and 0.953 pooled over all users (`lean2_without_RE`); the PR intervals are about ±0.07. Conclusions drawn from the test split alone were over-confident.
2. **Adapter fine-tuning is the strongest and the only clearly better method.** `ft_logit` has the highest ROC (0.963), PR (0.792), F1 (0.788) and F_latency (0.762). It is significantly better than frozen embeddings (ΔROC +0.024, ΔPR +0.065, ΔF1 +0.059; Holm p = 0.004, 0.045, 0.018) and than TF-IDF (ΔROC +0.049, ΔPR +0.111, ΔF1 +0.073; Holm p ≤ 0.004). Against `lean2_without_RE` it is better in ROC (+0.010), PR (+0.039) and F1 (+0.065) but not significantly after Holm correction (p = 0.19, 0.81, 0.088).
3. **Features beyond PHQ show no demonstrable gain.** `lean2_without_RE`, `only_PHQ` and `lean_PHQ_plus_LIWC` are indistinguishable (|ΔPR| ≤ 0.010, Holm p = 1). `lean_without_RE` is, if anything, slightly better than `lean2_without_RE` (ΔROC −0.005, Holm p = 0.042; ΔPR −0.025, p = 0.32). The style-alignment LSM features of Section 8.5–8.6 therefore do not help in the cross-validation; the single-split gain was within noise.
4. **Hand-crafted features add nothing to the fine-tuned logit.** `ft_logit_plus_lean2_without_RE` is not better than `ft_logit` (ΔPR −0.020, ΔF1 −0.050, not significant). It does beat `lean2_without_RE` in ROC (+0.005, Holm p = 0.004), which shows what the fine-tuned logit adds to the features, not the reverse. Adding frozen embeddings to `lean2` brings nothing (`mental_plus_lean2_without_RE`).
5. **Bag-of-words baseline.** TF-IDF logistic regression ranks users worse (ROC 0.914, PR 0.680; ROC significantly below every other configuration, Holm p ≤ 0.002) but has a similar F1 (0.715), the highest AUC@10 (0.902) and the shortest median alarm delay (5.7 posts). The differences to the PHQ-based configurations in PR, F1 and AUC@10 are not significant. The simple baseline is therefore competitive for early alarms, and a claim of early-detection superiority over a bag-of-words model is not supported. Its learned terms were not inspected for topic or community shortcuts.
6. **AUC@10** shows no significant difference between any two configurations (all Holm p ≥ 0.11).

Revised recommendation. If a hand-crafted configuration is wanted, `only_PHQ` or `lean_PHQ_plus_LIWC` (28 and 34 features) is as good as `lean2` and simpler; `lean2` is not supported as the recommended configuration. If the best accuracy is the aim, the adapter fine-tuned logit is the strongest option, at the price of a labelled fine-tuning step.

Limitations of this analysis. One sequence-model seed and one adapter run per outer fold; with 102 positives the intervals are wide (about ±0.07 in PR), so the non-significant differences are not evidence of equality; the comparisons were pre-specified but their number is still large; the `tfidf_lr` hyper-parameters were tuned lightly while the others were fixed earlier; the cross-validation uses the same users that earlier choices (feature groups, `lean2`, and the sequence-model hyper-parameters chosen with `run_grid.py` on the 712 training users) were made on, which favours those choices if anything; the decision rule is chosen on single-model out-of-fold probabilities but applied to the average of the 5 inner models (and, for `ft_logit`, to the average of 3 adapter models), so the threshold-based metrics (F1, delay, F_latency) may carry a small calibration shift, while ROC and PR are not affected.

10.6 Error analysis: false positives and false negatives

Setup. The pooled 5×3 cross-validation predictions of Section 10.5 are used, so every user is judged by models that never saw it. A user counts as an error of a configuration when its alarm decision is wrong in at least 2 of the 3 repeats. The main model is `ft_logit`; `lean2_without_RE`, `only_PHQ`, `mental_emb` and `tfidf_lr` are used for the overlap. Per-user descriptors come from the posts; two keyword patterns (regular expressions in `error_analysis.py`, written in the first version of the script and not changed afterwards) mark posts with mental-health terms (depression, anxiety, therapy, antidepressants, suicide, …) and first-person self-reports of depression ("I was diagnosed with

depression", "my depression", "I'm depressed", …). In addition, one author labelled the 71 users that are errors of `ft_logit` or `lean2_without_RE` (38 false positives, 33 false negatives) from a blind material (`annotation_material.py`): per user, in time order, the posts at which the alarm fired, the 3 posts with the highest held-out `ft_logit`, the 3 with the highest `phq_score`, up to 10 random posts with a mental-health term and 3 random posts, each cut at 1000 characters, without any score. The annotator knew whether a user was a false positive or a false negative; there was no second annotator, so the categories below are indicative, and "no statement" for a false negative means none in the posts shown. (An earlier reading, which looked only at the posts with the highest `ft_logit`, was circular for the claim that the model scores such posts highly, and is replaced.) Following the data-use agreement no text is quoted here; the excerpts stay local in `Results/v2/error_analysis/` (git-ignored).

Configuration	FN (of 102)	FP (of 789)
`ft_logit`	20	21
`lean2_without_RE`	24	34
`only_PHQ`	25	31
`mental_emb`	25	30
`tfidf_lr`	32	22

Table 10.6a. Users misclassified by each configuration (majority over the 3 repeats).

Overlap. Of the 41 depressed users missed by at least one of the five models, 9 are missed by all five; of the 56 control users flagged by at least one model, 7 are flagged by all five. Most errors are therefore model-specific, but a core of hard users is shared by every approach (Figure 12, left).

Group	n	posts	words per post	share of posts with mental-health terms	users with a self-report phrase	mean held-out `ft_logit`	mean `phq_score`
TP	82	464	35.0	0.155	87%	+0.93	0.446
FN	20	854	13.5	0.028	60%	-0.96	0.400
TN	768	208	13.5	0.000	2%	-1.73	0.375
FP	21	241	31.0	0.058	38%	+0.34	0.424
p, FN vs TP		0.236	<0.001	<0.001	0.011	<0.001	<0.001
p, FP vs TN		0.274	<0.001	<0.001	<0.001	<0.001	<0.001

Table 10.6b. Users grouped by the outcome of `ft_logit`: medians (share of users for the self-report column) and p-values (Mann–Whitney; Fisher's exact test for the self-report column; unadjusted, exploratory).

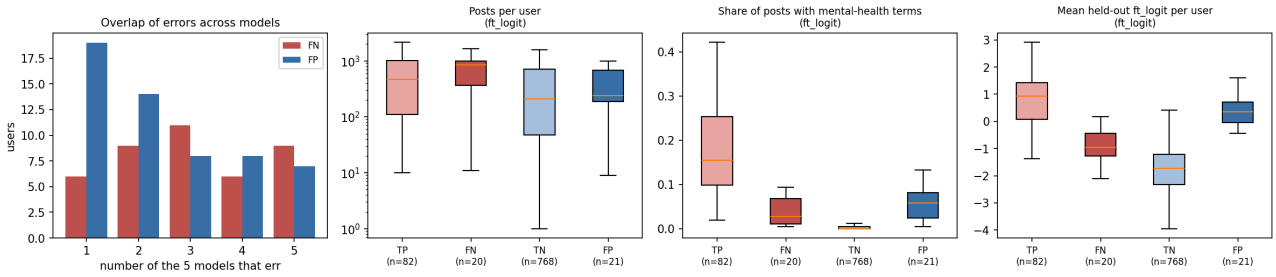


Figure 12. Left: number of the five models that misclassify a user (users with at least one error). Right: posts per user, share of posts with mental-health terms and mean held-out `ft_logit`, by outcome of `ft_logit`.

False negatives (20 depressed users missed by `ft_logit`)

- **The evidence is present but diluted.** In 18 of the 20 users the annotator found at least one first-person statement of a depression diagnosis or of ongoing depression (the regular expression finds 12; it misses phrasings such as "I've been depressed" or "diagnosed with MDD"). Posts matching a broadened pattern (`fn_analysis.py`) rank in the top 3 % of the user's posts by held-out `ft_logit` (median percentile 0.97, true positives 0.95), so the post-level model recognises them. They are rare, however: a median 2.8 % of the posts contain mental-health terms (15.5 % for true positives), and the users have long histories (median 854 posts over about four years) of short, mostly unrelated comments (median 13.5 words against 35 for true positives).
- **The sequence model does not keep isolated strong evidence.** For 15 of the 20 users the peak probability never reaches the threshold (median peak / threshold 0.84), although single posts are scored as strongly depressive. The probability depends on the whole history and is pulled down by the many neutral posts.
- **Short histories.** Three users have only 11–32 posts; their probability crosses the threshold but not for `k` consecutive posts (near misses).
- **Other cases.** Two users have no first-person statement among the posts shown; one of them writes about a partner's depression in a history of 12 posts.

- **Mechanism (`fn_analysis.py`, `docs/figures/fn_mechanism_summary.csv`, `fn_disclosure_response.csv`).** Majority outcome of the 3 repeats for the 20 `ft_logit` misses: 15 never reach the threshold, 5 reach it but not for `k` consecutive posts; 7 raise an alarm in one of the 3 repeats. Around a disclosure post (broadened self-report pattern), the sequence probability of a missed user moves from a median 0.52 to 0.60 of the threshold and reaches the threshold within the next 20 posts in 20 % of the 147 cases (16 users); for true positives it is already at 1.08 of the threshold at the post and reaches it in 96 % of the 1776 cases. The disclosure raises the probability but not enough, which agrees with isolated evidence being diluted. Descriptive, small N, no test.
- **Possible remedies (not tested):** features that retain the strongest evidence so far (running maximum of `ft_logit`, number of posts above a score), or max/attention pooling over the history instead of a mean-like summary.

False positives (21 control users flagged by `ft_logit`), categories from the manual reading (they overlap; each user is counted once, in the first matching category):

- **Own depression described in the first person** (diagnosis, ongoing depression, antidepressants for depression): 10. These cases cannot be resolved here: either the control label is wrong, or the collection's labelling criterion is stricter than what users write. Overall 27 of the 789 control users (3.4 %) match the self-report pattern in at least one post, against 83 of the 102 depressed users.
- **Other mental-health conditions or treatment** (bipolar disorder, complex PTSD, panic and anxiety, recovery groups): 6.
- **Chronic physical illness** with fatigue, pain or low mood: 4.
- **Everyday distress** (loneliness, relationships, job dissatisfaction, family conflict): 0.
- **Supportive commenters** in mental-health communities who write about depression to others: 1.
- **No clear depression-related content:** 0.
- The false alarm does not fire on the user's most depressive-looking post: in repeat 0 the alarm post of 20 `ft_logit` false positives has a median percentile of 0.71 among the user's own posts by held-out `ft_logit` (above the user's median in 70 %, in the top 10 % for 4 of 20), and the median alarm is raised after 46 posts. The alarm reflects the accumulated history rather than the post itself (`verify_claims.py`). False positives have a higher mean held-out `ft_logit` than false negatives (+0.34 against –0.96), so at the user level many false positives look more depressive than the missed users, and no threshold can remove both error types.

A rule without training as a sanity check. Raising the alarm at the first post that matches the self-report pattern, with no learning at all, gives over all 891 users precision 0.755, recall 0.814 and **F1 0.783**, about the same as the best model (`ft_logit` 0.788); ranking users by the number of matching posts gives ROC 0.897 and PR 0.754 (`lean2_without_RE`: 0.953 and 0.753). The rule is late, however: median delay 55 posts, F_latency 0.621 (models 0.680–0.762) and AUC@10 0.578 (models 0.875–0.902).

- The labels are based on self-reported diagnoses, and such statements are still in the users' texts. Part of what any model learns is to recognise the labelling statement itself, and the F1 values of all methods should be read with that in mind.
- The added value of the learned models is mainly **earliness**: they flag users before an explicit disclosure appears.
- A paper should report this rule as a baseline and, if possible, an evaluation with the self-report statements removed.

Caveats. The keyword patterns are simple and not validated (both false matches and misses occur); the categories come from one author; the counts depend on the majority rule over 3 repeats; the posts shown are a selection (at most about 15 per user), so "no statement" means none among them.

10.7 Error analysis of `lean2`

Setup. Same protocol as Section 10.6 (pooled 5×3 cross-validation; a user is an error when the alarm decision is wrong in at least 2 of the 3 repeats), now for the hand-crafted configuration `lean2_without_RE` (PHQ features, three LIWC categories, LSM style alignment, running means; RE is excluded from the cross-validation, Section 10.5). It misclassifies 24 depressed users and 34 control users, against 20 and 21 for `ft_logit` (Table 10.6a). Of these, 11 of the 24 false negatives are also missed by `ft_logit` and 17 of the 34 false positives are also flagged by it. The same author (no second annotator, same blind material as in Section 10.6) labelled the 13 false negatives that `ft_logit` gets right and all 34 false positives; the 11 shared false negatives are covered by Section 10.6. No text is quoted (data-use agreement); material and labels stay in `Results/v2/error_analysis/annotation/` (git-ignored).

Group	n	posts	words per post	mean `phq_score`	max `phq_score`	LIWC HEALTH ×10³	LIWC ANX ×10³	LIWC SAD ×10³	share of posts with mental-health terms	users with a self-report phrase	mean held-out `ft_logit`
TP	78	544	32.0	0.449	0.618	9.0	4.1	10.9	0.158	87%	+0.93

FN	24	421	24.0	0.394	0.588	6.3	2.3	6.5	0.055	62%	-0.55
TN	755	207	13.5	0.375	0.531	2.3	1.2	4.8	0.000	2%	-1.75
FP	34	384	24.0	0.413	0.601	6.4	3.1	7.5	0.029	29%	-0.14
p, FN vs TP		0.318	0.073	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	0.014	<0.001
p, FP vs TN		0.066	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001

Table 10.7a. Users grouped by the outcome of `lean2_without_RE`: medians (share of users for the self-report column); p-values as in Table 10.6b (unadjusted, exploratory). LIWC rates are per word ×1000. `ft_logit` is shown only as an outside text signal; `lean2` does not use it.

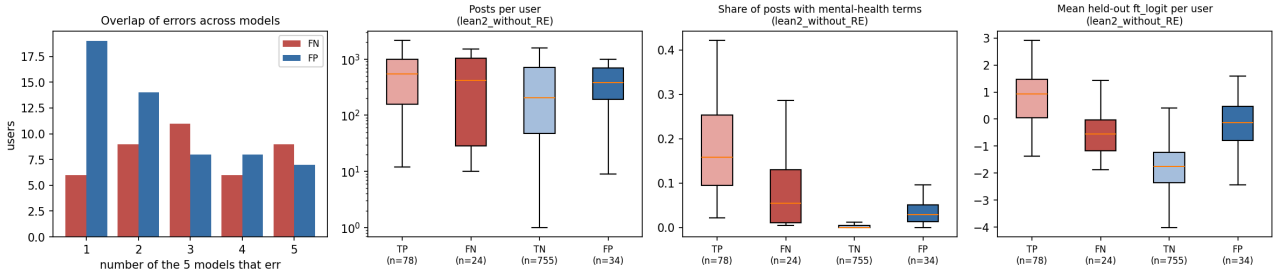


Figure 13. As Figure 12, for `lean2_without_RE`.

False negatives (24 depressed users missed by `lean2`)

- **The features see the topic, not the statement.** Missed users have a median per-user `phq_score` of 0.394, close to control users (0.375) and well below detected users (0.449); their LIWC HEALTH/ANX/SAD rates are also lower than those of detected users (Table 10.7a). Yet 12 of the 13 misses that `ft_logit` does catch contain first-person statements of a depression diagnosis, medication or ongoing depression (the regular expression finds only 15 of the 24 in total). The `phq_score` of these posts lies in the ordinary range (0.41–0.59 in the excerpts read), while `ft_logit` scores them +2.9 to +4.6. PHQ similarity responds to symptom-like wording, not to "I was diagnosed with depression".
- **Short histories (7 of these 13 users have 10–54 posts).** With few posts a single strong disclosure matters, and `lean2` does not weigh it enough; `ft_logit` does. Across these 13 users the peak probability reaches 0.97 of the threshold in the median.
- **Long histories (6 of the 13, 336–1524 posts).** The disclosures are a few posts among many others (2–15 % of the posts contain mental-health terms) and are diluted, as for `ft_logit`. The 11 shared false negatives are of this type (median 622 posts, peak / threshold 0.47).
- **Near misses.** 15 of the 24 reach at least 80 % of the threshold (5 cross it, but not for `k` consecutive posts); 6 stay below 50 %.
- Adding the fine-tuned logit to `lean2` does not remove these errors systematically: `ft_logit_plus_lean2_without_RE` is not significantly better than `ft_logit` alone (Section 10.5).

False positives (34 control users flagged by `lean2`), categories as in Section 10.6 (each user counted once, in the first matching category; indicative, one author):

- **Own depression described in the first person:** 10.
- **Other mental-health conditions or treatment** (anxiety, ADHD/OCD, bipolar disorder, C-PTSD, autism, therapy, recovery groups): 9.
- **Chronic physical illness or injury** with distress: 5.
- **Everyday distress** (relationships, loneliness, family conflict): 4.
- **Supportive commenters** who write about depression or suicide prevention to others: 4.
- **No clear depression-related content:** 2.
- **The features measure vocabulary.** False positives have much higher `phq_score` and LIWC HEALTH/ANX/SAD rates than true negatives (all $p < 0.001$, Table 10.7a), and 29 % of them match the self-report pattern (2 % of true negatives). 18 of the 34 (other conditions, physical illness, supportive commenters) write about health in mental-health communities, which a topic-based feature cannot separate from having depression. `ft_logit` flags fewer such users (21 in total) but the 17 shared ones are of the same kinds.
- **The 17 false alarms of `lean2` that `ft_logit` avoids** have a lower mean held-out `ft_logit` (median –0.80) than the 17 shared ones (+0.36); `lean2` flags them on topic vocabulary alone.
- **The alarm is not caused only by the post on which it fires.** In repeat 0 the alarm post of the 30 `lean2` false positives that alarm has a median percentile of 0.69 among the user's own posts by held-out `ft_logit` (above the user's median in 21 of 30, in the top 10 % for 9 of 30); the alarm comes from the accumulated history. The

median alarm is raised after 42.5 posts (`ft_logit`: 46); 14 of the 30 fire within the first 30 posts, 11 after more than 100.

Comparison with `ft_logit`. The two models make different mistakes on the same data: `lean2` additionally misses short-history users with an explicit disclosure (13 users) and additionally flags health-topic commenters (17 users). Both extra error types follow from using lexical topic features instead of reading the statement. The 9 depressed and 7 control users that all five models get wrong (Section 10.6) are not helped by any of the approaches.

Caveats. `lean2_without_RE` instead of `lean2` (RE excluded); the keyword patterns are not validated; the categories come from one author who read a selection of at most about 15 posts per user; the alarm-post statistics use repeat 0 only.

10.8 Feature groups: how early each detects, and what each gets wrong

Setup. Every feature group was run alone in the pooled 5×3 cross-validation of Section 10.5 (`only_X`: the group plus the three context features `post_index`, `is_comment`, `has_parent`; same splits, seeds and decision rule). `context_only` has the three context features alone and controls for the position and volume of posts. "LSM (counts)" is the original LSM of Section 4 (73 features with history), "LSM alignment" the rate-based `lsmr_*`/`dlsm_*` (43), "LIWC" the 15 own-text categories (33). RE is not included (Section 10.5). *Curves:* AUC after n posts uses the probability after n posts (a user with fewer posts contributes the last one); "flagged within n posts" is the share of users whose alarm, under the decision rule chosen in the user's outer fold, fired within n posts; means over the 3 repeats, 95 % bootstrap intervals over users (500 draws, stratified, same draws for every configuration). *Tests:* a third family of 9 pre-specified comparisons (every group against `context_only`, and PHQ against LIWC, LSM and LSM alignment), Holm-adjusted within the family; the first two families are unchanged. *Errors:* same majority rule as Section 10.6; the profile uses the automatic descriptors only (no manual reading for these configurations).

Group	# features	ROC	PR	AUC@10	F1	F_latency
PHQ	28	0.952 [0.935, 0.968]	0.742 [0.677, 0.815]	0.875	0.718 [0.657, 0.778]	0.681
LIWC (15 categories)	33	0.926 [0.901, 0.949]	0.660 [0.586, 0.745]	0.847	0.653 [0.592, 0.714]	0.620
LSM (counts)	73	0.874 [0.837, 0.909]	0.556 [0.476, 0.641]	0.764	0.564 [0.498, 0.624]	0.479
LSM alignment	43	0.851 [0.811, 0.886]	0.478 [0.403, 0.568]	0.745	0.507 [0.448, 0.566]	0.464
behaviour	9	0.808 [0.763, 0.849]	0.375 [0.314, 0.458]	0.745	0.438 [0.377, 0.500]	0.416
cosine similarity	10	0.727 [0.676, 0.778]	0.303 [0.244, 0.381]	0.621	0.272 [0.251, 0.292]	0.255
context only (control)	3	0.662 [0.607, 0.718]	0.333 [0.259, 0.419]	0.620	0.236 [0.222, 0.249]	0.225

Table 10.8a. Single feature groups in the cross-validation (mean over repeats, 95 % bootstrap interval; AUC@10 intervals about ±0.04). Prevalence of depressed users: 11.4 %.

A – B	ΔROC (Holm p)	ΔPR (Holm p)	ΔF1 (Holm p)	ΔAUC@10 (Holm p)
`only_PHQ` – `context_only`	+0.291 (0.004)	+0.409 (0.004)	+0.482 (0.004)	+0.255 (0.004)
`only_OWN_LIWC` – `context_only`	+0.264 (0.004)	+0.326 (0.004)	+0.417 (0.004)	+0.226 (0.004)
`only_LSM` – `context_only`	+0.212 (0.004)	+0.223 (0.004)	+0.328 (0.004)	+0.144 (0.004)
`only_LSMX_no_par` – `context_only`	+0.189 (0.004)	+0.144 (0.042)	+0.271 (0.004)	+0.125 (0.004)
`only_SIM` – `context_only`	+0.066 (0.018)	-0.030 (0.686)	+0.036 (0.004)	+0.001 (0.957)
`only_BEHAVIOR` – `context_only`	+0.146 (0.004)	+0.042 (0.686)	+0.202 (0.004)	+0.124 (0.004)
`only_PHQ` – `only_OWN_LIWC`	+0.027 (0.004)	+0.082 (0.024)	+0.064 (0.017)	+0.028 (0.214)
`only_PHQ` – `only_LSMX_no_par`	+0.102 (0.004)	+0.264 (0.004)	+0.211 (0.004)	+0.130 (0.004)
`only_PHQ` – `only_LSM`	+0.078 (0.004)	+0.186 (0.004)	+0.154 (0.004)	+0.111 (0.004)

Table 10.8b. Paired differences A – B between feature groups (mean over repeats, Holm-adjusted p in parentheses).

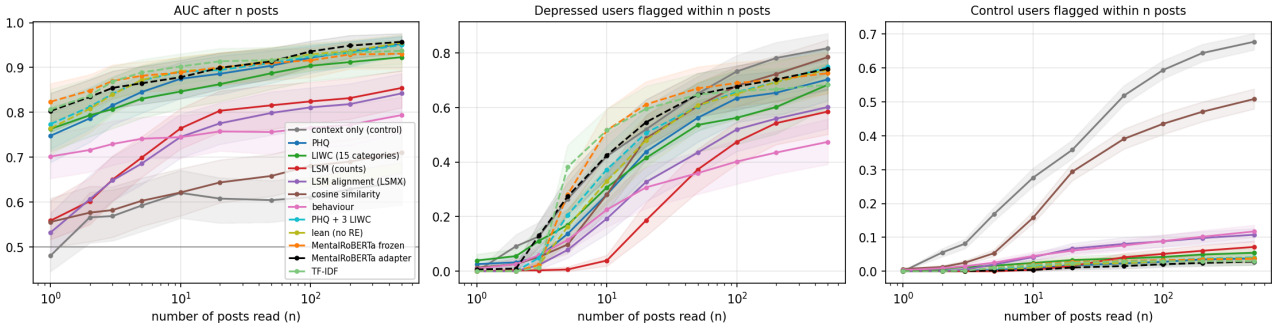


Figure 14. Left: AUC after n posts. Middle and right: share of depressed and of control users flagged within n posts. Solid: single feature groups; dashed: references (PHQ + 3 LIWC, frozen and adapter fine-tuned MentalRoBERTa, TF-IDF); bands: 95 % bootstrap intervals.

Configuration	AUC@1	AUC@10	AUC@100	AUC@500	flagged ≤10 posts	flagged ≤50 posts	precision	median delay [Q1–Q3]	detected within 10
PHQ	0.748	0.875	0.922	0.953	0.28	0.56	0.699	14.0 [10–46]	38%
LIWC (15 categories)	0.763	0.847	0.904	0.923	0.31	0.54	0.613	14.0 [6–45]	44%
LSM (counts)	0.559	0.764	0.825	0.855	0.04	0.37	0.517	40.0 [17–96]	6%
LSM alignment	0.532	0.745	0.811	0.842	0.19	0.43	0.421	22.8 [8–74]	30%
behaviour	0.702	0.745	0.766	0.794	0.23	0.36	0.365	14.2 [6–120]	41%
cosine similarity	0.556	0.621	0.681	0.711	0.28	0.60	0.163	17.0 [9–54]	34%
context only (control)	0.481	0.620	0.611	0.644	0.42	0.65	0.137	12.5 [4–52]	48%
PHQ + 3 LIWC	0.774	0.891	0.924	0.951	0.37	0.60	0.700	10.3 [5–35]	49%
MentalRoBERTa frozen	0.824	0.889	0.916	0.931	0.52	0.67	0.722	8.3 [5–12]	70%
MentalRoBERTa adapter	0.803	0.878	0.936	0.957	0.42	0.65	0.783	9.5 [5–32]	54%
TF-IDF	0.806	0.902	0.926	0.937	0.52	0.65	0.749	5.7 [5–10]	76%

Table 10.8c. Earliness of the feature groups. "Flagged ≤n posts" is the share of all depressed users flagged within n posts; delay statistics are over the detected depressed users (true positives of the three repeats).

Configuration	FN	FP	FN median posts	FN mental-health share	FN with self-report	FP median posts	FP with self-report	recall, with self-report (83)	recall, without (19)
PHQ	25	31	622	0.051	64%	412	23%	0.81	0.53
LIWC (15 categories)	31	41	622	0.053	58%	231	20%	0.78	0.32
LSM (counts)	36	61	546	0.095	67%	483	18%	0.71	0.37
LSM alignment	36	83	304	0.115	67%	368	13%	0.71	0.37
behaviour	47	96	336	0.126	72%	660	7%	0.59	0.32
cosine similarity	19	439	76	0.150	53%	405	5%	0.88	0.53
context only (control)	11	583	54	0.237	64%	397	4%	0.92	0.79
PHQ + 3 LIWC	24	34	746	0.031	62%	416	21%	0.82	0.53
MentalRoBERTa frozen	25	30	956	0.029	64%	225	27%	0.81	0.53
MentalRoBERTa adapter	20	21	854	0.028	60%	241	38%	0.86	0.58
TF-IDF	32	22	954	0.032	69%	172	27%	0.73	0.47

Table 10.8d. Error profile (users wrong in at least 2 of 3 repeats; medians; shares of users). Mental-health share = share of posts with mental-health terms (patterns of Section 10.6). Recall is split by whether a depressed user has at least one post matching the self-report pattern (83 users) or none (19 users; one user is 5 percentage points, so these values are indicative only).

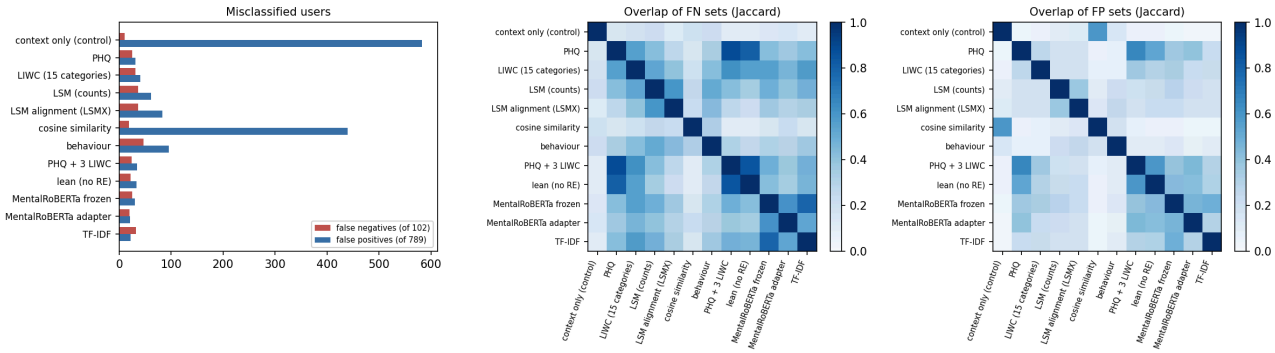


Figure 15. Left: misclassified users per configuration. Middle and right: overlap (Jaccard index) of the sets of false

negatives and of false positives.

Which groups carry signal.

- The ranking is PHQ > LIWC > LSM (counts) > LSM alignment > behaviour > cosine similarity (Table 10.8a). PHQ alone reaches ROC 0.952 and PR 0.742, LIWC alone 0.926 and 0.660. PHQ is significantly better than LIWC (ΔROC +0.027, ΔPR +0.082, ΔF1 +0.064; Holm p = 0.004, 0.024, 0.017), than LSM (counts) and than LSM alignment (ΔPR +0.186 and +0.264, Holm p = 0.004).
- Every group is above `context_only` in ROC (Holm p ≤ 0.018), but in PR only PHQ, LIWC, LSM (counts) and LSM alignment are (Holm p ≤ 0.042); behaviour and cosine similarity are not (p = 0.686).
- **Post position and volume alone are informative.** `context_only` reaches ROC 0.662 and PR 0.333 (prevalence 0.114) because depressed users write more posts. Its decision rule flags 583 of the 789 control users (precision 0.137, F1 0.236), so it is useless as a detector but shows the size of the length confound. Cosine similarity (ROC 0.727) and behaviour (0.808) add only a little to it; the LSM groups add more (0.874 and 0.851).

How early each group detects.

- **After one post** (Figure 14, left) the text groups already rank users: LIWC AUC 0.763 and PHQ 0.748 (behaviour 0.702), against 0.803 for the adapter fine-tuned model and 0.806 for TF-IDF. LSM (counts), LSM alignment and cosine similarity are near 0.53–0.56 at one post: they exist only for comments with a parent text and need several posts to accumulate. By 10 posts: PHQ 0.875, LIWC 0.846, LSM 0.764, LSM alignment 0.745, behaviour 0.745. By 100 posts PHQ (0.922) is close to the fine-tuned model (0.936), LIWC 0.904, the LSM groups 0.81–0.82.
- **Alarm delay** (Table 10.8c). Among the informative single groups (leaving out the context control, which flags most users) LIWC and PHQ have the same median delay (14 posts), but a larger share of LIWC's detected users is flagged within 10 posts (44 % against 38 %); LIWC is less precise than PHQ (precision 0.613 against 0.699); PHQ alarms at a median of 14 posts LSM (counts) is the slowest (median 40 posts, 6 % within 10, 3.9 % of all depressed users flagged at 10 posts). The combination of PHQ and 3 LIWC categories alarms earlier than either (median 10.3, 48.5 % within 10) at the precision of PHQ (0.700); this is descriptive, the difference was not tested. TF-IDF, frozen and adapter fine-tuned MentalRoBERTa alarm earliest (76 %, 70 % and 54 % of detected users within 10 posts). In the cumulative curves (Figure 14, middle) the groups differ mostly before 50 posts; after 500 posts PHQ flags 70 % of the depressed users, LIWC 68 %, LSM alignment 60 %, behaviour 47 %.
- **False alarms over time** (Figure 14, right): context only and cosine similarity flag 68 % and 51 % of control users after 500 posts, behaviour and LSM alignment about 11 %, PHQ and LIWC under 6 %.

What each group gets wrong (Table 10.8d, Figure 15).

- **Different groups miss different depressed users.** The overlap of the false-negative sets is high between PHQ and PHQ + 3 LIWC (Jaccard 0.89, the combination mostly inherits PHQ's misses), moderate between PHQ and LIWC (0.56) or LSM (0.42), and low between PHQ and LSM alignment (0.27) or the adapter fine-tuned model (0.36). The false-positive sets overlap much less (mostly 0.07–0.26 between groups, 0.37 between the two LSM groups; PHQ with the fine-tuned model 0.40).
- **Misses of the stronger groups are the diluted users.** The median history of the users missed by PHQ or LIWC is 622 posts (adapter: 854), with few mental-health posts (5 % of posts); the weaker groups also miss users with shorter histories (LSM alignment 304, behaviour 336 posts) and users who write more openly about mental health (10–13 % of the posts for LSM, LSM alignment and behaviour).
- **Recall by history length** (indicative: 23, 25 and 54 depressed users in the three bins; output `docs/figures/groups_length_bins.csv`). The recall of the systems that score post text falls as histories grow (TF-IDF 0.87, 0.76, 0.57; frozen encoder 0.91, 0.80, 0.67; adapter 0.87, 0.84, 0.76 for < 100, 100–499 and ≥ 500 posts), which is consistent with evidence dilution; PHQ and LIWC are weak on short histories (0.61 and 0.61 below 100 posts) and best at 100–499 posts (0.88 and 0.76), so features that accumulate over the history need a minimum number of posts. A concatenation of the adapter logit and the 74 features did not improve on the adapter alone (ΔPR −0.020, Holm p = 1).

Posts per user (depressed / control)	**< 100 (23 / 280)**	**100–499 (25 / 243)**	**≥ 500 (54 / 266)**
PHQ: recall (false-alarm rate)	0.61 (0.02)	0.88 (0.05)	0.76 (0.05)
LIWC	0.61 (0.05)	0.76 (0.06)	0.70 (0.05)
LSM (counts)	0.39 (0.03)	0.84 (0.10)	0.67 (0.11)

LSM alignment	0.43 (0.07)	0.76 (0.13)	0.69 (0.12)
Behaviour	0.39 (0.05)	0.48 (0.13)	0.63 (0.19)
PHQ + 3 LIWC	0.70 (0.02)	0.88 (0.06)	0.74 (0.05)
MentalRoBERTa frozen	0.91 (0.03)	0.80 (0.06)	0.67 (0.03)
MentalRoBERTa adapter	0.87 (0.01)	0.84 (0.04)	0.76 (0.03)
TF-IDF	0.87 (0.03)	0.76 (0.05)	0.57 (0.01)

- **False alarms differ in kind.** The semantic groups flag control users who write about depression: 23 % (PHQ), 20 % (LIWC) and 18 % (LSM) of their false positives match the self-report pattern (adapter 38 %, TF-IDF 27 %; 3.4 % of all control users). The behaviour group flags heavy posters: the median false positive has 660 posts (its true negatives: 182), and only 7 % match the self-report pattern. LIWC's false positives have shorter histories (median 231 posts), where a few posts with health vocabulary are enough.
- **Without an explicit self-report phrase every configuration misses more** (indicative, 19 users): recall falls from 0.81 to 0.53 for PHQ, from 0.86 to 0.58 for the adapter fine-tuned model and from 0.83 to 0.58 for `lean`, and by more for LIWC (0.78 to 0.32), LSM (0.71 to 0.37) and behaviour (0.59 to 0.32). PHQ and the fine-tuned model therefore hold up best, LIWC and behaviour fall most.

Summary. PHQ is the strongest and, among the single groups, one of the earliest signals; LIWC is almost as early but noisier; the LSM groups are late and weak, which agrees with the absence of a gain beyond PHQ in Section 10.5; behaviour and context mainly reflect how much a user writes. Groups err on different users, but combining them (PHQ + 3 LIWC) mostly reproduces the errors of PHQ.

Caveats. Every configuration contains the three context features, including `post_index`; the groups differ in size (9 to 73 features); RE is not included; 19 depressed users without a self-report phrase is a small subset; the error profiles use keyword patterns without manual reading; for AUC after n posts, users with fewer than n posts use their last probability, so the curves at large n mix users of different history lengths; the delay statistics are descriptive and untested.

---

11. Limitations, risks and open work

Limitations and risks

1. **Few positives.** 81 training and 21 test depressed users. The 95 % interval of the test F1 is about ±0.14–0.17 and seed noise about ±0.03–0.05; a single user crossing the threshold changes F1 by about 0.03. Most F1 differences are not statistically significant.
2. **Many configurations were evaluated on the same test set** (multiple comparisons). OOF (81 positives) is more stable but is also a single split.
3. **Single split.** The main tables (Sections 1–9 and 10.1–10.4) use one train/test split. Section 10.5 repeats the key comparisons with 5×3 cross-validation over all 891 users; its results are the ones to rely on, and they are lower than the single-split test results.
4. **Topic/community shortcuts.** Parent-rate features (`par_*`) may reflect the community rather than the user's own state; they are excluded from the recommended configuration, but PHQ itself may also contain topic information.
5. **Posting-volume difference** between depressed and control users (median 508 vs 237 posts, training set) still leaves a partial shortcut for `post_index` and length-related features; the ablation shows that removing `post_index` does not change the metrics, which suggests a weak dependence but does not exclude it.
6. **External dependency.** The PHQ features depend on the `extremism` repository (our fork, branch `my-changes`, which contains the fix to `item_scoring.py`).
7. **The fine-tuned MentalRoBERTa baseline is a single adapter run** with untuned hyper-parameters and post-level training; its variance and the benefit of tuning or of end-to-end user-level fine-tuning are unknown.
8. **Repository hygiene.** The online client directory `Test/` contains a plaintext token (git-ignored but still in the git history; it must be cleaned before the repository is made public).
9. **RE was not evaluated in the repeated cross-validation.** Its role is established on the single split only (21 test positives, 81 out-of-fold positives), where it is redundant; with a nested refit of the language models it could be re-tested, but this was not done.

Open work

- More adapter seeds and some hyper-parameter tuning for the fine-tuned baseline, and possibly end-to-end

user-level fine-tuning (the cross-validation of Section 10.5 uses one adapter run per outer fold).
- The `lean3` experiment (further simplification).
- Computing cost: measured in Section 10.4; not yet measured are the one-off offline extraction time of the whole dataset, the fine-tuning time of the RE models, and a smaller PHQ sentence encoder.
- Aligning the online client with the new pipeline (the old client uses the legacy 99-dimensional feature semantics).
- A second annotator for the error categories (Section 10.6, 10.7); leave-one-group-out cross-validation (`without_X`); more adapter seeds; a second dataset (Section 13.7).
- Delete `Archive/` (about 8.5 GB of old notebooks and results) once confirmed; push the local commits.

---

12. Reproduction and code layout

12.1 Environment

conda environment `hongyi` (Python 3.12); two RTX 4090 GPUs; main dependencies: pandas, numpy, torch, scikit-learn, transformers, sentence-transformers, the local LIWC (`liwc.py`, `liwc_script.py`, git-ignored).

12.2 Run order

```
# 1) Data and features (run the cells of data-processing.ipynb top to bottom, or call the module functions)
#    -> Results/v2/..., Features/v2/{train,test}_features.pkl (212 columns)

# 2) Frozen MentalRoBERTa embeddings (optional, for the comparison)
nohup conda run -n hongyi python -u embed_posts.py train --device cuda:0 > Results/v2/embed_train.log 2>&1 &
nohup conda run -n hongyi python -u embed_posts.py test  --device cuda:1 > Results/v2/embed_test.log 2>&1 &

# 2b) Adapter fine-tuned MentalRoBERTa: one process per user-level fold, then combine into the post-level
feature ft_logit
for k in 0 1 2; do nohup conda run -n hongyi python -u finetune_mental.py fold --fold $k --device cuda:$((k %
2)) > Results/v2/ft_fold$k.log 2>&1 & done
conda run -n hongyi python finetune_mental.py combine

# 3) Training and evaluation (names are keys of feature_cols.EXPERIMENTS_V2; add --parent-only for the parent-
only subset)
nohup conda run -n hongyi python -u run_experiments.py lean2 lean only_PHQ all --seeds 42 43 44 --device cuda:0
\
      > Results/v2/train.log 2>&1 &

# 4) Repeated cross-validation (Section 10.5): adapter per outer fold (15 jobs: --repeat 0..2, --outer 0..4),
then the sequence models, the baseline and the tests
conda run -n hongyi python -u cv_ft.py --repeat 0 --outer 0 --device cuda:0
nohup conda run -n hongyi python -u cv_all.py --repeats 3 --shard 0 3 --device cuda:0 > Results/v2/cv_0.log 2>&1
&   # shards 0, 1, 2
nohup conda run -n hongyi python -u cv_tfidf.py --repeats 3 > Results/v2/cv_tfidf.log 2>&1 &
conda run -n hongyi python -u cv_all.py --configs context_only only_SIM only_LSM only_OWN_LIWC only_BEHAVIOR
only_LSMX_no_par --repeats 3 --shard 0 1 --device cuda:0   # single feature groups (Section 10.8)
conda run -n hongyi python cv_significance.py --repeats 3   # -> models/v2/cv_all/{summary,pairs}.csv
conda run -n hongyi python error_analysis.py   # error analysis of Section 10.6; add a model name for Section
10.7
conda run -n hongyi python feature_group_analysis.py   # curves, delays, error profiles and recall by history
length of Section 10.8
conda run -n hongyi python paper/make_tables.py && conda run -n hongyi python paper/make_figures.py   # tables
and figures of the paper
(cd paper && tectonic -X compile main.tex)   # paper/main.pdf

# 5) Summary: ex.seed_summary(P, [names], [42, 43, 44]) in Develop/Train_and_evaluate.ipynb
# 6) Figures: conda run -n hongyi python docs/make_figures.py
```

Seed 42 keeps the plain experiment name; other seeds are stored as `<name>_seed<seed>`.

12.3 Code layout (`4Z03/jupyter`)

File	Purpose
`paths.py`	All paths and environment-variable overrides
`data_prep.py`	Reading threads, cleaning, frozen user split, time sorting, RE folds
`post_features.py`	LIWC/LSM/LSMX, own LIWC rates, cosine, RE (fine-tuning, scoring, cross-fitting), feature assembly
`features_history.py`	All history features (single entry point `build_features`)

feature_cols.py	Feature columns, groups and all experiment definitions (EXPERIMENTS_V2)
seq_model.py	Standardisation, batching, causal Transformer, training and prediction
seq_eval.py	Alarm rule, delays, F_latency, sweep, bootstrap, AUC@n
experiment.py	5-fold CV, threshold selection, test evaluation, caching, summaries
run_experiments.py	Command-line entry point (--parent-only, --seeds)
run_grid.py	16-configuration hyper-parameter grid
embed_posts.py	Frozen MentalRoBERTa embeddings
finetune_mental.py	Cross-fitted adapter fine-tuning of MentalRoBERTa (fold, combine)
benchmark.py	Computing-cost measurements (docs/benchmark_results.json)
cv_splits.py, cv_ft.py, cv_all.py	Repeated 5×3 cross-validation over all users: splits, nested adapter fine-tuning, sequence models
cv_tfidf.py	TF-IDF logistic-regression baseline in the same cross-validation
cv_significance.py	Pooled metrics, bootstrap intervals, paired tests (Holm, Nadeau–Bengio, DeLong, McNemar)
error_analysis.py	False positives and negatives of the cross-validation, self-report rule baseline
feature_group_analysis.py	AUC after n posts, detection delay and error profile of each feature group
docs/make_figures.py	Figures of this report
paper/	ACL-format paper (main.tex, refs.bib); make_tables.py and make_figures.py generate its tables and figures from models/v2/cv_all/ and docs/figures/; build with tectonic -X compile main.tex (conda environment tex)
data-processing.ipynb, Develop/Train_and_evaluate.ipynb	Thin notebooks
tests/	5 test files (currently passing: 13 + 7 + 9 + 17 + 12)

12.4 Tests

```
conda run -n hongyi python tests/test_features_history.py
conda run -n hongyi python tests/test_post_features.py
conda run -n hongyi python tests/test_pipeline.py
conda run -n hongyi python tests/test_sequence.py
conda run -n hongyi python tests/test_cv.py
```

They cover: prefix invariance, independence of input order, formulas of running means and log_gap, LSM/LSMX formulas, RE folds being user-disjoint and stratified, pipeline assembly on synthetic data, alignment of embeddings by row_id, clipping in the standardiser, the sequence model and the evaluation functions.

13. Paper plan and outline (8-page long paper)

13.1 Positioning

- **Direction.** An analysis paper, not a system paper: *what do linguistic feature groups contribute to early depression detection, and how do they fail?* The evidence is a leak-free, repeated cross-validation over all 891 users of eRisk 2025 Task 2 (102 depressed), with paired significance tests, an earliness analysis and an error analysis.
- **Working title.** *What Do Linguistic Feature Groups Contribute to Early Depression Detection? A Repeated Cross-Validation and Error Analysis on Reddit Users.*
- **Contribution types.** Primary: Type 3b (Empirical Results). Secondary: Type 6 (Evaluation Methods: repeated cross-validation with a nested decision rule, family-wise significance tests, earliness curves). Type 5 (Software / Systems) only as a minor item, because the repository is research code and the data and LIWC dictionaries cannot be released.
- **Venue and length.** A long paper (8 pages plus references) for a workshop on language and mental health or on early risk detection; the material is too thin on novelty and datasets for a main-conference long paper (one dataset, 102 positives, no new method).
- **Research questions.** RQ1: which feature groups carry signal beyond post position and volume? RQ2: how early does each group detect? RQ3: do features beyond PHQ-9 similarity, or a fine-tuned encoder, add anything? RQ4: which users does each group get wrong, and why?

13.2 Abstract (draft, about 180 words)

Early depression detection systems are usually reported on a single train/test split, so the contribution of individual linguistic features and the kinds of users they fail on remain unclear. We evaluate PHQ-9 item similarity, LIWC categories, language style matching, cosine similarity to the parent text and posting behaviour, each alone and in combination, with a causal Transformer over per-post features, using 5×3 repeated cross-validation over 891 Reddit users (102 depressed) of eRisk 2025 Task 2, a nested decision rule and family-wise paired tests. PHQ-9 similarity is the strongest single group (ROC 0.952, PR 0.742) and significantly better than LIWC and style matching; features beyond it add no demonstrable gain (tested for the 74-feature set against PHQ; the 42-feature variant with four LSM scores, PR 0.777, was not tested against PHQ), and post position and volume alone already reach ROC 0.662. Text groups rank users after a single post, whereas style-matching features need several posts. An adapter fine-tuned MentalRoBERTa is best overall (ROC 0.963) but not significantly better than hand-crafted features after correction. Error analysis shows that stronger groups miss users whose evidence is diluted in long histories, and that semantic features flag users who write about depression without being labelled depressed.

13.3 Outline, section by section

1 Introduction (0.75 page).

- Early risk detection in eRisk: users read post by post, alarm when the probability stays above a threshold for k posts; evaluation with latency-weighted F1.
- Gap: feature-based and neural systems are compared on single splits with few positives; the roles of individual feature groups, and the length confound (depressed users write more), are rarely isolated; errors are rarely analysed.
- Contributions (three bullets): (i) a leak-free repeated cross-validation protocol with paired tests; (ii) the contribution and the earliness of each feature group, with a position/volume control; (iii) an error analysis by feature group and a comparison with a fine-tuned encoder and a bag-of-words baseline.

2 Related work (0.5 page). eRisk early detection tasks and the latency metric; hand-crafted psycholinguistic features (PHQ-9 items, LIWC, language style matching); mental-health encoders and adapters; evaluation practice (repeated cross-validation, corrected resampled t-test, DeLong); self-report-labelled Reddit corpora and their known label issues. (Citations to be verified: Losada and Crestani on eRisk; Kroenke et al. on PHQ-9; Ireland and Pennebaker on style matching; Ji et al. on MentalRoBERTa; Pfeiffer et al. on AdapterHub; Nadeau and Bengio; DeLong et al.; Holm; Yates et al. on RSDD.)

3 Data and evaluation protocol (1 page).

- Data: 891 users (102 depressed, 11.4 %), 343,153 posts without truncation, about 60 % of the rows with the parent text; depressed users write more (median 508 against 237 posts in the training users). Labels come from self-reported diagnoses; no text is quoted (data-use agreement). *Table 1: data statistics.*
- Task and decision rule: probability after every post, alarm when it is at least `th` for `k` consecutive posts; `(th, k)` is chosen only on out-of-fold probabilities of the training users of each outer fold; F_latency with the eRisk constant 0.0078.
- Protocol: 5-fold stratified cross-validation repeated 3 times over all users; in every outer fold the model is trained as in the single-split pipeline (inner 5-fold, early stopping); every user is predicted once per repeat by a model that never saw it; identical splits and seeds for all configurations; fine-tuned logits and TF-IDF are refitted inside every outer fold; RE is excluded (Section 13.6).
- Metrics: ROC and PR on the maximum probability, AUC after n posts, precision, recall, F1, F_latency, alarm delay; means over repeats with 95 % stratified bootstrap intervals over users (same draws for all configurations).
- Tests: paired bootstrap difference with Holm adjustment inside pre-specified families (references; baselines; feature groups); corrected resampled t-test, DeLong and McNemar in the supplement.

4 Features, model and comparison systems (0.75 page).

- Groups (single-group runs add three context features: `post_index`, `is_comment`, `has_parent`): PHQ (9 item similarities to PHQ-9 archetype sentences, score, running maxima), LIWC (15 own-text categories), LSM (original count-based, and rate-based alignment `lsmr_*`/`dlsm_*`), cosine similarity to the parent, behaviour (length, night posting, gap), context only (control).
- Model: causal Transformer (hidden 256, 4 heads, 3 layers, 4.0 M parameters) over per-post features with history features (running mean, max/min, rolling standard deviation).
- References: frozen MentalRoBERTa embeddings; adapter fine-tuned MentalRoBERTa (cross-fitted logit); TF-IDF logistic regression; PHQ + 3 LIWC and `lean` as compact hand-crafted sets.

5 Results (about 4 pages).

- *5.1 RQ1, which groups carry signal. Table 2* (Table 10.8a) and *Table 3* (selected rows of Table 10.8b). PHQ ROC 0.952 and PR 0.742 > LIWC 0.926 and 0.660 > LSM (counts) 0.874 and 0.556 > LSM alignment 0.851 and 0.478 > behaviour 0.808 and 0.375 > cosine similarity 0.727 and 0.303; context only 0.662 and 0.333. PHQ against LIWC: ΔPR +0.082 (Holm p = 0.024); against both LSM groups ΔPR +0.186 and +0.264 (p = 0.004). Every group is above the context control in ROC; in PR behaviour and cosine similarity are not.
- *5.2 RQ2, how early. Figure 1* (Figure 14): AUC after n posts and the share of depressed and control users flagged within n posts. After one post: LIWC 0.763, PHQ 0.748, behaviour 0.702, LSM groups and cosine similarity 0.53–0.56, adapter 0.803, TF-IDF 0.806. At 10 posts PHQ 0.875, LIWC 0.846; at 100 posts PHQ 0.922 against 0.936 for the adapter. *Table 4* (Table 10.8c): median delay and share of detected users flagged within 10 posts (LIWC 44 %, PHQ 38 %, LSM counts 6 %; PHQ + 3 LIWC 49 %; TF-IDF 76 %, frozen encoder 70 %, adapter 54 %).
- *5.3 RQ3, beyond PHQ. Table 5* (selected rows of Tables 10.5a and 10.5b): `lean2`, `lean`, `only_PHQ` and PHQ + 3 LIWC are indistinguishable (|ΔPR| ≤ 0.010; `lean` slightly better than `lean2`, ΔROC +0.005, Holm p = 0.042); the adapter is best (ROC 0.963, PR 0.792) and significantly better than the frozen encoder (ΔPR +0.065, p = 0.045) and TF-IDF (ΔPR +0.111, p = 0.002) but not significantly better than the hand-crafted set after Holm (ΔPR +0.039, p = 0.81; ΔF1 +0.065, p = 0.088). TF-IDF ranks worse (ROC 0.914) but alarms earliest.
- *5.4 RQ4, errors. Figure 2* (Figure 15) and *Table 6* (Table 10.8d). Error sets differ between groups (false-negative overlap, Jaccard: PHQ and PHQ + 3 LIWC 0.89, PHQ and LIWC 0.56, PHQ and LSM alignment 0.27; false positives 0.07–0.26 between groups, 0.37 between the two LSM groups). Misses of the strong groups are users with long histories and diluted evidence (median 622 posts, 5 % of posts with mental-health terms); false alarms of the semantic groups are users who write about depression (18–23 % match a self-report pattern against 3.4 % of all controls); false alarms of the behaviour group are heavy posters (median 660 posts against 182 for its true negatives). Indicative, from one author and without a second annotator: categories of the false alarms of the fine-tuned model and of `lean2` (own depression in 10 of 21 and 10 of 34; otherwise other conditions, physical illness, everyday distress, supportive commenters) go to the appendix. Of the depressed users missed by the adapter, 18 of 20 wrote a first-person statement of depression among the posts shown (12 of 13 for the additional `lean2` misses). Without an explicit self-report phrase (19 depressed users) every configuration loses recall (PHQ 0.81 to 0.53, adapter 0.86 to 0.58, LIWC 0.78 to 0.32).
- *Reference row.* A rule without learning that alarms at the first self-report phrase has F1 0.783 and median delay 55 posts (adapter: F1 0.788, median delay 9.5); report it as one row of Table 5 so that readers can judge what the labels capture.

6 Discussion, limitations and ethics (0.75 page). See Sections 13.5 and 13.6.

Appendix. Full result tables (Appendix A), single-split results and the optimism of the single split (`lean2` test PR 0.831, pooled 0.753), hyper-parameters, compute cost (Section 10.4), error categories from the manual reading, reproduction details.

13.4 Claims and the evidence for them

#	Claim	Evidence	Strength
1	PHQ-9 similarity is the strongest single group	Tables 10.8a, 10.8b; ΔPR +0.082 over LIWC, +0.19 to +0.26 over LSM	Significant after Holm
2	Post position and volume alone are informative (ROC 0.662), so group results need this control	`context_only`	Descriptive, large effect
3	The 74-feature combination adds no demonstrable gain beyond PHQ	`lean2_without_RE` against `only_PHQ` and `lean_PHQ_plus_LIWC`; the four-LSM-score variant was not tested against PHQ	Non-significant; not proof of equality
4	Text groups rank users after one post; style-matching groups need several posts	Figure 14, Table 10.8c	Descriptive, intervals in the figure
5	The adapter fine-tuned encoder is best and clearly better than frozen embeddings and TF-IDF	Table 10.5b	Significant after Holm
6	Hand-crafted and fine-tuned approaches are not significantly different after correction	Table 10.5b	Non-significant
7	Groups err on different users; misses are diluted evidence, false alarms follow vocabulary or posting volume	Table 10.8d, Figure 15, Sections 10.6 and 10.7	Descriptive; categories from one author
8	A single split overstates performance	Section 10.5	Descriptive

13.5 Claims that must not be made

- That the hand-crafted system beats a fine-tuned encoder (not significant), or that RE is redundant in the cross-validation (it was tested only on the single split).
- Any generalisation beyond this dataset, or to clinical use, screening or diagnosis.
- That a difference in alarm delay between groups reflects speed alone: delays are medians over different sets of detected users (the pre-specified delay tests are in `pairs.csv`; e.g. TF-IDF alarms earlier than the adapter, frozen encoder, PHQ and `lean2_without_RE`, Holm p = 0.002, and LSM counts later than PHQ, p = 0.004; PHQ and LIWC do not differ).
- That the models detect depression "before disclosure": the labels come from self-reported diagnoses and the self-report statements stay in the text; the paper should say that performance reflects this labelling, report the self-report rule as a reference and describe the results as detection of users who have disclosed, not as prediction without disclosure.

13.6 Limitations and ethics (draft points)

- 102 depressed users; intervals about ±0.07 in PR; non-significant is not equal.
- One dataset; labels from self-reported diagnoses; control users are not verified as non-depressed (some describe their own depression).
- RE not nested and therefore not in the cross-validation; hyper-parameters and the feature selection were made on users that later enter the cross-validation; one sequence-model seed and one adapter run per outer fold; thresholds are chosen on single-model out-of-fold probabilities but applied to model averages (threshold-based metrics may be slightly shifted).
- Error categories from one author who read a selection of at most about 15 posts per user (blind to scores, not to the error type); keyword patterns are not validated.
- Ethics: data-use agreement and no quotation of posts; research use only; the system must not be used to screen or label people; risk of false positives and of exposing users; code released without data and without the LIWC dictionary.

13.7 Remaining work before submission (in order of value)

1. A second annotator for (a sample of) the error categories, with agreement; otherwise keep the categories in the appendix.
2. Leave-one-group-out cross-validation (`without_X`), to show what each group adds when the others are present.
3. More adapter seeds for the fine-tuned reference.
4. Related work and a final check of the citations; check the target venue's page limit, template and checklist.
5. Move the long tables to the appendix and cut the figures to the two that carry the argument (Figures 14 and 15).

13.8 If only 4 pages are allowed

Keep: protocol (0.75 page), Table 10.8a with the control, Figure 14, one small table that combines delay and error profile, three limitation lines. Drop: RQ3 details (one sentence for the fine-tuned and TF-IDF references), manual error categories, the appendix material (point to the repository).

Appendix A. All experiment results (auto-generated)

Columns as in Section 8; each cell is mean±std over seeds 42, 43, 44. `#feat` is the number of input features; `median delay` is in posts.

Full data (47 experiments)

experiment	#feat	F1	P	R	median delay	F_lat	OOF PR	ROC	PR	AUC@10	AUC@100
all	150	0.664±0.045	0.625±0.083	0.714±0.048	11.833±4.537	0.635±0.039	0.726±0.064	0.948±0.004	0.806±0.005	0.857±0.008	0.891±0.003
all_v3	212	0.696±0.038	0.682±0.017	0.714±0.082	18.000±6.727	0.650±0.041	0.710±0.008	0.944±0.004	0.798±0.010	0.863±0.010	0.894±0.010
base_features	101	0.685±0.042	0.635±0.029	0.746±0.073	13.500±4.770	0.651±0.028	0.737±0.017	0.951±0.007	0.800±0.022	0.824±0.003	0.888±0.002
ft_logit	4	0.688±0.019	0.740±0.059	0.651±0.073	3.667±1.155	0.681±0.021	0.735±0.031	0.960±0.006	0.814±0.023	0.888±0.007	0.930±0.009
ft_logit_plus_lean2	77	0.731±0.031	0.750±0.013	0.714±0.048	18.500±1.803	0.681±0.033	0.697±0.033	0.953±0.003	0.835±0.012	0.868±0.003	0.901±0.007
lean	44	0.708±0.023	0.687±0.032	0.730±0.027	17.667±6.658	0.661±0.006	0.716±0.054	0.947±0.009	0.820±0.012	0.868±0.014	0.893±0.008
lean2	76	0.697±0.041	0.698±0.015	0.698±0.073	18.667±2.309	0.649±0.041	0.744±0.028	0.950±0.006	0.831±0.005	0.860±0.007	0.893±0.002
lean2_without_LIWC	70	0.686±0.021	0.668±0.048	0.714±0.095	18.667±7.506	0.639±0.039	0.693±0.042	0.946±0.003	0.810±0.013	0.839±0.002	0.889±0.002

lean2_without_LSMalign	36	0.723±0.012	0.772±0.055	0.683±0.027	18.000±6.062	0.675±0.012	0.675±0.027	0.945±0.005	0.815±0.007	0.860±0.006	0.900±0.006
lean2_without_PHQ	51	0.527±0.008	0.518±0.035	0.540±0.027	23.833±7.751	0.481±0.023	0.570±0.026	0.887±0.001	0.632±0.004	0.823±0.003	0.836±0.004
lean2_without_RE	74	0.713±0.027	0.750±0.094	0.698±0.120	16.167±4.537	0.671±0.021	0.748±0.033	0.945±0.005	0.820±0.007	0.860±0.004	0.888±0.001
lean2_without_cummean	51	0.707±0.022	0.687±0.018	0.730±0.055	17.333±8.129	0.662±0.010	0.674±0.048	0.942±0.008	0.808±0.009	0.837±0.013	0.895±0.006
lean2_without_dlsm	56	0.733±0.014	0.776±0.048	0.698±0.055	14.500±3.041	0.694±0.008	0.728±0.033	0.952±0.003	0.834±0.003	0.861±0.006	0.888±0.006
lean2_without_lsmr	56	0.714±0.000	0.714±0.000	0.714±0.000	17.000±1.000	0.670±0.003	0.743±0.027	0.950±0.009	0.841±0.008	0.865±0.004	0.897±0.001
lean2_without_post_index	75	0.715±0.015	0.743±0.073	0.698±0.073	19.000±3.000	0.665±0.022	0.730±0.040	0.952±0.007	0.835±0.010	0.860±0.008	0.896±0.004
lean_PHQ_plus_LIWC	34	0.708±0.028	0.800±0.137	0.651±0.073	16.500±0.500	0.665±0.027	0.707±0.040	0.947±0.004	0.820±0.004	0.864±0.006	0.893±0.006
lean_PHQ_plus_LSM	36	0.667±0.027	0.639±0.041	0.698±0.027	11.167±5.923	0.640±0.010	0.707±0.048	0.947±0.004	0.818±0.005	0.839±0.005	0.892±0.003
lean_PHQ_plus_LSMX	90	0.745±0.022	0.838±0.160	0.698±0.120	28.833±10.153	0.665±0.045	0.702±0.032	0.952±0.007	0.820±0.008	0.856±0.006	0.900±0.004
lean_PHQ_plus_LSMX_no_par	68	0.687±0.023	0.648±0.021	0.730±0.027	16.833±8.520	0.644±0.015	0.693±0.023	0.949±0.006	0.834±0.009	0.857±0.003	0.890±0.002
lean_PHQ_plus_LSMX_par	50	0.684±0.033	0.705±0.071	0.667±0.000	12.500±5.895	0.653±0.032	0.719±0.045	0.944±0.005	0.793±0.011	0.856±0.016	0.900±0.004
lean_PHQ_plus_RE	30	0.671±0.031	0.634±0.022	0.714±0.048	8.333±2.082	0.652±0.026	0.683±0.042	0.943±0.007	0.805±0.003	0.845±0.003	0.896±0.004
lean_plus_LSMX	106	0.715±0.017	0.715±0.034	0.714±0.000	15.667±5.508	0.674±0.016	0.718±0.021	0.951±0.004	0.822±0.011	0.870±0.006	0.893±0.000
lean_without_LIWC	38	0.656±0.023	0.608±0.008	0.714±0.048	16.167±3.617	0.618±0.015	0.714±0.037	0.947±0.006	0.809±0.008	0.858±0.010	0.893±0.006
lean_without_LSM	36	0.723±0.012	0.772±0.055	0.683±0.027	18.000±6.062	0.675±0.012	0.675±0.027	0.945±0.005	0.815±0.007	0.860±0.006	0.900±0.006
lean_without_PHQ	19	0.576±0.013	0.600±0.102	0.571±0.082	11.167±5.485	0.553±0.020	0.611±0.051	0.900±0.006	0.703±0.014	0.827±0.012	0.872±0.004
lean_without_RE	42	0.694±0.051	0.691±0.073	0.698±0.027	13.833±5.575	0.659±0.034	0.710±0.027	0.945±0.005	0.820±0.010	0.863±0.010	0.887±0.005
lean_without_cummean	35	0.644±0.011	0.675±0.036	0.619±0.048	16.833±11.251	0.605±0.038	0.658±0.026	0.945±0.005	0.807±0.002	0.835±0.002	0.894±0.005
lean_without_post_index	43	0.718±0.020	0.710±0.029	0.730±0.073	16.667±5.033	0.674±0.020	0.703±0.042	0.949±0.007	0.825±0.006	0.868±0.009	0.891±0.002
mental_emb	771	0.666±0.034	0.748±0.048	0.603±0.055	8.333±2.887	0.647±0.027	0.629±0.054	0.909±0.003	0.737±0.008	0.894±0.012	0.883±0.027
mental_plus_lean2	844	0.690±0.029	0.729±0.120	0.667±0.048	6.833±2.754	0.675±0.032	0.678±0.055	0.948±0.003	0.802±0.007	0.906±0.008	0.898±0.007
no_cummean	119	0.702±0.031	0.676±0.017	0.730±0.055	14.833±5.923	0.663±0.015	0.745±0.029	0.949±0.006	0.798±0.004	0.826±0.004	0.889±0.004
only_BEHAVIOR	9	0.532±0.020	0.425±0.015	0.714±0.048	8.167±3.753	0.518±0.027	0.301±0.039	0.875±0.008	0.445±0.009	0.784±0.004	0.803±0.004
only_LSM	73	0.567±0.025	0.595±0.066	0.556±0.099	39.167±3.819	0.483±0.017	0.475±0.047	0.878±0.011	0.638±0.023	0.747±0.008	0.802±0.006
only_LSMX	65	0.584±0.034	0.724±0.032	0.492±0.055	25.333±5.508	0.528±0.019	0.558±0.026	0.910±0.004	0.690±0.008	0.825±0.008	0.840±0.005
only_LSMX_no_par	43	0.521±0.058	0.521±0.036	0.540±0.153	37.333±8.021	0.449±0.066	0.370±0.043	0.880±0.003	0.546±0.024	0.718±0.011	0.784±0.006
only_LSMX_par	25	0.620±0.045	0.644±0.092	0.603±0.027	14.500±2.179	0.587±0.037	0.586±0.027	0.889±0.006	0.685±0.008	0.832±0.005	0.846±0.009
only_OWN_LIWC	33	0.687±0.033	0.865±0.100	0.571±0.000	42.333±11.427	0.578±0.057	0.631±0.025	0.904±0.003	0.725±0.016	0.815±0.012	0.869±0.009
only_PHQ	28	0.696±0.036	0.782±0.102	0.635±0.055	21.333±12.292	0.641±0.031	0.664±0.046	0.939±0.011	0.802±0.008	0.832±0.012	0.889±0.007
only_RE	12	0.561±0.019	0.628±0.018	0.508±0.027	31.167±9.438	0.496±0.037	0.478±0.046	0.876±0.003	0.531±0.005	0.838±0.012	0.834±0.000
only_SIM	10	0.296±0.015	0.178±0.012	0.873±0.027	20.167±5.485	0.273±0.011	0.245±0.043	0.801±0.005	0.467±0.023	0.682±0.006	0.732±0.009
post_level_only	43	0.614±0.049	0.627±0.072	0.603±0.027	6.667±2.887	0.600±0.044	0.613±0.035	0.915±0.007	0.698±0.035	0.871±0.013	0.903±0.003
without_BEHAVIOR	144	0.692±0.024	0.692±0.045	0.698±0.073	13.667±6.658	0.658±0.008	0.705±0.025	0.940±0.009	0.792±0.017	0.837±0.005	0.887±0.008
without_LSM	80	0.681±0.039	0.638±0.029	0.730±0.055	17.500±5.408	0.637±0.023	0.736±0.053	0.943±0.005	0.792±0.022	0.871±0.007	0.894±0.003
without_OWN_LIWC	120	0.689±0.048	0.644±0.013	0.746±0.110	14.000±10.583	0.652±0.018	0.699±0.039	0.951±0.008	0.800±0.022	0.831±0.007	0.890±0.008
without_PHQ	125	0.618±0.029	0.661±0.093	0.587±0.027	11.000±4.583	0.594±0.037	0.670±0.030	0.894±0.009	0.674±0.012	0.820±0.007	0.854±0.010
without_RE	141	0.686±0.007	0.637±0.026	0.746±0.055	14.000±3.464	0.651±0.016	0.723±0.057	0.948±0.005	0.804±0.007	0.848±0.007	0.895±0.005
without_SIM	143	0.707±0.035	0.672±0.041	0.746±0.027	18.500±2.291	0.659±0.027	0.725±0.066	0.951±0.009	0.813±0.035	0.853±0.009	0.892±0.006

Parent-only data (27 experiments)

experiment	#feat	F1	P	R	median delay	F_lat	OOF PR	ROC	PR	AUC@10	AUC@
parent_all	150	0.655±0.043	0.718±0.045	0.603±0.055	27.000±5.196	0.588±0.026	0.703±0.012	0.950±0.002	0.788±0.007	0.868±0.003	0.904±
parent_all_v3	212	0.621±0.009	0.680±0.023	0.571±0.000	24.167±3.253	0.565±0.004	0.668±0.058	0.943±0.002	0.770±0.004	0.857±0.010	0.900±
parent_lean	44	0.623±0.020	0.644±0.011	0.603±0.027	4.333±2.082	0.615±0.023	0.678±0.032	0.950±0.003	0.791±0.010	0.874±0.002	0.909±
parent_lean2	76	0.655±0.025	0.700±0.050	0.619±0.048	15.167±7.286	0.619±0.040	0.664±0.075	0.949±0.003	0.798±0.009	0.882±0.006	0.910±
parent_lean2_without_LIWC	70	0.645±0.026	0.644±0.038	0.651±0.073	14.500±8.675	0.611±0.025	0.665±0.096	0.956±0.003	0.803±0.009	0.870±0.005	0.910±
parent_lean2_without_LSMalign	36	0.622±0.008	0.664±0.043	0.587±0.027	13.000±6.928	0.593±0.016	0.682±0.064	0.941±0.002	0.768±0.007	0.858±0.002	0.898±
parent_lean2_without_PHQ	51	0.593±0.022	0.601±0.057	0.587±0.027	11.167±2.843	0.569±0.023	0.553±0.043	0.871±0.006	0.696±0.009	0.813±0.012	0.826±
parent_lean2_without_RE	74	0.645±0.039	0.680±0.081	0.619±0.048	9.000±11.758	0.624±0.019	0.688±0.047	0.949±0.003	0.796±0.012	0.876±0.010	0.902±
parent_lean2_without_cummean	51	0.623±0.020	0.649±0.051	0.603±0.055	11.500±6.265	0.597±0.007	0.671±0.070	0.944±0.003	0.755±0.015	0.859±0.001	0.916±
parent_lean2_without_dlsm	56	0.610±0.009	0.655±0.020	0.571±0.000	7.333±6.110	0.595±0.016	0.709±0.060	0.952±0.002	0.791±0.011	0.869±0.002	0.912±
parent_lean2_without_lsmr	56	0.641±0.024	0.631±0.031	0.651±0.027	10.167±12.573	0.617±0.010	0.672±0.060	0.939±0.000	0.789±0.006	0.834±0.012	0.901±
parent_lean2_without_post_index	75	0.661±0.035	0.712±0.054	0.619±0.048	13.667±5.686	0.628±0.018	0.674±0.044	0.955±0.003	0.805±0.010	0.872±0.006	0.904±
parent_lean_PHQ_plus_LSM	36	0.607±0.038	0.612±0.021	0.603±0.055	6.000±1.000	0.596±0.039	0.699±0.067	0.949±0.004	0.781±0.006	0.860±0.007	0.911±
parent_lean_PHQ_plus_LSMX	90	0.632±0.030	0.685±0.032	0.587±0.027	22.500±9.097	0.579±0.004	0.674±0.084	0.961±0.002	0.818±0.010	0.865±0.006	0.915±
parent_lean_PHQ_plus_LSMX_no_par	68	0.645±0.042	0.656±0.038	0.635±0.055	11.000±10.966	0.619±0.030	0.645±0.064	0.956±0.006	0.804±0.018	0.878±0.006	0.913±
parent_lean_PHQ_plus_LSMX_par	50	0.617±0.058	0.633±0.053	0.603±0.073	4.500±2.179	0.609±0.062	0.692±0.043	0.951±0.003	0.771±0.005	0.853±0.005	0.911±
parent_lean_plus_LSMX	106	0.665±0.031	0.652±0.013	0.683±0.073	9.833±8.372	0.643±0.037	0.684±0.076	0.961±0.001	0.815±0.011	0.873±0.009	0.914±

parent_lean_without_LSM	36	0.622±0.008	0.664±0.043	0.587±0.027	13.000±6.928	0.593±0.016	0.682±0.064	0.941±0.002	0.768±0.007	0.858±0.002	0.898
parent_only_LSM	73	0.517±0.028	0.607±0.164	0.476±0.082	26.500±21.960	0.465±0.043	0.468±0.032	0.858±0.003	0.592±0.010	0.753±0.007	0.821
parent_only_LSMX	65	0.607±0.036	0.706±0.093	0.540±0.055	15.500±4.359	0.573±0.041	0.572±0.063	0.917±0.005	0.724±0.017	0.790±0.019	0.834
parent_only_LSMX_no_par	43	0.546±0.018	0.493±0.048	0.619±0.048	17.000±5.292	0.512±0.007	0.470±0.037	0.871±0.010	0.541±0.025	0.758±0.021	0.806
parent_only_LSMX_par	25	0.597±0.044	0.758±0.076	0.492±0.027	29.167±12.945	0.531±0.039	0.578±0.073	0.892±0.003	0.702±0.004	0.817±0.007	0.854
parent_only_OWN_LIWC	33	0.563±0.014	0.660±0.011	0.492±0.027	34.333±1.258	0.491±0.014	0.578±0.043	0.829±0.011	0.650±0.016	0.726±0.006	0.794
parent_only_PHQ	28	0.636±0.040	0.684±0.043	0.603±0.099	8.500±3.041	0.618±0.046	0.712±0.024	0.934±0.001	0.760±0.003	0.835±0.002	0.899
parent_only_RE	12	0.510±0.050	0.531±0.078	0.492±0.027	33.333±7.654	0.445±0.029	0.410±0.038	0.861±0.004	0.589±0.014	0.733±0.004	0.830
parent_only_SIM	10	0.288±0.018	0.176±0.014	0.794±0.027	15.833±8.893	0.271±0.008	0.217±0.034	0.770±0.006	0.444±0.027	0.643±0.006	0.730
parent_without_LSM	80	0.621±0.009	0.680±0.023	0.571±0.000	14.333±8.977	0.589±0.028	0.716±0.020	0.945±0.003	0.765±0.002	0.845±0.011	0.891

Appendix B. Audit of the old pipeline (all addressed in the new pipeline)

Issues that affected results

1. Train/serve skew: about 90 % of comments had `min_sim_so_far == -1` (a cumulative minimum over all rows including submissions, with `-1` as the sentinel for `sim`); the online client updated history only on comments.
2. Early stopping did not restore the best weights (`best_state = model.state_dict()` was not copied, so the last epoch was restored).
3. So-far features were computed on data that was not sorted by time.
4. Control posts were down-sampled (200 k train / 40 k test), so depressed and control users differed strongly in the median number of posts (507 vs 90), making `post_index` a shortcut.
5. The offline and online decision rules differed (per-token logits with 5 consecutive posts vs pooled head with a single threshold); the training loss used only the pooled head.

Evaluation credibility 6. Baseline notebooks tuned thresholds on the test set. 7. Only 21 positive test users, no interval estimate or cross-validation. 8. Test posts were down-sampled: the user prevalence was unchanged, but sequence lengths, `post_index` and delays were distorted. 9. The `-1` sentinel overlapped the valid cosine range; RE was `-1` for submissions while the online client computed real values. 10. In-sample RE leakage: two distilgpt2 models were fine-tuned on the training posts and then scored the same posts, so the training RE separated the labels better than the test or online RE.

Code and workflow 11. No feature scaling; `collate_fn` derived the mask from "feature sum == 0"; `Final_model` imported the git-ignored `Test/feature_extractor`. 12. The default `scale=None` of the `extremism` `item_scoring.py` raised an error; the `!cd` in the PHQ cell did not persist; a notebook read a directory that does not exist. 13. About 300 lines of duplicated Transformer/evaluation code; outdated README; missing environment file; hard-coded paths, GPU ids and environment name.

How the new pipeline handles them: cross-fitted RE, time sorting with prefix-invariance tests, `has_parent` / `is_comment` instead of sentinels, no down-sampling, standardisation with training-row statistics, 5-fold CV with OOF threshold selection, a single test evaluation, deep-copied best weights on early stopping, per-position loss consistent with the per-position offline rule, and `feature_cols.py` as the single tracked definition of the features.