


Headless bitemporal mirror — fan-in, robust copy, best-effort idempotent rules

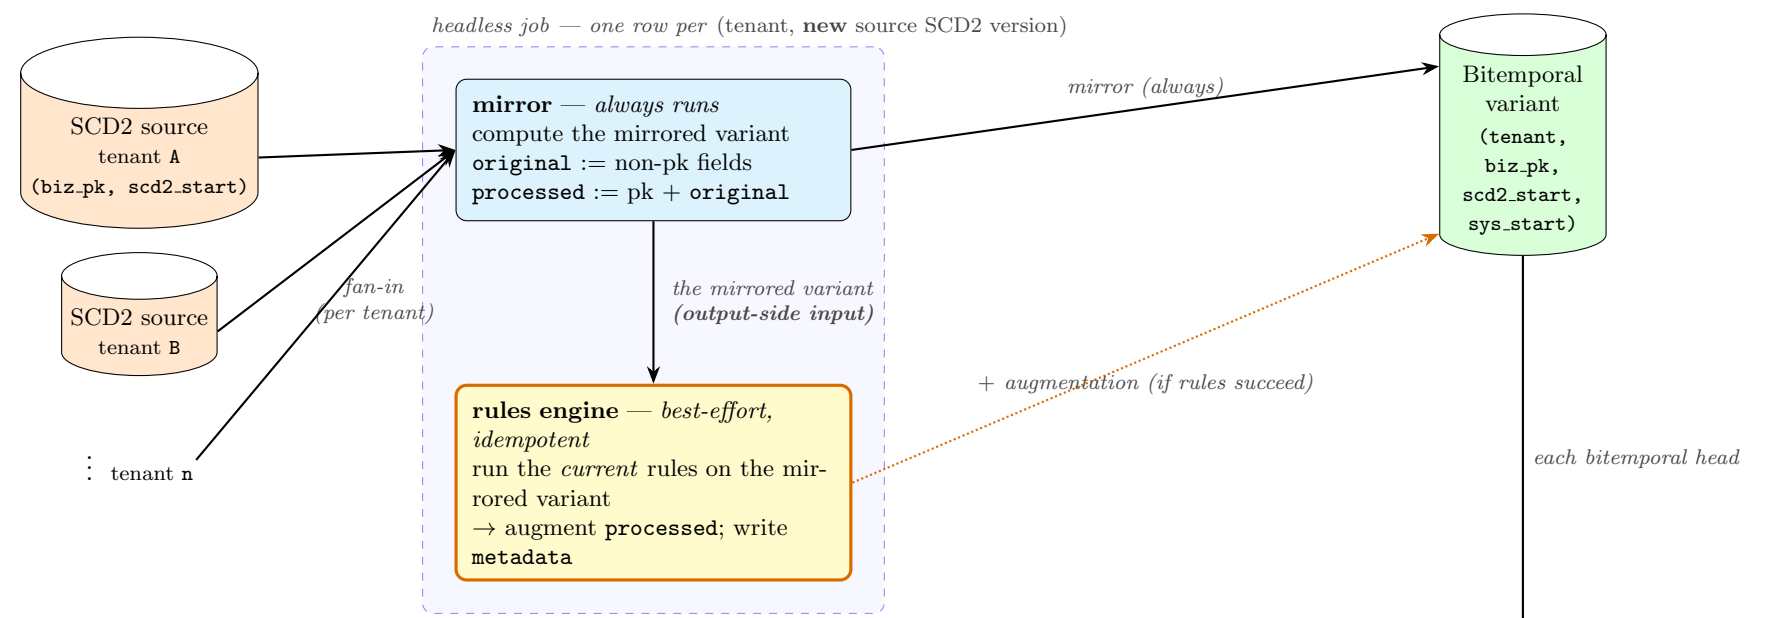

Rules' input is OUTPUT-SIDE. For a new source version the job computes the mirror first, then runs the idempotent rules on the mirrored variant — choosing to apply the mirror only, or the mirror + augmentation.

schemaless JSON →	original	processed	metadata
meaning	mirrored non-pk fields	all non-temporal fields; = pk + original until rules run	anything about processed's state
head — mirror + augmentation (rules OK)	source values	rule-enriched	{verdicts, ...}
head — mirror only (rules FAIL, incl. initial head)	source values	pk + original	∅ (still mirrored)

Fan-in. The output fans in many SCD2 sources — one per tenant — so its key leads with a tenant id, (tenant, biz_pk, scd2_start, sys_start), keeping the tenants disjoint in one bitemporal variant. **Invariant.** A rules failure never blocks the mirror: every new source version still lands as a head with processed = pk + original and empty metadata (including an item's very first, initial head); a later successful rules run appends a new sys_start version carrying the augmentation — on the system-time axis, without disturbing the business (scd2_start) history.