

Aurora Home — Webhooks and Integration

Developer guide · covers release 4.3

What webhooks give you

From release 4.3 the hub can post state changes to an endpoint you control. Webhooks are outbound only: there is no inbound API, and nothing you send to the hub will change its state. Integrations that need to set a temperature do so through the app's account-linking flow, not through this interface.

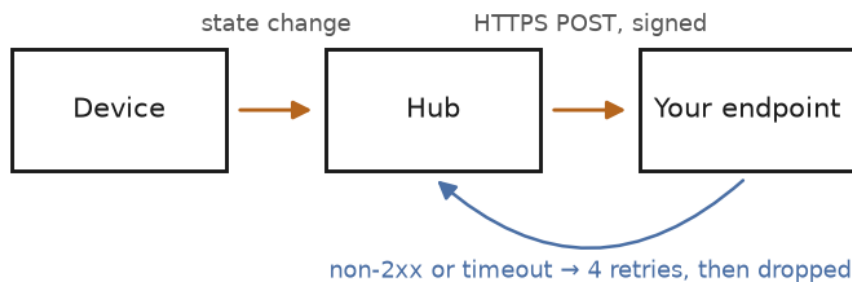


Figure 1: A state change travels from device to hub to your endpoint; the hub retries on failure.

Registering an endpoint

Register an HTTPS endpoint in the app under Settings. Plain HTTP is rejected. The hub sends a verification request containing a nonce, which your endpoint must echo back within ten seconds before deliveries begin.

Event types

Event	Fires when	Payload includes
`zone.setpoint_changed`	A setpoint changes, whether by schedule, automation or by hand	zone, old and new setpoint, source
`zone.temperature_reported`	A zone's averaged temperature changes by at least 0.5 K	zone, temperature, contributing sensors
`device.battery_low`	A device crosses the low-battery threshold	device, measured voltage
`device.unreachable`	A device misses three consecutive reports	device, last seen timestamp
`hub.updated`	Firmware finishes applying	previous and current version

Delivery and retries

Deliveries are at-least-once. A non-2xx response or a timeout over five seconds is retried four times with exponential backoff, after which the event is dropped. Your endpoint must therefore be idempotent: the same event identifier can arrive more than once, and ordering is not guaranteed under retry.

Attempt	Delay after the previous
1	immediate
2	10 seconds
3	60 seconds
4	5 minutes
5	30 minutes

Rate limits

A hub sends at most 60 events per minute. Beyond that, events of the same type for the same zone are coalesced, and only the most recent is delivered. A busy commercial property routinely reaches this limit during morning warm-up, so treat coalescing as normal rather than as a fault.

Signing

Every request carries an HMAC-SHA256 signature over the raw body, using the secret shown once when the endpoint is registered. Verify it against the raw bytes, before any JSON parsing: a re-serialised body will not match.

Limits worth knowing

One endpoint per property. Payloads are capped at 64 KB. The event log the hub keeps for its own retries holds 24 hours, so an endpoint offline for longer than that loses the events in between with no backfill.