
Two stages of binary-to-Rust reconstruction

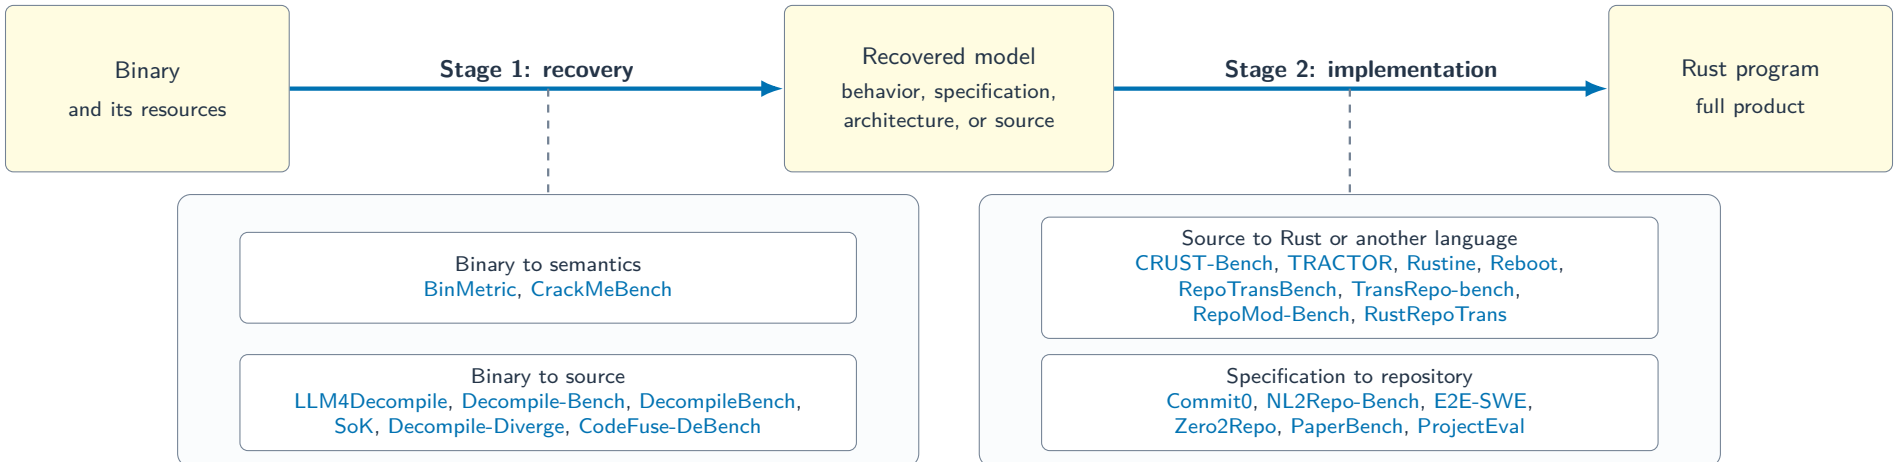

Rustify: binary only, both stages, whole product, scored against the original binary

Prior benchmarks score one stage. Stage 1 benchmarks stop at a function or a question. Stage 2 benchmarks give the source or a written specification.