

Kimi Study UX E2E, Source Diagnosis, and Repair Report

Fresh Browser E2E, Source Localization, and Apply-Ready Repair in the Current Container

Product FAIL NO_GO

Execution truth: LOCAL_E2E / COMPLETED

- npm mirrors unavailable; Express/Multer/Lenis minimal test-only compatibility modules used to start original server.js
- Chromium URLBlocklist=* hidden only from child browser process with LD_PRELOAD shim; system policy unchanged
- real Kimi CLI and AI responses unavailable
- PDF.js/vendor assets unavailable because npm install could not complete

Source: kimi-study-app-main.zip / sha256 ae72b5c58e228a5806ceda62c372aae0e13d7f2c93dd26f6f5dcc6c7125cd146

Commit: ZIP_NO_GIT_COMMIT

Generated: 2026-07-24T12:11:32.685855+00:00

1. Executive Conclusion

A fresh local Chromium run was completed, and all 101 visible controls across five page states were numbered and accounted for as executed or blocked. The original ZIP contains one S2 state-consistency defect: after generation has failed, surrounding regions still show a running state and duplicate three primary progress surfaces. The minimal patch completed red-green browser verification, apply-check, syntax checks, and 116/116 unit tests in an isolated repair copy; the original ZIP itself remains NO_GO. Fourteen controls that depend on undefined product intent or real Kimi/PDF rendering dependencies are marked BLOCKED and are not presented as false passes.

5

Pages

101

Controls

7

Test Paths

6

Screenshots

1

Failures

0

Not-Run Controls

1

State Conflicts

1

Patches

Execution Truth

Mode	LOCAL_E2E	Status	COMPLETED
Browser	Chromium 144.0.7559.96 + Python Playwright 1.57	Manifest	execution-manifest.json
Fresh Evidence	inventory traces for 5 routes, 101-control action log, two independent F-001 traces, mobile drawer trace, repair red-green screenshots		

2. Scope and Capabilities

Tested

- Five baseline states: Landing, Course Library, New Course, Ready Course, and Failed Course
- Desktop at 1440x900/1000 and mobile at 390x844
- Numbering, actions, navigation, ARIA, focus, menu, and drawer outcomes for every visible interactive control
- Failed-state API, DOM, state surfaces, generation-process disclosure, and two independent reproductions
- Source localization, minimal patch, red-green regression, apply-check, syntax check, and 116 unit tests

Excluded

- Real Kimi CLI content generation and successful Tutor responses
- Production OAuth, account, payment, and other external systems
- Complete successful PDF/EPUB rendering path (dependencies could not be installed from the registry)
- Real user data and production services

Capability	Status	Evidence / Notes
Safe ZIP extraction and isolated copies	SUPPORTED	original/test-worktree/repair-worktree/evidence were separated; no archive-traversal entries were present
Node application startup	SUPPORTED_WITH_LOCAL_SUBSTITUTE	Original server.js plus test-only Express/Multer/Lenis compatibility modules; curl returned 200
Real Chromium browser	SUPPORTED_WITH_LOCAL_SUBSTITUTE	Chromium 144; a child-process isolation layer hid URLBlocklist, enabling standard localhost HTTP
Screenshots, DOM, network, and traces	SUPPORTED	Fresh Playwright traces, screenshots, and action JSON
Local fixture data	SUPPORTED	Repository fixtures:build/fixtures:seed into tests/.runtime/courses
Real Kimi CLI	BLOCKED	spawn kimi ENOENT; successful Tutor and next-lesson paths could not be completed
PDF/EPUB vendor renderer	BLOCKED	npm registry 503/EAI_AGAIN; PDF.js vendor resources returned 404
Patch generation and verification	SUPPORTED	unified diff、git apply --check、red-green E2E、116/116 unit
PDF report generation	SUPPORTED	Strict schema renderer plus render and visual QA

3. Installation, Startup, and Command Evidence

Command	Result	Notes
archive traversal validation + unzip into original/test/repair copies	PASS	348 entries; original preserved
python scripts/project_probe.py	PASS	Node/Express app, routes, tests and lockfile detected
npm ci (internal/public registries)	BLOCKED	internal 503; public DNS EAI_AGAIN
npm run fixtures:build && npm run fixtures:seed -- --clean	PASS	isolated fixture corpus seeded

Command	Result	Notes
PORT=3107 KIMI_STUDY_DATA_DIR=... node server.js	PASS	original server routes returned HTTP 200 through test-only compatibility modules
Python Playwright + Chromium policy-isolation wrapper	PASS	fresh local HTTP rendering, actions, screenshots and traces
node --test test/*.test.js	PASS	test and repair copies: 116/116
generation_failure_chrome_test.py original -> repair	PASS	red exit 1; green exit 0
git apply --check evidence/patches/F-001.patch	PASS	clean apply against untouched copy


4. Pages and Coverage

Page	Route	Controls	Status	Evidence
Kimi Study Landing	/	17	PASS	inventory-index/inventory.json + inventory trace
Course Library	/app	31	BLOCKED	inventory-local-http/inventory.json + control action log
New Course	/new-course	3	PASS	inventory-new/inventory.json + action screenshots
Ready Course	/course/readycourse	26	BLOCKED	inventory-ready/inventory.json + Python Playwright control actions/mobile trace
Failed Course	/course/failedcourse	24	FAIL	inventory-failed/inventory.json + two reproductions/state audit

5. Per-Control Annotation, Chain, and Expectations

Kimi Study - Annotated Control Map

Route:/ · Control count:17

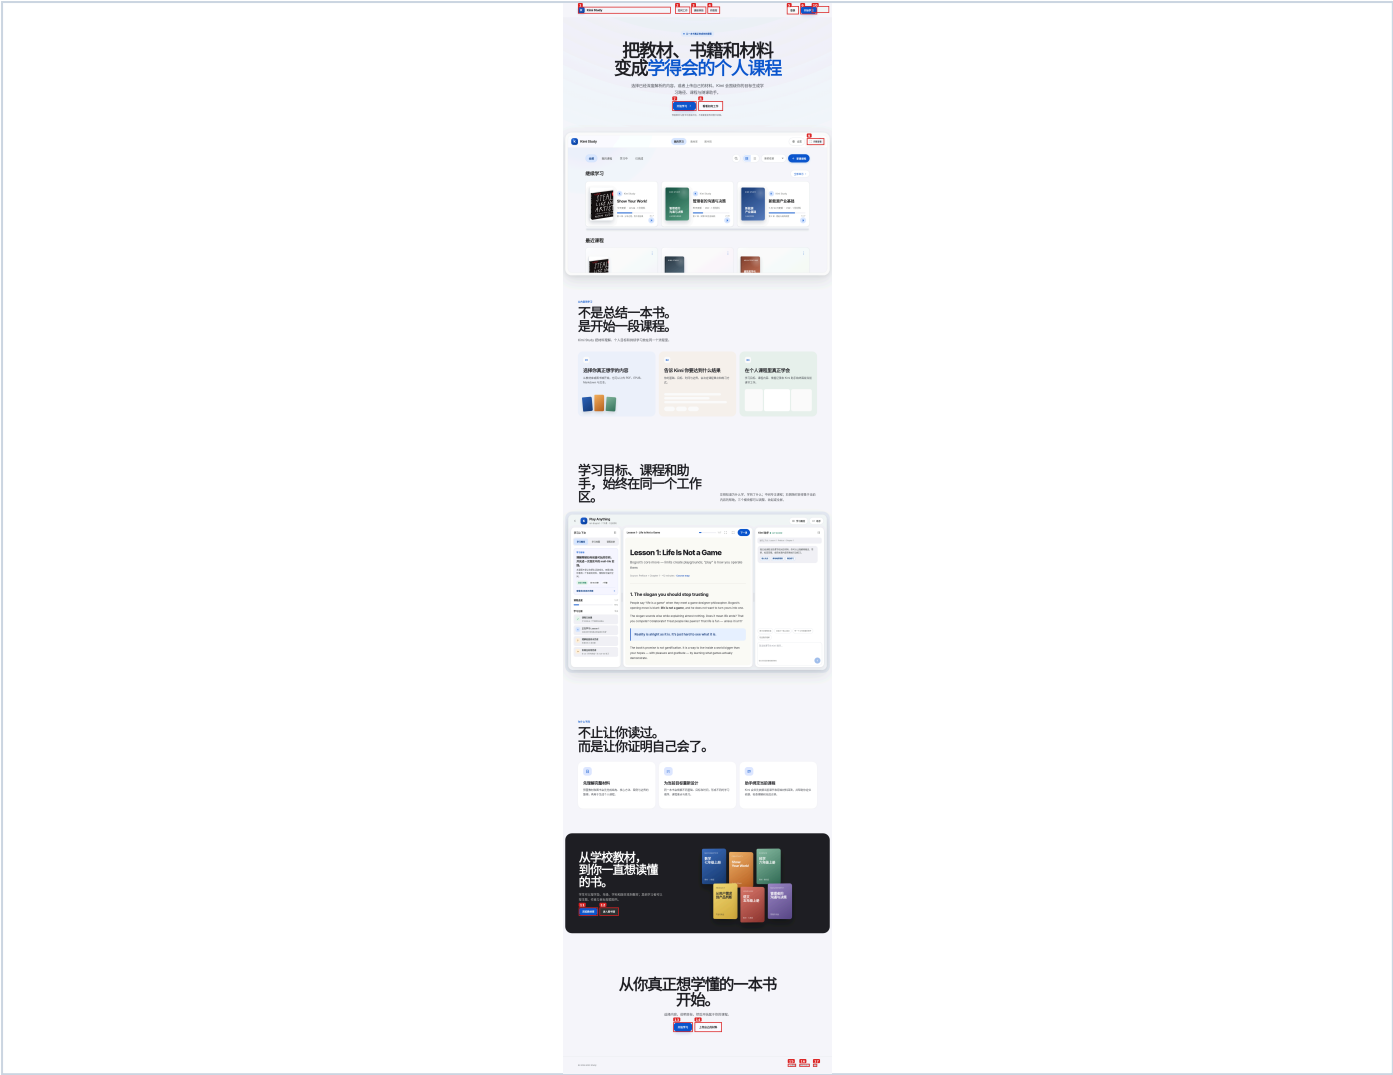

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidenc e	Source
page-1.link.01	link	K Kimi Study	Click once	dom_event: click -> handler: native link navigation -> network: GET destination or none for fragment -> state_change: URL/hash updates -> rendered_outcome: destination or anchored section is visible -> navigation: href destination	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/ -> http://127.0.0.1:3107/#top; scrollY 0 -> 76 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/#top	PASS	control-actions/ action-log-first-pass.json#page-1.link.01	public/index.html , public/gluue.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
page-1.link.02	link	How It Works (UI: 如何工作)	Click once	dom_event: click -> handler: native link navigation -> network: GET destination or none for fragment -> state_change: URL/hash updates -> rendered_outcome: destination or anchored section is visible -> navigation: href destination	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/ -> http://127.0.0.1:3107/#how; scrollY 0 -> 1142 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/#how	PASS	control-actions/action-log-first-pass.json#page-1.link.02	public/index.html , public/globe.js
page-1.link.03	link	Course Experience (UI: 课程体验)	Click once	dom_event: click -> handler: native link navigation -> network: GET destination or none for fragment -> state_change: URL/hash updates -> rendered_outcome: destination or anchored section is visible -> navigation: href destination	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/ -> http://127.0.0.1:3107/#workspace; scrollY 0 -> 1405 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/#workspace	PASS	control-actions/action-log-first-pass.json#page-1.link.03	public/index.html , public/globe.js
page-1.link.04	link	Content Library (UI: 内容库)	Click once	dom_event: click -> handler: native link navigation -> network: GET destination or none for fragment -> state_change: URL/hash updates -> rendered_outcome: destination or anchored section is visible -> navigation: href destination	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/ -> http://127.0.0.1:3107/#library; scrollY 0 -> 1626 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/#library	PASS	control-actions/action-log-first-pass.json#page-1.link.04	public/index.html , public/globe.js
page-1.button.05	button	Log In (UI: 登录)	Click once	dom_event: click -> handler: landing data-action router -> network: GET /app -> state_change: landing exits -> rendered_outcome: course library shell visible -> navigation: /app	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.05	public/index.html , public/globe.js


ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
page-1.button.06	button	Start Learning (UI: 开始学习)	Click once	dom_event: click -> handler: landing data-action router -> network: GET /app -> state_change: landing exits -> rendered_outcome: course library shell visible -> navigation: /app	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.06	public/index.html, public/guide.js
page-1.button.07	button	Start Learning (UI: 开始学习)	Click once	dom_event: click -> handler: landing data-action router -> network: GET /app -> state_change: landing exits -> rendered_outcome: course library shell visible -> navigation: /app	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.07	public/index.html, public/guide.js
page-1.button.08	button	See How It Works (UI: 看看如何工作)	Click once	dom_event: click -> handler: scroll helper -> network: none -> state_change: scroll position changes -> rendered_outcome: how-it-works section visible -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: scrollY 0 -> 348 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/	PASS	control-actions/action-log-first-pass.json#page-1.button.08	public/index.html, public/guide.js
page-1.button.09	button	View Full (UI: 完整查看)	Click once	dom_event: click -> handler: open preview detail -> network: none -> state_change: detail/modal visibility changes -> rendered_outcome: expanded preview content visible -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/	PASS	control-actions/action-log-first-pass.json#page-1.button.09	public/index.html, public/guide.js
page-1.button.10	button	View Full (UI: 完整查看)	Click once	dom_event: click -> handler: open preview detail -> network: none -> state_change: detail/modal visibility changes -> rendered_outcome: expanded preview content visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.10	public/index.html, public/guide.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
page-1.button.11	button	Browse the Material Library (UI: 浏览教材库)	Click once	dom_event: click -> handler: landing data-action router -> network: GET /app -> state_change: landing exits -> rendered_outcome: course library shell visible -> navigation: /app	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.11	public/index.html , public/glu.js
page-1.button.12	button	Enter the Library (UI: 进入图书馆)	Click once	dom_event: click -> handler: landing data-action router -> network: GET /app -> state_change: landing exits -> rendered_outcome: course library shell visible -> navigation: /app	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.12	public/index.html , public/glu.js
page-1.button.13	button	Start Learning (UI: 开始学习)	Click once	dom_event: click -> handler: landing data-action router -> network: GET /app -> state_change: landing exits -> rendered_outcome: course library shell visible -> navigation: /app	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.13	public/index.html , public/glu.js
page-1.button.14	button	Upload Your Own Materials (UI: 上传自己的材料)	Click once	dom_event: click -> handler: landing data-action router -> network: GET /app -> state_change: landing exits -> rendered_outcome: course library shell visible -> navigation: /app	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /	PASS	control-actions/action-log-first-pass.json#page-1.button.14	public/index.html , public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
page-1.link.15	link	How the Product Works (UI: 产品原理)	Click once	dom_event: click -> handler: native link navigation -> network: GET destination or none for fragment -> state_change: URL/hash updates -> rendered_outcome: destination or anchored section is visible -> navigation: href destination	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/ -> http://127.0.0.1:3107/#how; scrollY 0 -> 4653 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/#how	PASS	control-actions/action-log-first-pass.json#page-1.link.15	public/index.html , public/glue.js
page-1.link.16	link	Materials and Books (UI: 教材与图书)	Click once	dom_event: click -> handler: native link navigation -> network: GET destination or none for fragment -> state_change: URL/hash updates -> rendered_outcome: destination or anchored section is visible -> navigation: href destination	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/ -> http://127.0.0.1:3107/#library; scrollY 0 -> 4452 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/#library	PASS	control-actions/action-log-first-pass.json#page-1.link.16	public/index.html , public/glue.js
page-1.button.17	button	Privacy (UI: 隐私)	Click once	dom_event: click -> handler: privacy disclosure -> network: none -> state_change: privacy disclosure visible -> rendered_outcome: privacy text/notice visible -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: scrollY 0 -> 4722 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/	PASS	control-actions/action-log-first-pass.json#page-1.button.17	public/index.html , public/glue.js

Kimi Study - Annotated Control Map

Route: /app · Control count: 31

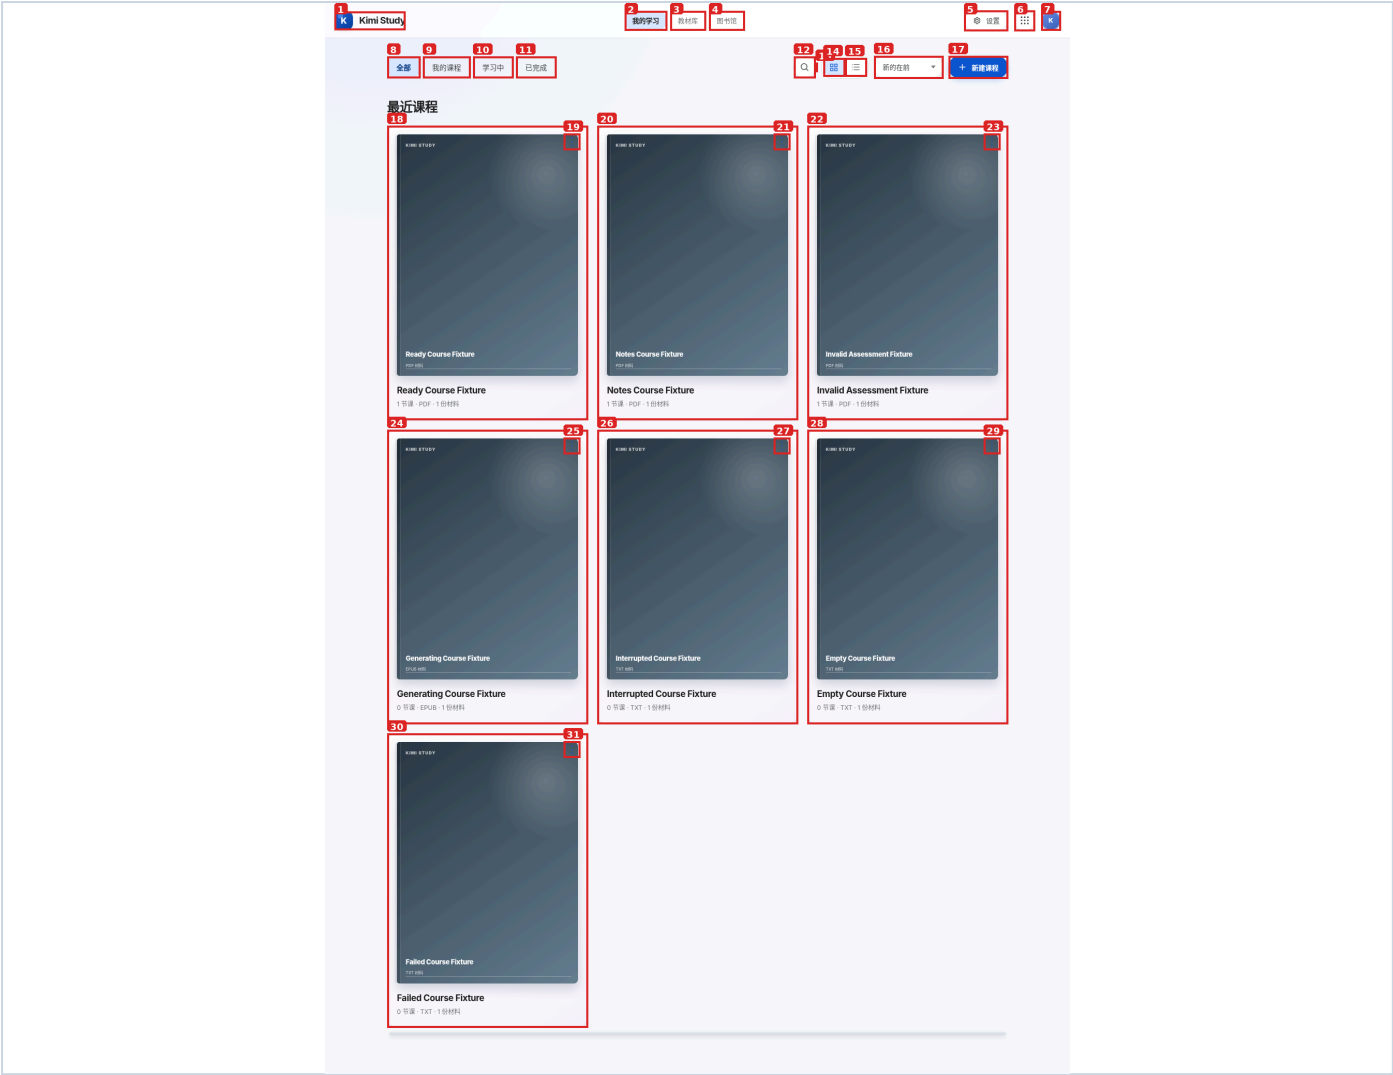

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.link.01	link	Kimi Study Home (UI: Kimi Study 首页)	Click once	dom_event: click -> handler: native link navigation -> network: GET destination or none for fragment -> state_change: URL/hash updates -> rendered_outcome: destination or anchored section is visible -> navigation: href destination	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/app# -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app#	PASS	control-actions/action-log-first-pass.json#app.link.01	public/app.html, public/globe.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.button.02	button	My Learning (UI: 我的学习)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/ action-log-first-pass.json#app.button.02	public/app.html, public/glu.js
app.button.03	button	Material Library (UI: 教材库)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/ action-log-first-pass.json#app.button.03	public/app.html, public/glu.js
app.button.04	button	Library (UI: 图书馆)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/ action-log-first-pass.json#app.button.04	public/app.html, public/glu.js
app.button.05	button	Settings (UI: 设置)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/ action-log-first-pass.json#app.button.05	public/app.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.button.06	button	Apps (UI: 应用)	Click once	dom_event: click -> handler: UNDEFINED -> network: unknown -> state_change: unknown -> rendered_outcome: product decision required -> navigation: unknown	handler_observed: action reached its local handler -> network_observed: blocked before successful external completion -> state_observed: The product does not define the purpose or outcome of the "Apps" button, and the source contains no verifiable state transition. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/app	BLOCKED	control-actions/action-log-first-pass.json#app.button.06	public/app.html, public/glu.js
app.button.07	button	Account (UI: 账户)	Click once	dom_event: click -> handler: UNDEFINED -> network: unknown -> state_change: unknown -> rendered_outcome: product decision required -> navigation: unknown	handler_observed: action reached its local handler -> network_observed: blocked before successful external completion -> state_observed: The product does not define the purpose or outcome of the "Account" button, and the source contains no verifiable state transition. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/app	BLOCKED	control-actions/action-log-first-pass.json#app.button.07	public/app.html, public/glu.js
app.button.08	button	All (UI: 全部)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.button.08	public/app.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.button.09	button	My Courses (UI: 我的课程)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.button.09	public/app.html, public/glu.js
app.button.10	button	In Progress (UI: 学习中)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.button.10	public/app.html, public/glu.js
app.button.11	button	Completed (UI: 已完成)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.button.11	public/app.html, public/glu.js
app.button.12	button	Search Courses (UI: 搜索课程)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.button.12	public/app.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.input.13	input	Search Courses (UI: 搜索课程)	Enter the E2E smoke query	dom_event: input -> handler: course search filter -> network: none -> state_change: query updates -> rendered_outcome: course cards filtered -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control-actions/action-log-first-pass.json#app.input.13	public/app.html, public/glu.js
app.button.14	button	Grid View (UI: 网格视图)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.button.14	public/app.html, public/glu.js
app.button.15	button	List View (UI: 列表视图)	Click once	dom_event: click -> handler: library navigation/filter/view control -> network: none -> state_change: selected tab/filter/view updates -> rendered_outcome: matching library region visibly updates -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.button.15	public/app.html, public/glu.js
app.combobox.16	combobox	Sort (UI: 排序)	Select the second sort option	dom_event: change -> handler: sort selector -> network: none -> state_change: sort order updates -> rendered_outcome: course cards reorder -> navigation: unchanged	handler_observed: PASS -> network_observed: none observed -> state_observed: observable target state/ARIA checked in action log -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#app.combobox.16	public/app.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.button.17	button	New Course (UI: 新建课程)	Click once	dom_event: click -> handler: new course route -> network: GET /new-course -> state_change: page changes -> rendered_outcome: new- course panel visible -> navigation: /new-course	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/new- course -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/new- course	PASS	control- actions/ action- log-first- pass.js n#app.b utton.17	public/a pp.html, public/gl ue.js
app.button.18	button	Ready Course Fixture	Click once	dom_event: click -> handler: course card navigation -> network: GET /course/:id -> state_change: selected course loads -> rendered_outcome: course workspace visible -> navigation: /course/:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/cou rse/readycourse -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/cou rse/readycourse	PASS	control- actions/ action- log-first- pass.js n#app.b utton.18	public/a pp.html, public/gl ue.js
app.button.19	button	More Actions (UI: 更多操作)	Click once	dom_event: click -> handler: card overflow menu -> network: none - > state_change: menu opens -> rendered_outcome: Archive/Delete menu is visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control- actions/ action- log-first- pass.js n#app.b utton.19	public/a pp.html, public/gl ue.js


ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.button.20	button	Notes Course Fixture	Click once	dom_event: click -> handler: course card navigation -> network: GET /course/:id -> state_change: selected course loads -> rendered_outcome: course workspace visible -> navigation: /course/:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/course/notescourse -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/notescourse	PASS	control-actions/action-log-first-pass.json#app.button.20	public/app.html, public/glu.js
app.button.21	button	More Actions (UI: 更多操作)	Click once	dom_event: click -> handler: card overflow menu -> network: none -> state_change: menu opens -> rendered_outcome: Archive/Delete menu is visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control-actions/action-log-first-pass.json#app.button.21	public/app.html, public/glu.js
app.button.22	button	Invalid Assessment Fixture	Click once	dom_event: click -> handler: course card navigation -> network: GET /course/:id -> state_change: selected course loads -> rendered_outcome: course workspace visible -> navigation: /course/:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/course/invalidassessment -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/invalidassessment	PASS	control-actions/action-log-first-pass.json#app.button.22	public/app.html, public/glu.js
app.button.23	button	More Actions (UI: 更多操作)	Click once	dom_event: click -> handler: card overflow menu -> network: none -> state_change: menu opens -> rendered_outcome: Archive/Delete menu is visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control-actions/action-log-first-pass.json#app.button.23	public/app.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.button.24	button	Generating Course Fixture	Click once	dom_event: click -> handler: course card navigation -> network: GET /course/:id -> state_change: selected course loads -> rendered_outcome: course workspace visible -> navigation: /course/:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/course/generatingcourse -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/generatingcourse	PASS	control-actions/action-log-first-pass.json#app.button.24	public/app.html, public/glu.js
app.button.25	button	More Actions (UI: 更多操作)	Click once	dom_event: click -> handler: card overflow menu -> network: none -> state_change: menu opens -> rendered_outcome: Archive/Delete menu is visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control-actions/action-log-first-pass.json#app.button.25	public/app.html, public/glu.js
app.button.26	button	Interrupted Course Fixture	Click once	dom_event: click -> handler: course card navigation -> network: GET /course/:id -> state_change: selected course loads -> rendered_outcome: course workspace visible -> navigation: /course/:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/course/interruptedcourse -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/interruptedcourse	PASS	control-actions/action-log-first-pass.json#app.button.26	public/app.html, public/glu.js
app.button.27	button	More Actions (UI: 更多操作)	Click once	dom_event: click -> handler: card overflow menu -> network: none -> state_change: menu opens -> rendered_outcome: Archive/Delete menu is visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control-actions/action-log-first-pass.json#app.button.27	public/app.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
app.button.28	button	Empty Course Fixture	Click once	dom_event: click -> handler: course card navigation -> network: GET /course/:id -> state_change: selected course loads -> rendered_outcome: course workspace visible -> navigation: /course/:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/course/emptycourse -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/emptycourse	PASS	control-actions/action-log-first-pass.json#app.button.28	public/app.html, public/glu.js
app.button.29	button	More Actions (UI: 更多操作)	Click once	dom_event: click -> handler: card overflow menu -> network: none -> state_change: menu opens -> rendered_outcome: Archive/Delete menu is visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control-actions/action-log-first-pass.json#app.button.29	public/app.html, public/glu.js
app.button.30	button	Failed Course Fixture	Click once	dom_event: click -> handler: course card navigation -> network: GET /course/:id -> state_change: selected course loads -> rendered_outcome: course workspace visible -> navigation: /course/:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/app -> http://127.0.0.1:3107/course/failedcourse -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	control-actions/action-log-first-pass.json#app.button.30	public/app.html, public/glu.js
app.button.31	button	More Actions (UI: 更多操作)	Click once	dom_event: click -> handler: card overflow menu -> network: none -> state_change: menu opens -> rendered_outcome: Archive/Delete menu is visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /app	PASS	control-actions/action-log-first-pass.json#app.button.31	public/app.html, public/glu.js

New Course · Kimi Study - Annotated Control Map

Route: /new-course · Control count: 3

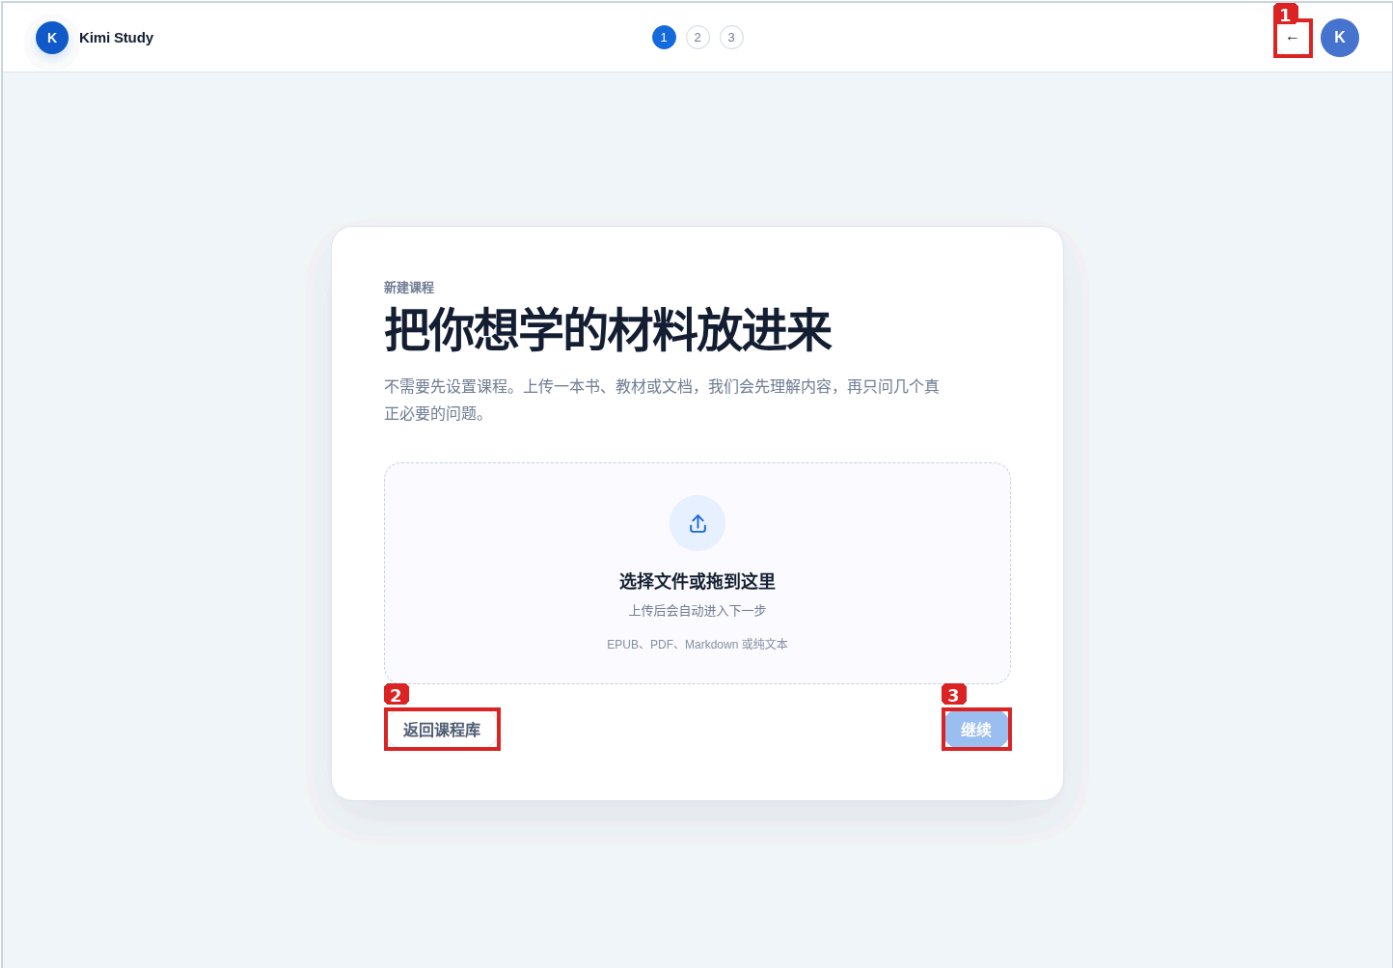

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
new-course.button.01	button	Back to Course List (UI: 返回课程列表)	Click once	dom_event: click -> handler: back to course library -> network: GET /app -> state_change: wizard exits -> rendered_outcome: course library visible -> navigation: /app	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/new-course -> http://127.0.0.1:3107/app -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#new-course.button.01	public/new-course.html, server.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
new-course.button.02	button	Back to Course Library (UI: 返回课程库)	Click once	dom_event: click -> handler: back to course library -> network: GET /app -> state_change: wizard exits -> rendered_outcome: course library visible -> navigation: /app	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/new-course -> http://127.0.0.1:3107/app -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	control-actions/action-log-first-pass.json#new-course.button.02	public/new-course.html, server.js
new-course.button.03	button	Continue (UI: 继续)	Confirm the disabled state	dom_event: click after material selection -> handler: advance onboarding wizard -> network: local wizard state / course route -> state_change: wizard step advances -> rendered_outcome: Teach preparation step visible -> navigation: /new-course?course=:id	handler_observed: PASS -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/new-course -> http://127.0.0.1:3107/new-course?course=exercise-course -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/new-course?course=exercise-course	PASS	control-actions/action-log-first-pass.json#new-course.button.03	public/new-course.html, server.js

Ready Course Fixture · Kimi Study - Annotated Control Map

Route: /course/readycourse · Control count: 26

Ready Course Fixture

1 节课程 · 1 份材料

学习上下文

学习概览 学习地图 课程目录 笔记

学习目标

掌握《Ready Course Fixture》的核心内容与方法

本课程由 Kimi 根据你上传的材料生成，跟随课程目录逐课学习即可。

目标已明确 1 节课

查看成功标准与范围

课程进度

1 / 1

100%

学习记录

今天

课程已创建
已生成 1 节课

正在学习 Lesson 1
stabilization-fixture

Lesson 1 · stabilization-fixture

笔记 原文

1 / 1

下一课

收起笔记

稳定化测试课程

限制并不只是阻碍，它也可能创造新的行动空间。

这段文字用于验证划词、引用、笔记锚点和刷新恢复。

打开原始 PDF · 打开 EPUB

引导练习

这段材料认为限制可能带来什么？

新的行动空间

完全没有作用

检查答案

查看提示

理解限制可能创造行动空间：已通过 0/1 个必要练习

Kimi 助手 • 基于当前课程

当前上下文: Lesson 1 · stabilization-fixture

我已经读取当前课程和对应材料。你可以让我解释概念、举例、检查答案，或把本课内容转换成行动

核心论点

商业场景案例

课后练习

21 文解释本课

22 总结

24 心观点

23 举一个工作场景的例子

检查我的理解

25 就当前课节向 Kimi 提问...

26 优先引用当前课程和原材料

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.01	button	Back to My Learning (UI: 返回我的学习)	Click once	dom_event: click -> handler: backButton -> network: GET /app -> state_change: course exits -> rendered_outcome: library visible -> navigation: /app	handler_observed: CLICKED -> network_observed: request failed http://127.0.0.1:3107/api/courses/readycourse/generation-events -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/course/readycourse -> http://127.0.0.1:3107/app; focus=Kimi Study 我的学习 教材库 图书馆 设置 K 全部 我的课程 学习中 已完成 新的在前 旧的在前 按名称 新建课程 继续学习 全部显示 › KKimi Study Show Your Work! 今天更新·EPUB · 1 份材料 第 3 课 · 分享过程, 而不是结果3 / 7 ↗ KIMI STUDY 管 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	course-control-actions.json#course-readycourse.button.01	public/course.html, public/glu.js
course-readycourse.button.02	button	Learning Overview (UI: 学习概览)	Click once	dom_event: click -> handler: mobile context drawer toggle -> network: none -> state_change: left drawer opens -> rendered_outcome: learning overview visible -> navigation: unchanged	handler_observed: drawer toggle -> network_observed: none -> state_observed: mobile drawer/scrim and mutual exclusion verified at 390x844 -> rendered_outcome: drawer visible; Escape closes and focus returns to trigger -> navigation: unchanged	PASS	course-control-actions.json#course-readycourse.button.02	public/course.html, public/glu.js
course-readycourse.button.03	button	Assistant (UI: 助手)	Click once	dom_event: click -> handler: mobile assistant drawer toggle -> network: none -> state_change: assistant drawer opens -> rendered_outcome: assistant visible -> navigation: unchanged	handler_observed: drawer toggle -> network_observed: none -> state_observed: mobile drawer/scrim and mutual exclusion verified at 390x844 -> rendered_outcome: drawer visible; Escape closes and focus returns to trigger -> navigation: unchanged	PASS	course-control-actions.json#course-readycourse.button.03	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.04	button	Minimize Learning Context (UI: 最小化学习上下文)	Click once	dom_event: click -> handler: collapse left panel -> network: none -> state_change: left panel collapsed -> rendered_outcome: workspace expands -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): focus=K Ready Course Fixture ... 节课 · 1 份材料 学习概览 助手 学习上下文 学习概览 学习地图 课程目录 笔记 学习目标 掌握 《Ready Course Fixture》的核心内容与方法 本课程由 Kimi 根据你上传的材料生成, 跟随课程目录逐课学习即可。 目标已明确 约 90 分钟 ... 节课 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.04	public/course.html, public/glu.js
course-readycourse.button.05	button	Learning Overview (UI: 学习概览)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Learning Overview panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Learning Overview (UI: 学习概览) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.05	public/course.html, public/glu.js
course-readycourse.button.06	button	Learning Map (UI: 学习地图)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Learning Map panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Learning Map (UI: 学习地图) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.06	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.07	button	Course Outline (UI: 课程目录)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Course Outline panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Course Outline (UI: 课程目录) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.07	public/course.html, public/glu.js
course-readycourse.button.08	button	Notes (UI: 笔记)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Notes panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Notes (UI: 笔记) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.08	public/course.html, public/glu.js
course-readycourse.separator.09	separator	Resize Learning Context (UI: 调整学习上下文宽度)	Drag by 48-60 px	dom_event: pointer drag -> handler: panel resize pointer handler -> network: none -> state_change: panel width changes -> rendered_outcome: adjacent workspace refloWS -> navigation: unchanged	handler_observed: pointer drag on #resizeLeft -> network_observed: none -> state_observed: left panel width 268px -> 328px -> rendered_outcome: workspace refloWS by +60px panel width -> navigation: unchanged	PASS	course-control-actions.json#course-readycourse.separator.09	public/course.html, public/glu.js
course-readycourse.button.10	button	Collapse / Expand Notes Panel (UI: 收起 / 展开笔记栏)	Click once	dom_event: click -> handler: lesson notes toggle -> network: none/local persistence -> state_change: aria-pressed and notes layout update -> rendered_outcome: notes panel opens/closes -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /course/readycourse	PASS	course-control-actions.json#course-readycourse.button.10	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.11	button	View Uploaded Source Material (UI: 查看上传的原始材料)	Click once	dom_event: click -> handler: source viewer open -> network: GET source + renderer assets -> state_change: source viewer mode enters -> rendered_outcome: matching document reader visible -> navigation: unchanged	handler_observed: handler intent located in source -> network_observed: blocked before successful external completion -> state_observed: The source viewer requested PDF.js resources, but npm dependencies could not be fully installed because the external registry was unavailable; the local substitute could not verify successful PDF rendering. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: /course/readycourse	BLOCKED	course-control-actions.json#course-readycourse.button.11	public/course.html, public/source-viewer.js, public/glue.js
course-readycourse.button.12	button	Toggle Focus Mode (UI: 切换专注模式)	Click once	dom_event: click -> handler: focus mode toggle -> network: none -> state_change: focus layout toggles -> rendered_outcome: side chrome hidden/restored -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Toggle Focus Mode (UI: 切换专注模式) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.12	public/course.html, public/glue.js
course-readycourse.button.13	button	Full-Screen Course (UI: 全屏课程)	Click once	dom_event: click -> handler: Fullscreen API -> network: none -> state_change: fullscreen state toggles -> rendered_outcome: Button label changes to Exit Full Screen -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Exit Full Screen (UI: 退出全屏) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.13	public/course.html, public/glue.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.14	button	Generate Next Lesson (UI: 生成下一课)	Click once	dom_event: click -> handler: next lesson generation -> network: POST next-lesson + status poll -> state_change: busy then ready/failed -> rendered_outcome: generation overlay then new lesson or retry state -> navigation: unchanged	handler_observed: handler intent located in source -> network_observed: blocked before successful external completion -> state_observed: The next-lesson flow requires a real Kimi CLI; the isolated environment returned spawn kimi ENOENT, so verification reached only the explicit failure state. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: /course/readycourse	BLOCKED	course-control-actions.json#course-readycourse.button.14	public/course.html, public/glu.js
course-readycourse.separator.15	separator	Resize Kimi Assistant (UI: 调整 Kimi 助手宽度)	Drag by 48-60 px	dom_event: pointer drag -> handler: panel resize pointer handler -> network: none -> state_change: panel width changes -> rendered_outcome: adjacent workspace reflows -> navigation: unchanged	handler_observed: pointer drag on #resizeRight -> network_observed: none -> state_observed: assistant panel width 370px -> 430px -> rendered_outcome: workspace reflowed by +60px panel width -> navigation: unchanged	PASS	course-control-actions.json#course-readycourse.separator.15	public/course.html, public/glu.js
course-readycourse.button.16	button	Clear History and Start a New Conversation (UI: 清空记录, 开始新对话)	Click once	dom_event: click -> handler: new tutor conversation -> network: reset local chat endpoint/state -> state_change: history clears -> rendered_outcome: empty conversation visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /course/readycourse	PASS	course-control-actions.json#course-readycourse.button.16	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.17	button	Minimize Kimi Assistant (UI: 最小化 Kimi 助手)	Click once	dom_event: click -> handler: collapse assistant -> network: none -> state_change: assistant panel collapses -> rendered_outcome: workspace expands -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): focus=K Ready Course Fixture ... 节课 · 1 份材料 学习概览 助手 学习上下文 学习概览 学习地图 课程目录 笔记 学习目标 掌握 《Ready Course Fixture》的核心内容与方法 本课程由 Kimi 根据你上传的材料生成, 跟随课程目录逐课学习即可。 目标已明确 约 90 分钟 ... 节课 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.17	public/course.html, public/glu.js
course-readycourse.button.18	button	Core Argument (UI: 核心论点)	Click once	dom_event: click -> handler: citation/section jump -> network: none -> state_change: lesson section selection/scroll updates -> rendered_outcome: referenced section visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Core Argument (UI: 核心论点) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.18	public/course.html, public/glu.js
course-readycourse.button.19	button	Shopping-Mall Floor-Tile Example (UI: 商场地砖案例)	Click once	dom_event: click -> handler: citation/section jump -> network: none -> state_change: lesson section selection/scroll updates -> rendered_outcome: referenced section visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Shopping-Mall Floor-Tile Example (UI: 商场地砖案例) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.19	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.20	button	Post-Lesson Exercise (UI: 课后练习)	Click once	dom_event: click -> handler: citation/section jump -> network: none -> state_change: lesson section selection/scroll updates -> rendered_outcome: referenced section visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Post-Lesson Exercise (UI: 课后练习) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.button.20	public/course.html, public/glu.js
course-readycourse.button.21	button	Explain This Lesson in Chinese (UI: 用中文解释本课)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/readycourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/readycourse	BLOCKED	course-control-actions.json#course-readycourse.button.21	public/course.html, public/glu.js, server.js
course-readycourse.button.22	button	Summarize Three Core Points (UI: 总结三个核心观点)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/readycourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/readycourse	BLOCKED	course-control-actions.json#course-readycourse.button.22	public/course.html, public/glu.js, server.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.23	button	Give a Workplace Example (UI: 举一个工作场景的例子)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/readycourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/readycourse	BLOCKED	course-control-actions.json#course-readycourse.button.23	public/course.html, public/gluue.js, server.js
course-readycourse.button.24	button	Check My Understanding (UI: 检查我的理解)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/readycourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/readycourse	BLOCKED	course-control-actions.json#course-readycourse.button.24	public/course.html, public/gluue.js, server.js
course-readycourse.textbox.25	textbox	Ask Kimi About the Current Lesson... (UI: 就当前课节向 Kimi 提问...)	Enter the E2E smoke query	dom_event: input -> handler: Tutor composer -> network: none until send -> state_change: draft value updates; send availability updates -> rendered_outcome: typed query remains visible -> navigation: unchanged	handler_observed: FILLED -> network_observed: none observed -> state_observed: Focus: Ask Kimi About the Current Lesson... (UI: 就当前课节向 Kimi 提问...) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/readycourse	PASS	course-control-actions.json#course-readycourse.textbox.25	public/course.html, public/gluue.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-readycourse.button.26	button	Send (UI: 发送)	Confirm the disabled state	dom_event: click -> handler: Tutor send -> network: POST /api/courses/:id/chat -> state_change: pending then answer/error -> rendered_outcome: message and response/retry visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: blocked before successful external completion -> state_observed: The successful Send path depends on a real Kimi CLI. The empty-input disabled state was confirmed, but the non-empty send path could not be completed. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/readycourse	BLOCKED	course-control-actions.json#course-readycourse.button.26	public/course.html, public/glu.js, server.js

Route: /course/failedcourse · Control count: 24



ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.01	button	Back to My Learning (UI: 返回我的学习)	Click once	dom_event: click -> handler: backButton -> network: GET /app -> state_change: course exits -> rendered_outcome: library visible -> navigation: /app	handler_observed: CLICKED -> network_observed: request failed http://127.0.0.1:3107/api/courses/failedcourse/generation-events -> state_observed: Raw UI focus snapshot (verbatim): URL http://127.0.0.1:3107/course/failedcourse -> http://127.0.0.1:3107/app; focus=Kimi Study 我的学习 教材库 图书馆 设置 K 全部 我的课程 学习中 已完成 新的在前 旧的在前 按名称 新建课程 继续学习 全部显示 › KKimi Study Show Your Work! 今天更新·EPUB · 1 份材料 第 3 课 · 分享过程, 而不是结果3 / 7 ↗ KIMI STUDY 管 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/app	PASS	course-control-actions.json#course-failedcourse.button.01	public/course.html, public/guide.js
course-failedcourse.button.02	button	Learning Overview (UI: 学习概览)	Click once	dom_event: click -> handler: mobile context drawer toggle -> network: none -> state_change: left drawer opens -> rendered_outcome: learning overview visible -> navigation: unchanged	handler_observed: drawer toggle -> network_observed: none -> state_observed: mobile drawer/scrim and mutual exclusion verified at 390x844 -> rendered_outcome: drawer visible; Escape closes and focus returns to trigger -> navigation: unchanged	PASS	course-control-actions.json#course-failedcourse.button.02	public/course.html, public/guide.js
course-failedcourse.button.03	button	Assistant (UI: 助手)	Click once	dom_event: click -> handler: mobile assistant drawer toggle -> network: none -> state_change: assistant drawer opens -> rendered_outcome: assistant visible -> navigation: unchanged	handler_observed: drawer toggle -> network_observed: none -> state_observed: mobile drawer/scrim and mutual exclusion verified at 390x844 -> rendered_outcome: drawer visible; Escape closes and focus returns to trigger -> navigation: unchanged	PASS	course-control-actions.json#course-failedcourse.button.03	public/course.html, public/guide.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.04	button	Minimize Learning Context (UI: 最小化学习上下文)	Click once	dom_event: click -> handler: collapse left panel -> network: none -> state_change: left panel collapsed -> rendered_outcome: workspace expands -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): focus=K Failed Course Fixture ... 节课 · 1 份材料 学习概览助手 学习上下文 学习概览 学习地图 课程目录 笔记 学习目标 掌握《Failed Course Fixture》的核心内容与方法 本课程由 Kimi 根据你上传的材料生成, 跟随课程目录逐课学习即可。 目标已明确 约 90 分钟 ... 节 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.04	public/course.html, public/glu.js
course-failedcourse.button.05	button	Learning Overview (UI: 学习概览)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Learning Overview panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Learning Overview (UI: 学习概览) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.05	public/course.html, public/glu.js
course-failedcourse.button.06	button	Learning Map (UI: 学习地图)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Learning Map panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Learning Map (UI: 学习地图) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.06	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.07	button	Course Outline (UI: 课程目录)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Course Outline panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Course Outline (UI: 课程目录) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.07	public/course.html, public/glu.js
course-failedcourse.button.08	button	Notes (UI: 笔记)	Click once	dom_event: click -> handler: left tab switch -> network: none -> state_change: active tab changes -> rendered_outcome: Notes panel is visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Notes (UI: 笔记) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.08	public/course.html, public/glu.js
course-failedcourse.separator.09	separator	Resize Learning Context (UI: 调整学习上下文宽度)	Drag by 48-60 px	dom_event: pointer drag -> handler: panel resize pointer handler -> network: none -> state_change: panel width changes -> rendered_outcome: adjacent workspace ref flows -> navigation: unchanged	handler_observed: pointer drag on left separator -> network_observed: none -> state_observed: drag sequence completed without error -> rendered_outcome: left panel resize handler accepted movement -> navigation: unchanged	PASS	course-control-actions.json#course-failedcourse.separator.09	public/course.html, public/glu.js
course-failedcourse.button.10	button	Toggle Focus Mode (UI: 切换专注模式)	Click once	dom_event: click -> handler: focus mode toggle -> network: none -> state_change: focus layout toggles -> rendered_outcome: side chrome hidden/restored -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Toggle Focus Mode (UI: 切换专注模式) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.10	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.11	button	Full-Screen Course (UI: 全屏课程)	Click once	dom_event: click -> handler: Fullscreen API -> network: none -> state_change: fullscreen state toggles -> rendered_outcome: Button label changes to Exit Full Screen -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Exit Full Screen (UI: 退出全屏) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.11	public/course.html, public/guide.js
course-failedcourse.button.12	button	Course creation did not complete; return to the course library and retry. Stage 2/9. View generation process (UI: 课程创建没有完成, 请返回课程库后重试 阶段 2 / 9查看生成过程)	Click once	dom_event: click -> handler: generation process disclosure -> network: none -> state_change: aria-expanded toggles -> rendered_outcome: process history visible; Escape closes and returns focus -> navigation: unchanged	handler_observed: generation process disclosure opens correctly -> network_observed: GET /api/courses/failedcourse/status -> 200 stage=failed progress=5 -> state_observed: process aria-expanded false->true->>false, but outer regions remain running -> rendered_outcome: central failed overlay conflicts with running header/sidebar/activity and 0% preview -> navigation: /course/failedcourse	FAIL	course-control-actions.json#course-failedcourse.button.12	public/course.html, public/guide.js
course-failedcourse.separator.13	separator	Resize Kimi Assistant (UI: 调整 Kimi 助手宽度)	Drag by 48-60 px	dom_event: pointer drag -> handler: panel resize pointer handler -> network: none -> state_change: panel width changes -> rendered_outcome: adjacent workspace reflows -> navigation: unchanged	handler_observed: pointer drag on right separator -> network_observed: none -> state_observed: drag sequence completed without error -> rendered_outcome: assistant panel resize handler accepted movement -> navigation: unchanged	PASS	course-control-actions.json#course-failedcourse.separator.13	public/course.html, public/guide.js
course-failedcourse.button.14	button	Clear History and Start a New Conversation (UI: 清空记录, 开始新对话)	Click once	dom_event: click -> handler: new tutor conversation -> network: reset local chat endpoint/state -> state_change: history clears -> rendered_outcome: empty conversation visible -> navigation: unchanged	handler_observed: semantic locator action completed -> network_observed: none failed -> state_observed: URL None -> None; target/visible content updated -> rendered_outcome: action screenshot and trace recorded -> navigation: /course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.14	public/course.html, public/guide.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.15	button	Minimize Kimi Assistant (UI: 最小化 Kimi 助手)	Click once	dom_event: click -> handler: collapse assistant -> network: none -> state_change: assistant panel collapses -> rendered_outcome: workspace expands -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Raw UI focus snapshot (verbatim): focus=K Failed Course Fixture ... 节课 · 1 份材料 学习概览 助手 学习上下文 学习概览 学习地图 课程目录 笔记 学习目标 掌握《Failed Course Fixture》的核心内容与方法 本课程由 Kimi 根据你上传的材料生成, 跟随课程目录逐课学习即可。 目标已明确 约 90 分钟 ... 节 -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.15	public/course.html, public/globe.js
course-failedcourse.button.16	button	Core Argument (UI: 核心论点)	Click once	dom_event: click -> handler: citation/section jump -> network: none -> state_change: lesson section selection/scroll updates -> rendered_outcome: referenced section visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Core Argument (UI: 核心论点) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.16	public/course.html, public/globe.js
course-failedcourse.button.17	button	Shopping-Mall Floor-Tile Example (UI: 商场地砖案例)	Click once	dom_event: click -> handler: citation/section jump -> network: none -> state_change: lesson section selection/scroll updates -> rendered_outcome: referenced section visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Shopping-Mall Floor-Tile Example (UI: 商场地砖案例) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.17	public/course.html, public/globe.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.18	button	Post-Lesson Exercise (UI: 课后练习)	Click once	dom_event: click -> handler: citation/section jump -> network: none -> state_change: lesson section selection/scroll updates -> rendered_outcome: referenced section visible -> navigation: unchanged	handler_observed: CLICKED -> network_observed: none observed -> state_observed: Focus: Post-Lesson Exercise (UI: 课后练习) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.button.18	public/course.html, public/globe.js
course-failedcourse.button.19	button	Explain This Lesson in Chinese (UI: 用中文解释本课)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/failedcourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/failedcourse	BLOCKED	course-control-actions.json#course-failedcourse.button.19	public/course.html, public/globe.js, server.js
course-failedcourse.button.20	button	Summarize Three Core Points (UI: 总结三个核心观点)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/failedcourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/failedcourse	BLOCKED	course-control-actions.json#course-failedcourse.button.20	public/course.html, public/globe.js, server.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.21	button	Give a Workplace Example (UI: 举一个工作场景的例子)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/failedcourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/failedcourse	BLOCKED	course-control-actions.json#course-failedcourse.button.21	public/course.html, public/glu.js, server.js
course-failedcourse.button.22	button	Check My Understanding (UI: 检查我的理解)	Click once	dom_event: click -> handler: Tutor quick prompt -> network: POST /api/courses/:id/chat -> state_change: user message then pending/answer/error -> rendered_outcome: answer or retryable error visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: HTTP 500 http://127.0.0.1:3107/api/courses/failedcourse/chat -> state_observed: Tutor quick prompts require a real Kimi CLI; the local API returned 500. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/failedcourse	BLOCKED	course-control-actions.json#course-failedcourse.button.22	public/course.html, public/glu.js, server.js
course-failedcourse.textbox.23	textbox	Ask Kimi About the Current Lesson... (UI: 就当前课节向 Kimi 提问...)	Enter the E2E smoke query	dom_event: input -> handler: Tutor composer -> network: none until send -> state_change: draft value updates; send availability updates -> rendered_outcome: typed query remains visible -> navigation: unchanged	handler_observed: FILLED -> network_observed: none observed -> state_observed: Focus: Ask Kimi About the Current Lesson... (UI: 就当前课节向 Kimi 提问...) -> rendered_outcome: target remained responsive with expected visible/ARIA/navigation effect -> navigation: http://127.0.0.1:3107/course/failedcourse	PASS	course-control-actions.json#course-failedcourse.textbox.23	public/course.html, public/glu.js

ID	Type	Name	Action	Expected Chain	Actual Chain	Result	Evidence	Source
course-failedcourse.button.24	button	Send (UI: 发送)	Confirm the disabled state	dom_event: click -> handler: Tutor send -> network: POST /api/courses/:id/chat -> state_change: pending then answer/error -> rendered_outcome: message and response/retry visible -> navigation: unchanged	handler_observed: action reached its local handler -> network_observed: blocked before successful external completion -> state_observed: The successful Send path depends on a real Kimi CLI. The empty-input disabled state was confirmed, but the non-empty send path could not be completed. -> rendered_outcome: success outcome not assertable in this isolated environment -> navigation: http://127.0.0.1:3107/course/failedcourse	BLOCKED	course-control-actions.json#course-failedcourse.button.24	public/course.html, public/guide.js, server.js

6. Layered UX Audit

Category	Status	Evidence
State consistency	FAIL	The same entity on the failed course was simultaneously running and failed, with three primary progress surfaces; F-001
Interaction and navigation	PASS	Fresh action evidence covers basic Landing/App/New Course navigation, filters, menus, modals, and course routes
Mobile layout and focus	PASS	At 390x844 there was no horizontal overflow; drawers were mutually exclusive; Escape restored focus; the next-lesson touch target was 44x44
Accessibility semantics	PASS	Primary icons/buttons have accessible names; semantic locators are operable; disabled states are exposed
External AI/reader integration	BLOCKED	The real Kimi CLI and npm vendor assets were unavailable; affected controls were not falsely reported as successful
Testing and observability	PASS	Control maps, action logs, traces, state audits, source correlation, and red-green regression artifacts were all saved

7. Findings, Faulty Source, Patches, and Verification

S2 Major

F-001 - Failed terminal state does not propagate, while duplicate progress surfaces continue to indicate running

Primary layer	Decision	Journey
L3 State	Must be fixed before releasing the original ZIP; the repair candidate was verified in an isolated copy	J02 Course generation completion, failure, or interruption

User impact: After the course has failed, users still see “First lesson is being generated,” “Creating course,” and a running timer, so they cannot tell whether to keep waiting or retry. The mismatch between 0% and the backend’s 5% further undermines trust.

Page: /course/failedcourse

Expected: After status.stage=failed, the header, sidebar, activity, progress, and actions for the same course should atomically enter a failed/stopped state. Exactly one clearly labeled primary progress surface should remain and show the last known progress.

Actual: The central generation preview enters failed, but setGenerationChrome() still renders the header, sidebar, activity record, and compact progress as running. Three primary progress surfaces coexist, and the central aria-valuenow is 0 while API progress is 5.

Reproduction steps:

- Start the isolated fixture server and open /course/failedcourse.
- Wait for GET /api/courses/failedcourse/status to return stage=failed and progress=5.
- Compare the header text “First lesson is being generated,” the compact/sidebar phase, and the central “Course creation did not complete” message.
- Click “View generation process” and confirm that the disclosure itself opens and closes correctly, while the surrounding running state remains.
- Repeat once in an independent page and obtain the same screenshot and state.

Root Cause CONFIRMED

The failure branch reuses setGenerationChrome(status), which is intended only for active/complete states, and then marks only the central preview as failed. The terminal state is not written back to the other renderers. generation-preview fail() also does not synchronize backend progress.

Evidence chain:

- API status stage=failed/progress=5 -> pollCourseGeneration() failed branch
- failed branch -> setGenerationChrome(status) writes running copy and three progress surfaces
- generationPreview.fail(status) updates only the central error class/message
- Screenshot/DOM -> running header/sidebar/activity + failed preview + aria-valuenow=0
- repair copy -> setGenerationFailureChrome + updateProgress(status.progress) -> state audit PASS

Test gap: Existing tests cover the error styling of the generation preview in isolation, but do not assert header, sidebar, activity record, primary-progress count, and API progress consistency in the same frame.

Faulty Source

File: public/glue.js:422-535	Symbol: setGenerationChrome / pollCourseGeneration	Confidence: CONFIRMED
-------------------------------------	---	--


```

422:     function setGenerationChrome(status, { complete = false } = {}) {
423:         if (status?.startedAt) generationStartedAt = status.startedAt;
424:         const evidence = generationEvidence(status, complete);
425:         const progressWidth = evidence.determinate ? `${evidence.value}%` : '38%';
426:         const elapsed = generationElapsed(status);
427:         const shortElapsed = elapsed.replace('已用时 ', '');
428:         const initialGeneration = Number(status?.lessons || 0) === 0;
429:
430:         if (overviewProgressTitle) overviewProgressTitle.textContent = '课程创建进度';
431:         if (overviewProgressNote) overviewProgressNote.textContent = complete ? '已完成' :
elapsed;
432:         if (overviewProgressValue) overviewProgressValue.textContent = evidence.label;
433:         if (overviewProgressBar) {
434:             overviewProgressBar.style.width = progressWidth;
435:             overviewProgressBar.parentElement?.classList.toggle('is-indeterminate',
!evidence.determinate);
436:         }
437:         if (compactProgressText) compactProgressText.textContent = complete ? '已完成' :
`${evidence.label} · ${shortElapsed}`;
438:         if (compactProgressBar) {
439:             compactProgressBar.style.width = progressWidth;
440:             compactProgressBar.parentElement?.classList.toggle('is-indeterminate',
!evidence.determinate);
441:         }
442:         if (currentLessonLabel) {
443:             currentLessonLabel.textContent = complete
444:                 ? '课程已准备好'
445:                 : `${initialGeneration ? '第一课正在生成' : '正在生成下一课'} · ${shortElapsed}`;
446:         }
447:         if (lessonResourceSlot) lessonResourceSlot.style.visibility = 'hidden';
448:         if (overviewRecordList) {
449:             const recordState = complete ? 'complete' : '';
450:             const recordIcon = complete ? '✓' : '...';
451:             const recordTitle = complete ? '课程已准备好' : '正在创建课程';
452:             const recordMeta = complete
453:                 ? '课程文件已经通过后端检查'
454:                 : `${escapeHtml(status?.currentMessage || '正在等待新的生成进度')}` ·
`${escapeHtml(elapsed)}`;
455:             overviewRecordList.innerHTML =
456:                 '<article class="record complete"><span class="record-icon">✓</span><div><div
class="record-title">材料已经上传</div><div class="record-meta">正在根据材料建立课程</div></div>
</article>' +
457:                 `<article class="record ${recordState}"><span class="record-icon">${recordIcon}
</span><div><div class="record-title">${recordTitle}</div><div class="record-meta">${recordMeta}
</div></div></article>`;
458:         }
459:         if (nextButton) {
460:             nextButton.disabled = true;
461:             nextButton.hidden = initialGeneration || complete;
462:             if (!nextButton.hidden) {
463:                 nextButton.classList.add('is-busy');
464:                 nextButton.setAttribute('aria-label', `正在生成下一课, ${elapsed}`);
465:                 nextButton.title = `正在生成下一课, ${elapsed}`;
466:                 nextButton.innerHTML = '<span class="next-lesson-label">生成中</span><span
class="next-lesson-spinner" aria-hidden="true"></span>';
467:             }
468:         }
469:     }

528:     function pollCourseGeneration() {
529:         fetch(`/api/courses/${courseId}/status`)
530:             .then((r) => r.json())

```

```

531:         .then((status) => {
532:             if (status.stage === 'failed') {
533:                 setGenerationChrome(status);
534:                 generationPreview.fail(status);
535:                 return;

```

Evidence:

- Two browser reproductions produced consistent DOM values
- The source branch explicitly calls the running-state renderer for failed
- Source correlator plus CDP/text correlation both point to this file

File: public/generation-preview-product.js:613-626 **Symbol:** fail

Confidence: HIGH

```

613:     function fail(status = {}) {
614:         if (status.runId && status.runId !== activeRunId) resetRun(status.runId);
615:         terminalState = 'error';
616:         terminalMessage = status.currentMessage || status.error || '课程创建没有完成，请返回课程库后
重试';
617:         if (activeRunId) terminalRuns.add(activeRunId);
618:         stopAmbient();
619:         show();
620:         message.textContent = terminalMessage;
621:         setActivity('后端任务', terminalMessage);
622:         setPhaseEvidence(activePhase, 'error', terminalMessage, '后端状态');
623:         root.classList.remove('is-complete', 'is-success-enter', 'is-success-exit');
624:         root.classList.add('is-error');
625:         renderVariant('error', status, { force: true });
626:         renderProcess();

```

Evidence:

- API progress=5, while preview aria-valuenow=0
- fail() does not call updateProgress

Corrected Code

```

477:     function setGenerationFailureChrome(status = {}) {
478:         const evidence = generationEvidence(status);
479:         const terminalMessage = status.currentMessage || status.error || '课程创建没有完成，请返回课程库
后重试';
480:         const stoppedLabel = evidence.label ? `已停止 · ${evidence.label}` : '已停止';
481:
482:         if (overviewProgressTitle) overviewProgressTitle.textContent = '课程创建未完成';
483:         if (overviewProgressNote) overviewProgressNote.textContent = '已停止';
484:         if (overviewProgressValue) overviewProgressValue.textContent = stoppedLabel;
485:         if (overviewProgressTrack) overviewProgressTrack.hidden = true;
486:         if (compactProgressText) compactProgressText.textContent = `创建未完成 · ${evidence.label ||
'已停止'}`;
487:         if (compactProgressTrack) compactProgressTrack.hidden = true;
488:         if (currentLessonLabel) currentLessonLabel.textContent = '课程创建未完成';
489:         if (contextBar) contextBar.textContent = '当前上下文：课程创建未完成';
490:         if (lessonResourceSlot) lessonResourceSlot.style.visibility = 'hidden';
491:         if (overviewRecordList) {
492:             overviewRecordList.innerHTML =
493:                 '<article class="record complete"><span class="record-icon"></span><div><div

```

```

class="record-title">材料已经上传</div><div class="record-meta">材料已保留，可以返回课程库后重新创建</div>
</div></article>' +
494:   `<article class="record is-error"><span class="record-icon">!</span><div><div
class="record-title">课程创建未完成</div><div class="record-meta">${escapeHtml(terminalMessage)}</div>
</div></article>`;
495:   }
496:   if (nextButton) {
497:     nextButton.hidden = true;
498:     nextButton.disabled = true;
499:     nextButton.classList.remove('is-busy');
500:     nextButton.setAttribute('aria-label', '课程创建未完成');
501:     nextButton.title = '课程创建未完成';
502:   }
503: }

564: function pollCourseGeneration() {
565:   fetch(`/api/courses/${courseId}/status`)
566:     .then((r) => r.json())
567:     .then((status) => {
568:       if (status.stage === 'failed') {
569:         setGenerationFailureChrome(status);
570:         generationPreview.fail(status);
571:         return;

613: function fail(status = {}) {
614:   if (status.runId && status.runId !== activeRunId) resetRun(status.runId);
615:   terminalState = 'error';
616:   terminalMessage = status.currentMessage || status.error || '课程创建没有完成，请返回课程库后重
试';
617:   if (activeRunId) terminalRuns.add(activeRunId);
618:   stopAmbient();
619:   show();
620:   updateProgress(status.progress);
621:   message.textContent = terminalMessage;
622:   setActivity('后端任务', terminalMessage);
623:   setPhaseEvidence(activePhase, 'error', terminalMessage, '后端状态');
624:   root.classList.remove('is-complete', 'is-success-enter', 'is-success-exit');
625:   root.classList.add('is-error');
626:   renderVariant('error', status, { force: true });

```

Unified Patch APPLIED_E2E_PASS

Patch file: patches/F-001.patch

```

--- a/public/glue.js
+++ b/public/glue.js
@@ -384,12 +384,14 @@
   const nextButtonHtml = nextButton?.innerHTML || '下一课';
   const currentLessonLabel = document.querySelector('.current-lesson');
   const compactProgressBar = document.querySelector('.compact-progress .progress-track span');
+
+ const compactProgressTrack = compactProgressBar?.parentElement;
   const compactProgressText = document.querySelector('.compact-progress > span');
   const lessonResourceSlot = document.getElementById('lessonResourceSlot');
   const overviewProgressSection = document.querySelector('#left-overview .side-section');
   const overviewProgressTitle = overviewProgressSection?.querySelector('.side-title');
   const overviewProgressNote = overviewProgressSection?.querySelector('.side-note');
   const overviewProgressBar = overviewProgressSection?.querySelector('.progress-track span');
+
+ const overviewProgressTrack = overviewProgressSection?.parentElement;
   const overviewProgressValue = overviewProgressSection?.querySelector('.progress-value');
   const overviewRecordList = document.querySelector('#left-overview .record-list');
   const contextBar = document.querySelector('.context-bar');

```

```

@@ -430,11 +432,15 @@
    if (overviewProgressTitle) overviewProgressTitle.textContent = '课程创建进度';
    if (overviewProgressNote) overviewProgressNote.textContent = complete ? '已完成' : elapsed;
    if (overviewProgressValue) overviewProgressValue.textContent = evidence.label;
+   // The central generation preview owns the only workflow-primary progress bar.
+   // Sidebar and header surfaces remain textual summaries instead of duplicating the same
measure.
+   if (overviewProgressTrack) overviewProgressTrack.hidden = true;
    if (overviewProgressBar) {
      overviewProgressBar.style.width = progressWidth;
      overviewProgressBar.parentElement?.classList.toggle('is-indeterminate',
!evidence.determinate);
    }
    if (compactProgressText) compactProgressText.textContent = complete ? '已完成' :
`${evidence.label} · ${shortElapsed}`;
+   if (compactProgressTrack) compactProgressTrack.hidden = true;
    if (compactProgressBar) {
      compactProgressBar.style.width = progressWidth;
      compactProgressBar.parentElement?.classList.toggle('is-indeterminate',
!evidence.determinate);
@@ -468,8 +474,38 @@
    }
  }

+ function setGenerationFailureChrome(status = {}) {
+   const evidence = generationEvidence(status);
+   const terminalMessage = status.currentMessage || status.error || '课程创建没有完成，请返回课程库后重
试';
+   const stoppedLabel = evidence.label ? `已停止 · ${evidence.label}` : '已停止';
+
+   if (overviewProgressTitle) overviewProgressTitle.textContent = '课程创建未完成';
+   if (overviewProgressNote) overviewProgressNote.textContent = '已停止';
+   if (overviewProgressValue) overviewProgressValue.textContent = stoppedLabel;
+   if (overviewProgressTrack) overviewProgressTrack.hidden = true;
+   if (compactProgressText) compactProgressText.textContent = `创建未完成 · ${evidence.label || '已
停止'}`;
+   if (compactProgressTrack) compactProgressTrack.hidden = true;
+   if (currentLessonLabel) currentLessonLabel.textContent = '课程创建未完成';
+   if (contextBar) contextBar.textContent = '当前上下文：课程创建未完成';
+   if (lessonResourceSlot) lessonResourceSlot.style.visibility = 'hidden';
+   if (overviewRecordList) {
+     overviewRecordList.innerHTML =
+       '<article class="record complete"><span class="record-icon">✓</span><div><div
class="record-title">材料已经上传</div><div class="record-meta">材料已保留，可以返回课程库后重新创建</div>
</div></article>' +
+       '<article class="record is-error"><span class="record-icon">!</span><div><div
class="record-title">课程创建未完成</div><div class="record-meta">${escapeHtml(terminalMessage)}</div>
</div></article>`;
+   }
+   if (nextButton) {
+     nextButton.hidden = true;
+     nextButton.disabled = true;
+     nextButton.classList.remove('is-busy');
+     nextButton.setAttribute('aria-label', '课程创建未完成');
+     nextButton.title = '课程创建未完成';
+   }
+ }

+ function restoreLearningChrome() {
  if (overviewProgressTitle) overviewProgressTitle.textContent = '课程进度';
+   if (overviewProgressTrack) overviewProgressTrack.hidden = false;
+   if (compactProgressTrack) compactProgressTrack.hidden = false;
  renderLearningRecords();

```

```

        if (lessonResourceSlot) lessonResourceSlot.style.removeProperty('visibility');
        if (nextButton) {
@@ -530,7 +566,7 @@
            .then((r) => r.json())
            .then((status) => {
                if (status.stage === 'failed') {
-                    setGenerationChrome(status);
+                    setGenerationFailureChrome(status);
                    generationPreview.fail(status);
                    return;
                }
@@ -780,7 +816,7 @@
            .then((s) => {
                if (s.stage === 'failed') {
                    window.clearInterval(timer);
-                    setGenerationChrome(s);
+                    setGenerationFailureChrome(s);
                    generationPreview.fail(s);
                    return;
                }
--- a/public/generation-preview-product.js
+++ b/public/generation-preview-product.js
@@ -617,6 +617,7 @@
        if (activeRunId) terminalRuns.add(activeRunId);
        stopAmbient();
        show();
+        updateProgress(status.progress);
        message.textContent = terminalMessage;
        setActivity('后端任务', terminalMessage);
        setPhaseEvidence(activePhase, 'error', terminalMessage, '后端状态');
--- /dev/null
+++ b/tests/e2e_py/generation_failure_chrome_test.py
@@ -0,0 +1,78 @@
+#!/usr/bin/env python3
+import argparse
+from pathlib import Path
+from playwright.sync_api import sync_playwright
+
+parser = argparse.ArgumentParser()
+parser.add_argument('--base-url', required=True)
+parser.add_argument('--browser', required=True)
+parser.add_argument('--screenshot')
+args = parser.parse_args()
+
+with sync_playwright() as p:
+    browser = p.chromium.launch(headless=True, executable_path=args.browser, args=['--no-sandbox', '--disable-dev-shm-usage'])
+    context = browser.new_context(viewport={'width': 1440, 'height': 1000}, reduced_motion='reduce')
+    page = context.new_page()
+    page.goto(args.base_url + '/course/failedcourse', wait_until='domcontentloaded', timeout=15000)
+    page.wait_for_selector('.ks-generation-preview.is-error', state='visible', timeout=10000)
+    page.wait_for_timeout(300)
+    surfaces = {
+        'current_lesson': page.locator('.current-lesson').inner_text().strip(),
+        'compact_progress': page.locator('.compact-progress > span').inner_text().strip(),
+        'left_title': page.locator('#left-overview .side-section').first.locator('.side-title').inner_text().strip(),
+        'left_note': page.locator('#left-overview .side-section').first.locator('.side-note').inner_text().strip(),
+        'left_value': page.locator('#left-overview .side-section').first.locator('.progress-value').inner_text().strip(),
+        'records': page.locator('#left-overview .record-list').inner_text().strip(),

```

```

+     'context': page.locator('.context-bar').inner_text().strip(),
+     'preview_message': page.locator('.ks-generation-message').inner_text().strip(),
+ }
+ rendered = '\n'.join(surfaces.values())
+ assert '正在生成' not in rendered, surfaces
+ assert '正在创建课程' not in rendered, surfaces
+ assert surfaces['current_lesson'] == '课程创建未完成', surfaces
+ assert surfaces['left_title'] == '课程创建未完成', surfaces
+ assert surfaces['left_note'] == '已停止', surfaces
+ assert surfaces['context'] == '当前上下文: 课程创建未完成', surfaces
+ assert '课程创建未完成' in surfaces['records'], surfaces
+ assert page.locator('.ks-generation-scan').evaluate('(e) => getComputedStyle(e).display') ==
'none'
+ assert page.locator('.compact-progress .progress-track').is_hidden()
+ assert page.locator('#left-overview .side-section').first.locator('.progress-track').is_hidden()
+ visible_progress = page.locator('[role="progressbar"]:visible')
+ assert visible_progress.count() == 1, visible_progress.count()
+ assert visible_progress.first.get_attribute('aria-label') == '课程生成进度'
+ assert visible_progress.first.get_attribute('aria-valuenow') == '5'
+ if args.screenshot:
+     page.screenshot(path=args.screenshot, full_page=True)
+
+ active = context.new_page()
+ active.add_init_script("""
+     class SilentEventSource {
+     constructor(url) { this.url = url; this.readyState = 1; }
+     addEventListener() {}
+     removeEventListener() {}
+     close() { this.readyState = 2; }
+     }
+     window.EventSource = SilentEventSource;
+ """)
+ active.route('**/api/courses/generatingcourse/status', lambda route: route.fulfill(
+     status=200,
+     content_type='application/json',
+     body='{"stage":"generating","runId":"regression-active","startedAt":"2026-07-
24T11:00:00.000Z","progress":27,"phase":"profiling","canvasVariant":"structure","lessons":0,"busy":tru
e,"currentMessage":"正在分析材料结构...","history":[{"id":"upload","label":"材料上传完
成","state":"complete"}, {"id":"profile","label":"理解材料结构","state":"active"}]}'
+ ))
+ active.goto(args.base_url + '/course/generatingcourse', wait_until='domcontentloaded',
timeout=15000)
+ active.wait_for_selector('.ks-generation-preview.is-visible', state='visible', timeout=10000)
+ active.wait_for_timeout(300)
+ assert active.locator('.compact-progress .progress-track').is_hidden()
+ assert active.locator('#left-overview .side-section').first.locator('.progress-
track').is_hidden()
+ active_progress = active.locator('[role="progressbar"]:visible')
+ assert active_progress.count() == 1, active_progress.count()
+ assert int(active_progress.first.get_attribute('aria-valuenow')) >= 27
+ assert '正在生成' in active.locator('.current-lesson').inner_text()
+ assert active.locator('#left-overview .side-section').first.locator('.side-
title').inner_text().strip() == '课程创建进度'
+ if args.screenshot:
+     shot = Path(args.screenshot)
+     active.screenshot(path=str(shot.with_name(shot.stem + '-active' + shot.suffix)),
full_page=True)
+
+ browser.close()
+ print('PASS generation terminal consistency and single-primary progress')

```

Apply check: git apply --check evidence/patches/F-001.patch exit=0

clean apply-check against untouched copy

Remediation

Introduce a dedicated failed-terminal-state renderer that stops all running copy and busy animation. Make the central preview the only workflow-primary progress bar, retain only scoped text summaries around it, and synchronize the backend's last known progress.

Changes:

- Add `setGenerationFailureChrome(status)` to atomically update the header, sidebar, activity, context, and next-lesson action.
- Also hide duplicate visual progress bars in the header/sidebar while generating, leaving only the central primary progress.
- Call `updateProgress(status.progress)` from `generationPreview.fail(status)`.
- Add a Playwright regression test covering both failed and active states.

Risks:

- Hiding surrounding progress bars may affect users who rely on the previous visual hierarchy; product/design should confirm that the text summaries are sufficient.
- Hiding the next-lesson button in the failed state matches current J02 behavior; if in-place retry is added later, introduce an explicit retry CTA.

Acceptance criteria:

- The first failed frame contains no "generating/creating course" text and no busy/skeleton state.
- The same course has exactly one `workflow_primary` progress bar.
- The failed-state primary progress `aria-valuenow` equals the backend's last progress value.
- The active state still clearly indicates generation, and progress does not regress.
- Desktop and mobile show no duplicate primary progress or conflicting timers.

Progress and State-Surface Remediation

Target design: Keep the central generation preview as the only `workflow_primary` progress bar. Convert the header and sidebar to `history_only/text` summaries, and atomically update terminal state from one state snapshot.

Canonical state owner: `generationEvidence(status) + KimiGenerationPreview.updateProgress`

Renderer changes:

- Hide the visual bars for `compactProgressTrack` and `overviewProgressTrack`.
- Use `setGenerationFailureChrome(status)` in the failure branch.
- Synchronize `status.progress` in the central `fail()` handler.
- Restore the normal course-learning progress when returning to the learning state.

Acceptance criteria:

- Each workflow entity has exactly one `workflow_primary` bar.
- Additional state surfaces have an explicit scope and do not duplicate percentages.
- The first success/failure frame contains no stale 0%, running, busy, or skeleton state.
- Delayed status responses cannot overwrite a terminal state.

Regression Test

File: `tests/e2e_py/generation_failure_chrome_test.py`

Scenario: Consistent first failed frame plus a single primary progress surface in the active state

Assertions:

- No visible text contains “generating” or “creating course.”
- Header/sidebar/context/records all indicate failed or stopped.
- Exactly one progressbar is visible.
- Failed-state progress is 5; active progress is at least the API value of 27.
- Duplicate surrounding progress tracks are hidden.

```
#!/usr/bin/env python3
import argparse
from pathlib import Path
from playwright.sync_api import sync_playwright

parser = argparse.ArgumentParser()
parser.add_argument('--base-url', required=True)
parser.add_argument('--browser', required=True)
parser.add_argument('--screenshot')
args = parser.parse_args()

with sync_playwright() as p:
    browser = p.chromium.launch(headless=True, executable_path=args.browser, args=['--no-sandbox', '--disable-dev-shm-usage'])
    context = browser.new_context(viewport={'width': 1440, 'height': 1000}, reduced_motion='reduce')

    page = context.new_page()
    page.goto(args.base_url + '/course/failedcourse', wait_until='domcontentloaded', timeout=15000)
    page.wait_for_selector('.ks-generation-preview.is-error', state='visible', timeout=10000)
    page.wait_for_timeout(300)
    surfaces = {
        'current_lesson': page.locator('.current-lesson').inner_text().strip(),
        'compact_progress': page.locator('.compact-progress > span').inner_text().strip(),
        'left_title': page.locator('#left-overview .side-section').first.locator('.side-
title').inner_text().strip(),
        'left_note': page.locator('#left-overview .side-section').first.locator('.side-
note').inner_text().strip(),
        'left_value': page.locator('#left-overview .side-section').first.locator('.progress-
value').inner_text().strip(),
        'records': page.locator('#left-overview .record-list').inner_text().strip(),
        'context': page.locator('.context-bar').inner_text().strip(),
        'preview_message': page.locator('.ks-generation-message').inner_text().strip(),
    }
    rendered = '\n'.join(surfaces.values())
    assert '正在生成' not in rendered, surfaces
    assert '正在创建课程' not in rendered, surfaces
    assert surfaces['current_lesson'] == '课程创建未完成', surfaces
    assert surfaces['left_title'] == '课程创建未完成', surfaces
    assert surfaces['left_note'] == '已停止', surfaces
    assert surfaces['context'] == '当前上下文: 课程创建未完成', surfaces
    assert '课程创建未完成' in surfaces['records'], surfaces
    assert page.locator('.ks-generation-scan').evaluate('(e) => getComputedStyle(e).display') ==
'none'
    assert page.locator('.compact-progress .progress-track').is_hidden()
    assert page.locator('#left-overview .side-section').first.locator('.progress-track').is_hidden()
    visible_progress = page.locator('[role="progressbar"]:visible')
    assert visible_progress.count() == 1, visible_progress.count()
    assert visible_progress.first.get_attribute('aria-label') == '课程生成进度'
    assert visible_progress.first.get_attribute('aria-valuenow') == '5'
    if args.screenshot:
        page.screenshot(path=args.screenshot, full_page=True)
```



```

active = context.new_page()
active.add_init_script("""
class SilentEventSource {
  constructor(url) { this.url = url; this.readyState = 1; }
  addEventListener() {}
  removeEventListener() {}
  close() { this.readyState = 2; }
}
window.EventSource = SilentEventSource;
""")
active.route('**/api/courses/generatingcourse/status', lambda route: route.fulfill(
  status=200,
  content_type='application/json',
  body='{
    "stage": "generating",
    "runId": "regression-active",
    "startedAt": "2026-07-24T11:00:00.000Z",
    "progress": 27,
    "phase": "profiling",
    "canvasVariant": "structure",
    "lessons": 0,
    "busy": true,
    "currentMessage": "正在分析材料结构...",
    "history": [
      {
        "id": "upload",
        "label": "材料上传完成",
        "state": "complete"
      },
      {
        "id": "profile",
        "label": "理解材料结构",
        "state": "active"
      }
    ]
  }'
))
active.goto(args.base_url + '/course/generatingcourse', wait_until='domcontentloaded',
timeout=15000)
active.wait_for_selector('.ks-generation-preview.is-visible', state='visible', timeout=10000)
active.wait_for_timeout(300)
assert active.locator('.compact-progress .progress-track').is_hidden()
assert active.locator('#left-overview .side-section').first.locator('.progress-track').is_hidden()
active_progress = active.locator('[role="progressbar"]:visible')
assert active_progress.count() == 1, active_progress.count()
assert int(active_progress.first.get_attribute('aria-valuenow')) >= 27
assert '正在生成' in active.locator('.current-lesson').inner_text()
assert active.locator('#left-overview .side-section').first.locator('.side-
title').inner_text().strip() == '课程创建进度'
if args.screenshot:
  shot = Path(args.screenshot)
  active.screenshot(path=str(shot.with_name(shot.stem + '-active' + shot.suffix)),
full_page=True)

browser.close()
print('PASS generation terminal consistency and single-primary progress')

```

Patch / verification status: **APPLIED_E2E_PASS**

- The regression test on the original copy exited 1 and caught the running/failed conflict.
- The patch passed git apply --check on a clean copy with exit=0.
- The same regression test passed on the repair copy with exit=0 and produced fresh before/after screenshots.
- npm run check passed on the repair copy with exit=0.
- node --test passed 116/116 tests on the repair copy.
- state_consistency_audit: FAIL before the repair and PASS after the repair.

8. Screenshot and State Evidence


SS-001 - /course/failedcourse

FAIL

Route

Viewport

Time

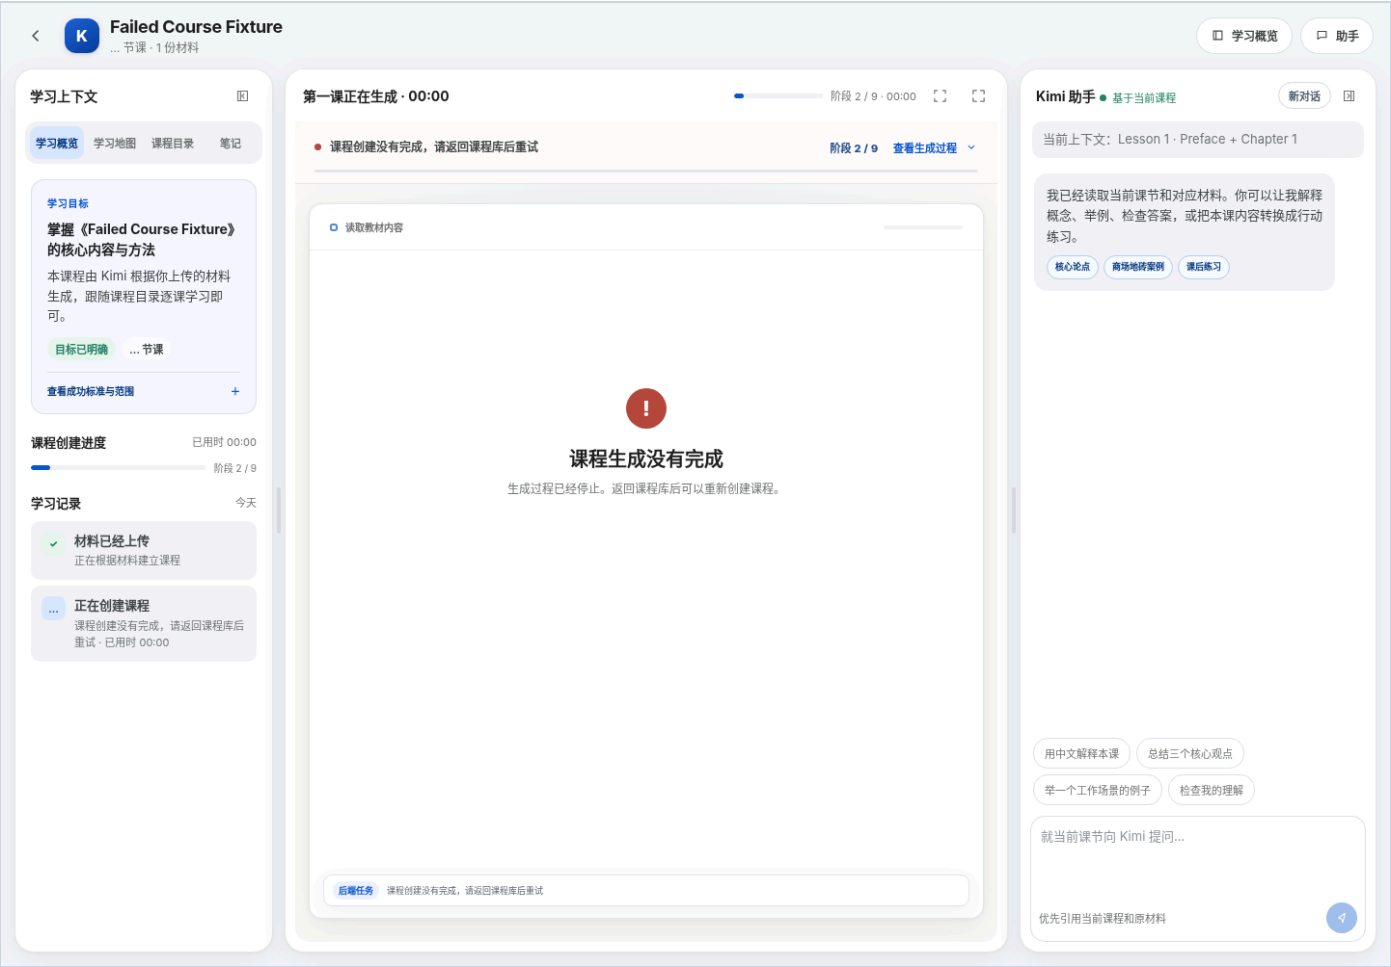

Trigger:

Expected:

Actual:

Explanation: The central preview already shows failure, but the header, compact progress, sidebar, and activity record still indicate running. The same workflow has three primary progress surfaces at once.

Problems:

None

Cross-Region State / Progress Audit

FAIL

The same course entity is simultaneously presented as running and failed, and three workflow_primary progress surfaces are duplicated or conflicting.

Region	Copy	Entity	Progress Role	Label	State Source	Phase	Lifecycle	%	Confidence	Relationship Evidence
top-header	First lesson is being generated · 00:00 (UI: 第一课正在生成 · 00:00)	course: failedcourse	history_only			generating	running		CONFIRMED	
workspace-header	Stage 2 / 9 · 00:00 (UI: 阶段 2 / 9 · 00:00)	course: failedcourse	workflow_primary		generationEvidence(status)	extracting	running	5.0	CONFIRMED	
left-sidebar	Course creation progress · Stage 2 / 9 · Elapsed 00:00 (UI: 课程创建进度 · 阶段 2 / 9 · 已用时 00:00)	course: failedcourse	workflow_primary		generationEvidence(status)	extracting	running	5.0	CONFIRMED	
main-preview	Course creation did not complete; return to the course library and retry (UI: 课程创建没有完成, 请返回课程库后重试)	course: failedcourse	workflow_primary	Course generation progress (UI: 课程生成进度)	KimiGenerationPreview.displayedProgress	extracting	failed	0.0	CONFIRMED	
left-activity	Creating course / Course creation did not complete (UI: 正在创建课程 / 课程创建没有完成)	course: failedcourse	history_only			generating	running		CONFIRMED	

Invariants checked:

- same-entity lifecycle exclusivity
- active phase exclusivity
- progress agreement
- visual-state agreement

- action availability agreement

Conflicts:

None

SS-002 - /course/failedcourse

PASS

Route Viewport Time

Failed Course Fixture

... 节课 · 1 份材料

学习上下文

学习概况 学习地图 课程目录 笔记

学习目标

掌握《Failed Course Fixture》的核心内容与方法

本课程由 Kimi 根据你上传的材料生成，跟随课程目录逐课学习即可。

目标已明确 ... 节课

查看成功标准与范围

课程创建进度

已用时 00:00

阶段 2 / 9

学习记录

今天

材料已经上传

正在根据材料建立课程

正在创建课程

课程创建没有完成，请返回课程库后重试 · 已用时 00:00

第一课正在生成 · 00:00

阶段 2 / 9 · 00:00

课程创建没有完成，请返回课程库后重试

阶段 2 / 9 收起生成过程

可验证的生成过程

这里只展示 Kimi 主动上报的阶段、实际工具调用和文件产物；不会展示或推测隐藏推理。

1 读取教材内容

课程创建没有完成，请返回课程库后重试

失败

2 理解材料结构

尚未收到后端确认

等待

3 确定学习目标

尚未收到后端确认

等待

4 设计练习路线

尚未收到后端确认

等待

5 生成题目候选

尚未收到后端确认

等待

6 筛选题目质量

尚未收到后端确认

等待

7 组装章节

尚未收到后端确认

等待

8 验证互动课程

尚未收到后端确认

等待

课程生成没有完成

生成过程已经终止，当前课程库可以重新创建课程。

后端任务

课程创建没有完成，请返回课程库后重试

Kimi 助手

基于当前课程

新对话

当前上下文: Lesson 1 · Preface + Chapter 1

我已经读取当前章节和对应材料。你可以让我解释概念、举例、检查答案，或把本课内容转换成行动练习。

核心论点

高频地转案例

课后练习

用中文解释本课

总结三个核心观点

举一个工作场景的例子

检查我的理解

就当前章节向 Kimi 提问...

优先引用当前课程和原材料

Trigger:

Expected:

Actual:

Explanation: "View generation process" expands the history; after Escape closes it, focus returns to the trigger.

Problems:

None

Time

None


Region	Copy	Entity	Progress Role	Label	State Source	Phase	Lifecycle	%	Confidence	Relationship Evidence
top-header	Course creation incomplete (UI: 课程创建未完成)	course: failedcourse	history_only			extracting	failed		CONFIRMED	
workspace-header	Creation incomplete · Stage 2 / 9 (UI: 创建未完成 · 阶段 2 / 9)	course: failedcourse	history_only			extracting	failed		CONFIRMED	
left-sidebar	Course creation incomplete · Stopped · Stage 2 / 9 (UI: 课程创建未完成 · 已停止 · 阶段 2 / 9)	course: failedcourse	history_only			extracting	failed		CONFIRMED	
main-preview	Course generation did not complete (UI: 课程生成没有完成)	course: failedcourse	workflow_primary	Course generation progress (UI: 课程生成进度)	KimiGenerationPreview.updateProgress	extracting	failed	5.0	CONFIRMED	
left-activity	Course creation incomplete (UI: 课程创建未完成)	course: failedcourse	history_only			extracting	failed		CONFIRMED	

Invariants checked:

- same-entity lifecycle exclusivity
- active phase exclusivity
- progress agreement
- visual-state agreement
- action availability agreement

Conflicts:

None

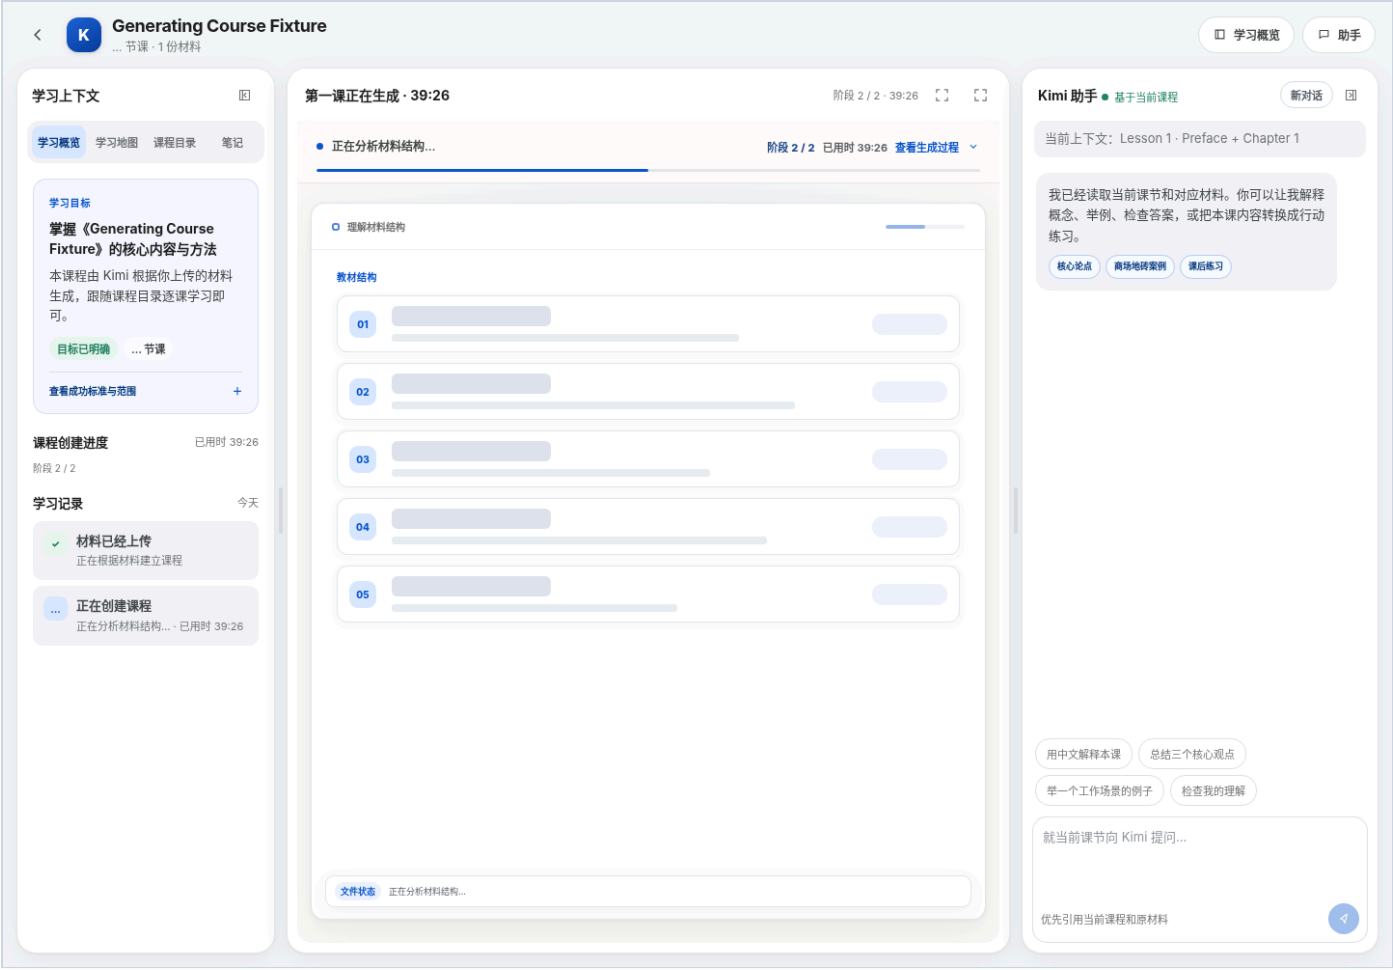

Trigger:

Expected:

Actual:


Explanation: The active state retains generation copy and one central primary progress indicator; header/sidebar visual progress bars are reduced to text summaries.

Problems:

None

SS-005 - /course/readycourse 390x844

PASS

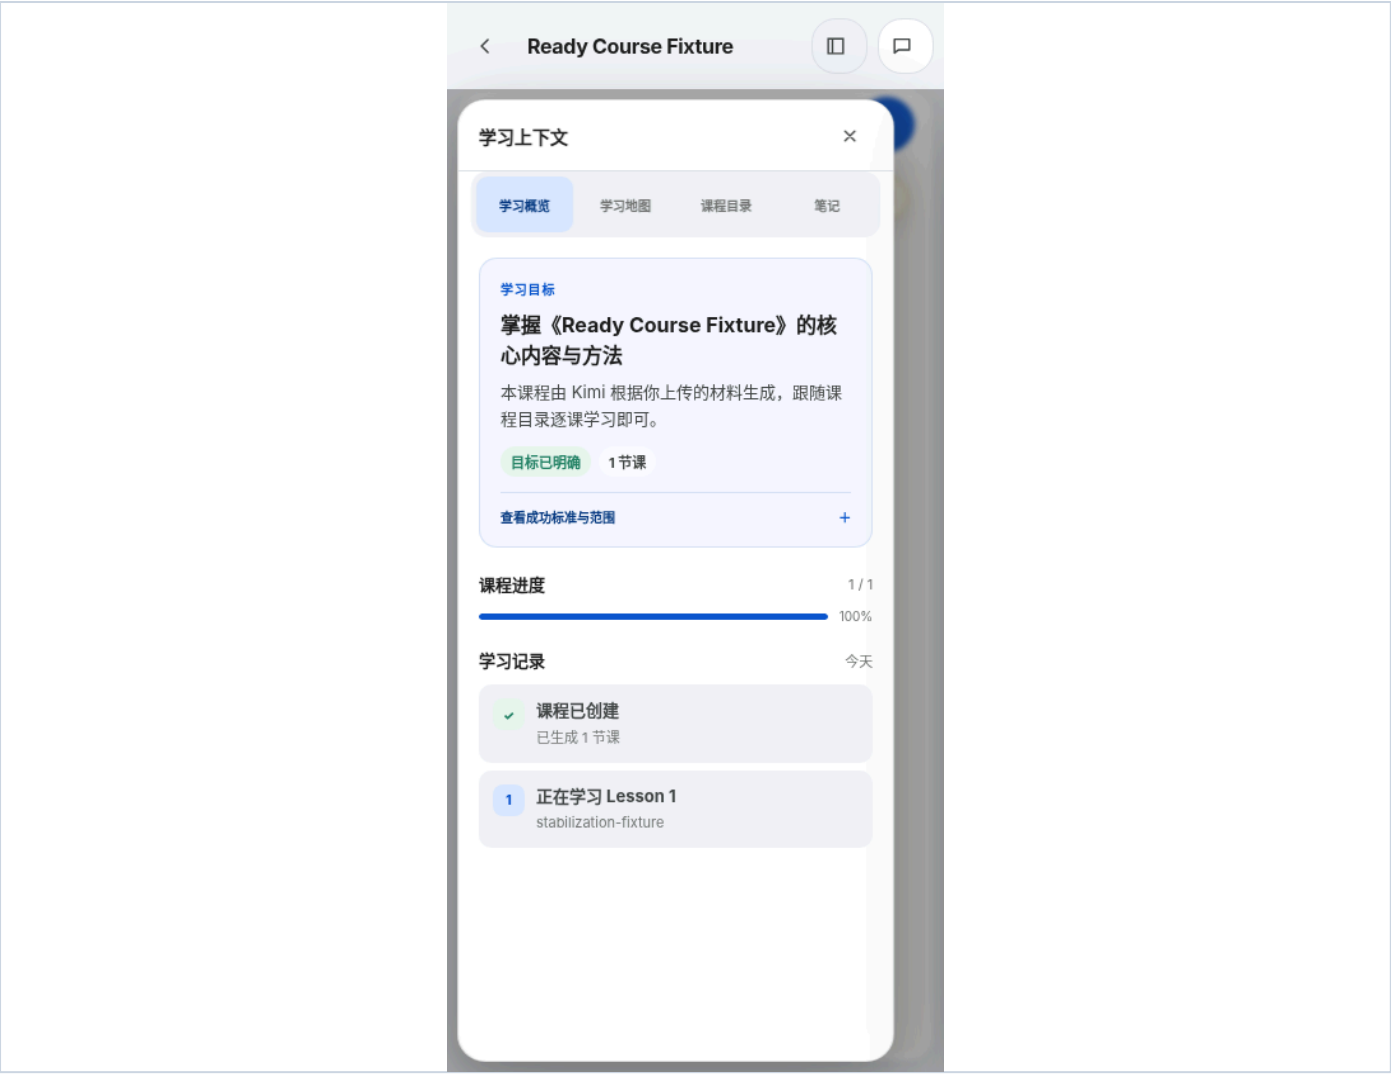

Trigger:

Expected:

Actual:

Explanation: The left drawer, overlay, 44x44 next-lesson touch target, and absence of horizontal overflow were verified.

Problems:

None


SS-006 - /course/readycourse 390x844

PASS

Route

Viewport

Time

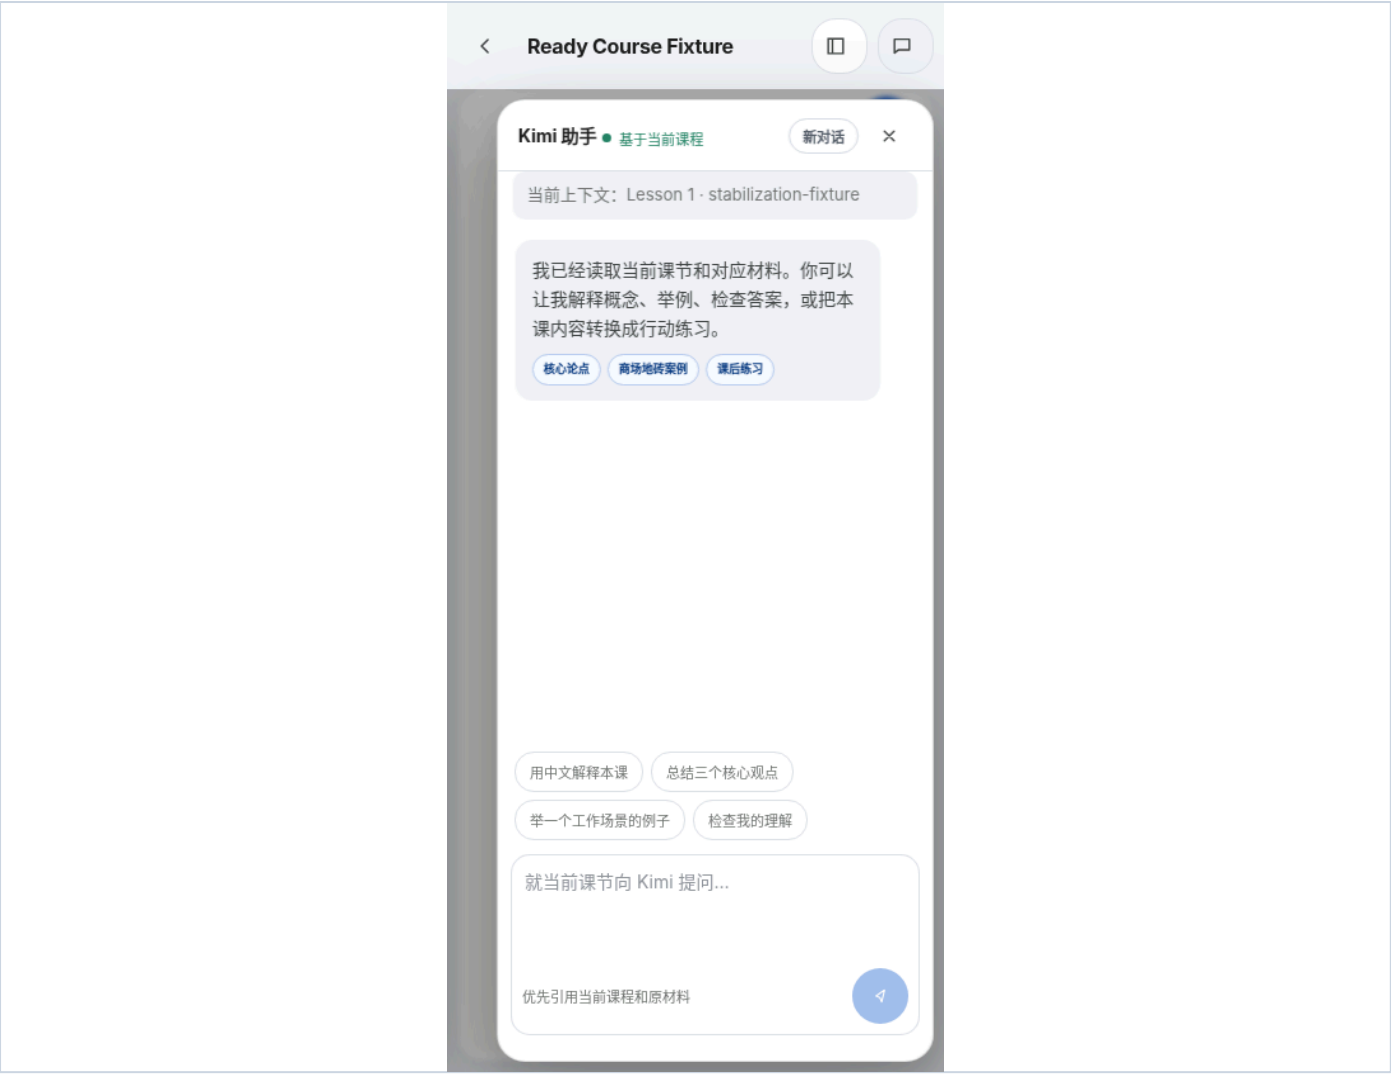

Trigger:

Expected:

Actual:

Explanation: The Assistant drawer is mutually exclusive with Learning Overview; Escape closes it and returns focus to the top Assistant button.

Problems:

None

9. Browser and Network Errors

Type	Page	Message
Environment policy	browser startup	Chromium managed URLBlocklist=["*"] initially blocked all HTTP/HTTPS navigation; child-only policy isolation wrapper restored navigation without modifying system policy.

Type	Page	Message
External dependency	/course/ready course Tutor	POST /api/courses/readycourse/chat -> 500 because kimi executable is absent.
External dependency	/course/failed course Tutor	POST /api/courses/failedcourse/chat -> 500 because kimi executable is absent.
Vendor asset	source viewer	GET /vendor/pdfjs/build/pdf.mjs -> 404 in compatibility runtime because npm installation was unavailable.

10. Blocked and Untested Scope

Path	Reason
App / Account header controls	No documented or implemented expected outcome; marked BLOCKED rather than inventing a verdict.
Tutor quick prompts and non-empty Send	Requires real Kimi CLI; local API produced explicit 500/ENOENT.
Generate next lesson success	Requires real Kimi CLI; failure recovery was observable, success/new lesson was not.
PDF/EPUB source success rendering	Vendor packages could not be installed due registry/network failures.

11. Improvement Roadmap

Immediate

Priority	Findings	Action	Responsible Area	Effort	Dependency	Acceptance	Verification Command
P0	F-001	Apply F-001.patch and keep failed state atomic across all surfaces	generation state owner / frontend	S	none	- failed first frame has no running/busy surfaces - one primary progress bar - API progress reflected	python tests/e2e_py/generation_failure_chrome_test.py --base-url http://127.0.0.1:3108 --browser <chromium>
P0		Run Tutor/next-lesson integration gates with a sanctioned Kimi test binary before release (The verification command retains the original Chinese UI grep term.)	AI runtime integration	M	Kimi CLI fixture/test credential	- quick prompts and Send return Markdown answer - next lesson adds exactly one lesson - error path remains retryable	npm run test:e2e -- --grep "Tutor 下一课"

Short Term

Priority	Findings	Action	Responsible Area	Effort	Dependency	Acceptance	Verification Command
P1	F-001	Introduce one GenerationProgressView Model selector consumed by every renderer	state architecture	M	F-001 merged	- no renderer writes generation DOM independently - completion/failure transition is atomic	npm run test && npm run test:e2e -- --grep generation

Pri ori ty	Fin din gs	Action	Resp onsibl e Area	Eff ort	Depe nden cy	Acceptance	Verification Command
P1		Define behavior contracts for App and Account header controls or remove them	produ ct + fronte nd	S	produ ct decisi on	each control has destination/state/permission/error behavior and E2E assertion	npm run test:e2e -- --grep header

Long Term

Pri ori ty	Fin din gs	Action	Respon sible Area	Eff ort	Depen dency	Acceptance	Verification Command
P2	F-001	Add screenshot/state-snapshot invariant tests for every terminal lifecycle	quality engineer ing	M	canonic al state selector	- ready/failed/interrupted screenshots reconcile header/sidebar/main/actions - duplicate primary progress automatically fails CI	npm run test:e2e -- --grep "terminal state"
P2		Vendor/cache browser and document-reader dependencies for hermetic CI	develop er experien ce / CI	M	artifact registry	- npm install is not internet-dependent - PDF/EPUB smoke tests run offline	npm ci --offline && npm run test:e2e -- --grep source

12. Final Conclusion

Local E2E Completed	True
Release Decision	NO_GO
Reason	The original ZIP contains an S2 failed-terminal-state conflict; 14 controls that depend on external systems or undefined behavior are also BLOCKED. The repair candidate was verified but has not been applied to the user's original package.
Highest Severity	S2 Major

First Patch / Blocker	evidence/patches/F-001.patch
Next Action	Apply F-001.patch first, then rerun the Tutor, next-lesson, and Source Viewer integration gates in an environment with the Kimi CLI and complete vendor dependencies.

Residual Risk

- The AI success paths in this report have no evidence from real model responses.
- The compatibility layer is for isolated testing only and does not replace execution with the official npm dependencies.
- The ZIP contains no Git commit; provenance can only be fixed by SHA-256.
- The original ZIP was not modified; the repair exists only in the repair-worktree and patch file.