



Mayao, Armhel G.
BSIS - 3A

PART 1:
Git Commands

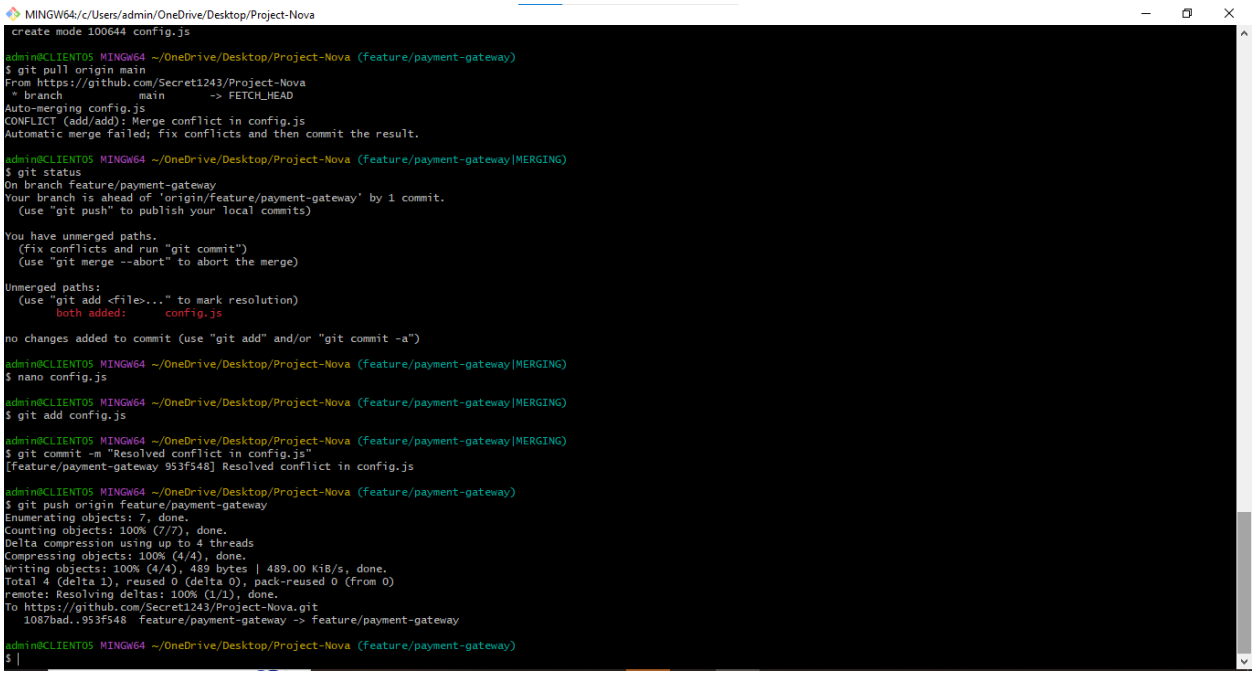

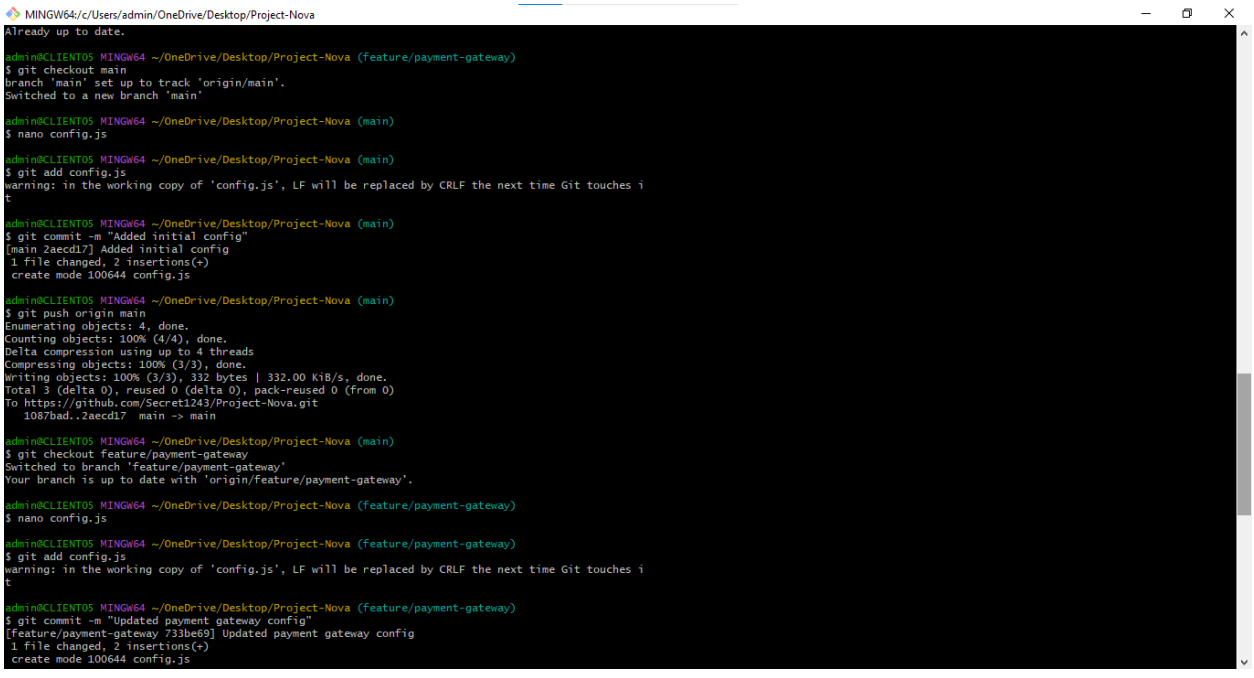

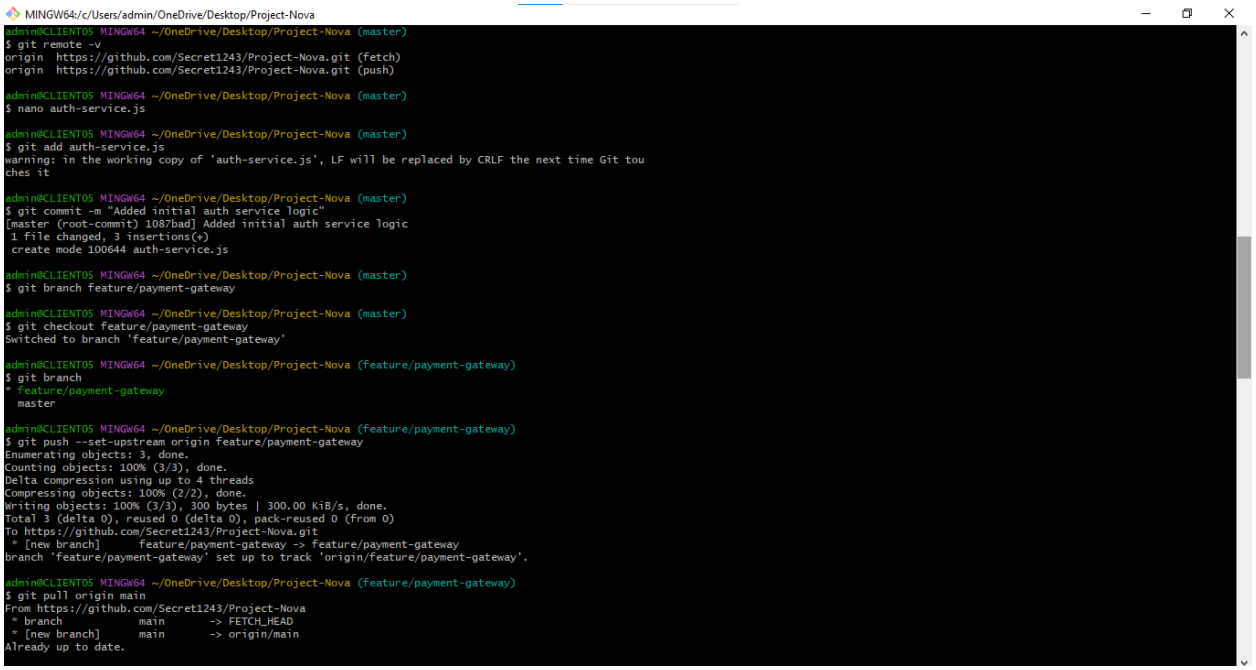

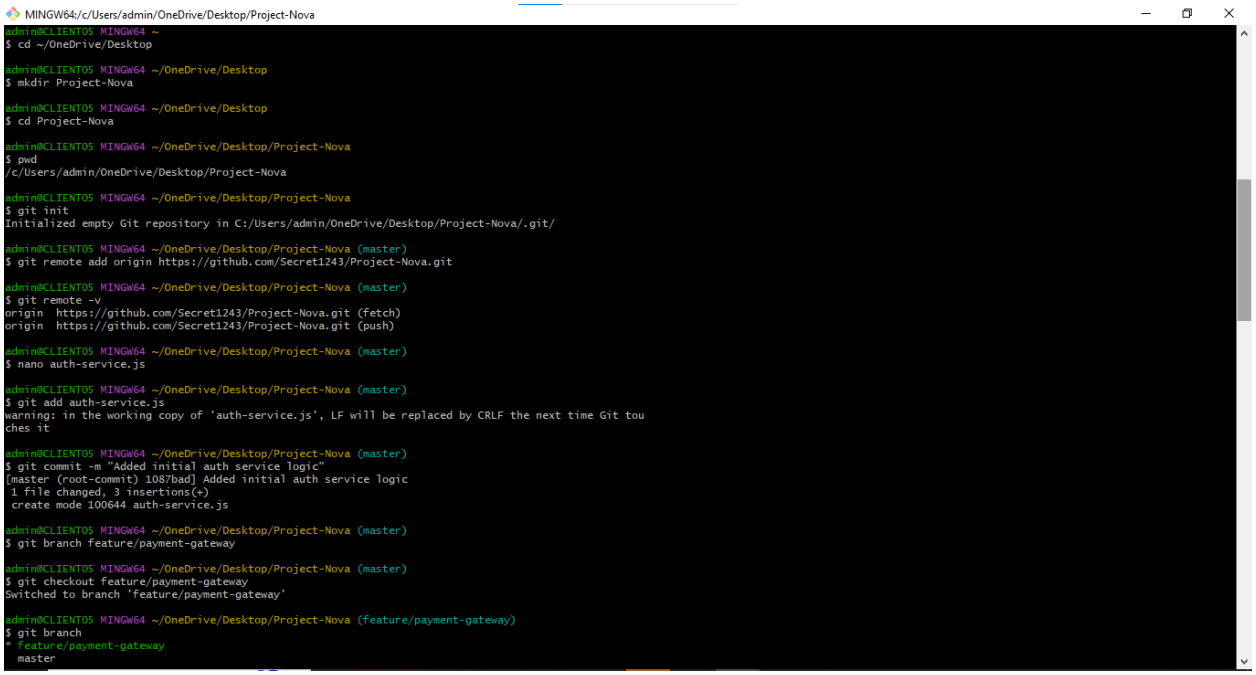

PART 2:

1. **Command:** git restore --staged .env
   Explanation: Removes .env from the staging area but keeps the file and its local changes. It does not delete the file. This command alone does not prevent accidentally committing .env later; add it to .gitignore if it should remain untracked.

2. **Command:** git commit --amend -m "Fixed authentication typo"
   Explanation: Replaces the most recent commit message with the corrected message without creating an additional commit. Use this when the commit has not been pushed.

3. **Commands:** git add styles.css, git commit --amend --no-edit
   Explanation: Stages the forgotten CSS file and adds it to the previous commit without changing that commit's message.

4. **Command:** git restore index.html
   Explanation: Discards unstaged changes in index.html and restores the version from the index (normally the last staged or committed version). This is destructive; any uncommitted edits to that file will be lost.

5. **Commands:** git branch new-feature, git reset HEAD~3 --hard, git checkout new-feature
   Explanation: Creates new-feature pointing to the current commit, moves HEAD back three commits on main, then switches to the new branch containing those commits.
   Caution: git reset --hard discards uncommitted changes and moves the current branch pointer. This assumes the three commits are the latest commits on main and have not been pushed. Verify your branch and history before running it.

6. **Command:** git switch -c recovery-branch
   Explanation: Creates and switches to a new branch at the current commit, preserving the commits made while in detached HEAD state.

7. **Command:** git revert <buggy-commit-hash>
   Explanation: Creates a new commit that reverses the changes from the specified commit. This preserves shared history, making it safer for a shared branch than resetting and force-pushing.

8. **Commands:** git reflog, git branch feature-x <commit-hash>
   Explanation: Uses the reflog to find the deleted branch's last commit, then recreates the branch at that commit. Replace feature-x with the actual deleted branch name and <commit-hash> with its recovered commit hash.

9. **Command:** git add -u
   Explanation: Stages modifications and deletions of tracked files, but does not stage new untracked files. The staged deletions will be recorded when you commit.

10. **Command:** git push origin --delete testing-junk
    Explanation: Deletes the testing-junk branch from the remote repository on GitHub. It does not delete your local branch with that name.