Fluency report component gallery

Every chart, table and component a Fluency report may use, each shown with the exact helper call that draws it. This page is generated from fluency_brand.py and is the source of truth.

fluency-report skill · scripts/fluency_brand.py · 29 components · Generated 05 Nov 2026

§1

Rules


- Use only these helpers. Do not hand-write SVG, Chart.js or inline bar markup in a report script.
- Palette: ink #111, text #242424, gray #777, rules #d8d8d8, red #b3242e, blue #175d9a, amber #a06c00. Colour carries meaning, never decoration.
- Every chart gets a one-line gray footnote saying what it shows. A day or bucket with no data is a hatched gap, never zero.
- To add a component: write it in fluency_brand.py, add an entry to ENTRIES in chart_gallery.py, regenerate this file.

§2

Charts

Column chart


One measure over time or across categories. One series is blue. Values print above columns when there are 16 or fewer.

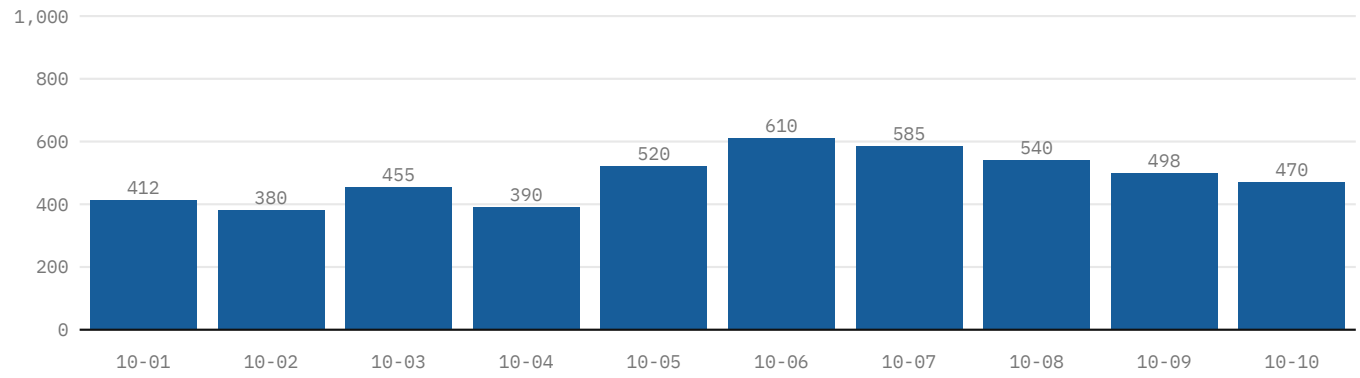


```
fb.column_chart(DAYS[:10], [412, 380, 455, 390, 520, 610, 585, 540, 498, 470], y_label="Sign-ins per day")
```

Column chart with a gap day


A day with no data is a hatched gap (None), never a zero column. Use it for every per-day series from an archive.

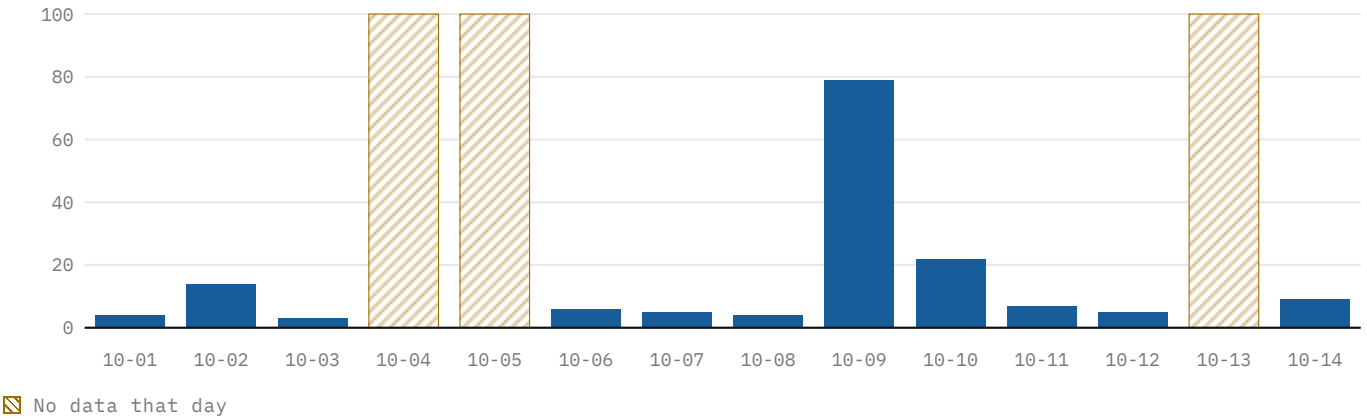


```
fb.column_chart(DAYS, [("Admin operations", [4, 14, 3, None, None, 6, 5, 4, 79, 22, 7, 5, None, 9])],
show_values=False, y_label="Admin operations per day")
```

Grouped columns


Compare two to four categories over the same x axis. Series run black, blue, gray, amber, red.

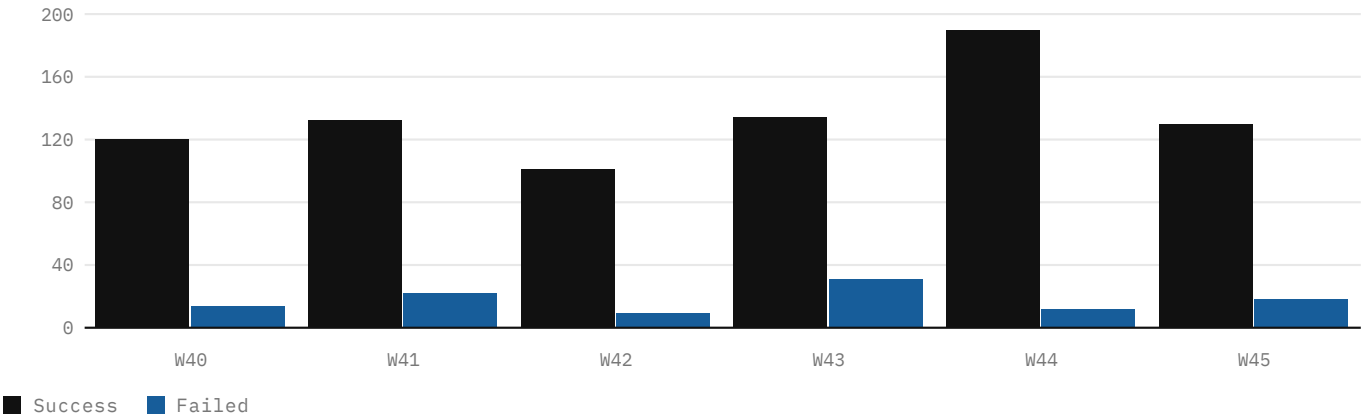


```
fb.column_chart(WEEK, [("Success", [120, 132, 101, 134, 190, 130]), ("Failed", [14, 22, 9, 31, 12, 18])],
mode="group")
```

Stacked columns


A total split by status; the total prints above each column. Pass colors= to give the parts meaning (blue ok, red failed).

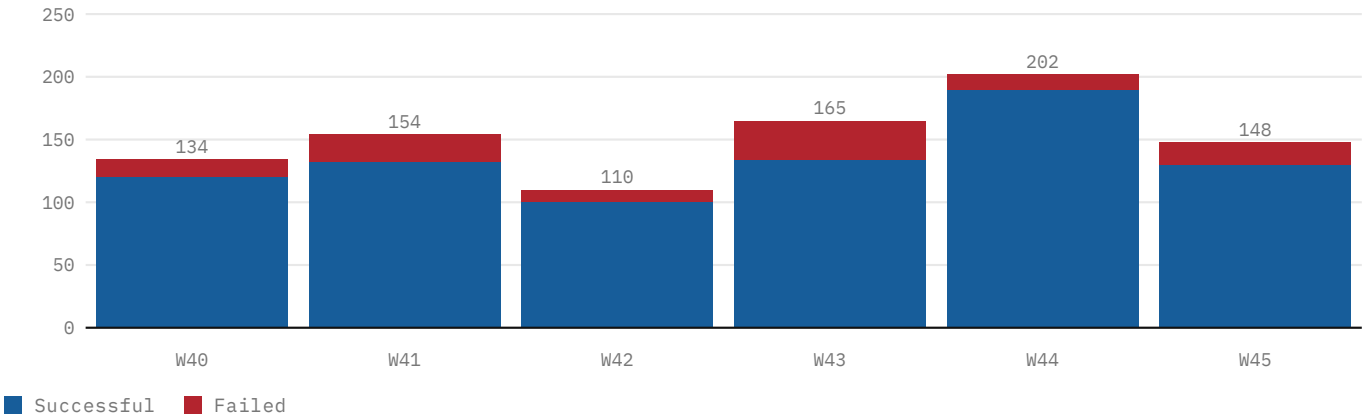


```
fb.column_chart(WEEK, [("Successful", [120, 132, 101, 134, 190, 130]), ("Failed", [14, 22, 9, 31, 12, 18])],
mode="stack", colors=["#175d9a", "#b3242e"])
```

Stacked columns by severity


Findings per day by band. Low blue, Medium amber, High red.

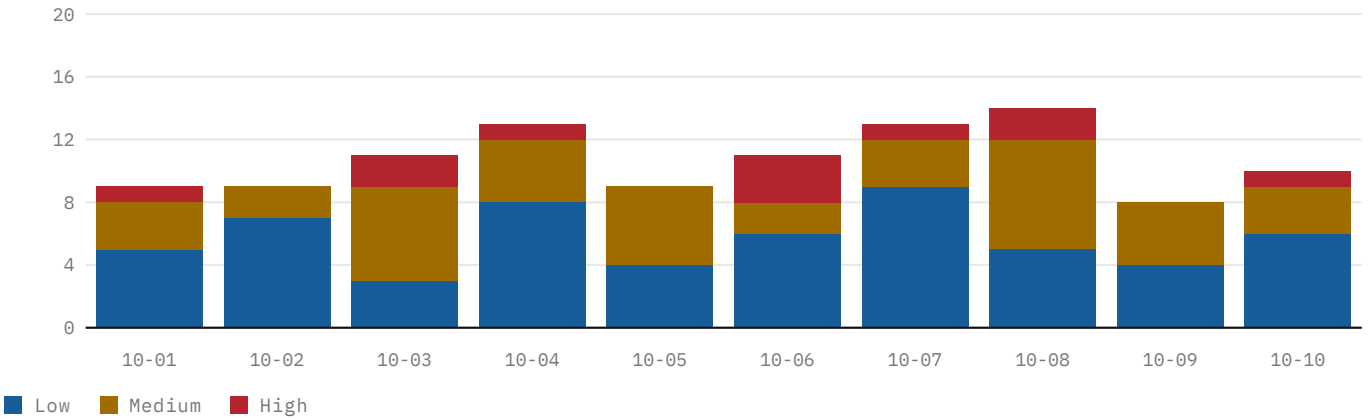


```
fb.column_chart(DAYS[:10], [("Low", [5, 7, 3, 8, 4, 6, 9, 5, 4, 6]), ("Medium", [3, 2, 6, 4, 5, 2, 3, 7, 4, 3]),
("High", [1, 0, 2, 1, 0, 3, 1, 2, 0, 1])], mode="stack", colors=["#175d9a", "#a06c00", "#b3242e"],
show_values=False)
```

Bar rows


A ranked list: the leading bar is blue, the rest gray. Use for top-N and distributions.

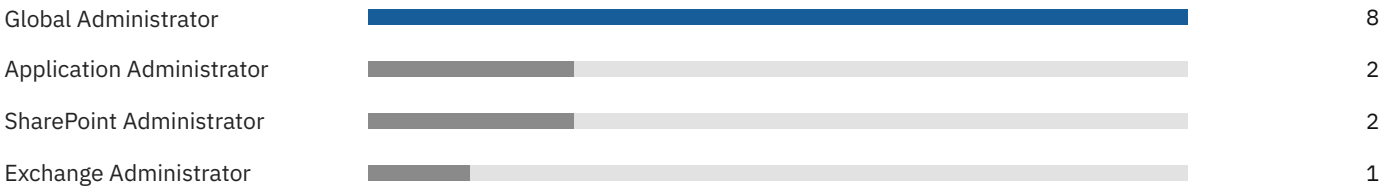


```
fb.bar_rows([("Global Administrator", 8), ("Application Administrator", 2), ("SharePoint Administrator", 2),
("Exchange Administrator", 1)])
```

Bar rows with meaning


A third element colours one bar by meaning (red critical, amber review); a fourth replaces the printed value.

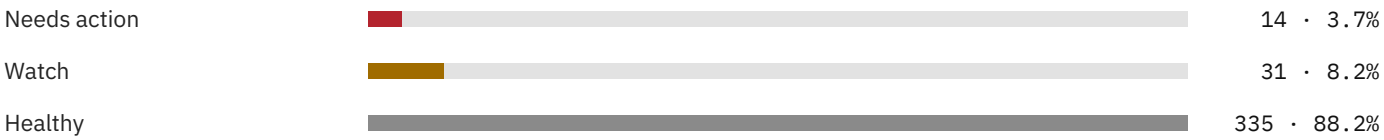


```
fb.bar_rows([("Needs action", 14, "#b3242e", "14 · 3.7%"), ("Watch", 31, "#a06c00", "31 · 8.2%"), ("Healthy", 335,
None, "335 · 88.2%")])
```

Grouped bars


Two measures per row, for example sent and received by host.

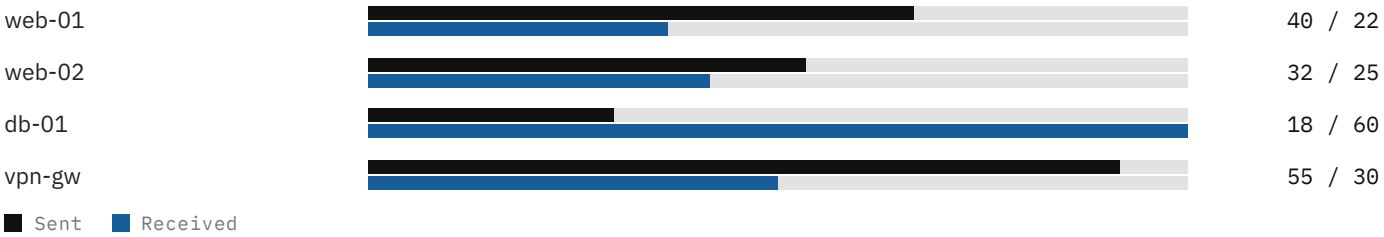


```
fb.bars_multi(["web-01", "web-02", "db-01", "vpn-gw"], [("Sent", [40, 32, 18, 55]), ("Received", [22, 25, 60, 30])],
mode="group")
```

Stacked bars


A total per row split by status.

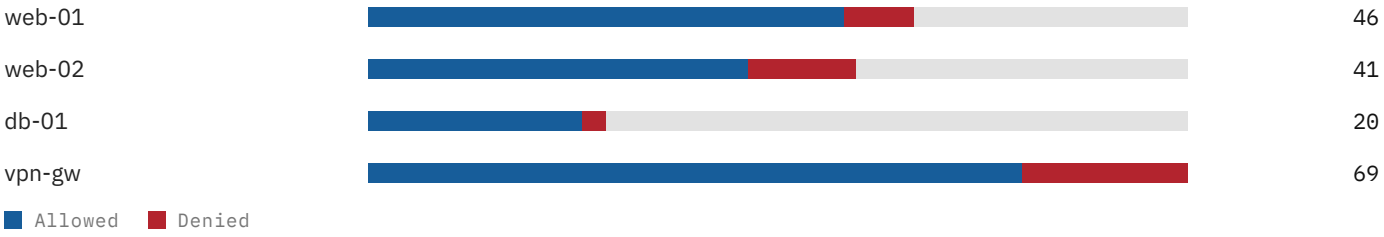


```
fb.bars_multi(["web-01", "web-02", "db-01", "vpn-gw"], [("Allowed", [40, 32, 18, 55]), ("Denied", [6, 9, 2, 14])],
mode="stack", colors=["#175d9a", "#b3242e"])
```

Line chart


A time series where the shape matters more than each value. Up to six series.

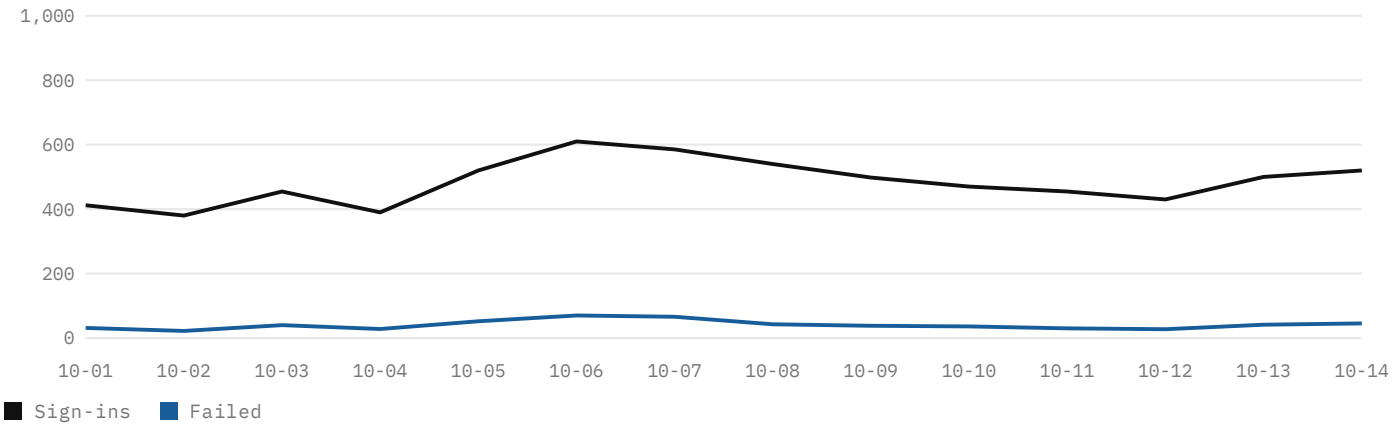


```
fb.line_chart(DAYS, [("Sign-ins", [412, 380, 455, 390, 520, 610, 585, 540, 498, 470, 455, 430, 500, 520]),
("Failed", [31, 22, 40, 28, 52, 70, 66, 43, 38, 36, 30, 27, 41, 45])])
```

Scatter plot

Two measures per item, optionally grouped. Example: exploitable CVEs against days since last seen.

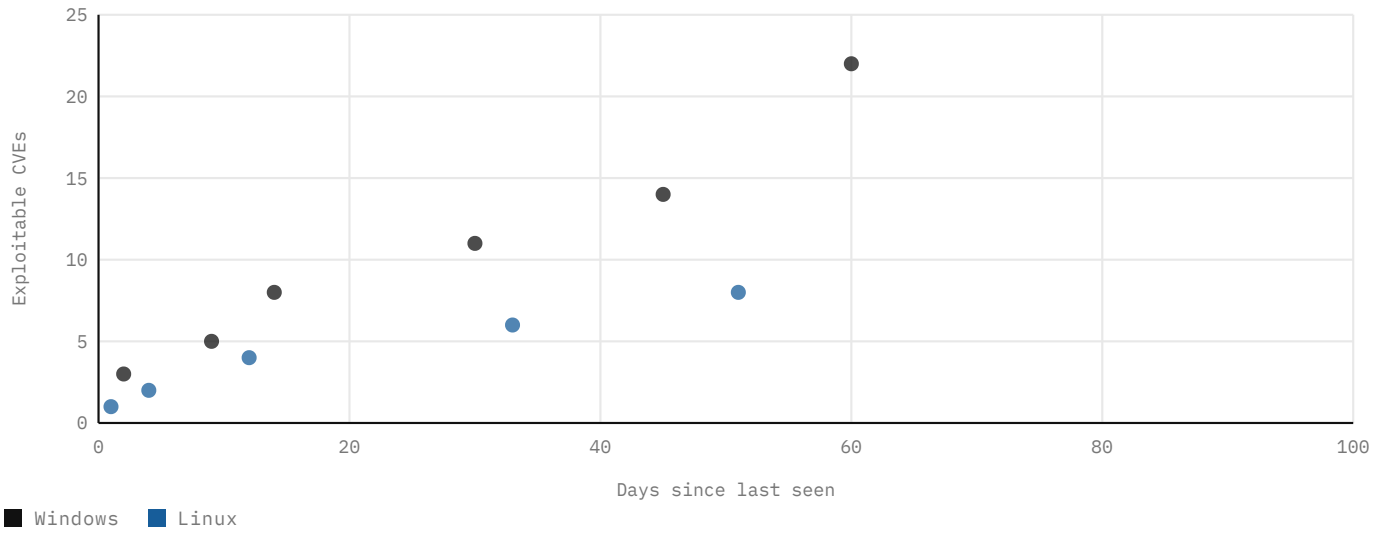


```
fb.scatter({"Windows": [(2, 3), (9, 5), (14, 8), (30, 11), (45, 14), (60, 22)], "Linux": [(1, 1), (4, 2), (12, 4),
(33, 6), (51, 8)]}, x_label="Days since last seen", y_label="Exploitable CVEs")
```

Heatmap

Two-dimensional counts (day by hour, user by application). tone: blue, gray, red or amber.

DAY / HOUR	00	04	08	12	16	20
Mon		2	30	44	38	5
Tue	1	3	41	52	47	6
Wed		2	36	49	40	9
Thu	2	4	33	41	35	3
Fri		1	20	28	19	2

```
fb.heatmap(["Mon", "Tue", "Wed", "Thu", "Fri"], ["00", "04", "08", "12", "16", "20"], [[0, 2, 30, 44, 38, 5], [1, 3, 41, 52, 47, 6], [0, 2, 36, 49, 40, 9], [2, 4, 33, 41, 35, 3], [0, 1, 20, 28, 19, 2]], tone="blue", row_header="Day / hour")
```

Risk matrix

A labelled two-axis grid with banded fills (likelihood by impact). level() returns 0 to 3.

LIKELIHOOD 1 → 5


	1	2	3	4	5
5				R3	
4				R1 R7	
3			R2		
2		R5			
1			R4		

IMPACT 1 → 5

```
fb.matrix_grid({(5, 4): "R3", (4, 4): "R1 R7", (3, 3): "R2", (2, 2): "R5", (1, 3): "R4"}, level=lambda L, I: 3 if L * I >= 18 else 2 if L * I >= 11 else 1 if L * I >= 6 else 0, row_title="LIKELIHOOD 1 → 5", col_title="IMPACT 1 → 5")
```

Donut

Part to whole with up to five parts. Use palette colours only.

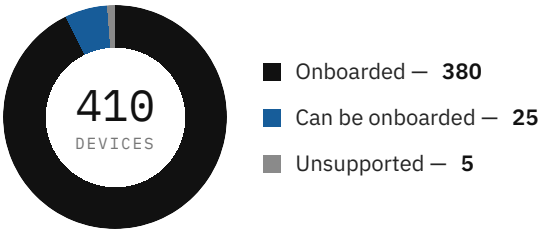


```
fb.donut([("Onboarded", 380, "#111111"), ("Can be onboarded", 25, "#175d9a"), ("Unsupported", 5, "#8a8a8a")], center_big="410", center_cap="devices")
```

Segment bar

One proportional strip with a legend, for coverage splits where a donut is too heavy.



Onboarded: 380 Can be onboarded: 25 Insufficient information: 10 Unsupported: 5

```
fb.segment_bar([("Onboarded", 380), ("Can be onboarded", 25), ("Insufficient information", 10), ("Unsupported", 5)])
```

Part-to-whole bar

Two-way split, for example MFA coverage.




331 with MFA 275 password only

```
fb.stack_bar(54.6, "331 with MFA", "275 password only")
```

Gauge

A single score out of a maximum, with one line of interpretation.



Posture score

Above the 60 baseline; MFA coverage is the main gap.

```
fb.gauge(72, label="score", heading="Posture score", text="Above the 60 baseline; MFA coverage is the main gap.")
```

Sparkline

A tiny trend for a table cell or KPI.



```
fb.sparkline([3, 5, 4, 9, 12, 10, 14])
```

§3

Tables

Data table

Mono caps header over a black rule, thin gray row rules, right-aligned mono numbers, a bold total row and a footnote. Cells are escaped unless their column is in raw_cols.

ACCOUNT	ROLES HELD	PRIMARY ROLES (TOP 2)
admin-a	2	Global Administrator · SharePoint Administrator
admin-b	10	AI Administrator · Exchange Administrator 10 ROLES
Total	**12**	

Account labels are placeholders. Role counts are exact.

```
fb.table(["Account", "Roles held", "Primary roles (top 2)"], [["admin-a", "2", "Global Administrator · SharePoint Administrator"], ["admin-b", "10", "AI Administrator · Exchange Administrator " + fb.tag("10 roles", "red")], ["Total", "12", ""]], widths=["22%", "14%", "64%"], num_cols=(1,), raw_cols=(2,), total_last=True, foot="Account labels are placeholders. Role counts are exact.")
```

Table with severity bars

row_class() puts a coloured bar on the first cell: sev-high (red), sev-med (amber), sev-low (blue).

HOST	STATUS	WHY
WS-016	NEEDS ACTION	stale; exploitable CVE
WS-021	WATCH	silent 10 days
WS-030	HEALTHY	none

```
fb.table(["Host", "Status", "Why"], [["WS-016", fb.tag("Needs action", "red"), "stale; exploitable CVE"], ["WS-021", fb.tag("Watch", "amber"), "silent 10 days"], ["WS-030", fb.tag("Healthy", "o-blue"), "none"]], num_cols=(), raw_cols=(1,), row_class=lambda r: "sev-high" if "Needs action" in r[1] else "sev-med" if "Watch" in r[1] else "sev-low")
```

Table with sparkline

A trend in the last column.

APPLICATION	EVENTS	14-DAY TREND
Exchange	11,746	
Teams	330	

```
fb.table(["Application", "Events", "14-day trend"], [["Exchange", "11,746", fb.sparkline([3, 5, 4, 9, 12, 10, 14])], ["Teams", "330", fb.sparkline([9, 8, 7, 5, 4, 3, 3], color="#b3242e")]], num_cols=(1,), raw_cols=(2,))
```

§4

Components

KPI strip

Four or five cells: big mono number, mono caps label, optional status tag. Colour a number only when it is the finding.

606	54.6%	8	100%	3 / 5
ACTIVE ACCOUNTS	MFA COVERAGE	GLOBAL ADMINS	OAUTH-APP REACH	AUDIT TESTS CLEAN
	275 WITHOUT MFA	BASELINE ≤ 2	REVIEW CONSENT	NO ACTION

```
fb.kpi_strip([fb.kpi("Active accounts", 606), fb.kpi("MFA coverage", "54.6%", color="red", tag=fb.tag("275 without MFA", "red")), fb.kpi("Global admins", 8, tag=fb.tag("Baseline ≤ 2", "blue")), fb.kpi("OAuth-app reach", "100%", tag=fb.tag("Review consent", "amber")), fb.kpi("Audit tests clean", "3 / 5", tag=fb.tag("No action", "o-blue"))])
```

Three-column band

What is exposed, what is already right, what to fix first.

01 — WHAT IS EXPOSED	02 — WHAT IS ALREADY RIGHT	03 — WHAT TO FIX FIRST
275 active accounts sign in with a password only.	No phishable MFA factors.	Cut Global Administrators to two named accounts.

```
fb.band([("01 — What is exposed", "275 active accounts sign in with a password only."), ("02 — What is already right", "No phishable MFA factors."), ("03 — What to fix first", "Cut Global Administrators to two named accounts.")])
```

Callouts

Gray box with a coloured left border: good (blue), watch (amber), act (red).

READING NOTE

Read the MFA figure with two caveats

Zero weak-factor findings does not prove that Conditional Access enforces MFA at sign-in.

REVIEW

Consent is broad

Every user can consent to third-party apps.

ACT

Global admins above baseline

Eight accounts hold Global Administrator; the baseline is two.

```
fb.callouts([fb.callout("good", "Reading note", "Read the MFA figure with two caveats", "Zero weak-factor findings does not prove that Conditional Access enforces MFA at sign-in."), fb.callout("watch", "Review", "Consent is broad", "Every user can consent to third-party apps."), fb.callout("act", "Act", "Global admins above baseline", "Eight accounts hold Global Administrator; the baseline is two.")])
```

Net read

The one black box per report, at the end of the executive summary.

Net read

Where MFA exists it is strong; the gap is coverage, not quality.

```
fb.netread("Net read", "Where MFA exists it is strong; the gap is coverage, not quality.")
```

Status tags

Filled red or blue for a problem or baseline, outlined amber for review, o-blue for clean, gray for unknown. Priority tags p1 red, p2 amber, p3 gray.

275 WITHOUT MFA BASELINE REVIEW CLEAN UNKNOWN P1 P2 P3


```
fb.tag("275 without MFA", "red") + " " + fb.tag("Baseline", "blue") + " " + fb.tag("Review", "amber") + " " + fb.tag("Clean", "o-blue") + " " + fb.tag("Unknown", "gray") + " " + fb.priority("P1") + " " + fb.priority("P2") + " " + fb.priority("P3")
```

Panel

A titled block for charts that sit side by side (col is the grid span out of 12).

Alerts by severity

LAST 30 DAYS

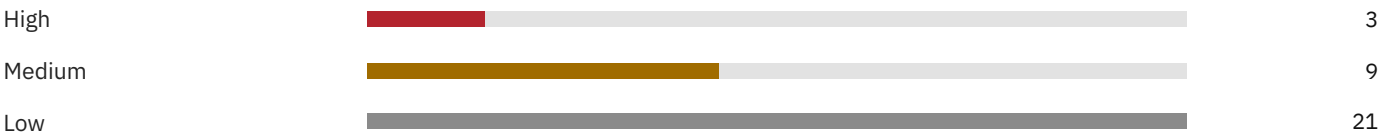


```
fb.panel("Alerts by severity", fb.bar_rows([("High", 3, "#b3242e"), ("Medium", 9, "#a06c00"), ("Low", 21)]), col=12,
subtitle="Last 30 days")
```

Recommended actions

P1 this week, P2 within 14 days, P3 quarterly.

Recommended actions

THIS WEEK — ADMINS	P1	Cut Global Administrators to two named accounts with break-glass.
WITHIN 14 DAYS — MFA	P2	Enforce MFA through Conditional Access.
QUARTERLY — HYGIENE	P3	Review guest lifecycle.

```
fb.next_steps([("This week — admins", "Cut Global Administrators to two named accounts with break-glass.", "P1"),
("Within 14 days — MFA", "Enforce MFA through Conditional Access.", "P2"), ("Quarterly — hygiene", "Review guest
lifecycle.", "P3")])
```

Methodology

Source, window, how figures were derived, limits.

Methodology

Read-only configuration snapshot taken 05 Nov 2026. Counts are exact; percentages are rounded to one decimal.

```
fb.methodology("<p>Read-only configuration snapshot taken 05 Nov 2026. Counts are exact; percentages are rounded to
one decimal.</p>")
```