

#### Welcome to

# Suricata, Zeek and DNS Capture

An Evening with Packets

Henrik Kramselund he/him han/ham hkj@zencurity.com @kramse **YO** 

Slides are available as PDF, kramse@Github suricatazeek-workshop.tex in the repo security-courses

#### Goal





Spend an evening using automated packet dissecting tools, multiple tools:

Try different ways to parse packets

Try The Zeek Network Security Monitor

Try Suricata a network threat detection engine

How to get started using packet capture tools in an enterprise

We try to do a lot, feel free to focus on specific parts

# Packet sniffing tools



Tcpdump for capturing packets

Wireshark for dissecting packets manually with GUI

Zeek Network Security Monitor

Snort, old timer Intrusion Detection Engine (IDS)

Suricata, modern robust capable of IDS and IPS (prevention)

ntopng High-speed web-based traffic analysis

Maltrail Malicious traffic detection system https://github.com/stamparm/MalTrail

Often a combination of tools and methods used in practice

Full packet capture big data tools also exist

### Kali Linux the pentest toolbox






Kali http://www.kali.org/ brings together 100s of tools 100.000s of videos on YouTube alone, searching for kali and \$TOOL

Use this to generate bad traffic

### Hackerlab setup





- Hardware: most modern laptop CPUs have virtualization support
   May need to enable it in BIOS
- Software: use your favorite operating system, Windows, Mac, Linux
- Virtualization software: VMware, Virtual box, choose your poison
- Hackersoftware: Kali as a Virtual Machine https://www.kali.org/
- Install sniffing VM put into *bridge mode*

# Your lab setup



• Go to GitHub, Find user Kramse, click through security-courses, courses, suricatazeek and download the PDF files for the slides and exercises:

https://github.com/kramse/security-courses/tree/master/courses/networking/suricatazeek-workshop

• Get the lab instructions, from

https://github.com/kramse/kramse-labs/tree/master/suricatazeek





Now lets do the exercise

# Check your VM, run Ansible

which is number 1 in the exercise PDF.

### What happens today?



Think like a blue team member find hacker traffic

Get basic tools running

Improve situation

- See where the data end up
- What kind of data and metadata can we extract
- How can we collect and make use of it
- Databases and web interfaces, examples shown
- Consider what your deployment could be

Today focus on the lower parts, but user interfaces are important too

# **Security devops**



We need devops skillz in security automate, security is also big data integrate tools, transfer, sort, search, pattern matching, statistics, ... tools, languages, databases, protocols, data formats

Use GitHub! So many libraries and programs that can help, maybe solve 90% of your problem, and you can glue the rest together


Example introductions:

- Seven languages/database/web frameworks in Seven Weeks
- Elasticsearch the definitive guide

We are all Devops now, even security people!

# **Internet today**



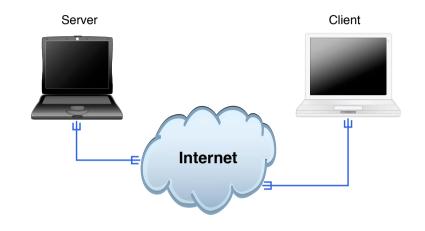

Clients and servers

Roots in academia

Protocols more than 20 years old

HTTP is becoming encrypted, but a lot other traffic is not

#### **OSI** and Internet models



OSI Reference Model

Application

Presentation

Session

Transport

Network

Link

Physical

Internet protocol suite

Applications	NFS
HTTP, SMTP, FTP,SNMP,	XDR
	RPC
TCP UDP	
IPv4 IPv6 ICMPv6 <sub>ICMP</sub>	
ARP RARP MAC	
Ethernet token-ring ATM	

# **Using Wireshark**



```
http-example.cap
  Apply a display filter ... <%/>
                172.24.65.102 91.102.91.18
                                                            58816 → http [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=16 TSval=745562412 TSecr=0 SACK PERM...
  1 0.000000
  2 0.000170
                172.24.65.102 91.102.91.18 TCP
                                                            58817 - http [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=16 TSval=745562412 TSecr=0 SACK_PERM...
  3 0.127053
                               172,24,65,102 TCP
                                                            http - 58816 [SYN, ACK] Seg=0 Ack=1 Win=16384 Len=0 MSS=1460 SACK PERM=1 WS=8 TSval=18552...
                91.102.91.18
  4 0.127167
                91.102.91.18
                                172.24.65.102 TCP
                                                            http → 58817 [SYN, ACK] Seq=0 Ack=1 Win=16384 Len=0 MSS=1460 SACK_PERM=1 WS=8 TSval=25124...
  5 0.127181
               172.24.65.102 91.102.91.18 TCP
                                                            58816 - http [ACK] Seq=1 Ack=1 Win=131760 Len=0 TSval=745562538 TSecr=1855239975
  6 0.127226
                 172.24.65.102 91.102.91.18 TCP
                                                            58817 - http [ACK] Seg=1 Ack=1 Win=131760 Len=0 TSval=745562538 TSecr=2512433851
 8 0 141320
                91 102 91 18 172 24 65 102 HTTP
                                                            HTTP/1.1 304 Not Modified
 9 0.141421 172.24.65.102 91.102.91.18 TCP
                                                            58816 → http [ACK] Seq=503 Ack=190 Win=131568 Len=0 TSval=745562551 TSecr=1855239975
Frame 7: 568 bytes on wire (4544 bits), 568 bytes captured (4544 bits)
► Ethernet II, Src: Apple 6c:87:5e (7c:d1:c3:6c:87:5e), Dst: Cisco 32:09:30 (44:2b:03:32:09:30)
▶ Internet Protocol Version 4, Src: 172.24.65.102 (172.24.65.102), Dst: 91.102.91.18 (91.102.91.18)
Transmission Control Protocol, Src Port: 58816 (58816), Dst Port: http (80), Seq: 1, Ack: 1, Len: 502
 Hypertext Transfer Protocol
  ► GET / HTTP/1.1\r\n
    Host: 91.102.91.18\r\n
    Connection: keep-alive\r\n
    Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8\r\n
    User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10 9 2) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/33.0.1750.146 Safari/537.36\r\n
    Accept-Encoding: gzip,deflate.sdch\r\n
    Accept-Language: en-US,en;q=0.8,cs;q=0.6,da;q=0.4\r\n
    If-None-Match: "7053a63e31516a58b27a295edb31d07524a6e0a3"\r\n
    If-Modified-Since: Tue, 17 Nov 2009 11:22:22 GMT\r\n
    [Full request URI: http://91.102.91.18/]
     [HTTP request 1/1]
     [Response in frame: 8]
0000 44 2b 03 32 09 30 7c d1 c3 6c 87 5e 08 00 45 00 D+.2.0|Ñ Ãl.^..E.
0010 02 2a 9e d7 40 00 40 06 f5 ff ac 18 41 66 5b 66 .*.×@.@. õÿ¬.Af[f
0020 5b 12 e5 c0 00 50 08 ea 0e c7 03 14 0c 19 80 18
0030 20 2b 0f c0 00 00 01 01 08 0a 2c 70 61 aa 6e 94
0040 b7 27 47 45 54 20 2f 20 48 54 54 50 2f 31 2e 31 'GET / HTTP/1.1
0050 0d 0a 48 6f 73 74 3a 20 39 31 2e 31 30 32 2e 39 ..Host: 91.102.9
0060 31 2e 31 38 0d 0a 43 6f 6e 6e 65 63 74 69 6f 6e 1.18..Co nnection
0070 3a 20 6b 65 65 70 2d 61 6c 69 76 65 0d 0a 43 61 : keep-a live..Ca
0080 63 68 65 2d 43 6f 6e 74 72 6f 6c 3a 20 6d 61 78 che-Cont rol: max
0090 2d 61 67 65 3d 30 0d 0a 41 63 63 65 70 74 3a 20 -age=0.. Accept:
00a0 74 65 78 74 2f 68 74 6d 6c 2c 61 70 70 6c 69 63 text/htm l.applic
00b0 61 74 69 6f 6e 2f 78 68 74 6d 6c 2b 78 6d 6c 2c ation/xh tml+xml,
00c0 61 70 70 6c 69 63 61 74 69 6f 6e 2f 78 6d 6c 3b applicat ion/xml;
http-example.cap
                                                                                          Packets: 9 - Displayed: 9 - Marked: 0 - Load time: 0:0.0
```

https://www.wireshark.org





Now lets do the exercise

# Wireshark and tcpdump

which is number 2 in the exercise PDF.






Now lets do the exercise

# **Capturing network packets**

which is number 3 in the exercise PDF.

# **Network mapping**



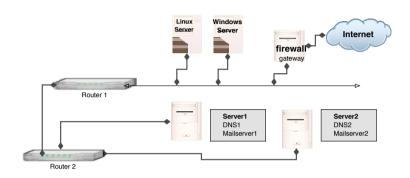

Using traceroute and similar programs it is often possible to make educated guess to network topology

Time to live (TTL) for packets are decreased when crossing a router when it reaches zero the packet is timed out, and ICMP message sent back to source Default Unix traceroute uses UDP, Windows tracert use ICMP

#### traceroute - UDP



```
# tcpdump -i en0 host 10.20.20.129 or host 10.0.0.11
tcpdump: listening on en0
23:23:30.426342 10.0.0.200.33849 > router.33435: udp 12 [ttl 1]
23:23:30.426742 safri > 10.0.0.200: icmp: time exceeded in-transit
23:23:30.436069 10.0.0.200.33849 > router.33436: udp 12 [ttl 1]
23:23:30.436357 safri > 10.0.0.200: icmp: time exceeded in-transit
23:23:30.437117 10.0.0.200.33849 > router.33437: udp 12 [ttl 1]
23:23:30.437383 safri > 10.0.0.200: icmp: time exceeded in-transit
23:23:30.437574 10.0.0.200.33849 > router.33438: udp 12
23:23:30.438946 router > 10.0.0.200: icmp: router udp port 33438 unreachable
23:23:30.451319 10.0.0.200.33849 > router.33439: udp 12
23:23:30.452569 router > 10.0.0.200: icmp: router udp port 33439 unreachable
23:23:30.452813 10.0.0.200.33849 > router.33440: udp 12
23:23:30.454023 router > 10.0.0.200: icmp: router udp port 33440 unreachable
23:23:31.379102 10.0.0.200.49214 > safri.domain: 6646+ PTR?
200.0.0.10.in-addr.arpa. (41)
23:23:31.380410 safri.domain > 10.0.0.200.49214: 6646 NXDomain* 0/1/0 (93)
14 packets received by filter
O packets dropped by kernel
```

Low TTL, UDP, high ports above 33000 = Unix traceroute signature

# **Experiences gathered**



Lots of information

Reveals a lot about the network, operating systems, services etc.

I use a template when getting data

- Respond to ICMP:  $\square$  echo,  $\square$  mask,  $\square$  time
- Respond to traceroute: □ ICMP, □ UDP
- Open ports TCP og UDP:
- Operating system:
- ... (banner information )

Beware when doing scans it is possible to make routers, firewalls and devices perform badly or even crash!

### The Zeek Network Security Monitor



#### The Zeek Network Security Monitor

Why Choose Zeek? Zeek is a powerful network analysis framework that is much different from the typical IDS you may know.

#### Adaptable

Zeek's domain-specific scripting language enables sitespecific monitoring policies.

#### Efficient

Zeek targets high-performance networks and is used operationally at a variety of large sites.

#### Flexible

Zeek is not restricted to any particular detection approach and does not rely on traditional signatures.

#### Forensics

Zeek comprehensively logs what it sees and provides a high-level archive of a network's activity.

#### **In-depth Analysis**

Zeek comes with analyzers for many protocols, enabling high-level semantic analysis at the application layer.

#### Highly Stateful

Zeek keeps extensive application-layer state about the network it monitors.

#### **Open Interfaces**

Zeek interfaces with other applications for real-time exchange of information.

#### Open Source

Zeek comes with a BSD license, allowing for free use with virtually no restrictions.

The Zeek Network Security Monitor is not a single tool, more of a powerful network analysis framework (former name Bro)

Source https://www.zeek.org/

# **Zeek scripts**



source: dns-fire-count.bro from

 $https://github.com/LiamRandall/bro-scripts/tree/master/fire-scripts\ https://www.zeek.org/sphinx-git/script-reference/scripts.html.$ 





Now lets do the exercise

# Zeek on the web 10min

which is number 4 in the exercise PDF.

#### **Exercise setup**



We will use a combination of your virtual servers, my switch hardware and my virtual systems.

# There will be sniffing done on traffic! Don't abuse information gathered

We try to mimic what you would do in your own networks during the exercises.

Another way of running exercises might be: https://github.com/jonschipp/ISLET

Recommended and used by Zeek and Suricata projects.

#### Get Started with Zeek



To run in "base" mode: zeek -r traffic.pcap

To run in a "near zeekctl" mode: zeek -r traffic.pcap local

To add extra scripts: zeek -r traffic.pcap myscript.zeek

Note: the project was renamed from Bro to Zeek in Oct 2018

#### Zeek demo: Run



```
// install zeek first
kunoichi:~ root# zeekctl
Hint: Run the zeekctl "deploy" command to get started.
Welcome to ZeekControl 1.5
Type "help" for help.
[ZeekControl] > install
creating policy directories ...
installing site policies ...
generating standalone-layout.zeek ...
generating local-networks.zeek ...
generating zeekctl-config.zeek ...
generating zeekctl-config.sh ...
kunoichi:etc root# grep eth0 node.cfg
interface=eth0
```

#### Zeek demo: Run Zeek



```
// back to zeekctl and start it
[ZeekControl] > start
starting bro
// and then
kunoichi:zeek root# pwd
/usr/local/var/spool/bro
kunoichi:zeek root# tail -f dns.log
```

#### More examples at:

https://www.zeek.org/sphinx/script-reference/log-files.html





Now lets do the exercise

# Zeek DNS capturing domain names 10min

which is number 5 in the exercise PDF.





Now lets do the exercise

# Zeek TLS capturing certificates 10min

which is number 6 in the exercise PDF.

### **DNS** is important



Another tool that provides a basic SQL-frontend to PCAP-files

https://www.dns-oarc.net/tools/packetq

https://github.com/DNS-OARC/PacketQ

Going back in time and finding systems that visited a specific domain can explain when and where an infection started.

Deciding on which tool to use, Zeek or PacketQ depends on the situation.

# Suricata IDS/IPS/NSM





Suricata is a high performance Network IDS, IPS and Network Security Monitoring engine. Open Source and owned by a community run non-profit foundation, the Open Information Security Foundation (OISF). Suricata is developed by the OISF and its supporting vendors.

http://suricata-ids.org/ http://openinfosecfoundation.org





Now lets do the exercise

# **Suricata Basic Operation**

which is number 7 in the exercise PDF.





Now lets do the exercise

# **Basic Suricata rule configuration**

which is number 8 in the exercise PDF.





Now lets do the exercise

# **Configure Mirror Port**

which is number 9 in the exercise PDF.





Now lets do the exercise

# Save Suricata JSON Output in Database

which is number 10 in the exercise PDF.

#### **NetFlow**



NetFlow is getting more important, more data share the same links

Accounting is important

Detecting DoS/DDoS and problems is essential

NetFlow sampling is vital information - 123Mbit, but what kind of traffic

Currently also investigating sFlow - hopefully more fine grained





Now lets do the exercise

# **Suricata Netflow**

which is number 11 in the exercise PDF.

#### **Zeek JSON**



As shown with Suricata, it is also possible to insert Zeek output into Elasticsearch.

Use Filebeat, configured for reading and sending the data

# **Commercial Support**



You can and should use updated rulesets for Suricata.

I Recommend the Emerging Threats ET Pro ruleset, which is about USD 900 per year per sensor. So two sites with Suricata running in both, 2x USD 900

# **Summary**



We started from a basic Ubuntu/Debian server, and using Zeek and Suricata we now know more about our network.

We can collect logs about network traffic based on generic NetFlow, specific types DNS/TLS/protocols, and traffic matching advanced rulesets.

We know it is possible to create dashboards and visualizing the data.

What are the next steps?

# **Questions?**





Henrik Kramselund he/him han/ham hkj@zencurity.com @kramse ♥♥

You are always welcome to send me questions later via email

Mobile: +45 2026 6000