



Application



API



API Service




TAREA 1.1

Entorno Cliente

José Miguel Verdú Sagredo

1. JSON Repositorios

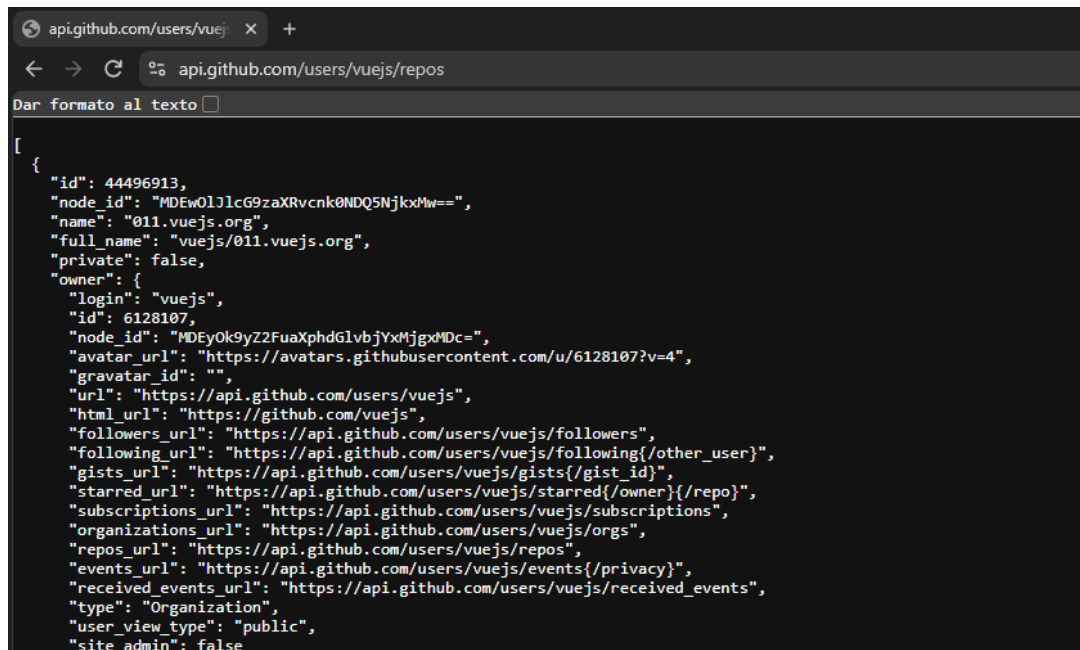


The screenshot shows a web browser with the address bar at `api.github.com/users/vuejs/repos`. The page content is a JSON array containing one object representing the user's repositories. The object includes fields like `id`, `node_id`, `name`, `full_name`, `private`, `owner` (with `login` and `id`), `avatar_url`, `html_url`, `followers_url`, `following_url`, `gists_url`, `starred_url`, `subscriptions_url`, `organizations_url`, `repos_url`, `events_url`, `received_events_url`, `type`, `user_view_type`, and `site_admin`.

```
[
  {
    "id": 44496913,
    "node_id": "MDEwOJl1cG9zaXRvcnk0NDQ5NjkdMw==",
    "name": "011.vuejs.org",
    "full_name": "vuejs/011.vuejs.org",
    "private": false,
    "owner": {
      "login": "vuejs",
      "id": 6128107,
      "node_id": "MDEyOk9yZ2FuaXphdGlvbjYxMjgxMDc=",
      "avatar_url": "https://avatars.githubusercontent.com/u/6128107?v=4",
      "gravatar_id": "",
      "url": "https://api.github.com/users/vuejs",
      "html_url": "https://github.com/vuejs",
      "followers_url": "https://api.github.com/users/vuejs/followers",
      "following_url": "https://api.github.com/users/vuejs/following{/other_user}",
      "gists_url": "https://api.github.com/users/vuejs/gists{/gist_id}",
      "starred_url": "https://api.github.com/users/vuejs/starred{/owner}/{/repo}",
      "subscriptions_url": "https://api.github.com/users/vuejs/subscriptions",
      "organizations_url": "https://api.github.com/users/vuejs/orgs",
      "repos_url": "https://api.github.com/users/vuejs/repos",
      "events_url": "https://api.github.com/users/vuejs/events{/privacy}",
      "received_events_url": "https://api.github.com/users/vuejs/received_events",
      "type": "Organization",
      "user_view_type": "public",
      "site_admin": false
    }
  }
]
```

Investigando descubro la URL para acceder a la API de Github y podemos ver en JSON los datos de los repositorios de vuejs.

2. JSON Followers.

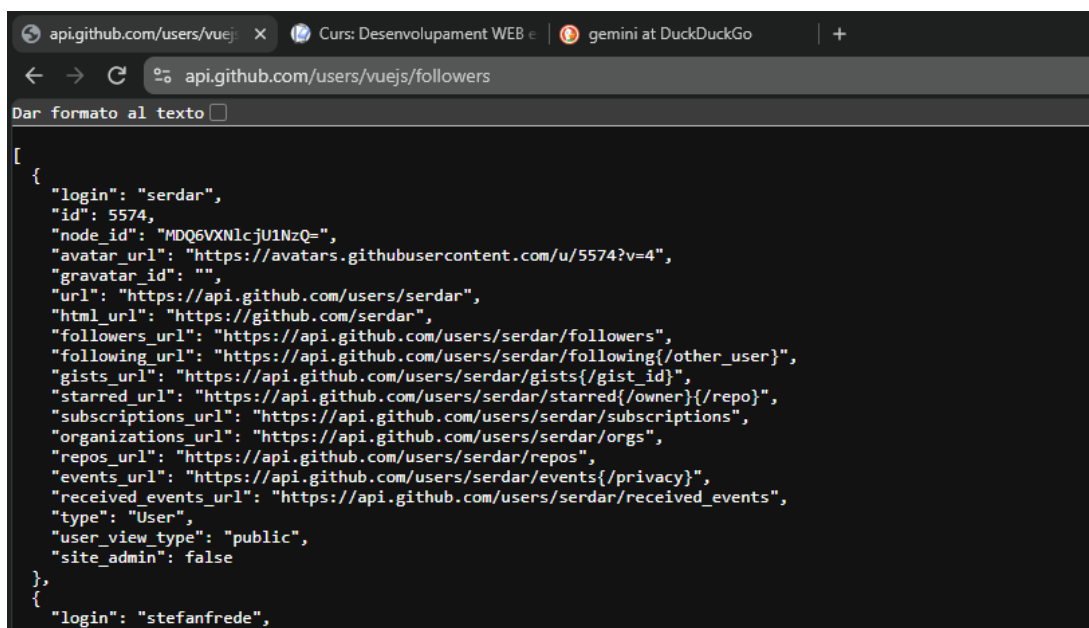

The screenshot shows a web browser with the address bar at `api.github.com/users/vuejs/followers`. The page content is a JSON array containing two objects representing the user's followers. The objects include fields like `login`, `id`, `node_id`, `avatar_url`, `gravatar_id`, `url`, `html_url`, `followers_url`, `following_url`, `gists_url`, `starred_url`, `subscriptions_url`, `organizations_url`, `repos_url`, `events_url`, `received_events_url`, `type`, `user_view_type`, and `site_admin`.

```
[
  {
    "login": "serdar",
    "id": 5574,
    "node_id": "MDQ6VXNlcjU1NzQ=",
    "avatar_url": "https://avatars.githubusercontent.com/u/5574?v=4",
    "gravatar_id": "",
    "url": "https://api.github.com/users/serdar",
    "html_url": "https://github.com/serdar",
    "followers_url": "https://api.github.com/users/serdar/followers",
    "following_url": "https://api.github.com/users/serdar/following{/other_user}",
    "gists_url": "https://api.github.com/users/serdar/gists{/gist_id}",
    "starred_url": "https://api.github.com/users/serdar/starred{/owner}/{/repo}",
    "subscriptions_url": "https://api.github.com/users/serdar/subscriptions",
    "organizations_url": "https://api.github.com/users/serdar/orgs",
    "repos_url": "https://api.github.com/users/serdar/repos",
    "events_url": "https://api.github.com/users/serdar/events{/privacy}",
    "received_events_url": "https://api.github.com/users/serdar/received_events",
    "type": "User",
    "user_view_type": "public",
    "site_admin": false
  },
  {
    "login": "stefanfrede",
    "id": 100000000,
    "node_id": "MDY6VXNlcjU1NzQ=",
    "avatar_url": "https://avatars.githubusercontent.com/u/100000000?v=4",
    "gravatar_id": "",
    "url": "https://api.github.com/users/stefanfrede",
    "html_url": "https://github.com/stefanfrede",
    "followers_url": "https://api.github.com/users/stefanfrede/followers",
    "following_url": "https://api.github.com/users/stefanfrede/following{/other_user}",
    "gists_url": "https://api.github.com/users/stefanfrede/gists{/gist_id}",
    "starred_url": "https://api.github.com/users/stefanfrede/starred{/owner}/{/repo}",
    "subscriptions_url": "https://api.github.com/users/stefanfrede/subscriptions",
    "organizations_url": "https://api.github.com/users/stefanfrede/orgs",
    "repos_url": "https://api.github.com/users/stefanfrede/repos",
    "events_url": "https://api.github.com/users/stefanfrede/events{/privacy}",
    "received_events_url": "https://api.github.com/users/stefanfrede/received_events",
    "type": "User",
    "user_view_type": "public",
    "site_admin": false
  }
]
```

Y aquí tenemos lo mismo, pero para los followers del usuario, como podemos ver solo cambio una parte de la URL.