

Cucumber Report

Sep 1, 2025, 10:54:23 AM

Start : Sep 01, 10:52:16.666 AM

End : Sep 01, 10:54:19.357 AM

Duration : 2 m 2.691 s

Features

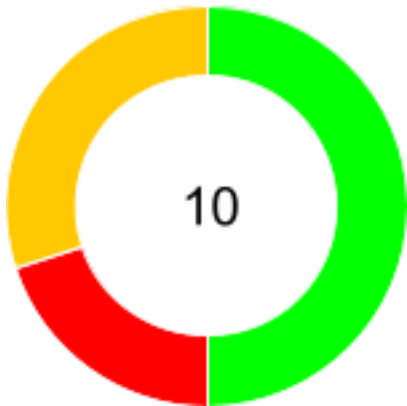
Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 5
FAILED - 2
SKIPPED - 3



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Launch MakeMyTrip Website</u>	2 m 2.691 s	2	0	2	0	10	5	2	3

#	Feature Name	Scenario Name
1	<u>Launch MakeMyTrip Website</u>	<u>Book bus functionality for different locations</u>
2		<u>Book bus functionality for different locations</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@SmokeTest	2	0	2	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Launch MakeMyTrip Website</u>	2	0	2	0	2 m 2.691 s

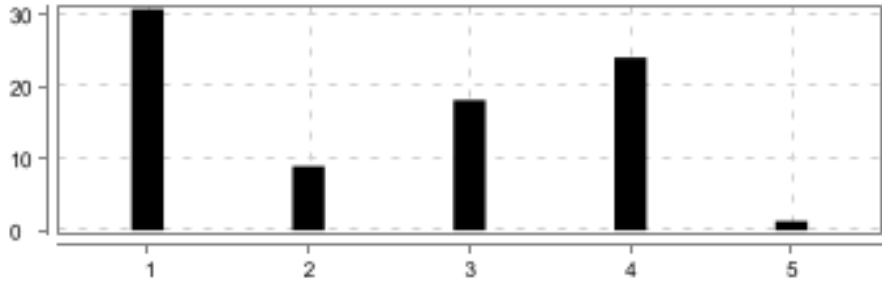



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Launch MakeMyTrip Website</u>	<u>Book bus functionality for different locations</u>	5	4	1	0	2 m 2.679 s
2		<u>Book bus functionality for different locations</u>	5	1	1	3	1 m 39.502 s

Launch MakeMyTrip Website

FAILED	DURATION - 2 m 2.691 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 10 Pass - 5 Fail - 2 Skip - 3	
/ 10:52:16.666 AM // 10:54:19.357 AM /					

Book bus functionality for different locations

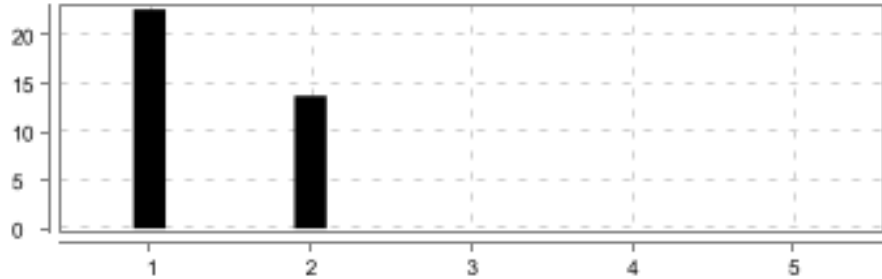

FAILED	DURATION - 2 m 2.679 s		Steps Total - 5 Pass - 4 Fail - 1 Skip - 0	
/ 10:52:16.678 AM // 10:54:19.357 AM /				
Launch MakeMyTrip Website				
@SmokeTest				

#	Step / Hook Details	Status	Duration
1	Given The browser is launched with "https://www.makemytrip.com"	PASSED	30.707 s
2	And User has navigated to "Bus" tab	PASSED	8.891 s
3	When The user enters "Chennai" location and "Bangalore" location	PASSED	18.104 s
4	And I click on Search	PASSED	24.012 s
5	Then User should be able to view the list of available buses org.openqa.selenium.NoSuchWindowException: Browsing context has been discarded Build info: version: '4.21.0', revision: '79ed462ef4' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '24.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [4c6f203e-8efd-4c3d-b93c-ccb8a37e8f29, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 142.0.1, moz:accessibilityChecks: false, moz:buildID: 20250827004350, moz:geckodriverVersion: 0.36.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 23368, moz:profile: C:\Users\MUTHUS~1\RAJ\AppData..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, userAgent: Mozilla/5.0 (Windows NT 10....} Session ID: 4c6f203e-8efd-4c3d-b93c-ccb8a37e8f29 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:483) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138)	FAILED	1.259 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:321) at com.work.framework.InitiateDriver.takeScreenshot(InitiateDriver.java:50) at com.work.framework.StepDefinitions.StepDef.user_should_be_able_to_view_the_list_of_available_buses(StepDef.java:97) at ?.User should be able to view the list of available buses(file:///C:/Users/muthuseli.rajapandi/IdeaProjects/TestNGSeleniumProject/src/test/ resources/features/TestMakeMyTrip.feature:20) * Not displayable characters are replaced by '?'. </pre>		
	<p>AFTER - com.work.framework.StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.WebDriverException: Failed to decode response from marionette Build info: version: '4.21.0', revision: '79ed462ef4' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '24.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [4c6f203e-8efd-4c3d-b93c-ccb8a37e8f29, quit {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 142.0.1, moz:accessibilityChecks: false, moz:buildID: 20250827004350, moz:geckodriverVersion: 0.36.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 23368, moz:profile: C:\Users\MUTHUS~1\RAJAppDa..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, userAgent: Mozilla/5.0 (Windows NT 10....) Session ID: 4c6f203e-8efd-4c3d-b93c-ccb8a37e8f29 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:483) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.lambda\$execute\$1(DriverCommandExecutor.java:126) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run\$\$\$capture(CompletableFuture.java:1814) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run(CompletableFuture.java) at --- Async.Stack.Trace --- (captured by IntelliJ IDEA debugger) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.<init>(CompletableFuture.java:1800) at java.base/java.util.concurrent.CompletableFuture.asyncSupplyStage(CompletableFuture.java:1828) at java.base/java.util.concurrent.CompletableFuture.supplyAsync(CompletableFuture.java:2051) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:123) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) </pre>	FAILED	0.908 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.quit(RemoteWebDriver.java:433) at org.openqa.selenium.firefox.FirefoxDriver.quit(FirefoxDriver.java:397) at com.work.framework.InitiateDriver.quitDriver(InitiateDriver.java:62) at com.work.framework.StepDefinitions.Hooks.tearDown(Hooks.java:28) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:565) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:565) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:141) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:686) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:230) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:81) at org.testng.internal.thread.Async\$AsyncTask.run(Async.java:34) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1095) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:619) at java.base/java.lang.Thread.run(Thread.java:1447)		

Book bus functionality for different locations

<div>FAILED</div> <div>DURATION - 1 m 39.502 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 3</div>	<div></div>
/ 10:52:16.685 AM // 10:53:56.187 AM /				
Launch MakeMyTrip Website				
@SmokeTest				

#	Step / Hook Details	Status	Duration
1	Given The browser is launched with "https://www.makemytrip.com"	PASSED	22.669 s
2	And User has navigated to "Bus" tab <pre>org.openqa.selenium.NoSuchElementException: Unable to locate element: //span[@data-cy='closeModal'] For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.21.0', revision: '79ed462ef4' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '24.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [7d84e430-5fe6-439d-9dc7-3ee29d0c870c, findElement {using=xpath, value=//span[@data-cy='closeModal']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 142.0.1, moz:accessibilityChecks: false, moz:buildID: 20250827004350, moz:geckodriverVersion: 0.36.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 27068, moz:profile: C:\Users\MUTHUS~1.RAJ\AppData..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, userAgent: Mozilla/5.0 (Windows NT 10....} Session ID: 7d84e430-5fe6-439d-9dc7-3ee29d0c870c at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:483) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at com.work.framework.Pages.HomePage.closePopup(HomePage.java:32) at com.work.framework.StepDefinitions.StepDef.user_has_navigated_to_tab(StepDef.java:67) at ?.User has navigated to "Bus" tab(file:///C:/Users/muthuselvi.rajapandi/IdeaProjects/TestNGSeleniumProject/src/test/resources/features/TestMakeMyTrip.feature:17) * Not displayable characters are replaced by '?'. </pre>	FAILED	13.732 s

#	Step / Hook Details	Status	Duration
3	When The user enters "Bangalore" location and "Hyderabad" location	SKIPPED	0.001 s
4	And I click on Search	SKIPPED	0.001 s
5	Then User should be able to view the list of available buses	SKIPPED	0.005 s